

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 82306519.8

(51) Int. Cl.³: **D 21 B 1/24**

(22) Date of filing: 07.12.82

(30) Priority: 07.12.81 GB 8136864
01.06.82 US 383713

(43) Date of publication of application:
15.06.83 Bulletin 83/24

(84) Designated Contracting States:
DE FR GB SE

(71) Applicant: **AMCA INTERNATIONAL LIMITED**
1155 Dorchester Boulevard West
Montreal, PQ, H3B 4C7(CA)

(72) Inventor: **Willey, John A.**
58 Scotia Avenue
Brantford Ontario N3R 6X5(CA)


(74) Representative: **Cheyne, John Robert Alexander**
Mackenzie European Patent Attorney et al,
Haseltine Lake & Co. Hazlitt House 28 Southampton
Buildings Chancery Lane
London WC2A 1AT(GB)

(54) **Method and apparatus for centrifugal pulpwood and wood chip grinding.**

(57) A method and apparatus for grinding pulpwood and/or wood chips, in which the force urging the wood against the grinding surface arises centrifugally and utilising this force to promote uniform and pressurised water spray against the internal grinding surface.

The grinder (10) includes a cylindrical internal grinding surface (22) and a coaxial rotor (28,30) the rotor having a central cavity and defining at least one pocket through which material in the central cavity can contact the grinding surface and means for applying water to the grinding surface.

./...

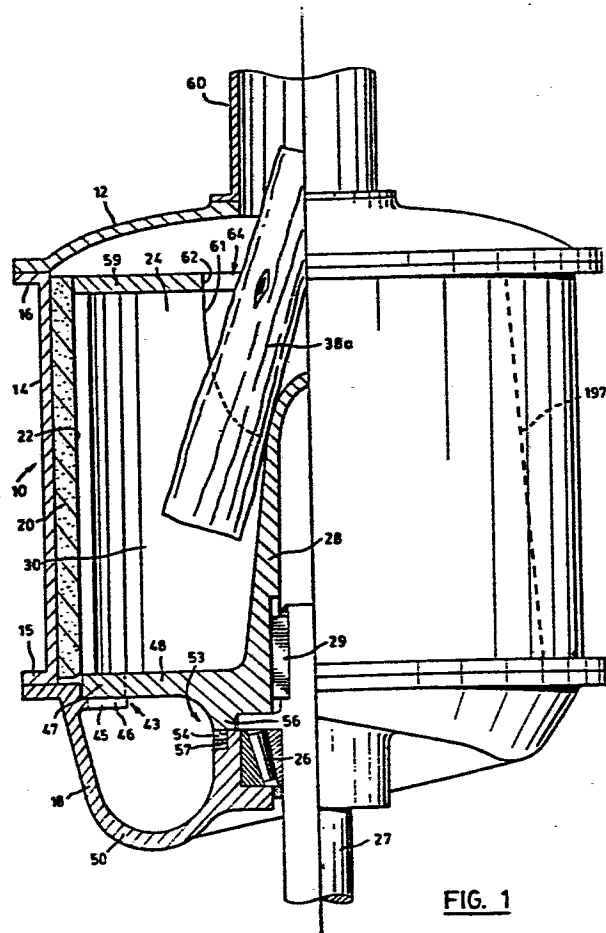

METHOD AND APPARATUS FOR CENTRIFUGAL
PULPWOOD AND WOOD CHIP GRINDING

The present invention relates to a method and apparatus for grinding pulpwood and/or wood chips, in which the force urging the wood against the grinding surface arises centrifugally. The present method and apparatus also includes various other features and advantages, which will be dealt with in detail below.

GENERAL BACKGROUND OF THIS INVENTION

10 One conventional method of producing ground wood pulp for the manufacture of paper products involves pressing a batch of pulpwood (roundwood or wood chips) against a rotating grinding stone while simultaneously feeding shower water into the grinding chamber, specifically by spraying the water directly on the surface of the stone at a location spaced from the actual grinding location. By means of a dam or weir, the formed ground wood stock, which is an aqueous slurry of pulp, is kept in the grinding chamber at a level a little higher than the lower point of the stone in order to clean, lubricate and cool the stone. The ground wood stock flowing over the dam is discharged by its own weight for further treatment. A variant of the foregoing is the "pitless" method, in which the stone is not immersed, and provision is made for extra water showers.

25 Another known method utilizes a disc refiner, in which material being refined or reduced is worked between two closely spaced opposed discs which undergo relative rotation.

30 In a recent development, the wood is ground under superatmospheric pressure, thus permitting grinding temperatures higher than in the standard stone groundwood (SGW). In U.S. Patents 3,808,090 and 3,948,449, a process is described for improving the groundwood pulp by grinding wood in a closed grinding chamber in a pressurized gaseous atmosphere. In the two patents just named, the wood is fed in and the superatmospheric pressure in the grinding chamber can be maintained only so long as the grinding of a wood batch continues.

0081380

However, when a new wood batch must be fed into the magazine, the magazine must be opened and the pressure of the grinding surface falls to atmospheric. Thus, the grinder does not work in a continuously pressurized
5 atmosphere.

In an attempt to overcome the problem just defined, additional developments have been made and patented by Oy Tampella Ab, as exemplified in Canadian Patent No. 1,097,118 issued March 10, 1981, and U.S.
10 Patents 4,270,703 and 4,274,600 issued June 2, 1981 and June 23, 1981, respectively. In the Oy Tampella process, a feed chamber upstream of the grinding chamber has two pressure seals, one to the atmosphere and one to the grinding chamber. Thus, the feed chamber acts as a
15 double-lock seal, to allow the pressure in the grinding chamber always to be maintained above atmospheric. By the use of this method, the pressure in the grinding chamber may reach as high as several bar, and temperatures at the grinding stone surface may climb well
20 above the standard pressure boiling point.

Because of the considerable size and complexity of the SGW process and the pressurized groundwood (PGW) process developed hitherto, it would be desirable to reduce the complexity and size of an installation for
25 producing ground pulp that can be used in paper making. In both the PGW and SGW processes, very large pressure shoes must be hydraulically driven to urge the roundwood against the grinding stone, and above the general location of the pressure shoes must be provided a stack
30 for the incoming wood to be ground.

A different approach to the grinding of wood pulp is one in which the grinding pressure between the wood and the grinding surface is brought about centrifugally, by providing an internal cylindrical
35 grinding surface, and by "flinging" the wood outwardly against the stationary grinding surface through the use of centrifugal force. The centrifuging action not only would allow the appropriate pressure to arise between the wood and the grinding surface, but could also pressurize

0081380

a quantity of water being swept around along with the wood, thus permitting higher temperatures than the maximum attainable in the standard SGW process.

Early Canadian Patent 2834, issued October 24, 1873 discloses a primitive version of a centrifugal grinder for wood, which incorporates a stationary internal cylindrical grinding surface, and a rotor turning about a vertical axis, and flinging the feed wood centrifugally outward along radial pathways to contact the grinding surface. Water for cooling the grinding surface and for making up the pulp slurry is simply squirted into the housing by a single hose or pipe.

Because of the primitive construction utilized by Moore, his apparatus would not do for the high speed grinding requirements of the present day.

Accordingly, it is an aspect of this invention to provide an apparatus that is improved with respect to the Moore apparatus, and in particular which utilizes the rotating principle in order to promote uniform and pressurized water spray against the internal grinding surface.

Accordingly, this invention provides a centrifugal grinder, which includes an internal grinding surface in the shape of a surface of revolution. A rotor mounted for rotation coaxially with the grinding surface, the rotor having a central cavity and defining at least one pocket through which material in the central cavity can contact the grinding surface. First means are provided for delivering material to be ground to the central cavity, and second means are provided for rotating the rotor. Third means are incorporated in the rotor for applying water to the grinding surface.

Further, this invention provides a method of grinding, utilizing an internal grinding surface in the shape of a surface of revolution. The method includes rotating material around the internal grinding surface to generate centrifugal grinding force between the material and surface, while at the same time applying water to the

grinding surface through orifices also rotated around the surface in proximity thereto.

GENERAL DESCRIPTION OF THE DRAWINGS

Two embodiments of this invention are
5 illustrated in the accompanying drawings, in which like numerals denote like parts throughout the several views and in which:

Figure 1 is a part elevation and part sectional view of the first embodiment of a centrifugal pulp wood
10 grinder constructed in accordance with this invention;

Figure 2 is a part plan view and part horizontal sectional view of the centrifugal pulpwood grinder of Figure 1;

Figure 3 is a schematic sectional view showing
15 in general the means by which water can be brought to spray orifices adjacent the grinding surface;

Figure 4 is an axial sectional view through a second embodiment of this invention;

Figure 5 is a cross-sectional view taken at the
20 line 5-5 in Figure 4;

Figure 6 is a cross-sectional view taken at the line 6-6 in Figure 4; and

Figure 7 is an elevational view of the rotor shown in Figure 6, looking in the direction of the arrow
25 7.

DETAILED DESCRIPTION OF THE DRAWINGS

Attention is first directed to Figure 1, of which the left hand portion is an axial sectional view of a centrifugal pulpwood grinder 10 which includes a
30 cap-like top frame 12, a cylindrical outer stone mounting frame 14 having two outwardly extending flanges 15 and 16 at its opposite ends, and a bottom frame 18 which will be described in greater detail below. Securely mounted within the stone mounting frame are a plurality of stone
35 segments 20 which provide a radially symmetrical, concave, cylindrical, inside grinding surface 22. The stone segments may be of hexagonal shape.

Mounted centrally of the grinding chamber 24 on conical bearings of which one is shown in Figure 1 at the

0081380

numeral 26 is a drive shaft 27, to which a rotary hub 28 is affixed by means of a key 29.

Extending substantially radially away from the hub 28 is at least one, and a preferably two or three hollow arms 30 adapted to propel the pulpwood circumferentially along and around the grinding surface 22.

As pictured in Figure 2, the arm 30 rotates about the axis 31 in the direction of the arrow 32, and undergoes a gradual curvature so that its distal portion 34 slopes toward the rear compared to the direction of rotation. As can also be seen in Figure 2, the distal portion 34 has a plurality of engagement teeth 36 along its forward surface, the teeth 36 being adapted to engage a piece of pulpwood 38 in order to stabilize the same as it rotates against the grinding surface 22, and in order to minimize bounce or rolling of the pulpwood 38. The hollow arm has, at its distal end, an adjustable finger bar 40, which may be a stainless steel casting, which is adapted to ride in close proximaty to the grinding surface 22 to ensure that the slurry of water and ground pulp in the vicinity of the pulpwood 38 will also be swept circumferentially around the grinding surface 22, and thus "flung" outwardly against the grinding surface 22 by reason of the centrifugal force.

It will be appreciated that, where only a single arm 30 is provided, the hub 28 will need to be counter-balanced by additional weight opposite the position of the single arm. By providing two opposed arms, or three identical arms at spacings of 120°, the need for counter-balance is eliminated.

Returning to Figure 1, it will be seen that the bottom frame 18 includes a shredder shown generally by the numeral 43, the shredder 42 including a stator 45 and rotor 47, the rotor being an integral part of a disk-like rotating bottom wall 48 which is integral with the hub 28. the rotor 47 is provided with a plurality of slots, as is also the stator 45, and the openings 46 of the two sets of slots pass across each other at high speeds, thus

0081380

shredding the ground pulp material through a type of scissors or shearing action. The purpose of the shredding is to break up slivers which would otherwise tend to propagate a downstream jamming condition.

5 The bottom frame 18 includes a wall 50 defining a volute constituted an evacuation zone for the pulp slurry. An opening (not shown) is provided for removing the pulp slurry from the evacuation zone. A bearing seal is shown generally by the numeral 53, and includes a
10 stationary ring 54 of L-shape, which is urged upwardly against the bottom of an annular downward projection 56 integral with the hub 28 by a spring 57.

 At the top of the hollow arm 30 is an annular plate 59 which, along with the portion 48, defines a
15 containment zone for the aqueous pulp slurry which results from the grinding process.

 Connected above the top frame 12 is a pulpwood feed pipe 60 along which pieces of pulpwood 38a can travel. it will be noted in Figure 1 that the arm 30,
20 while connected to the hub 28, also has a free inner edge 61 which terminates at the inner circumference 62 of the annular plate 59. Thus, there is defined a central opening 64 into which the pieces of pulpwood 38a can fall.

25 It is contemplated that the hub 28 may not require the length shown in Figure 1, and may terminate at a location closer to the key 29. It is also contemplated that the entire grinding chamber 24 could be additionally pressurized above atmospheric by the use of
30 single or double seals (not shown), so that the pressure undergone by the aqueous slurry being centrifuged around and against the grinding surface 22 would be greater than atmospheric by reason of both the centrifugal effect and the additional pressurization.

35 While the embodiment shown in figures 1 and 2 is adapted for vertical orientation, i.e. with the axis of rotation extending vertically, the arrangement shown schematically in Figure 3 is shown in a horizontal orientation. The purpose of Figure 3 is essentially to

show how water can be ducted into a location adjacent the grinding surface 22a, and that the centrifuging effect of the rotation of the arms 30 will also produce an increase in the pressure of the water available at nozzles 67.

5 By straight-forward mathematical procedures, it is simple to show that, with a radius of 12 inches from the location of the nozzles 67 to the center line of rotation and a rotational rate in the region of 120 radians per second, a pressure increase of the order of
10 90-100 psi will take place from the center line to the nozzles. This allows the use of relatively low pressure water at the initial feed location 70. Since the pressure varies as the square of the radius and also as the square of the rotational speed, considerable pressure
15 increases for the water can be obtained within quite manageable dimensions.

 In Figure 3, an electric motor 71 rotates the input shaft 72 of a reduction gear box 74, of which the output shaft 75 rotates the hollow arms that are
20 represented in Figure 3 merely by the water piping 77.

 To obtain grinding pressures in the area of 100 psi, which are considered typical of the conventional grinders, mathematical computation shows that, with an 80 inch diameter centrifugal grinder, rotational speeds in
25 the area of 420 rpm are required. This would correspond with a surface speed of about 1760 inches per second.

 Attention is now directed to Figures 4 through 7, which illustrate the second embodiment of this invention.

30 In Figures 4 and 5, a cylindrical, internal grinding surface 90 is defined by cylindrical sections of suitable stone 92, which are retained in place by a stone retaining frame 94. Connected in a sealed manner with the stone retaining frame 94 is a housing 96, which is
35 sealed at the left in Figure 4 with respect to a bearing housing 99, and is sealed at the right in Figure 4 with respect to a bearing housing 101.

 The bearing housing 101 at the right in Figure 4 is connected to a pilot shaft bearing housing 104

containing a series of roller bearing 105 which centrally support a pilot shaft 107 for rotation about a central axis 109.

At the left in Figure 4, the bearing housing 99
5 is connected to a drive shaft bearing housing 112 of conventional construction which supports two roller bearings 113 and 115, which centrally support for rotation a low speed drive shaft 117 which, together with the pilot shaft 107, securely supports a rotor 120 for
10 rotation about the axis defined by the line 109.

As best seen by looking together at Figures 4 and 5, the rotor 120 consists essentially of two end plates 122 and 123, which support between them two axially extending sickle-shaped members 125 and 126 (see
15 Figure 5). More specifically, each of the sickle-shaped members 125 and 126 includes an outwardly extending portion 129, and a substantially part-cylindrical portion 131 which is eccentrically located with respect to the axis 109 of the rotor per se. More specifically, looking
20 at Figure 5, the center of curvature of the leftward part-cylindrical portion 131 is located at 134, while the center of curvature of the rightward part-cylindrical portion 131 is located at 136. The locations of these centers of curvatures are not critical, of course, since
25 the important thing is not where the centers are located, but rather that the surface defined by the portion 131 be such that it is located closer to the actual rotational axis 109 at one of its ends than at the other of its ends. To illustrate, looking at Figure 5, it can be seen
30 that the region 139 of the part-cylindrical portion 131 adjacent the portion 129 is closer to the axis 109 than the region 141. As can be seen in Figure 5, the space between the two members 125 and 126 is filled with logs of various diameters. It will be appreciated that as the
35 rotor turns about the axis 109, the centrifugal force thus generated will tend to cause the logs to "run down" the slope of the portion 131, as if this were a downward slope in a gravitational field. In effect, the centrifugal force generated by the rotation of the rotor,

0081380

provided this is sufficiently fast, will be considerably greater than the gravitational field, so that the logs between the members 125 and 126 will "see" primarily only the centrifugal force as they seek to escape away from the rotational axis 109. As the logs come into contact with the members 125 and 126, since the portions 131 thereof become progressively further and further from the axis 109 in the counter-clockwise direction as pictured in Figure 5, the logs likewise will tend to roll or move in the counter clockwise direction with respect to members 125 and 26, thus approaching the end regions thereof, where there is a spacing between the members 125 and 126, the spacing being such as to allow the logs to move outward under centrifugal force and contact the inside cylindrical surface 90 of the grinding stone segments. The rotor design shown in Figure 5 provides a "fluid centre" which avoids a situation developing wherein one pocket is fully loaded while the other one, which may be empty, cannot accept logs because its entrance is blocked.

At the edge of the portions 131 which are the most remote from the axis of rotation 109, there is a guide plate 143 which terminates close to the internal grinding surface 90. At the outer extremity of the portion 129 of each member 125, 126, there is supported a finger bar 145, which serves the purpose of retaining the aqueous slurry constituted by the groundwood stock and the water added thereto, rotating about and against the internal grinding surface 90. Advantageously, the finger bars 145 are shaped to assist in the evacuation of the pulp to the sides of the stone. A suitable configuration for the finger bar at 145 is that described in Canadian Patent No. 947,555, issued May 21, 1974 to Koehring - Waterous Ltd., and invented by G.W. Cryderman.

The outer plates 122 and 123 of the rotor 120 are shaped as illustrated in Figure 5, the shape being essentially circular but having two outwardly extending antipodal ears 147. The ears 147 are intended to restrict the egress of unwanted slivers. This causes the

slivers to remain in the grinding zone and ensures that they are ground out. It will be noted that the nominal outer periphery 150 of the plates 122 and 123 has a smaller diameter than the internal grinding surface 90, thus leaving a gap 152 therebetween, through which pulpwood stock can escape from the internal grinding surface 90. However, the ears 147 extend outwardly beyond the radius of the internal grinding surface 90, and thus overlap the grinding stones segments. This allows the definition of two "grinding cavities" as they might be described, each grinding cavity being defined laterally by two ears 147, outwardly by the grinding surface 90, forwardly by the plate 143 of one of the members 125 and 126, and rearwardly by the portion 129 and finger bar 145 of the other of the members 125 and 126. The logs are flung or urged centrifugally into these grinding cavities, and are there ground into stock.

Returning briefly to Figure 4, it will be seen that the bearing housings 99 and 101 define the outer limit for two annular stock/oil mechanical seals 156, which bear internally against the low speed drive shaft 117 and the pilot shaft 107 respectively.

Thus, the housing 96 defines the upper portion of a chamber within which the rotor 120 rotates, the chamber retaining the pulpwood stock and directing it downwardly. The lower part of the chamber may, as illustrated in Figures 4 and 5, be located below the level of the mill floor 158 in a stock sump 160 provided therein. At the bottom of the stock sump 160 is a stock exit passage way 162, which leads to a further processing step for the stock (this being of no concern to the present invention).

Attention is now directed to Figures 6 and 7, for a description of a particular feature of this invention relating to the desirability of urging the pulpwood stock toward the axial ends of the grinding surface 90, in order to promote removal of the stock from the face of the grinding surface.

Figure 6 shows an outside end view of the plate 123, being that on the left in Figure 4. Figure 6 shows that the leftward plate 123 includes in its periphery a recess 171, but that otherwise the plate 123 has the same shape as the plate 122 shown in Figure 5. Connected between the two plates 122 and 123 is an inverted V-shaped finger bar holder 173 to which is securely bolted or clamped a secondary finger bar 175, also of inverted V-shape. Figure 6 shows three fastening assemblies 178, which may be in the form of clamps or bolts.

Figure 7 shows a direct elevational view of the rotor 120, seen from a direction which shows the secondary finger bar 175 and its holder 173 in true shape. The secondary finger bar 175 consists of two plate elements, each with a curving outside edge 181, having the same curvature as the internal grinding surface 90. Since the direction of rotation seen in Figure 6 is clockwise (as it is in Figure 5), which means that the secondary finger bar 175 is moving upwardly as pictured in Figure 7 during normal rotation of the rotor 120, it will be appreciated that the groundwood stock slurry adhering to the grinding surface 90, but which has escaped beneath the finger bar 145, will be directed in two branches and will be urged axially towards the ends of the internal grinding surface 90, so that it can exit therefrom, and fall down into the stock sump 160.

The secondary finger bar 175 is considered an advantage in that it avoids too great a build-up of groundwood pulp stock on the internal grinding surface 90. Such a build-up could impair the grinding operation.

Attention is again directed to Figures 4 and 5 for a description of the water passageways which allow water to enter the grinding chamber axially along the low speed drive shaft 117, and to be made available at a plurality of nozzle locations adjacent the internal grinding surface.

More specifically, looking at Figure 4, the shower supply water is seen to enter from the left along

0081380

a feed pipe 184, through a rotary seal 186 and into a central passageway 189 located axially of the low speed drive shaft 117. From the axial passageway 189, a plurality (in this case 4) of radial passageways 191
5 extend outwardly from and communicate with the passageway 189, the passageways 191 being defined by appropriate pipes or other conduits. At the outer or distal ends of the passageways 123, the latter communicate with respective shower pipes 193 which extend axially with
10 respect to the rotor 120, and which are braced between the plates 122 and 123. As can be seen in Figure 4, each of the removeable shower pipes 193 is capped at the rightward end with a pipe cap 195, and has a plurality of nozzle openings 196 adjacent the internal grinding
15 surface 90.

As described earlier in this specification, rotation of the rotor 120 increases the pressure in the removeable shower pipes 193, with respect to the pressure in the passageway 189, permitting the supply water
20 entering along the pipe 184 to be less than the intended pressure in the removeable shower pipe 193.

The grinder structure herein disclosed has several advantages, and these are summarized below.

Firstly, the grinding assembly herein disclosed
25 can be used to create pressurized effects but without the need for pressure lock mechanisms.

Secondly, it is expected that this design will allow the grinding of wood chips as well as logs, with the addition of an auger feed or other means of
30 conveyance for the chips.

Further, by feeding the shower water through the rotor, a substantial component of its final pressure can be generated centrifugally. As well, the pressure of the water available at the orifices 196 will increase
35 with the rpm, as will the grinding pressure.

By comparison with disk refiners, in the chip feed shear area (where chips are accelerated from stationary to rotary motion), the grinder of the present invention rotates more slowly than a refiner. The

0081380

grinder of the present invention may rotate in the area of 500 rpm, as compared to 1800 rpm for a disk refiner. Thus less power is absorbed than in a refiner (in this specific area), and the chip reaches the working surface of the grinder in better condition due to the lower speed.

While a rotor having two antipodal pockets or grinding cavities has been illustrated in the drawings of this specification, it will be apparent that one, three or more such grinding cavities could be provided.

It will further be understood that the grinding pressure can be controlled accurately by providing means for varying the rotor speed, since this will govern the centrifugal force generated.

Although not illustrated, a screw feed could be utilized to move the logs or woodchips into the center of the rotor through the inlet in the pilot shaft 107. It will be clear that the structure defined in the specification lends itself to continuous loading, a major improvement over the traditional batch loaded grinder. By operating with a continuous feed or conveyor system, it is possible with the present apparatus to automate the loading, thus reducing manpower requirements and enhancing safety. These clearly represent advantages by comparison with the traditional type of grinder.

One option that may in the future be added to the design herein disclosed is that of rotating the internal grinding surface in the direction opposite to that of the rotor. This will increase the speed at which the wood traverses the grinding surface, without changing the grinding pressure (which is dependant only upon the centrifugal force, i.e. the speed of rotation of the rotor 120).

A further option would be to utilize a grinding stone surface which is other than cylindrical, for example a conical surface having a profile as shown by the broken line 197 in Figure 1. This could be used to aid both stock evacuation and rotor-to-stone clearance adjustment. Such an option may well apply to the chip

grinding process in particular, where the clearance between the stone and the rotor is more critical, and the variation in peripheral speed due to the varying diameter is of lesser importance.

5 Because the stone structure is stationary in the present design, the stresses are greatly reduced. The stone design for the present construction consists of vitrified sections set into the steel rim or frame 94. This will permit the provision of a stone having less
10 weight and complexity than traditional structures. A further option is the eventual design of the stone housing so that it forms a jacket for cooling purposes.

 While specific embodiments of this invention have been shown in the accompanying drawings and
15 described hereinabove, it will be apparent to those skilled in the art that changes and modifications may be made therein without departing from the essence of this invention, as set forth in the appended claims.

20

25

30

35

CLAIMS

1. A centrifugal grinder (10), comprising:
an internal grinding surface (22) in the shape of a surface of revolution,
a rotor (28, 30) mounted for rotation coaxially with
5 said grinding surface, the rotor having a central cavity and defining at least one pocket through which material in the central cavity can contact the grinding surface,
first means (60) for delivering material to be ground to the central cavity,
10 and second means (27) for rotating the rotor,
third means characterized in that third means (189, 191, 193, 196) are incorporated in the rotor for applying water to said grinding surface.
2. The invention claimed in claim 1, in which the
15 third means includes a first water pathway (189) into the rotor adjacent the axis thereof, and at least one second water pathway (193) in the rotor adjacent the grinding surface, a water passage means (191) joining the first and second pathways, and nozzle means (196) communicating with the second pathway
20 for spraying water against the grinding surface, the second pathway being further than the first pathway from the rotor axis, whereby rotation of the rotor increases the water pressure in the nozzle means with respect to that in the first pathway, due to the centrifugal effect.
- 25 3. The invention claimed in claim 1 or claim 2, in which the axis of the grinding surface is substantially horizontal.
4. The invention claimed in claim 1 or claim 2, in which the grinding surface is substantially cylindrical.
- 30 5. The invention claimed in claim 1 or claim 2, in which there are two said pockets located at antipodal positions on the rotor.
6. The invention claimed in claim 2, in which the first water pathway is coaxial with the rotor.
- 35 7. The invention claimed in claim 2 or claim 6, in which there are a plurality of said second water pathways spaced circumferentially around the rotor all extending substantially longitudinally of the rotor, each having a

plurality of nozzles for spraying water against the grinding surface.

8. The invention claimed in claim 1, claim 2 or claim

6, in which a primary finger bar is provided on the rotor

5 behind each pocket in the direction of rotation, the primary finger bar running substantially parallel with the rotor

axis, and in which a secondary finger bar is provided on the rotor behind each primary finger bar in the direction of

rotation, each secondary finger bar being herringbone in

10 configuration with the apex leading, so that the effect of the secondary finger bar is to urge pulpwood stock toward the axial ends of the grinding surface.

9. The invention claimed in claim 1, claim 2 or

15 claim 6, in which a primary finger bar (40) is provided on the rotor behind each pocket in the direction or rotation, the primary finger bar running substantially parallel with the

rotor axis, and in which a secondary finger bar (173) is provided on the rotor behind each primary finger bar in the

20 direction of rotation, each secondary finger bar being herringbone in configuration with the apex leading, so that

the effect of the secondary finger bar is to urge pulpwood stock toward the axial ends of the grinding surface, the

grinder further including a housing (96) defining a stock evacuation chamber at both ends of the grinding surface, and

25 a stock outlet communicating with said stock evacuation chamber.

10. A method of grinding, utilizing an internal grinding surface (22) in the shape of a surface of revolution,

the method including rotating material around said internal grinding surface to generate centrifugal grinding force be-

30 tween the material and the surface, while at the same time applying water to said grinding surface through orifices (196)

also rotated around the surface in proximity thereto.

11. The method claimed in claim 10, in which centrifugal force is used to increase the pressure of water available at

35 said orifices.

12. The method claimed in claim 11, in which the grinding surface is within a grinding chamber and the material is rotated around by a rotor coaxial with the grinding surface, and in which the step of applying water is accomplished by

admitting water axially into the rotor, and passing the water in the direction away from the rotor axis to the said orifices.

13. The method claimed in claim 10, claim 11 or claim 12, in which the material is pulpwood.

5 14. The method claimed in claim 10, claim 11 or claim 12, in which the material is pulpwood which is fed axially into a chamber containing the grinding surface.

15. The method claimed in claim 10, claim 11 or claim 12, in which said water applied through said orifices is also
10 carried around the grinding surface along with the said material, and is pressurized by centrifugal force, hence raising the boiling point of the water and allowing the grinding process to proceed at a temperature above the boiling point of water at atmospheric pressure, without evapor-
15 ating the water from the grinding surface.

16. A centrifugal grinder, comprising:

an internal grinding surface (22) in the shape of a surface of revolution which tapers in one direction along its axis,

20 a rotor (28, 30) mounted for rotation coaxially with the grinding surface, the rotor having a central cavity and defining at least one pocket through which material in the central cavity can contact the grinding surface,

25 first means (60) for delivering material to be ground to the central cavity,

second means (27) for rotating the rotor,

and third means (189,191,193,196) for applying water to said grinding surface.

30 17. The invention claimed in claim 16, in which the internal grinding surface is conical.

18. The invention claimed in claim 16 or claim 17, in which the third means includes a first water pathway (189) into the rotor adjacent the axis thereof, and at least one second-water pathway (193) in the rotor adjacent the grinding surface, a water passage means (191) joining the first and second pathways, and nozzle means (196) communicating with the second pathway for spraying water against the grinding surface, the second pathway being further than the first pathway from the rotor axis, whereby rotation of the rotor increases the water pressure in the nozzle means with respect


to that in the first pathway, due to the centrifugal effect.

19. The invention claimed in claim 16 or claim 17, in which there are two said pockets located at antipodal positions on the rotor.

5 20. A method of grinding, utilizing an internal grinding surface (22) in the shape of a surface of revolution which tapers along its axis, the method including rotating material around said internal grinding surface to generate centrifugal grinding force between the material and the surface,
10 while at the same time applying water to said grinding surface, the method further including utilizing the tapering profile of the surface of revolution to promote movement of the ground material in the direction in which the surface of revolution widens.

15 21. The method claimed in claim 20, in which water is applied to the grinding surface through orifices (196) which are rotated around the surface in proximity to the surface (22), and in which centrifugal force is used to increase the pressure of water available at said orifices.

20 22. The method claimed in claim 10, claim 20 or claim 21, in which the material is wood chips.

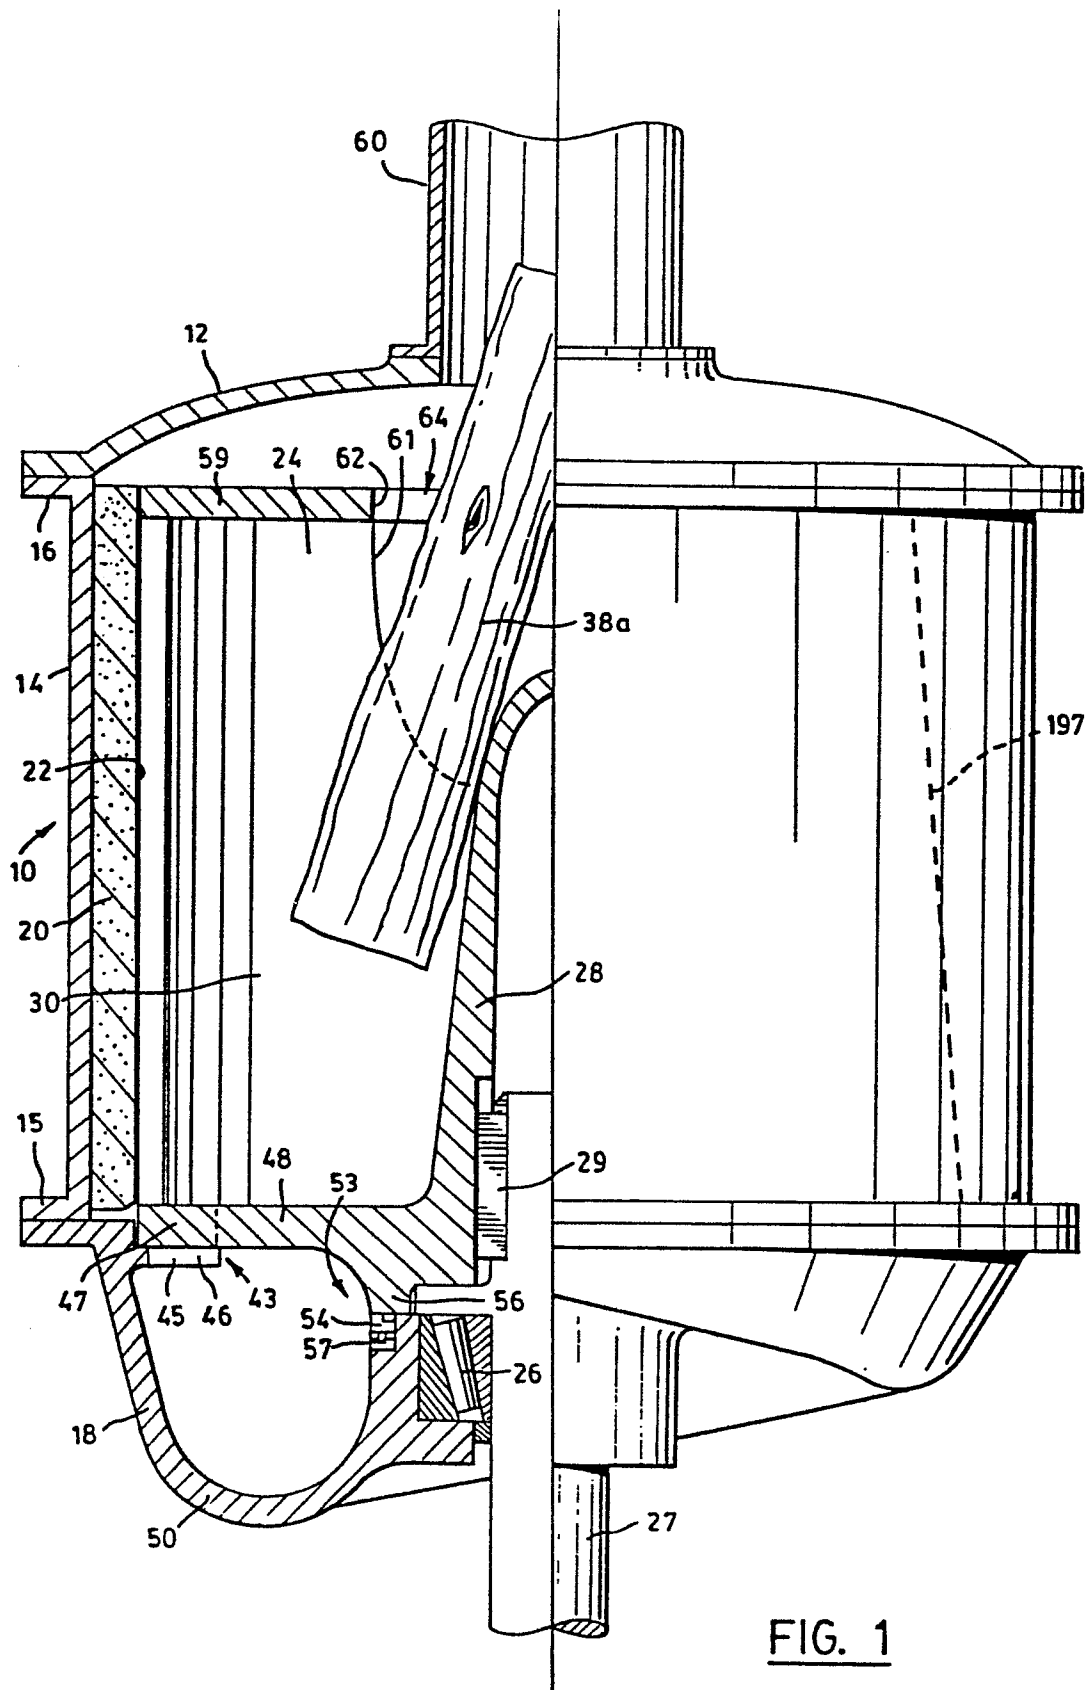

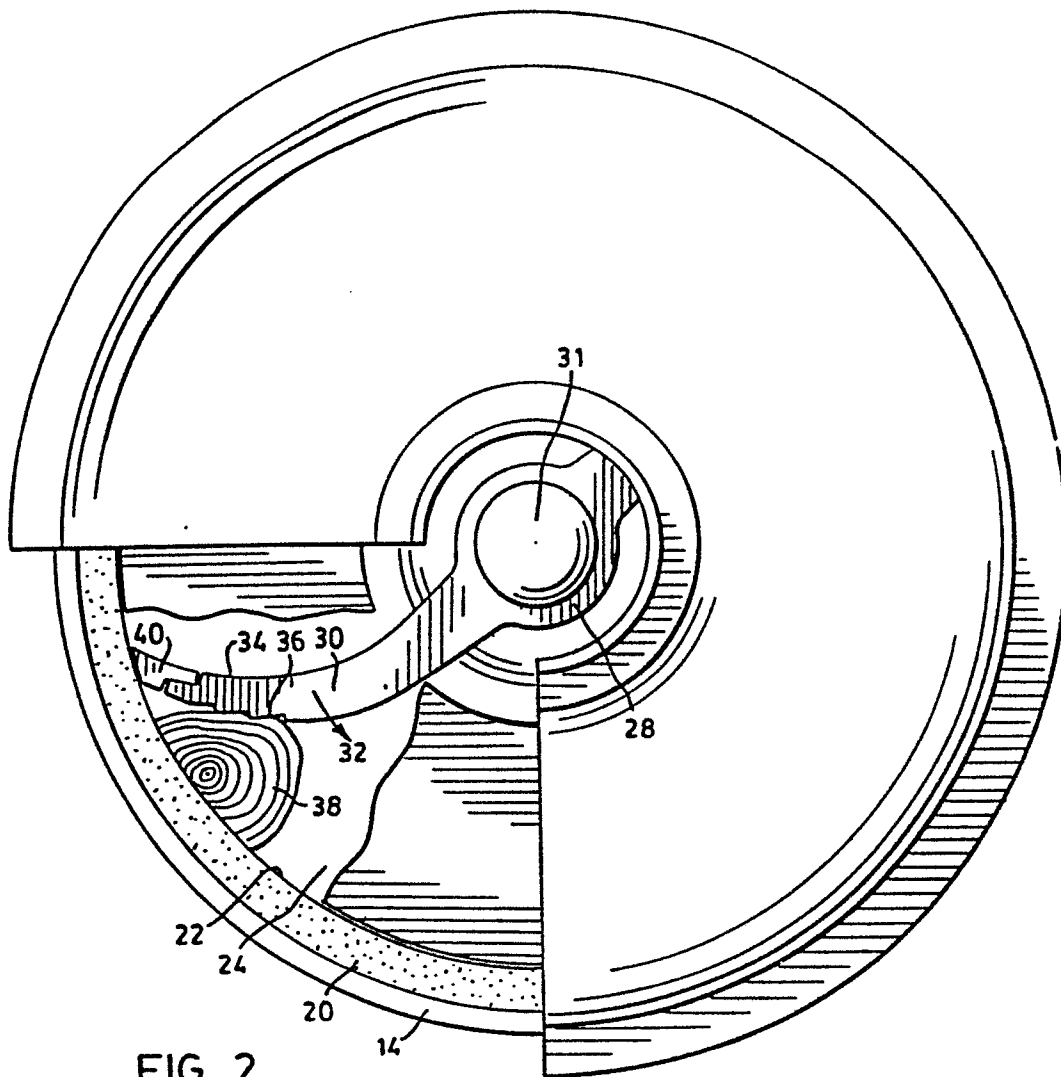


FIG. 2

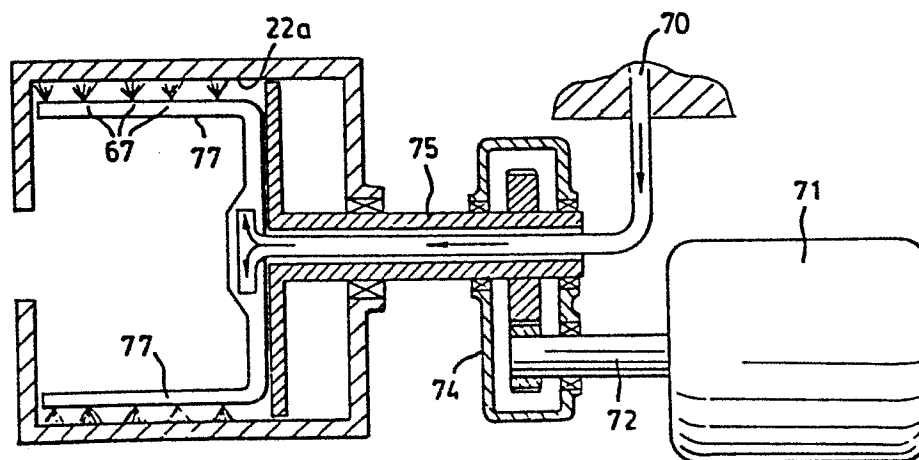
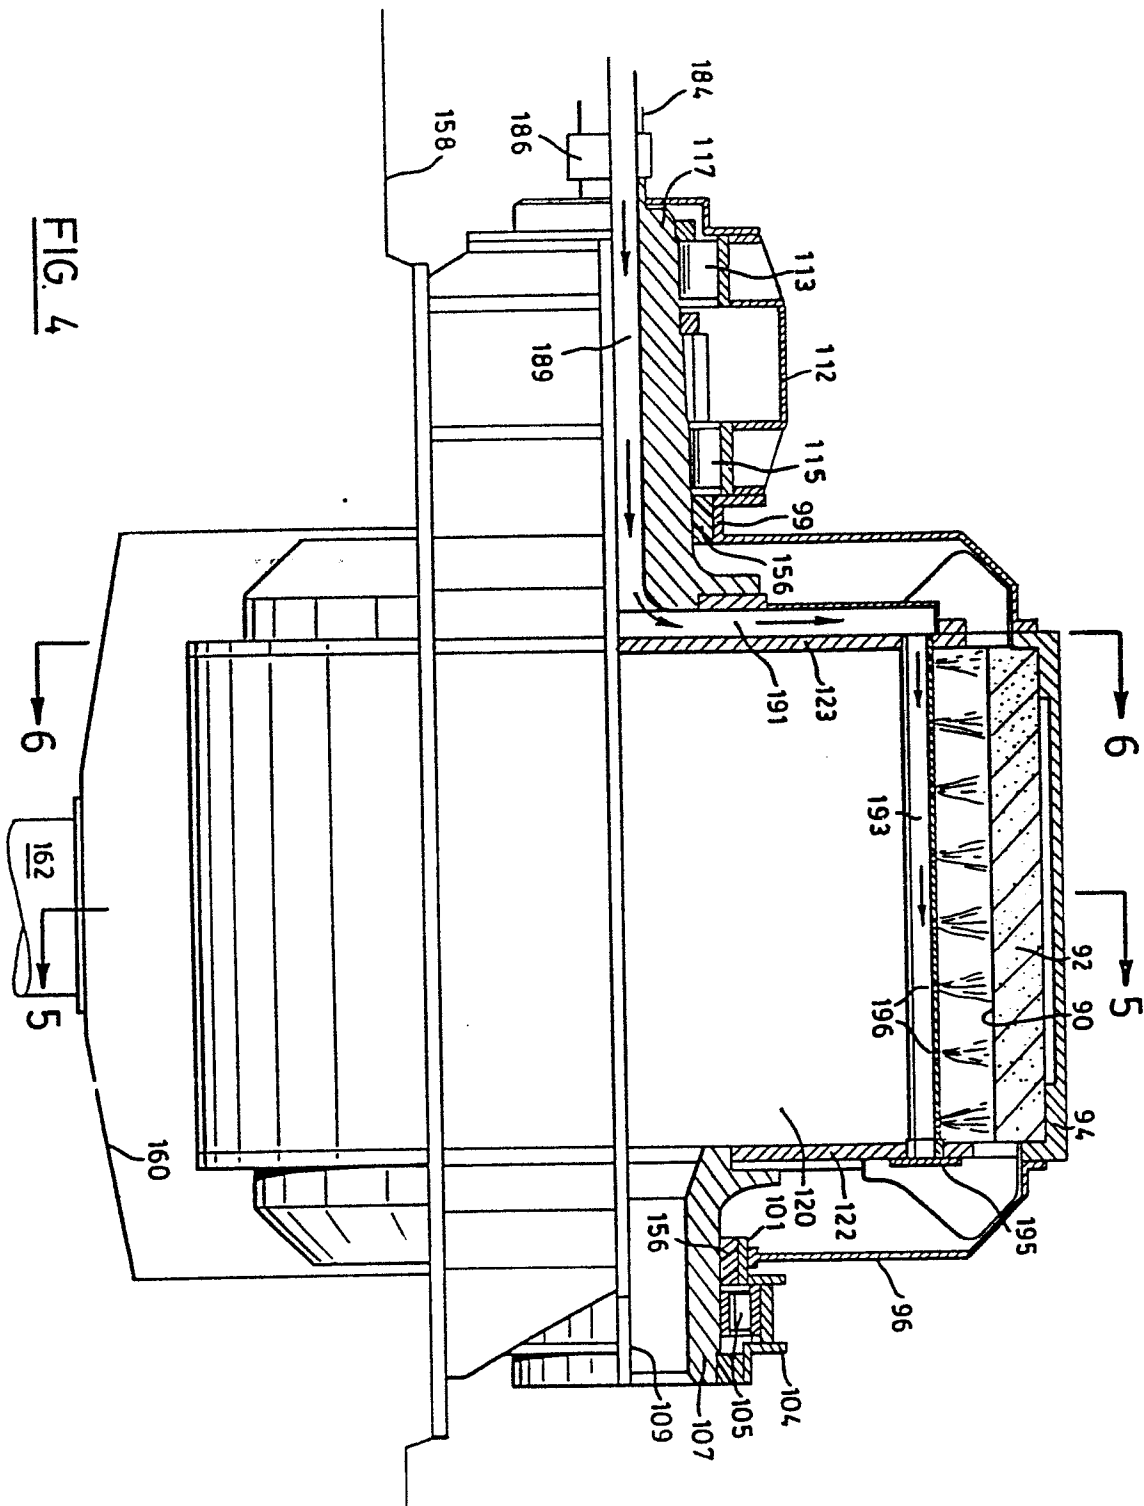


FIG. 3




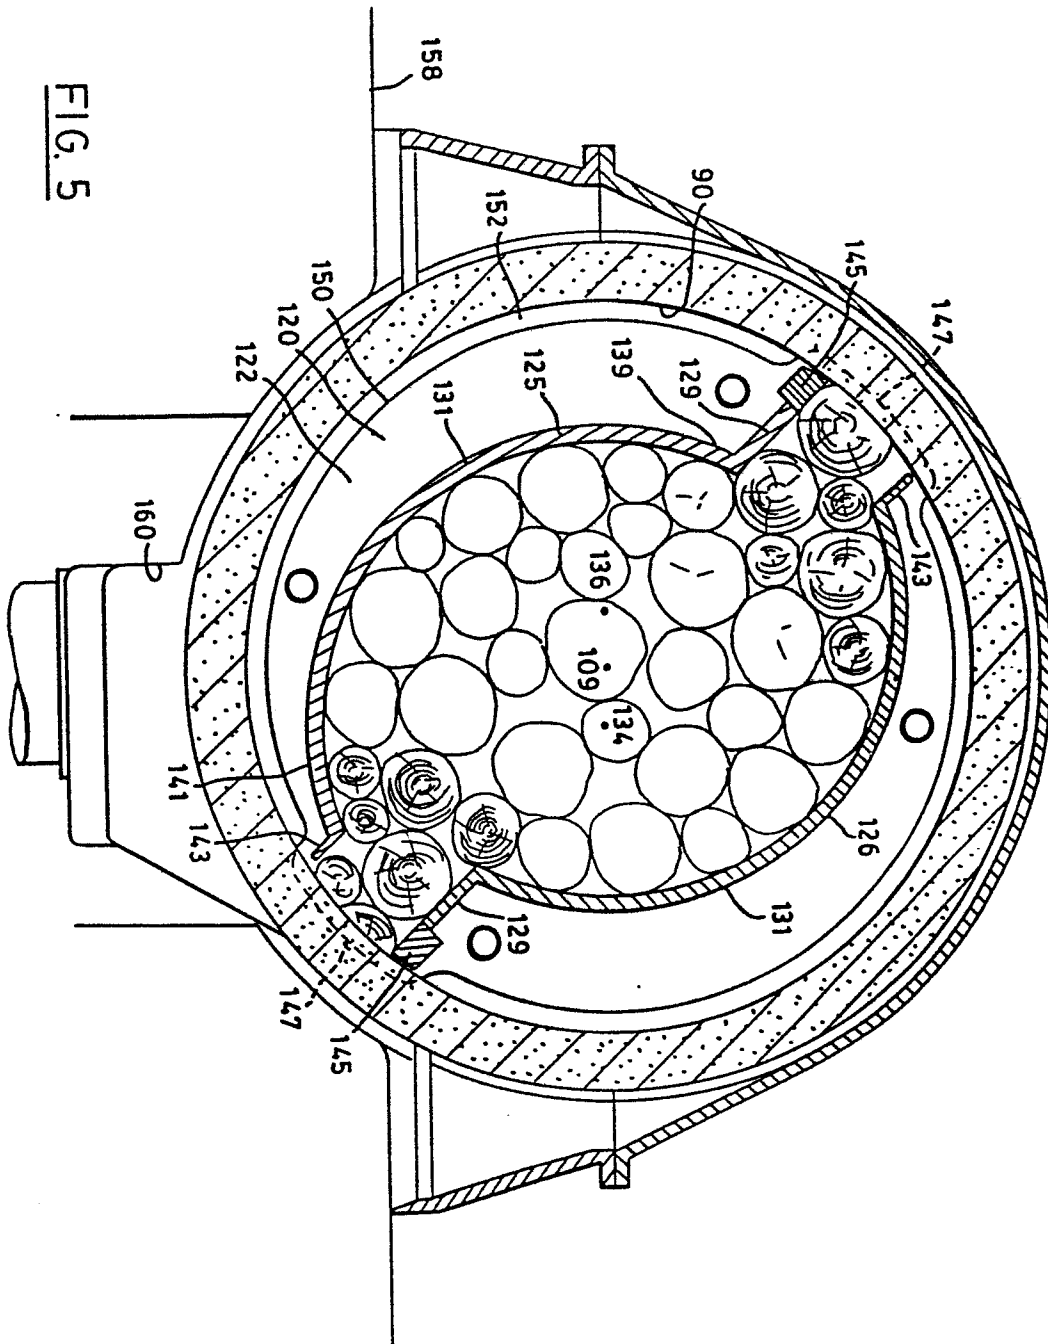


FIG. 5

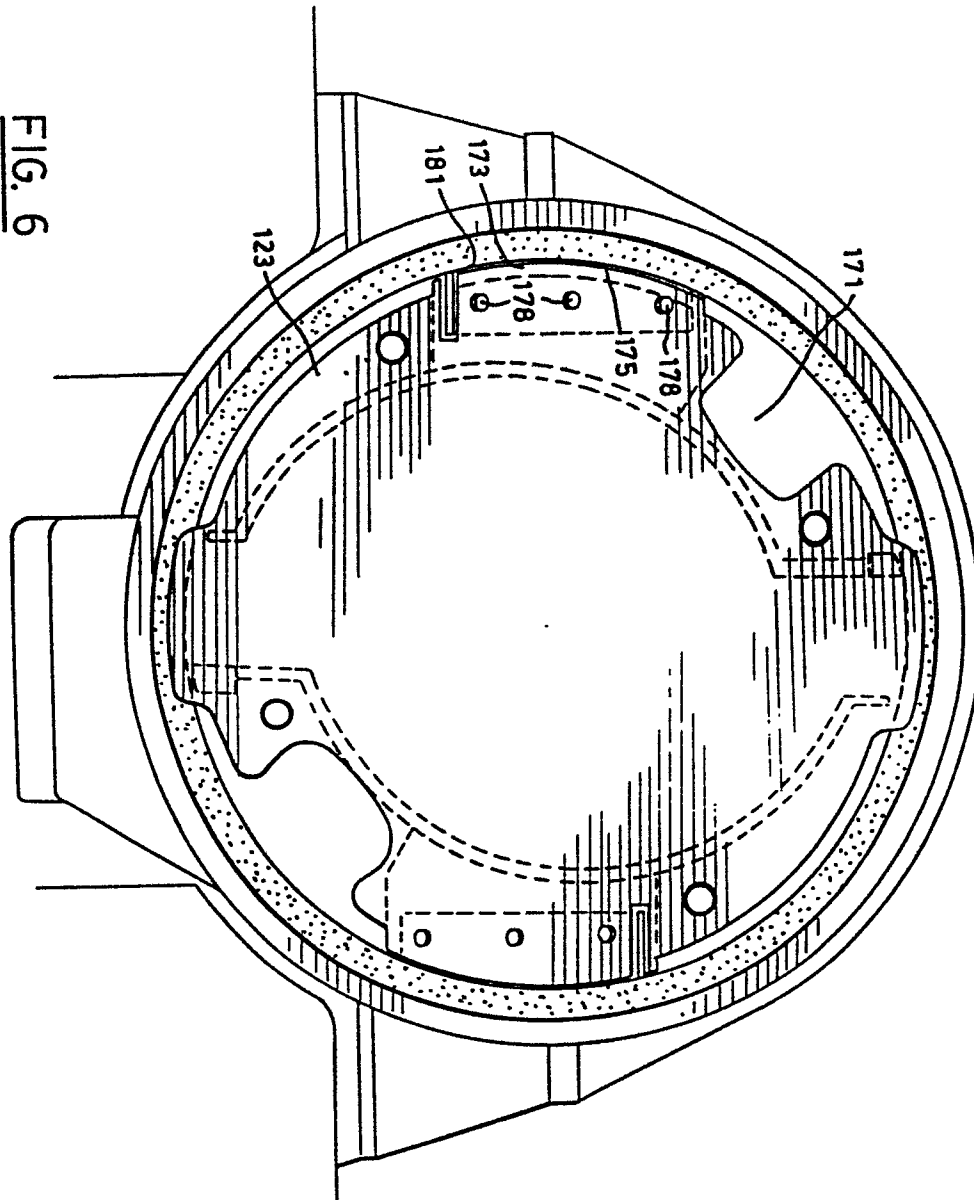

13-0118

0081380

6/6

