



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 090 646
A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 83301764.3

(51) Int. Cl.³: **C 11 D 13/10**

(22) Date of filing: 29.03.83

(30) Priority: 29.03.82 GB 8209151

(71) Applicant: **UNILEVER NV**, Burgemeester
s'Jacobplein 1 P.O. Box 760, NL-3000 DK Rotterdam (NL)

(43) Date of publication of application: 05.10.83
Bulletin 83/40

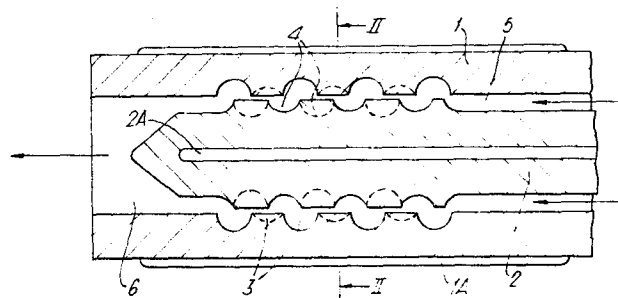
(72) Inventor: **Clarke, Terence Allan**, 2 Norbury Close
Bebington, Wirral Merseyside (GB)
Inventor: **Edwards, Richard Barrie**, Treeview Cedar Way
Gayton, Wirral Merseyside (GB)
Inventor: **Irving, Graeme Neil**, 14 Kirket Close Bebington,
Wirral Merseyside (GB)

(84) Designated Contracting States: **AT BE CH DE FR IT LI**
NL SE

(74) Representative: **Roscoe, Brian Corrie et al, UNILEVER**
PLC Patents Division P.O. Box 68 Unilever House,
London EC4P 4BQ (GB)

(54) **Detergent bar processing.**

(57) Grittiness in soap-containing formulations, one source of which is the reworking of previously processed soap, is reduced in an efficient manner by passing the formulation through a cavity transfer mixer.



EP 0 090 646 A1

TITLE : DETERGENT BAR PROCESSING

Field of the Invention

This invention relates to the processing of soap feedstocks to provide a soap bar having reduced grittiness.

5

Background to the Invention

Soap bars are required to have a smooth feel to provide comfortable in-use properties. However some ingredients in soap material can lead to grittiness during washing. A common feature of most soap processing lines is the use at the final plodder stage of scrap soap from the stamped bars. Soap from this source will have a lower water content than the soap feed material and will thus be harder. The presence of the scrap soap can lead to grittiness in the bar. Grittiness may also develop when a superfatting agent is added to soap after the final dryer stage.

20 The present invention utilises processing conditions to reduce grittiness by subjecting the soap feedstock to considerable working in an efficient manner.

General description

25

Certain formulations leading to grittiness in the product bar when processed by standard methods will be less

gritty when subjected to processing in accordance with this invention.

5 The present invention uses a device of the cavity transfer mixer class to work the soap base. These devices comprise two closely spaced mutually displaceable surfaces each having a pattern of cavities which overlap during movement of surfaces so that material moved between the surfaces traces a path through cavities alternately in each
10 surface so that the bulk of the material passes through the shear zone in the material generated by displacement of the surfaces.

Cavity transfer mixers are normally prepared with a
15 cylindrical geometry and in the preferred devices for this process the cavities are arranged to give constantly available but changing pathways through the device during mutual movement of the two surfaces. The devices having a cylindrical geometry will comprise a stator within which is
20 journaled a rotor; the opposing faces of the stator and rotor carry the cavities through which the material passes during its passage through annular the device.

The device may also have a planar geometry in which
25 opposed plane surfaces having patterns of cavities would be moved mutually, for example by rotation of one plane, so that material introduced between the surfaces at the point of rotation would move outwards and travel alternately between cavities on each surface.

30

Another form of cylindrical geometry maintains the inner cylinder stationary while rotating the outer cylinder. The central stator is more easily cooled, or heated if required, because the fluid connections can be
35 made in a simple manner; the external rotor can also be cooled or heated in a simple manner. It is also

mechanically simpler to apply rotational energy to the external body rather than the internal cylinder. Thus this configuration has advantages in construction and use.

Material is forced through the mixer using
5 auxilliary equipment as the rotor is turned. Examples of the auxilliary equipment are screw extruders and piston rams. The auxiliary equipment is preferably operated separately from the mixer so that the throughput and work performed on it can be separately varied. The separate
10 operation may be achieved by arranging the auxiliary equipment to provide material for processing at an angle to the centre line of the shear-producing device. This arrangement allows rotational energy to be supplied to the device producing shear around its centre line. An in-line
15 arrangement is more easily achieved when the external member of the device is the rotor. Separate operation of the device and auxiliary equipment assists in providing control of the processing.

20 In general a variety of cavity shapes can be used, for example Metal Box (UK 930 339) disclose longitudinal slots in the two surfaces. The stator and rotor may carry slots, for example six to twelve, spaced around their periphery and extending along their whole length.

25

Preferably one or both surfaces are subjected to thermal control. The process allows efficient heating/cooling of the material to be achieved. Preferably the temperature of the material during processing is below
30 40°C. The processing temperature will usually be from about 30°C to about 55°C.

The soap feedstock may contain non-soap detergents in amounts which would not interfere with the desired
35 effect. Examples of these actives are alkane sulphonates,

alcohol sulphates, alkyl benzene sulphonates, alkyl sulphates, acyl isethionates, olefin sulphonates and ethoxylated alcohols.

5 The processed feedstock was made into bar form using standard stamping machinery. Other product forms, eg extruded particles (noodles) and beads can be prepared from the feedstock.

10 Drawings:

 The invention will be described with reference to the accompanying diagrammatic drawings in which:

15 Figure 1 is a longitudinal section of a cavity transfer mixer with cylindrical geometry;

 Figure 2 is a transverse section along the line II-II on Figure 1;

20 Figure 3 illustrates the pattern of cavities in the device of Figure 1;

 Figures 4, 5 and 7 illustrate other patterns of
25 cavities;

 Figure 6 is a transverse section through a mixer having grooves in the opposed surfaces of the device;

30 Figure 8 is a longitudinal section of a cavity transfer mixer in which the external cylinder forms the rotor;

Specific description of devices

Embodiments of the devices will now be described.

5 A cavity transfer mixer is shown in Figure 1 in longitudinal section. This comprises a hollow cylindrical stator member 1, a cylindrical rotor member 2 journalled for rotation within the stator with a sliding fit, the facing cylindrical surfaces of the rotor and stator
10 carrying respective pluralities of parallel, circumferentially extending rows of cavities which are disposed with:

- 15 a) the cavities in adjacent rows on the stator circumferentially offset;
- b) the cavities in adjacent rows on the rotor circumferentially offset; and
- 20 c) the rows of cavities on the stator and rotor axially offset.

The pattern of cavities carried on the stator 3 and rotor 4 are illustrated on Figure 3. The cavities 3 on the
25 stator are shown hatched. The overlap between patterns of cavities 3, 4 is also shown in Figure 2. A liquid jacket 1A is provided for the application of temperature control by the passage of heating or cooling water. A temperature
30 control conduit 2A is provided in the rotor.

The material passing through the device moves through the cavities alternately on the opposing faces of the stator and rotor. The cavities immediately behind
35 those shown in section are indicated by dotted profiles on Figure 1 to allow the repeating pattern to be seen.

The material flow is divided between pairs of adjacent cavities on the same rotor or stator face because of the overlapping position of the cavity on the opposite stator or rotor face.

5

The whole or bulk of the material flow is subjected to considerable working during its passage through the shear zone generated by the mutual displacement of the stator and rotor surfaces. The material is entrained for a short period in each cavity during passage and thus one of its velocity components is altered.

The mixer had a rotor radius of 2.54 cm with 36 hemispherical cavities (radius 0.9 cm) arranged in six rows of six cavities. The internal surface of the stator carried seven rows of six cavities to provide cavity overlap at the entry and exit. The material to be worked was injected into the device through channel 5, which communicates with the annular space between the rotor and stator, during operation by a screw extruder. The material left the device through nozzle 6.

Figure 4 shows elongate cavities arranged in a square pattern; these cavities have the sectional profile of Figure 2. These cavities are aligned with their longitudinal axis parallel to the longitudinal axis of the device and the direction of movement of material through the device; the latter is indicated by the arrow.

Figure 5 shows a pattern of cavities having the dimensions and profile of those shown in Figures 1, 2 and 3. The cavities of Figure 5 are arranged in a square pattern with each cavity being closely spaced from flow adjacent cavities on the same surface. This pattern does not provide as high a degree of overlap as given by the pattern of Figure 3. The latter has each cavity closely

spaced to six cavities on the same surface, ie a hexagonal pattern.

Figure 6 is a section of a cavity transfer mixer
5 having a rotor 7 rotatably positioned within the hollow
stator 8 having an effective length of 10.7 cm and a
diameter of 2.54 cm. The rotor carried five parallel
grooves 9 of semi-circular cross section (diameter 5 mm)
equally spaced around the periphery and extending parallel
10 to the longitudinal axis along the length of the rotor.
The inner cylindrical surface of the stator 8 carried eight
grooves 10 of similar dimensions extending along its length
and parallel to the longitudinal axis. This embodiment,
utilised cavities extending along the length of the stator
15 and rotor without interruption. Temperature control jacket
and conduit were present.

Figure 7 shows a pattern of cavities wherein the
cavities on the rotor, shown hatched, and stator have a
20 larger dimension normal to the material flow; the latter
is indicated by an arrow. The cavities are thus elongate.
This embodiment provides a lower pressure drop over its
length compared with devices of similar geometry but not
having cavities positioned with a longer dimension normal,
25 i.e. perpendicular to the material flow. To obtain a
reduction in pressure drop at least one of the surfaces
must carry elongate cavities having their longer dimension
normal to the material flow.

30 The cavity transfer mixer of Figure 8 had the
external cylinder 11 journaled for rotation about central
shaft 12. Temperature control jacket 13 and conduit were
present but the latter is now shown because the cavities on
the central shaft are shown in plan view while the rotor is
35 sectioned. The central stator (diameter 52 mm) had three
rows 14 of three cavities with partial, i.e. half cavities

at the entry and exit points. On the rotor there were four rows 15 of three cavities. The cavities on the stator and rotor were elongate with a total arc dimension of 5.1 cm normal to the material flow with hemispherical section ends of 1.2 cm radius joined by a semicircular sectioned panel
5 of the same radius. The cavities were arranged in the pattern of Figure 7, i.e. with their long dimension normal to material flow. The rotor was driven by a chain drive to external toothed wheel 16.

10 Example

The cavity transfer mixer illustrated in Figure 1 was used.

15 The mixer had a rotor radius of 2.54cm with 36 hemispherical cavities (radius 0.9cm) arranged in six rows of six cavities. The internal surface of the stator carried seven rows of six cavities to provide cavity overlap at the entry and exit.

20

A tallow/coconut blend (80/20) was vacuum dried to 12% moisture. A portion was air dried at 70°C to a moisture content of 5%. A mixture of 2 parts of the 12% moisture material and 1 part of the 5% moisture material
25 was prepared and divided. One half was subjected to treatment in the cavity transfer device with the aid of a soap plodder while the other half was processed by the conventional milling route. The cavity transfer mixer was operated at 50 rpm with a throughput of 156g min⁻¹ and
30 water cooling was applied to the stator and rotor.

Tablets were stamped from each of the treated feedstocks and, used in handwashing at ambient. The tablets subjected to conventional treatment were gritty to

0090646

- 9 -

B.707

the feel while those treated according to the invention
were not classified as gritty by the users.

What we claim is:

1. A process of reducing the grittiness in a soap-containing detergent material wherein the material is
5 subjected to working by passing the material between two closely spaced mutually displaceable surfaces each having a pattern of cavities which overlap during movement of the surfaces so that the material moved between the surfaces traces a path through cavities alternately in each surface,
10 whereby the bulk of the material passes through the shear zone in the material generated by displacement of the surfaces.
2. A process according to Claim 1 wherein the two surfaces
15 have cylindrical geometry.
3. A process according to Claim 1 or 2 wherein thermal control is applied to at least one surface.
- 20 4. A process according to any preceding claim wherein the cavities in at least one surface are elongate with their long dimension normal to the flow of material.
5. A process according to any preceding claim wherein the
25 temperature of the soap-containing formulation during processing is in the range from about 30°C to about 55°C.
6. A process according to Claim 5 wherein the temperature is below about 40°C.

Fig. 1.

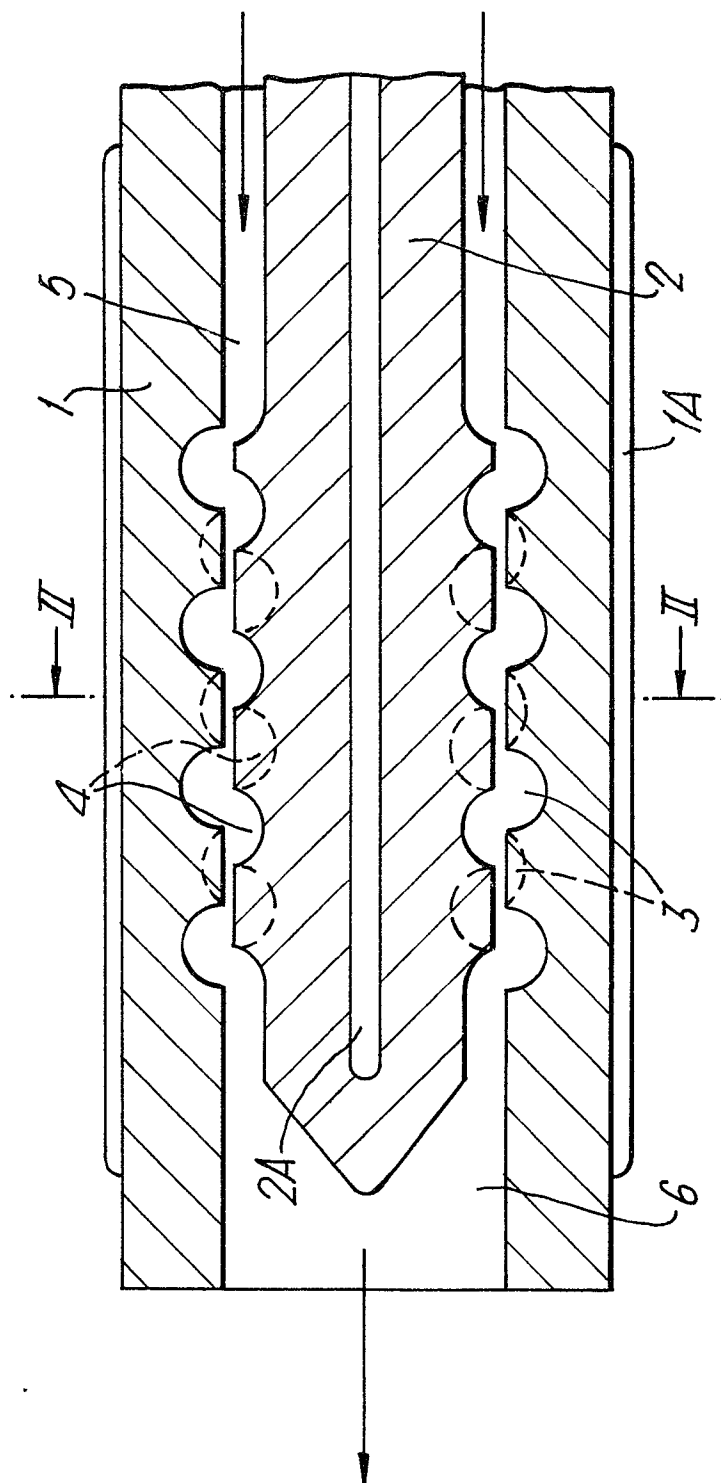


Fig.2.

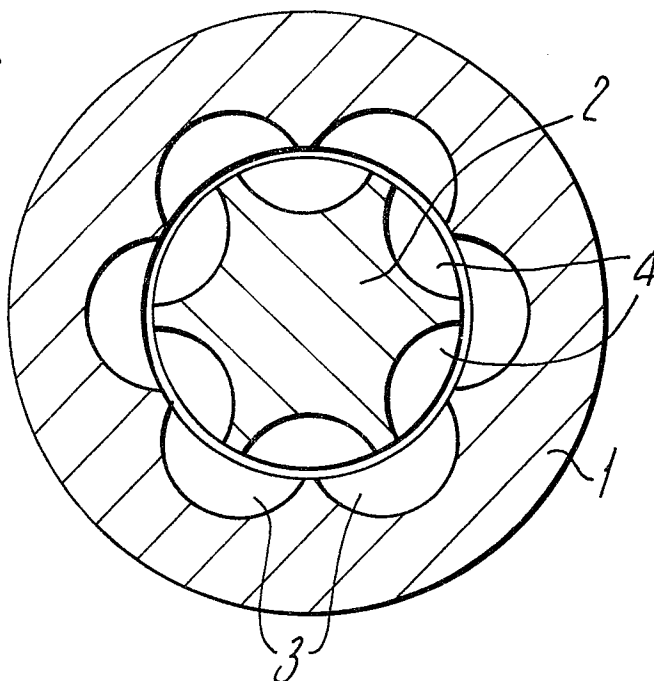


Fig.3.

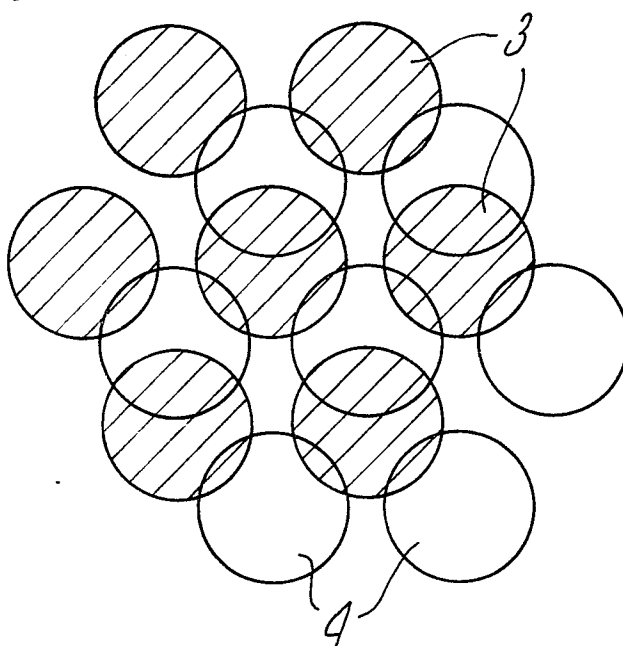


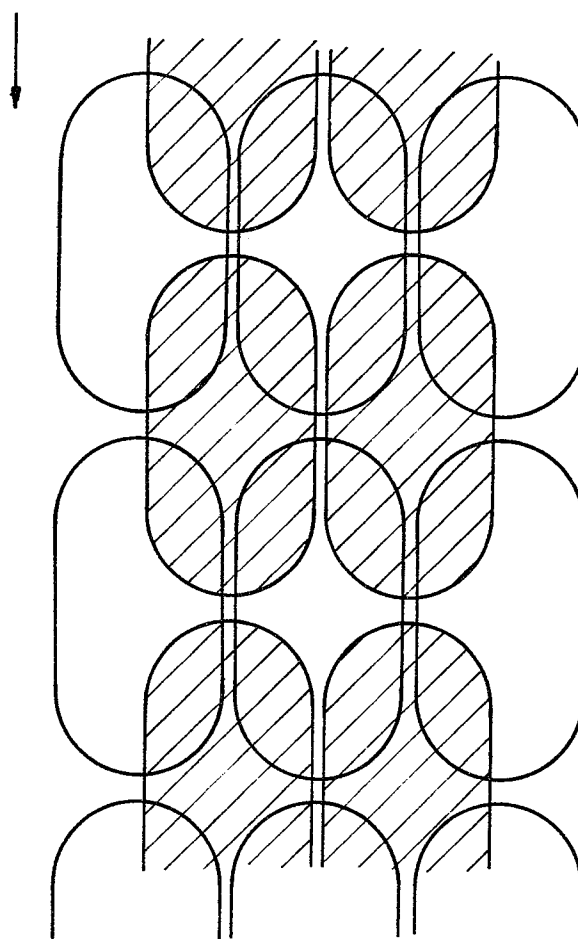
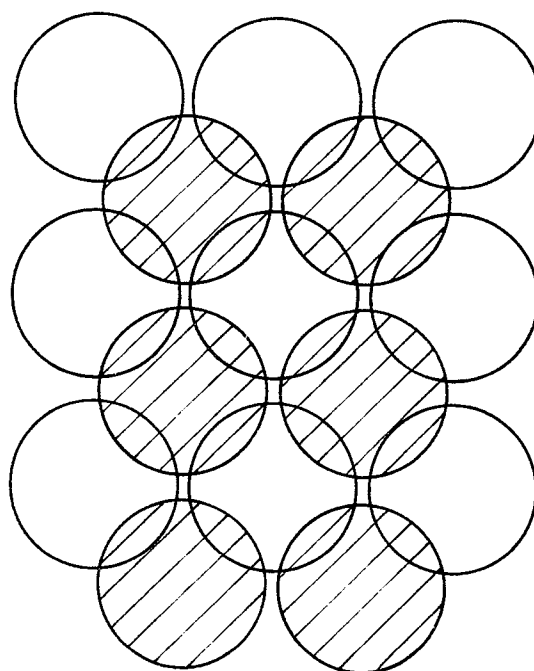
Fig. 4.*Fig. 5.*


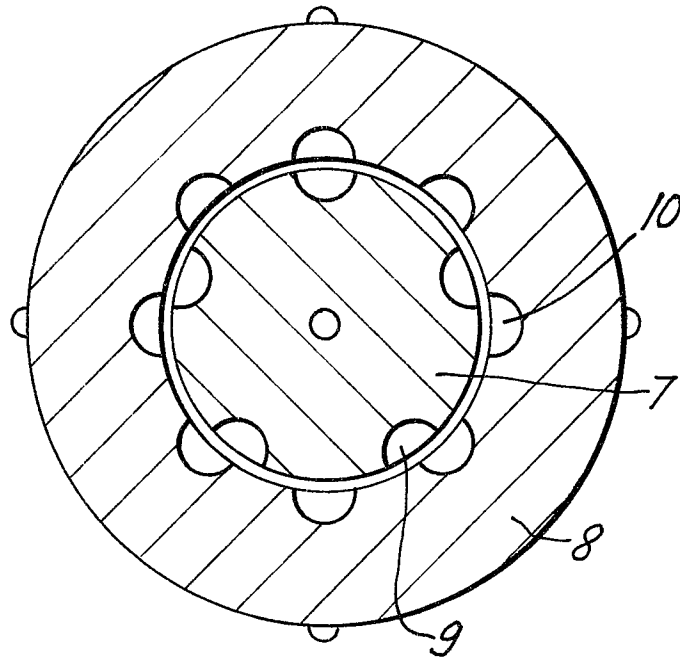
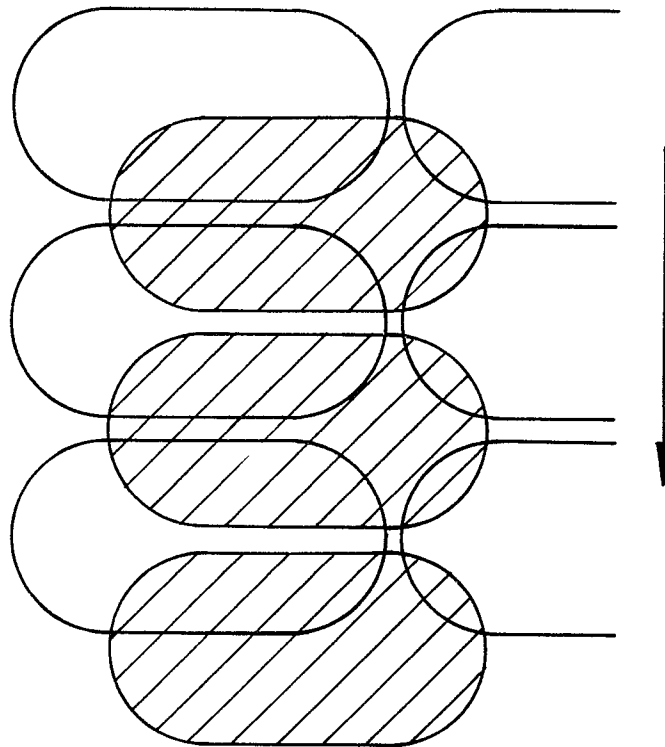
Fig. 6.*Fig. 7.*

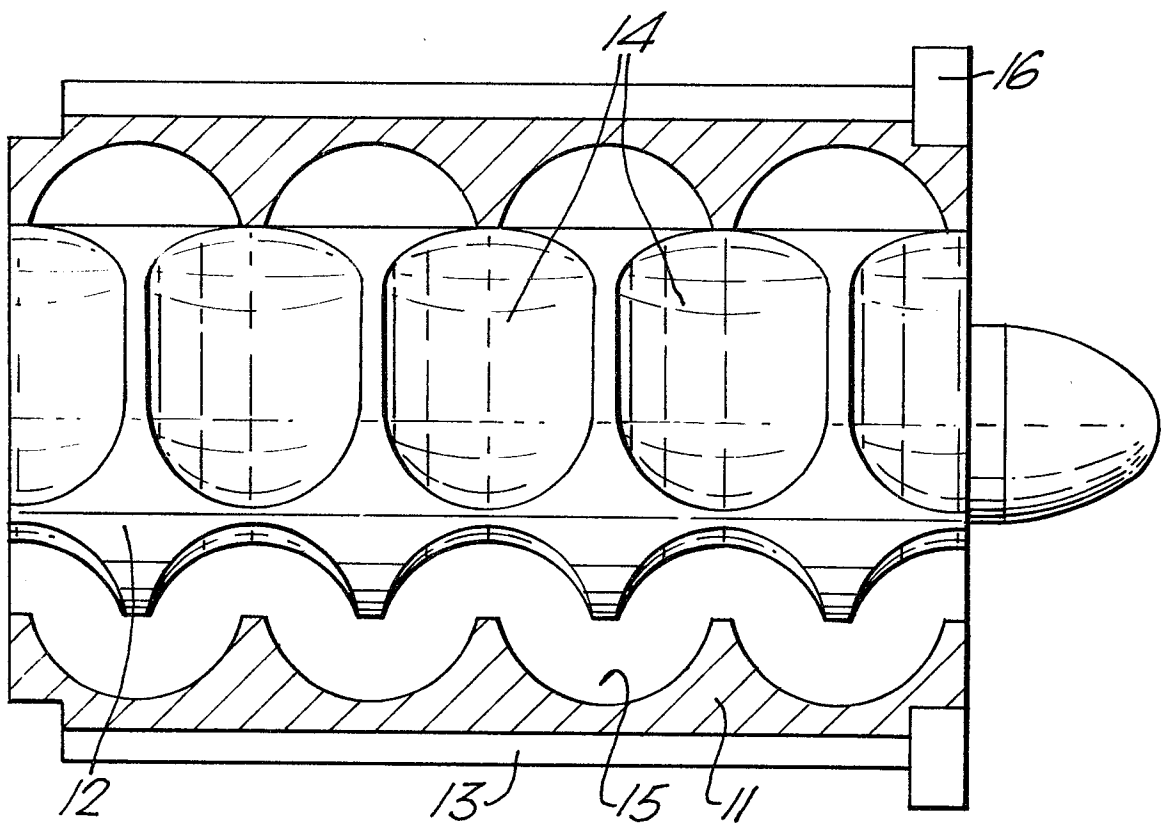Fig. 8.



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
D,A	GB-A- 930 339 (METAL BOX CO.) * Claims 1-4; figure 3 *		C 11 D 13/10
A	GB-A-2 034 742 (F.J. ZUCKER) * Claim 1 *		
A	US-A-3 779 521 (H. GODINES) * Figures 1, 2; claim 1 *		
A	DE-C-1 090 183 (DRAISWERKE GMBH) * Figure 4 *		
			TECHNICAL FIELDS SEARCHED (Int. Cl. 3)
			B 01 F 7/00 B 01 F 15/00 C 11 D 13/00
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 15-06-1983	Examiner SCHULTZE D
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			