



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 092 917
A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 83301843.5

(51) Int. Cl.³: **D 06 M 15/28**
D 21 H 5/20, D 06 N 5/00
C 08 L 95/00

(22) Date of filing: 31.03.83

(30) Priority: 05.04.82 US 365719

(43) Date of publication of application:
02.11.83 Bulletin 83/44

(84) Designated Contracting States:
BE DE FR GB IT NL SE

(71) Applicant: HERCULES INCORPORATED
910 Market Street
Wilmington Delaware 19899(US)

(72) Inventor: Jabloner, Harold
3307 Heritage Drive Westminister
Wilmington Delaware 19808(US)

(74) Representative: De Minvielle-Devaux, Ian Benedict
Peter et al,
CARPMAELS & RANSFORD 43, Bloomsbury Square
London WC1A 2RA(GB)

(54) Spurred polyolefin fibers with improved dispersibility in hydrocarbons, including hydrocarbon containing asphalt compositions and method for making the same.

(57) To an aqueous dispersion of spurred polyolefin pulp is added from about 1% to about 20%, preferably from about 2% to about 12%, by solid weight based on the weight of spurred polyolefin pulp, of an anionic latex containing a rubber or synthetic resin which is swellable in hydrocarbons. The latex is then precipitated onto the spurred polyolefin pulp with a suitable agent, preferably water-soluble calcium, magnesium, barium or aluminum salts or calcium or barium hydroxides. When the product is recovered, the resulting natural rubber or synthetic resin treated spurred polyolefin pulp is readily dispersible in hydrocarbons. Because of this, the pulp can be added to cutback asphalt to form viscous compositions which can be readily sprayed, brushed and trowled with minimal pulp separation problems.

EP 0 092 917 A2

- 1 -

Spurtd polyolefin fibers with improved dispersibility in hydrocarbons, including hydrocarbon containing asphalt compositions and method for making the same

This invention relates to spurtd polyolefin pulp. More particularly, the invention relates to spurtd polyolefin pulp having precipitated thereon a natural rubber or a synthetic resin. The pulp is readily dispersible in organic media and
5 is particularly useful as an additive to cutback asphalt compositions.

As is well known, cutback asphalt compositions have long been used, primarily in the construction industry, as coatings and cements. Typically, cutback asphalt compositions have a
10 viscosity less than about 2,000 cps. In many instances, it has been desirable to include fibers in the compositions to thicken them while at the same time improving their rheology so as to permit ready spraying, brushing and trowelling. Asbestos has been particularly suitable as the fiber compo-
15 nent of such asphalt compositions.

However, due to the health hazards associated with the use of asbestos, considerable effort has recently been directed in the art to the development of asbestos-free formulations having the desirable properties of the asbestos-based
20 compositions. Considerable work has been done, for example, with synthetic fibers, including polyolefin fibers. Polyolefin fibers were found to be effective from the standpoint of thickening the cutback asphalt compositions, but the fibers exhibited a tendency to clump together and float on the sur-
25 face of the compositions. Obviously, the polyolefin fibers did not remain well dispersed in the organic medium presented by the cutback asphalt compositions and as a consequence, the rheological properties of the compositions were very poor.

Now, in accordance with this invention, a cutback asphalt
30 composition containing well dispersed polyolefin pulp has been

found, said composition comprising asphalt, a hydrocarbon solvent and spurted polyolefin pulp having precipitated thereon a natural rubber or a synthetic resin. The pulp is readily dispersible in the cutback asphalt, remains well dispersed
5 therein for several days and is easily redispersed using mild stirring if separation occurs after prolonged storage. Furthermore, the composition has the desired rheological properties and, upon application, is resistant to cracking and to slumping.

10 The indicated pulp is prepared by adding water dispersible spurted polyolefin pulp in low concentration to water; agitating the resulting mixture to form an aqueous dispersion of the pulp; adding to the dispersion, with continued agitation, an anionic latex of a natural rubber or a synthetic
15 resin; precipitating said natural rubber or synthetic resin onto the polyolefin pulp by adding to the agitated aqueous dispersion containing said pulp and said anionic latex an agent capable of precipitating an anionic latex, preferably a water-soluble calcium, barium, magnesium or aluminum salt or
20 calcium or barium hydroxide and then isolating the treated pulp so formed from the aqueous dispersion.

Having generally outlined the embodiments of this invention, the following examples provide more specific details pertaining to the invention. All amounts are based on parts
25 by weight unless otherwise indicated.

Example 1

Ethanol refined spurted polypropylene pulp was made by placing into a Waring Blender, 2 liters of ethyl alcohol and 113.5 g of spurted polypropylene pulp. The pulp was refined
30 for two minutes in the blender, filtered and allowed to dry at room temperature.

Water dispersible treated spurted polypropylene pulp was made by mixing 3.5 liters water and 56.75 g of a 1% aqueous solution of a cationic copolymer which was 66% by weight
35 acrylamide and 34% by weight methacryloyloxyethyltrimethylammonium methyl sulfate. The pH of the solution was adjusted to 10 with aqueous sodium hydroxide. Then 113.5 g of spurted

polypropylene pulp was added and refined in a Waring Blender for one minute.

The water dispersible polypropylene pulp was latex treated by adding 10.99 g of a 51.6% emulsion of a carboxylated styrene-butadiene latex commercially available as Polysar XD 958, from Polysar Ltd. of Sarnia, Ontario, to the water dispersion. The mixture was beaten for 20 seconds.

A sufficient amount of an aqueous 10% barium chloride solution was added to precipitate the latex onto the pulp. The treated pulp was filtered and dried at room temperature.

Two asphalt cutback compositions were made. The first contained five grams of ethanol refined pulp in 400 g cutback asphalt. The second contained five grams latex treated pulp in 400 g of asphalt. For each composition the pulp was dispersed using a Hobart Planetary Mixer for 30 minutes. After dispersion the viscosity of each asphalt composition was measured using a Brookfield RVT model viscosimeter and a #6 spindle at 1 rpm. The composition containing the ethanol refined pulp had a viscosity of 28,000 cps while the latex treated pulp containing composition had a viscosity of 14,200 cps. Each composition was then placed in a metal can and aged at 66°C for three days. Examination after that time showed the latex treated pulp had only slightly separated from the cutback and was easily redispersed. The ethanol refined pulp was greatly separated and did not redisperse easily.

Example 2

A solution was prepared containing 1.14 g of the cationic copolymer described in Example 1 dissolved in 20 liters of water at a pH of 10. The solution was circulated in a Sprout-Waldren single disc, 12 inch refiner equipped with D2A502 blades. Then 227 grams spurted polypropylene pulp was added and refined for 5 minutes at one mil blade clearance. This procedure was duplicated and the materials were combined. Pulp length was measured by Bauer McNett procedure essentially as described in TAPPI standard T233. The only change was a reduction in weight of pulp charged to 2 grams, which was necessitated by the lower density of the synthetic pulp.

The measurement established that 2.1% of the pulp was retained on a 24 mesh screen while 28.2% of the pulp was retained on a 48 mesh screen. The refined water dispersible pulp slurry was divided into eight 50 g. portions. To each portion was added
5 a different latex as outlined in Table 1. The amount of latex added to each portion was chosen to give 10% by weight of latex solids based on the weight of the spurted polypropylene pulp. Each latex was then precipitated onto the pulp by slowly adding a 10% aqueous calcium hydroxide slurry. The
10 amount of calcium hydroxide need to precipitate the latex was predetermined in the following manner: Each latex was added to sufficient water to make a 0.15% solids dispersion. 14 ml of each dispersion was then placed in three bottles. To each of the three bottles was added 0.1, 0.5, or 1.0 ml respec-
15 tively of a calcium hydroxide slurry prepared by adding 10 grams of calcium oxide to 90 ml of water. The diluted latex samples plus calcium hydroxide were allowed to stand overnight and the minimum amount of calcium hydroxide required to clear the dilute latex was visually determined. This amount was
20 then used to calculate the volume needed to precititate the latex in the presence of the spurted polypropylene pulp.

The eight samples were dried at ambient conditions and each dispersed in an asphalt cutback at 1.25% pulp concentration. The pulps were dispersed by mixing in a Hobart Planetary Mixer for 30 minutes. The viscosities of the various
25 samples are reported in Table 1.

For each asphalt cutback composition 500 grams were placed in a metal container and allowed to age for eight days. Then the dispersions were poured onto an eight inch diameter
30 standard sieve with one-quarter inch openings. The amount of each composition that was retained on the sieve when the sieve was blinded and would no longer allow the latex treated pulp to pass through is recorded in Table 1.

Table 1

Sample Number	Latex Used	Trade Name	Brookfield Viscosity 1 rpm, cps	Amount Retained on Screen (g/500 g initially charge)
1	None	-	100,000	289
2	Natural Rubber	Firestone Hartex 103	48,000	206
3	Butadiene	Goodyear Pliolite LPM6433	72,000	240
4	Neoprene	duPont Neoprene Latex-type 115	30,000	81
5	Acrylic	Rohm & Haas Rhoplex N-580	24,000	82
6	Acrylic	Union Carbide UCAR175	66,000	207
7	Acrylic	Union Carbide UCAR173	87,000	218
8	Styrene- butadiene	Firestone FRS2002	51,000	205

- 5 -

Example 3

Five samples were made in the manner outlined in Example 2, except that the spurted polypropylene pulp was refined for 9 minutes at a 3 mil clearance. Each sample was prepared with 10% by weight of a different carboxylated styrene-butadiene latex. The particular latex used is shown in Table 2.

Each sample was used to make a different asphalt composition. Each composition consisted of 1.5% by weight treated pulp and 98.5% asphalt cutback. Slump resistance of these formulations in asphalt cutback was determined by applying a 150 mil of the composition coat of the composition to a 15 pound roofing felt. The coating was allowed to dry for two days at room temperature and 8 hours at 150°F. The samples were rated as failing if any amount of asphalt dripped off.

Table 2

<u>Sample</u>	<u>Latex Used</u>	<u>Brookfield Viscosity at 1.25%</u>		<u>Dry Slump</u>
		<u>1 rpm</u>	<u>10 rpm</u>	
1	Dow #241	100,000	25,500	All samples passed at 96 hours
2	Dow #293	85,600	24,200	
3	Dow #XD30406.00	94,000	23,400	
4	Polysar XD958	87,600	23,800	
5	Grace Darex 526L	90,000	22,800	

Example 4

Water dispersible spurted polypropylene pulp was prepared as outlined in Example 2. To three 227 g. portions of the pulp sufficient carboxylated styrene-butadiene latex, commercially available as Polysar XD-958, sold by Polysar Ltd., Sarnia, Ontario, was added so that there was 5% latex solids based on the weight of the pulps. The latex was then precipitated onto the pulp of each portion by use of a different precipitation agent. The precipitation agent used is outlined in Table 3. Finally, the pulp was filtered and dried.

Each latex treated pulp was then added at 1.25% by weight to a cutback asphalt to form three different samples. And each of the cutback asphalt samples were placed in metal cans and after the first day, aged at 66°C. The amount of pulp
5 separation for the three cutback asphalt samples was determined after 1, 2, and 6 days. The results are shown in Table 3. The ratings are relative to one another; a rating of one indicated the best sample.

Table 3

<u>Sample Number</u>	<u>Precipitation Agent</u>	<u>Brookfield Viscosity, 10 rpm</u>	<u>Separation 1 Day 25°C</u>	<u>Separation 3 Days 66°C</u>	<u>Separation 6 Days 66°C</u>
1	Dilute Alum to pH 4.5	30,000	none	2	2
2	Ca. 14g BaCl ₂	32,000	none	1	1
3	Dilute H ₂ SO ₄ to pH 2.63	30,500	partial	3	3

Example 5

Four samples containing latex treated spurted polypropylene pulp were made as outlined in Example 2 except for the refining. As shown in Table 4, the first sample was refined
5 for 5 minutes at a 10 mil clearance after latex precipitation. The other three samples were refined for 5 minutes with a 10 mil clearance before the latex was added.

To the water dispersible spurted polypropylene pulp was added sufficient carboxylated styrene butadiene latex, commercially available as Polysar XD-958, sold by Polysar Ltd.,
10 Sarnia, Ontario, to produce the percent of latex solids based on the weight of the pulps indicated in Table 4. Sufficient precipitating agent either aqueous 10% barium chloride solution or aqueous 10% calcium hydroxide slurry was used to pre-
15 cipitate the latex onto the pulp. The latex treated pulp were filtered and dried. The four samples were used to make four different cutback asphalt compositions in the manner outlined in Example 1. The compositions were visually inspected after three days and the results were recorded in Table 4. The
20 ratings are relative to each other, a rating of one indicates the best sample.

Table 4

<u>Sample</u>	<u>Refining</u>	<u>Treatment</u>	<u>Viscosity</u>	<u>Separation 3 Days 66°C</u>
1	5 min, 10 mil, after ppt'n of latex	10% Latex solid Ba ²⁺	21,000	2
2	5 min, 10 mil	10% Latex, Ca ²⁺	20,000	1
3	5 min, 10 mil	20% Latex, Ba ²⁺	23,000	4
4	5 min, 10 mil	20% Latex, Ca ²⁺	18,000	2

Example 6

100 lbs. of spurted polypropylene pulp, which had been treated with the cationic polymer described in Example 1 to make it water dispersible, was dispersed in 5000 lbs. of water in a Black Clawson hydropulper with the pH adjusted to 9-10. The slurry was pumped to a refiner chest where it was constantly stirred. For refining, the slurry was pumped from the bottom of the refiner chest through a Sprout Waldron double disk refiner and into the top of the same refiner chest. The pump rate was 140 gallons per minute. At the end of the third pass the pulp length distribution was such that 0.1% was retained on a 24 mesh screen while 11.7% was retained on a 48 mesh screen.

To the refined spurted polypropylene pulp was added 0.3 lbs. by dry weight of a commercially available cationic polyamide flocculent in order subsequently to improve the clarity of the white water. The mixture was stirred for 10 minutes and then 6 lbs. by dry weight of a carboxylated styrene-butadiene latex, commercially available as Dow latex 241, was added over a 10 minute period while stirring. 1.38 lbs., by dry weight, of calcium oxide was mixed with 12.4 lbs. of water. The resulting calcium hydroxide slurry was added in four portions with about 4 to 5 minutes allowed between each addition.

The pulps were wet lapped on the wet end of a Fourdrinier and dried.

A standard roof coating mix was made with 1.5% of the treated pulp and 98.5% dead level asphalt cutback by weight. The cutback was 65% dead level asphalt and 35% mineral spirits. The asphalt cutback had a Brookfield Viscosity of 1300 cps at 25°C (25 rpm, #3 spindle). Using a Hobart Planetary Mixer the treated pulp was blended into the asphalt cutback in about 1/2 minute. The mix was stirred for 10 minutes at which time it had a smooth creamy, buttery consistency. Examination of a smear under a microscope slide showed a fine dispersion and only a hint of pulp grouping. The mix towed smoothly without lumps. The mixture poured smoothly and only

showed slight floccing. The Brookfield viscosities at 25°C (#6 spindle) after standing overnight were:

<u>1 RPM</u>	<u>10 RPM</u>	<u>20 RPM</u>	<u>50 RPM</u>
65,000 cps	21,000 cps	15,500 cps	11,100 cps

5 After seven days at 150°F, the pulps floated to the top. The pulps were easily redispersed with gentle stirring. There was only light floccing. In a wet slump test (40 mils thick), test (150 mils air dried 150°F), about 10% of the coating ran off.

10 An aluminum roof coating was made by combining 520 grams, asphalt dead level cutback which had a viscosity of 1300 cps.; 40 grams, talc (5 micron size); 46 grams, talc (16 micron size); 10 grams of the treated pulp and 184 grams, Alcoa Aluminum Paste #6233, an aluminum flake pigment homogenously
15 incorporated in a solvent such as mineral spirits. The spurted polyolefin pulp immediately mixed into the cutback to give a smooth creamy mix. The total mix time was eleven minutes. The pulp was well dispersed. The mixture poured smoothly with only slight floccing.

20 The Brookfield viscosities with a #6 spindle at 25 were:

<u>1 RPM</u>	<u>10 RPM</u>	<u>20 RPM</u>	<u>50 RPM</u>
150,000 cps.	41,000 cps.	32,000 cps	off scale

After 7 days at 150°F, there was about 1/2" cutback on top, with gentle stirring the pulp and pigment redispersed.

25 Example 7

100 lbs., by dry weight, spurted polypropylene pulp which had been treated with poly(vinyl alcohol) to make it water dispersible and 5,000 water was charged to a hydropulper and dispersed. The pulp length distribution was such that about
30 1% was retained on a 24 mesh screen, while about 21% was retained on a 48 mesh screen.

To the refined spurted polypropylene was added 0.3 lbs. by dry weight of a commercially available cationic polyamide flocculent in order subsequently to improve the clarity of

the white water. The mixture was stirred and then was added 6 lbs., dry weight, of a carboxylated styrene butadiene latex, commercially available as Dow Latex 241. The mixture was stirred for 10 minutes. Then 1.38 lbs., dry weight, of CaO
5 which was slaked in 5.5 lbs. water was poured into the hydra-pulper over a period of 1 to 2 minutes. Mixing was continued for an additional 10 minutes. This slurry was then pumped to a stock chest for 20 minutes.

The pulp was isolated and then dewatered to form wet lap.
10 The solids content of the wet lap was about 50 to 52% by weight and it was 10 to 12 mils thick.

The procedure was repeated except that only 3 lbs. of latex was added.

Two cutback asphalt compositions were made by adding to
15 98.5% by weight asphalt cutback 1.5% by weight of the two samples respectively. The Brookfield viscosities of the samples at 25°C (#6 spindle) were determined and are shown in Table 5.

After setting for 24 hours at 150°F, the pulp floated to the top of both samples. In each case, the pulp was readily
20 redispersed.

Both samples passed the dry slump test as outlined in Example 3.

Table 5

25	Sample	Brookfield Viscosity (CPS)				Dry Slump
		1 RPM	#6 Spindle 10 RPM	20 RPM	50 RPM	
	1	130,000	28,000	20,000	13,500	No movement passed
30	2	140,000	27,000	24,000	13,000	No movement passed

The cutback asphalts used in accordance with this invention are well known in the art. They are formed by diluting asphalt to a liquid or semi-solid state using a petroleum thinner mainly composed of aliphatic hydrocarbons, such as
35 mineral spirits, either alone or in conjunction with a small

amount of aromatic hydrocarbons, such as benzene, toluene or xylene, to assist in solubilizing the asphalt. The asphalt component itself is a solid or semi-solid bitumen which can occur either naturally or can be obtained as a residue in the refining of petroleum. The solids content of the cutback
5 asphalts will ordinarily range from about 20 to about 70% by weight based on the total weight of the cutback composition.

Among the spurted polyolefin pulps which can be used in accordance with this invention are polypropylene and poly-
10 ethylene which are both commercially available. These pulps are generally treated so as to make them water dispersible before they are sold.

Alternatively, the spurted polyolefin pulps may be prepared by a process wherein the polyolefin is dispersed in a
15 liquid which is not a solvent for the polyolefin at its normal boiling point, heating the resulting dispersion at superatmospheric pressure to dissolve the polymer and then discharging the resulting solution into a zone of reduced temperature and pressure to form the fibrous product. The
20 liquid in which the polyolefin is dispersed may be a halogenated hydrocarbon such as methylene chloride, chloroform or carbon tetrachloride; an aromatic hydrocarbon such as benzene, toluene or xylene; an aliphatic hydrocarbon such as pentane or hexane; or an alicyclic hydrocarbon such as cyclohexane.
25 Mixtures of these solvents may be used, and water may be present when it is desired to form an emulsion of the polyolefin. Moreover, the pressure generated by the solvent vapors may be augmented by a pressurized inert gas such as nitrogen or carbon dioxide.

30 The temperature to which the dispersion of the polyolefin in the solvent is heated to form a solution of the polyolefin will depend upon the particular solvent used but should be sufficiently high to effect dissolution of the polyolefin. Temperatures in the range of about 100° to about 225°C ordinarily will be used, and the concentration of the polyolefin in
35 the resulting solution normally will be from about 5 to about 40% by weight. The pressure on the polyolefin solution may be from about 600 to about 1500 p.s.i., preferably from about


900 to about 1200 p.s.i. The orifice through which the solution is discharged will have a diameter of from about 1/2 to about 15 mm and a length to diameter ratio of from about 1/5 to about 10 mm.

5 The polyolefin pulp shown in the examples are spurted polypropylene pulp. However, there may also be used spurted polyethylene pulp and spurted pulps prepared from copolymers of ethylene and propylene, copolymers of propylene and other 1-olefins such as 1-butene, 4-methyl-pentene-1 and 1-hexene,
10 and mixtures of any of the aforementioned polymers.

The pulp length distribution of the spurted polyolefin pulp plays an integral part in determining the viscosity of the cutback asphalt composition. Fiber lengths are commonly reported in terms of their Bauer-McNett classification. Using
15 this classification it is desirable that the pulp length distribution contain less than 2.5% pulps retained on a 24 mesh screen and at from about 10% to about 30% pulps retained on a 48 mesh screen. If the pulp is too short the viscosity of the asphalt composition is unacceptably low. If the pulp is too
20 long the asphalt composition becomes lumpy and the pulp is hard to redisperse once they have separated from the cutback asphalt. It can be refined to the desired length by any of the methods known in the art. Typical of such refining methods is the use of a disc refiner.


25 Thus prepared, the spurted polyolefin pulp can be made water dispersible by dispersing it in an aqueous solution containing a dispersing agent. The dispersing agent may be cationic, anionic or nonionic.

Typical of applicable cationic dispersing agents are
30 those formed by the copolymerization of from about 60 to about 85% by weight of an acrylamide having the formula:



35 with from about 15 to about 40% by weight of an acrylate or

methacrylate ester having the formula:

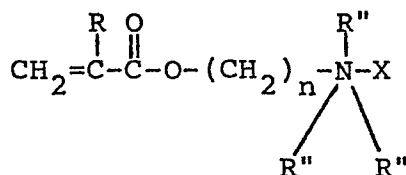

- 5 The amount of each monomer is based on the total monomers charged. R is hydrogen or methyl. R' is hydrogen, methyl or ethyl. R'' is methyl or ethyl, at least one R'' being methyl when X is the methyl sulfate anion. Alternatively, X can be the chloride anion. And n is 1 to 4. When using these co-
- 10 polymers as dispersing agents, the pH of the aqueous solution containing them dissolved therein is adjusted to be in the range of from about 9.5 to about 12 either prior to, during or after contact of the polyolefin pulps with said solution.

A preferred dispersing agent is a cationic copolymer of

15 acrylamide and a methacrylate ester; more specifically, it is a copolymer of acrylamide and methacryloyloxyethyltrimethylammonium methyl sulfate (MTMMS). The amount of acrylamide in this particular copolymer is 66% by weight, and the amount of MTMMS is 34% by weight.

20 Other operable cationic dispersing agents include the tetraalkylammonium halides such as dodecyltrimethylammonium chloride or bromide, tetradecyltrimethylammonium chloride, hexadecyltriethylammonium iodide and octadecyltri-n-butylammonium chloride.

25 Representative anionic dispersing agents are the alkyl aryl sulfonates, such as sodium p-dodecylbenzene sulfonate, sodium isopropyl naphthalene sulfonate, sodium tetrahydro naphthalene sulfonate, sodium methyl naphthalene sulfonate, and the alkyl sulfates, such as sodium cetyl sulfate, ammonium

30 lauryl sulfate and sodium tridecyl sulfate.

Exemplary nonionic dispersing agents are the polyvinyl alcohols as well as the aryloxypoly(ethyleneoxy) alkanols, such as phenoxy penta(ethyleneoxy) ethanol, phenoxy octa(ethyleneoxy) ethanol, phenoxy deca(ethyleneoxy) ethanol,

4-methylphenoxy-penta(ethyleneoxy)ethanol and 2,3,6-triethylphenoxyhepta(ethyleneoxy)ethanol. Related compounds containing both ethyleneoxy and propyleneoxy groups are also useful nonionic dispersing agents. All of the aforementioned dispersing agents are used in the amounts ordinarily required to provide an effective dispersion of pulps in an aqueous medium. Other methods of dispersion such as oxidation or ozonolysis of the spurted polyolefin pulp or addition of alkali treated water-soluble polymers containing quaternary ammonium groups will be known to those skilled in the art.

Once water dispersible spurted polyolefin pulp is obtained it is added to water and agitated to form an aqueous dispersion. Only a small amount, preferably up to about 3% pulp by weight, is added to the water. If too much pulp is added the dispersion becomes impossible to pump or stir.

The natural rubber or synthetic resins which are to be precipitated onto the spurted polyolefin pulp are added to the agitated dispersion as anionic latices. It is the swelling of the precipitated natural rubber or synthetic resin when exposed to the solvent used in a cut back asphalt which gives rise to the dispersibility of the spurted polyolefin pulp in the cutback asphalt. Consequently, it is important that the natural rubber or synthetic resin be one that swells, but is not dissolved, in the solvent used to form the cutback asphalt. Suitable latices include those formed from natural rubber; butadiene-styrene rubber; neoprene; a carboxylated butadiene-styrene rubber such as a terpolymer containing butadiene, styrene and an anionic monomer such as acrylic or methacrylic acid; a butadiene-acrylonitrile rubber; polybutadiene rubber or polyisobutylene rubber. The latex may also be formed from a polyacrylic or polymethacrylic acid ester.

The latices containing the resins are anionic. This can be achieved via the anionic nature of the resin itself, i.e. a resin containing carboxyl functionality such as a carboxylated butadiene-styrene rubber, or through the use of an anionic emulsifier. Being in such form, the elastomers readily precipitate onto the surface of the spurted polyolefin pulp when from about 1% to about 20%, preferably from about 2% to

about 12%, by weight of a solid precipitating agent based on the weight of spurted polyolefin pulp is added to the dispersion. Methods of precipitating anionic latices are known to those skilled in the art. Useful precipitating agents include
5 water-soluble multivalent salts such as those of calcium, barium, magnesium, or aluminum or calcium or barium hydroxides. Other exemplary precipitants include aluminum sulfate, alum (hydrated sodium aluminum sulfate), calcium nitrate and calcium bromide.

10 Once the natural rubber or synthetic resin has been precipitated onto the spurted polyolefin pulp, the pulp may be isolated from the dispersion by conventional means.

CLAIMS

1. A method for making spurted polyolefin pulp which is readily dispersible in hydrocarbons comprising: dispersing about 2% by total weight spurted polyolefin pulp in an aqueous medium; adding to the dispersion from about 1% to about 20%,
5 preferably from about 2 to about 10% by solid weight based on the weight of spurted polypropylene pulp anionic latex where the latex contains natural rubber or synthetic resins which are swellable in the organic media; precipitating the natural rubber or synthetic elastomer onto the spurted polyolefin
10 pulp; and isolating the pulp from the aqueous medium.

2. The method in claim 1 wherein from about 2 to about 12% by solid weight anionic latex is added to the dispersion.

3. The method of claim 1 wherein the spurted polyolefin pulp is spurted polypropylene pulp.

15 4. The method of claim 1, wherein the anionic latex contains neoprene.

5. The method of claim 1, wherein the anionic latex contains a carboxylated butadiene-styrene rubber.

20 6. The method of claim 4, wherein the carboxylated butadiene-styrene rubber is a styrene-butadiene-acrylic acid terpolymer.

7. The method of claim 1, wherein the precipitation is accomplished by adding a sufficient amount of a compound chosen from the group consisting of acid, alum, water-soluble
25 calcium, barium, magnesium and aluminum salts, calcium hydroxide and barium hydroxide.

8. A water dispersible spurted polyolefin pulp having precipitated thereon a natural rubber or synthetic resin swellable in organic media.

9. The water dispersible spurted polyolefin pulp of
5 claim 8, wherein the water dispersible spurted polyolefin pulp is water dispersible spurted polypropylene.

10. The water dispersible spurted polyolefin pulp of claim 8, wherein the synthetic resin is neoprene.

11. The water dispersible spurted polyolefin pulp of
10 claim 8, wherein the synthetic resin is a carboxylated butadiene-styrene rubber.

12. The water dispersible spurted polyolefin pulp of claim 11, wherein the carboxylated butadiene-styrene rubber is a styrene-butadiene-acrylic acid terpolymer.

13. An improved cutback asphalt composition comprising asphalt and a hydrocarbon solvent wherein the improvement comprises the addition of from about 0.5% to about 3% of a spurted polyolefin pulp having precipitated thereon a natural rubber or synthetic elastomer which is swellable in hydro-
20 carbon solvents.

14. The cutback asphalt of claim 13, wherein the spurted polyolefin pulp is spurted polypropylene pulp.

15. The composition of claim 13, wherein the synthetic resin is neoprene.

16. The composition of claim 13, wherein the synthetic
25 resin is a carboxylated butadiene-styrene rubber.

17. The composition of claim 17, wherein the carboxylated butadiene-styrene rubber is a styrene-butadiene-acrylic acid terpolymer.

18. The composition of claim 14, wherein the spurted polypropylene pulp has a Bauer-McNett classification such that less than about 1% of the pulp is retained on a 24 mesh screen and from about 10% to about 30% of the pulp is re-
5 tained on a 48 mesh screen.



European Patent
Office

EUROPEAN SEARCH REPORT

0092917

Application number

EP 83 30 1843

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
A	DE-A-2 413 922 (TORAY) * Claims * -----	1	D 06 M 15/28 D 21 H 5/20 D 06 N 5/00 C 08 L 95/02
			TECHNICAL FIELDS SEARCHED (Int. Cl. 3)
			D 06 M D 06 N D 21 H C 08 L C 10 C
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 03-08-1983	Examiner HELLEMANS W. J. R.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	