

(12)

**EUROPEAN PATENT APPLICATION**

(21) Application number: **84850157.3**

(51) Int. Cl.<sup>4</sup>: **B 28 C 5/16**

**B 01 F 15/00, B 01 F 7/18**

(22) Date of filing: **21.05.84**

(30) Priority: **20.05.83 SE 8302862**

(43) Date of publication of application:  
**28.11.84 Bulletin 84/48**

(88) Date of deferred publication of search report: **03.06.87**

(84) Designated Contracting States:  
**DE FR GB IT NL**

(71) Applicant: **Fetur Patentverwaltungsanstalt**

**Vaduz(LI)**

(72) Inventor: **Bech, Gunnar**  
**Björneborg**  
**S-61056 Vrena(SE)**

(72) Inventor: **Endal, Per-Olov**  
**Musseronvägen 16**  
**S-611 63 Nyköping(SE)**


(72) Inventor: **Ericsson, Rolf**  
**Jupitervägen 6**  
**S-611 60 Nyköping(SE)**

(74) Representative: **Roth, Ernst Adolf Michael et al,**  
**GÖTEBORGS PATENTBYRA AB Box 5005**  
**S-402 21 Göteborg(SE)**

(54) **A device in a mixer.**

(57) A device in a concrete activator, with a number of paddles rotatable about a common axel in a stationary mixing trough. The object is to provide a considerably simplified construction with respect to the bearing- and spring device of the paddle unit, which is so encased that the bearing- and spring components are not exerted to external damages and impurities. These problems have been solved by the fact that each distance member (16) comprises a distance tube projecting radially from the rotor (12) and fixed at this, that said bearing device (17) for a pivot arm (18) extending there-through is detachably attached to the free end of the distance tube, said bearing device being partly axially located in the distance tube, said paddle arm (19) being unrotatably attachable to the end of the pivot arm (18) located outside the distance tube, while a lever plate (25) is unrotatably eccentrically attached at the part (24) of the pivot arm (18) located inside the distance tube, and at the bearing device (17) just opposite the plate (25) a holder-on (26) being attached, and that between the plate and the holder-on (26) there is arranged at least one resiliently compressible member (29) in the form of a rubber block or the like.

**FIG 1**

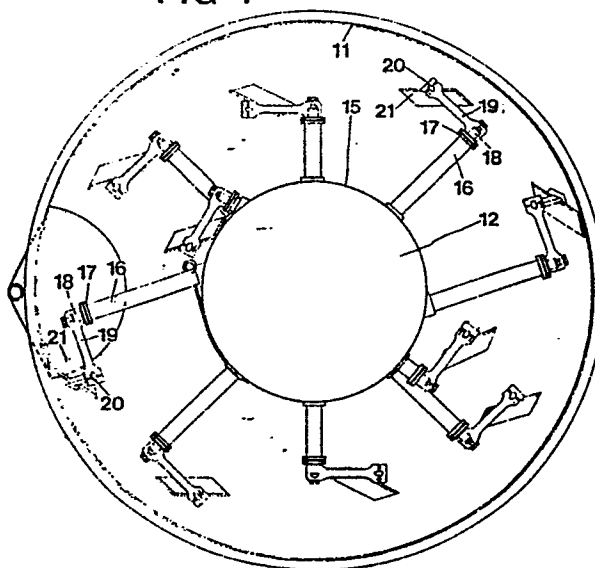



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
X	US-A-3 228 664 (McMILLAN) * Column 5, line 56 - column 6, line 21; figures *	1-4	B 28 C 5/16 B 01 F 15/00 B 01 F 7/18
X	DE-C- 187 630 (EIRICH) * Whole document *	1-4	
A	FR-A-1 494 131 (FERODO) * Whole document *	1-4	
A	GB-A-1 037 221 (BENFORD) * Page 4, line 128 - page 5, line 2; figures 1,3,5 *	1	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 3)
			B 01 F B 28 C
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 27-02-1987	Examiner PEETERS S.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	