

①⑫ **EUROPEAN PATENT SPECIFICATION**

- ④⑤ Date of publication of patent specification: **14.09.88** ⑤① Int. Cl.⁴: **C 08 G 63/08, C 09 D 3/64**
②① Application number: **84111195.8**
②② Date of filing: **19.09.84**

⑤④ **Lactone grafted polyethers in coatings for deformable substrates.**

- | | |
|--|--|
| ③⑩ Priority: 20.09.83 US 534070 | ⑦③ Proprietor: UNION CARBIDE CORPORATION
39 Old Ridgebury Road
Danbury Connecticut 06817 (US) |
| ④③ Date of publication of application:
03.04.85 Bulletin 85/14 | ⑦② Inventor: Kopf, Peter William
27 Walker Drive R.D. No. 1
Belle Mead, NJ 08502 (US)
Inventor: Marriam, Charles Neale
32 Hillcrest Road Box 757 Rural Delivery R.D. 1
Martinsville, NJ 08836 (US) |
| ④⑤ Publication of the grant of the patent:
14.09.88 Bulletin 88/37 | ⑦④ Representative: Weinhold, Peter, Dr. et al
Patentanwälte Dr. V. Schmied-Kowarzik Dipl.-
Ing. G. Dannenberg Dr. P. Weinhold Dr. D. Gudel
Dipl.-Ing. S. Schubert Dr. P. Barz
Siegfriedstrasse 8
D-8000 München 40 (DE) |
| ⑧④ Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE | |
| ⑤⑥ References cited:
DE-A-2 645 039
US-A-4 101 603 | |

EP 0 135 916 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Description

BACKGROUND OF THE INVENTION

Field of the Invention

5 This invention relates to coating compositions, and more particularly to improved coatings for deformable substrates such as elastic material and pre-coated metals subjected to deformation processing.

Description of the Prior Art

10 Hydroxyalkoxy phenoxy polyether resins, such as those disclosed in US—A—3,356,646, (Wynstra, et al.), are useful as binders, i.e., vehicles in coating compositions for pre-coated metal products. These resins provide superior toughness and resistance, particularly for metal substrates in exhibiting superior corrosion resistance and adhesion. In many applications, pre-coated metal is prepared on a coil coating line where a crude coil is uncoiled, cleaned, pre-treated, painted, dried, cooled and finally recoiled. In subsequent manufacture, such products are frequently subjected to various deformation operations. For example, various metal parts are formed from such coils in stamping and forming operations to give pre-coated sheet metal parts for appliances, automobiles and the like.

Such stamping and forming operations severely distress both the metal and the coating resulting in coating deficiencies such as cracks, chips, or peels in the highly distorted or elongated regions of the deformed metal. Consequently, the coated metal part is no longer commercially acceptable nor suitably protected from the environment.

20 It would therefore be desirable to provide a phenoxy polyether coating composition for deformable substrates which will perform satisfactorily during and subsequent to deformation operations.

SUMMARY OF THE INVENTION


25 This invention relates to coating compositions comprising a binder for deformable substrates. The binder is a high molecular weight polymer which is the reaction product of a hydroxyalkoxy phenoxy polyether and a lactone. The invention also relates to a process for producing a coated, deformed article using this coating composition, and the article thereby produced.

DETAILED DESCRIPTION OF THE INVENTION

30 It has been discovered that chemical modification of high molecular weight, hydroxyalkoxy phenoxy polyethers by reaction with lactone monomer, producing a lactone grafted polyether, provides improved coating performance when such material is applied as a binder to deformable substrates. These grafted polymers have been found to exhibit improvements in impact resistance, hardness, gloss, drawability and deformability.

35 The polymeric binder used in this invention is a high molecular weight polymer which is a lactone modified hydroxy substituted polyphenylether. This polymer is the reaction product of a lactone and a hydroxyalkyl phenoxy polyether.


The lactone reactant has the formula:

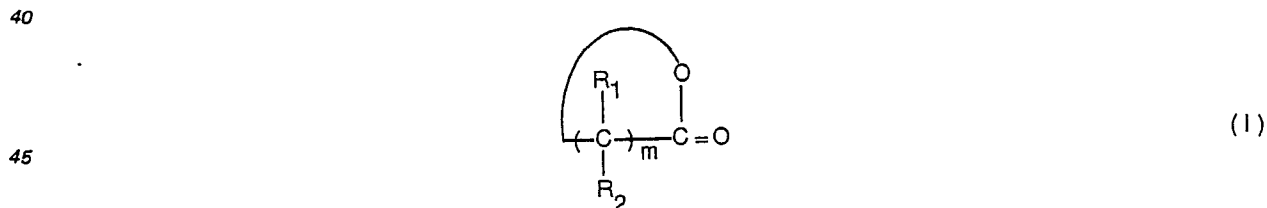

wherein each R_1 and R_2 is individually hydrogen or lower alkyl, and m is from 3 to 12. As such, the substituents of each R_1 , or R_2 , group may vary along the carbon chain. Preferably, R_1 and R_2 are all hydrogen, except that one hydrogen may be replaced by a methyl group.

50 Some representative examples of lactones of formula (I) include caprolactone, methyl-caprolactones, valerolactone, octanolide, dodecanolide, and the like. Preferred lactones include caprolactone, methyl-substituted caprolactones, and valerolactone.

The hydroxyalkoxy phenoxy polyether reactant has the average formula:

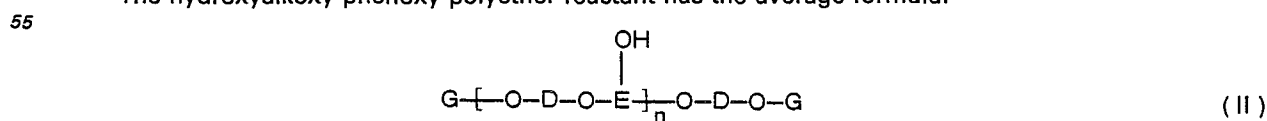

60 wherein D is the residue of a dihydroxy aromatic hydrocarbon; E—OH is the hydroxy residue of an epoxide; G is either hydrogen or the residue of a capped or uncapped epoxide; and n is sufficient to provide a weight average molecular weight of at least 30,000. Depending upon the molecular weight of the constituent residues within the polyether, the degree of polymerization, represented by n , will usually be at least 30, and preferably 50 or more. The polyethers include the polymers described as thermoplastic polyhydroxyethers in 3,356,646 (Wynstra et al.).

65

The polyethers can be prepared by interreacting (1) a dihydric phenol, preferably polynuclear in which the hydroxyl groups are attached to different nuclei, with (2) a substantially equimolar amount of epoxide and (3) an excess over stoichiometric proportions of an alkali metal hydroxide; in aqueous solution at the reflux temperature of the mixture until a prepolymer is formed. The mixture is then heated to about 150—120°C until a polyether, having a reduced viscosity of at least 0.45 dl/g, measured at 25°C as a 0.2 gram sample in 100 ml. of tetrahydrofuran, and a weight average molecular weight of at least 30,000, is obtained.

The reduced viscosity values can be computed using the equation:

$$\text{reduced viscosity} = \frac{t_s - t_0}{ct_0}$$

wherein t_0 is the efflux time of the solvent (tetrahydrofuran), t_s is the efflux time of the polyether solution, and c is the concentration of the polyether solution in terms of grams of polyether per 100 ml. of tetrahydrofuran.


The terminal group of the polyether, G , may provide an average of from 0 to 2 terminal epoxy groups. Due to the high molecular weight and degree of polymerization, the presence of such epoxy groups is insignificant, such that the polymer is substantially free of 1,2-epoxy groups. These terminal epoxy groups may be modified through the addition of capping agents which react with the epoxy group to provide a hydroxyl group on the carbon atom adjacent to the terminal carbon atom and a terminal capping group. Typical capping agents include superheated water or mineral acids to provide terminal hydroxyl groups, i.e. glycols; lower alkyl carboxylic acids to provide terminal phenoxy groups.

The dihydric phenol providing the residue of a dihydroxy aromatic hydrocarbon, D , can be either a dihydric mononuclear phenol or a polynuclear phenol. Such phenols have the general formula:




wherein Ar and Ar' are individually aromatic divalent hydrocarbons; R_3 and R_5 are individually lower alkyl, halogen, or lower alkoxy; R_4 is a covalent bond or divalent radical; x and y are from 0 to a maximum value corresponding to the number of substitutable sites on Ar and Ar' , respectively; and z is 0 or 1. The divalent radical, R_4 , includes, for example, such groups as: (1) divalent hydrocarbon radicals such as alkylenes; alkylidenes; cycloaliphatics, (e.g., cycloalkylene and cycloalkylidene; halogenated, alkoxy or aryloxy substituted alkylenes, alkylidene and cycloaliphatic radicals; alkarylene and aromatic radicals including halogenated, alkyl, alkoxy or aryloxy substituted aromatic radicals; two or more alkylidene radicals separated by an aromatic ring; and a ring fused to an Ar group; (2) polyalkoxy; (3) Polysiloxy; (4) a tertiary amino group; (5) an ether linkage; (6) a carbonyl group; or (7) a sulfur containing group, such as sulfoxide; and the like.

Preferred dihydroxy aromatic hydrocarbons include phenols set forth in formula (III) for when Ar and Ar' are phenylene, z is 1 and R_4 is a divalent saturated aliphatic hydrocarbon radical, particularly alkylene and alkylidene radicals having from 1 to 3 carbon atoms, e.g.



and cycloalkylene radicals having up to and including 10 carbon atoms. Preferably x and y are each 0. Particularly preferred phenols are bis(hydroxyphenyl)alkanes, such as 2,2-bis(4-hydroxyphenyl)propane, providing a residue D of




The epoxide contributing the hydroxy residue, E , can be a monoepoxide or diepoxide. The term "epoxide" defines a compound containing an oxirane group, i.e., oxygen bonded to 2 vicinal aliphatic carbon atoms forming a three-membered ring. Monoepoxides contain one such oxirane group and provide a residue E containing a single hydroxyl group. Diepoxides contain two such oxirane groups and provide a residue E containing two hydroxyl groups.

0 135 916


Epoxides having a terminal oxirane group, i.e., 1,2-epoxides, are preferred. Saturated epoxides, i.e., free of ethylenic unsaturation, and acetylenic unsaturation are also preferred.

Preferred diepoxides contain oxirane groups each connected to a group which may be selected from the list below, and which is not immediately connected to the carbon atoms of the oxirane group. The group may be selected from the following:

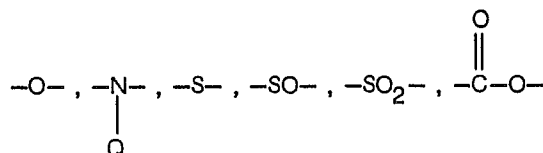

wherein Q is a saturated carbon radical such as an alkyl, cycloalkyl, aryl or aralkyl radical.

Particularly preferred saturated diepoxides contain solely carbon, hydrogen and oxygen, especially wherein the vicinal or adjacent carbon atoms form a part of an aliphatic hydrocarbon chain. Oxygen in such diepoxides can be, in addition to E oxirane oxygen, ether oxygen, --O-- ; oxacarbonyl oxygen,



and the like.

Particularly preferred monoepoxides have the formula:



wherein R_6 , R_7 , R_8 , R_9 and R_{10} are individually hydrogen or methyl and X is an electron donating group, providing residues as $\text{--CH}_2\text{CHCH}_2\text{--}$. Most preferred compounds are those in which X is halogen, i.e. the epihalohydrins. Specific examples of epihalohydrins include epichlorohydrin, epibromohydrin, 1,2-epoxy-1-methyl-3-chloropropane, 1,2-epoxy-1-butyl-3-chloropropane, 1,2-epoxy-2-methyl-3-fluoropropane, and the like.

The relative proportions of polyether to lactone will vary depending upon the amount of grafting desired in order to achieve a desired extent of modification of the reaction product properties as compared to unreacted polyether. Generally, the ratio of lactone to polyether, in parts by weight, will be between 0.05 to 5:1, preferably between 0.1 to 0.5:1; and most preferably between 0.15 to 0.3:1.

The reaction may be conducted in the presence of a solvent which may be a non-hydroxy compound which is liquid and substantially inert to the reactants under the reaction conditions. Such solvents include hydrocarbons; ethers; glycol ether esters, such as ethylene glycol ethyl or butyl ether acetates; ketones; high boiling naphthas; and the like. Preferred solvents include anisole, cyclohexanone, diethylene glycol dimethyl ether, and hydrocarbon mixtures, such as Exxon 150, which is a mixture of alkyl substituted aromatic hydrocarbons, produced by Exxon Corporation.


A catalyst is usually provided to assist the reaction between the lactone and the polyether. Such catalysts promote opening of the lactone ring for reaction as well as enhancing reaction rates. Typical catalysts include metal salts, such as metal alkoxides, halides, alkyls, hydrides and salts of organic acids, and mineral acids. Preferred catalysts include tin carboxylates; organic sulfonic acids, for example toluene sulfonic acid; and sulfuric acid. Particularly preferred catalysts include metal salts of aliphatic carboxylic acids, such as stannous octoate, dibutyl tin dilaurate and the like.

The reaction conditions may be selected from the standard procedures for conducting polymer grafting, via condensation reactions established in the art. The reaction may be conducted at any standard pressure, although atmospheric pressure is preferred. The reaction temperature will usually be between 100°C to 250°C , preferably between 150°C up to the boiling point of the solvent, if used. Most preferred reaction temperatures range between 170° to 200°C .

In a typical embodiment, either the lactone or polyether reactant is added to a reactor vessel, with or without solvent, and heated to the desired reactor temperature, with the addition of the remaining reactant. The material is heated to reflux and catalyst is charged to the reactor, usually in two separate charges. The


reaction is usually conducted at reflux or just below reflux temperature. The reaction is permitted to go to completion, usually after several hours. The solid polymer product may be directly formulated into a coating, or recovered by coagulation, washed with water and filtered to isolate substantially pure product.

The lactone modified hydroxy substituted polyphenylether is a high molecular weight, thermoplastic polymer, having the average formula:

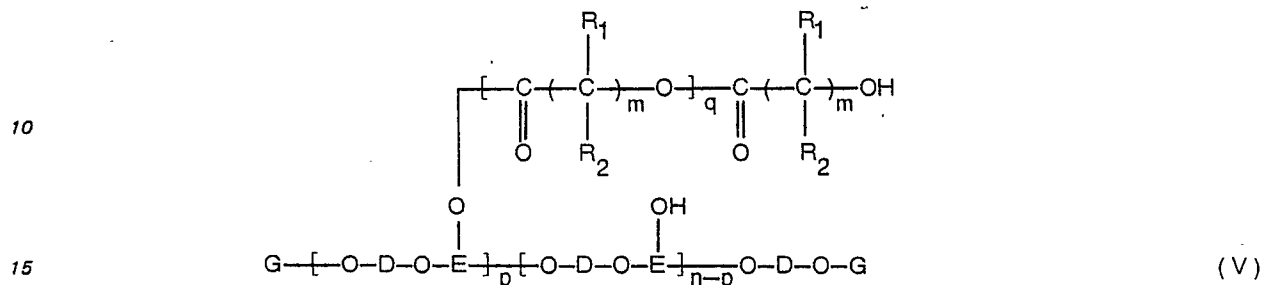

wherein D, E, G, R₁, R₂, m and n are as defined previously; p is from 0.01n to n; and q is ≥ 0. The degree of grafting, p, stated as a fraction of the average number of hydroxyl groups defined by n, is preferably from 0.01 to 0.5, and most preferably from 0.1 to 0.3. The average number of repeating lactone residue units per graft, q+1, is ≥ 1, preferably from 1 to 10, and most preferably from 2 to 5. In the broadest sense, the extent of grafting will range from a minimum amount required to provide measurably improved coating properties up to a maximum amount which, due to the preponderance of polylactone grafts exhibits a substantial decrease in hardness resulting in reduced coating utility. The lactone grafts are located at the reacted hydroxyl sites in a random distribution along the polyether backbone.

Using the preferred reactants of 2,2-bis(4-hydroxyphenyl)propane and epihalohydrin to provide the hydroxyalkoxy phenoxy polyether, and caprolactone as the lactone grafting monomer, a preferred lactone modified hydroxy substituted polyphenylether is provided having the average formula:

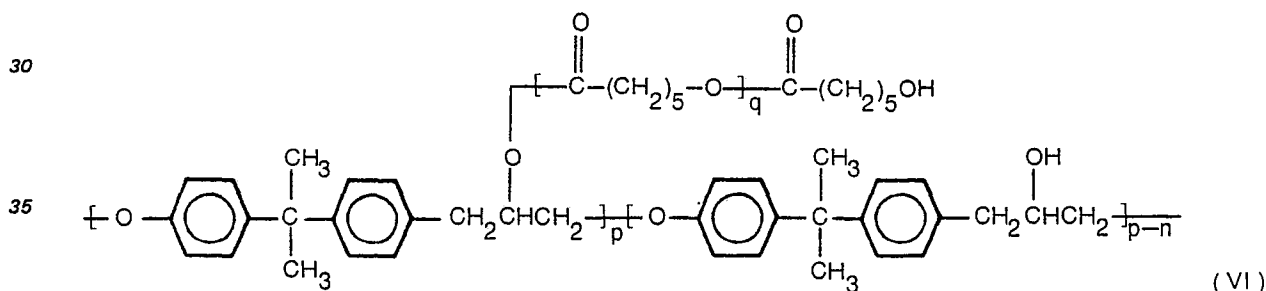

The lactone modified polyethers are particularly useful as binders in coating compositions for pre-coated, deformable substrates. Such coating compositions consist essentially of the lactone modified polyether base. Additional materials may optionally be provided including pigments, crosslinkers, cure initiators, carriers (i.e., solvents), dispersants, flow control agents, anti-settling agents and the like. Standard materials and proportions of these components may be used following well established procedures.

Deformable substrates are those materials which undergo, or have the capability of undergoing, deformation subsequent to the coating operation. Deformable substrates include bendable, elastic or pliable metal (e.g. sheet metal, wire) or plastic material. Such deformation may either be temporary or permanent. Permanent deformation occurs when an inelastic, pre-coated substrate, such as metal, is subjected to a deformation or shaping operation in which at least a portion of the substrate surface is bent or extended in some manner. Typical deformation operations include stamping or other similar procedures, which alter the substrate configuration. Stamping of pre-coated metal parts, such as in the preparation of auto body parts, is an example of substantially permanent deformation. Deformable substrates also include materials which are elastic or flexible such that deformation can occur either temporarily or permanently when the materials are further processed or used. Representative examples of such deformable substrates include films, wire, and pliable sheet, such as reaction injected molded, i.e. RIM, polyurethane, tubular or laminar materials.

Preferred deformable substrates include pre-coated metal or plastic articles which are subjected to shaping operations in preparation for their end uses. Particularly preferred substrates are pre-coated metal or RIM plastic articles which are subjected to stamping or similar shaping operations.

In a typical embodiment, a coating composition is prepared by mixing the lactone modified polyether with up to minor proportions of crosslinker and cure initiator in the presence of a major proportion of solvent. A minor or major proportion of pigment may also be provided. Coatings which contain crosslinkers may then be cured by heating, irradiation or other well established curing procedures.

Coating compositions of the invention may be applied to deformable substrates using standard coating procedures. The coated substrate is usually dried, and may then be subjected to deformation.

It has been discovered that coating compositions containing the lactone modified polyether possess an unexpectedly superior balance of properties when applied to deformable substrates. Improvement in impact resistance, hardness, gloss, drawability and deformability have been demonstrated for coatings with or without pigment, crosslinkers and other nonessential additives. When applied to pre-coated deformable substrates, the lactone modified polyether coatings not only provide superior integrity during and subsequent to deformation operations, but exhibit a desirable balance of improved properties when compared with coatings containing the unmodified polyether binder. Such performance was achieved with the presence of or need for additional components, although other components may optionally be provided.

Examples

The following examples are representative of preferred embodiments of this invention, and may be varied over the entire scope of the invention as previously described. The shorthand designations used in the examples are defined as follows:

Designation	Description
Designation	Description
Designation	Description
Designation	Description
Designation	Description
Anti-settling agent I	A wax distributed under the tradename MPA—60 by N.L. Industries.
Carrier I	Ethylene glycol ethyl ether acetate
Carrier II	Diethylene glycol dimethyl ether
Catalyst I	Stannous octoate
Crosslinker I	Hexamethoxy methyl melamine
Crosslinker II	Amino-bis[3-propyltrimethoxysilane]
Crosslinker III	A hexamethylene diisocyanate derivative distributed under the tradename Desmondur N—75 by Mobay Chemical Co.
Crosslinker IV	Trimethoxy methyl melamine
Cure initiator	p-toluene sulfonic acid
Dispersant I	A pigment dispersant distributed under the tradename Nuosperse 657 by Tenneco.
Drier I	Calcium oxide
Lactone I	Caprolactone
Polyether I	a 2-hydroxypropoxy, 2,2-bis(4,4'-phenoxy)propane polyether having a weight average molecular weight, $\bar{M}_w$ of 66,800 and a number average molecular weight, $\bar{M}_n$, of 16,200, containing substantially equal proportions of terminal epoxy and glycol groups
Solvent I	A high boiling naphtha which is a mixture of alkyl substituted aromatic hydrocarbons distributed under the tradename Exxon® 150 by Exxon Corp.

Examples 1—5: Preparation of Lactone Grafted Polyethers

These examples describe the preparation of lactone grafted polyethers used in this invention, and the amount of material set forth in Table 1 using the following procedures.

Example 1

The hydroxyalkyloxy phenoxy polyether, Polyether I, was pre-dried overnight in an oven at 90°C. The lactone, Lactone I, was purified by distillation and stored over molecular sieves, prior to use.

A solvent, Solvent I, was weighed into a reactor vessel. Polyether was added and the mixture heated to reflux, providing a vapor temperature of 178°C. The mixture was stirred for half an hour, providing a vapor temperature of 181°C. Heating was temporarily discontinued, and the reflux stopped, to add caprolactone, providing a vapor temperature of 171°C in the reactor vessel. The lactone addition provided a solubilizing effect while the mixture was stirred for several minutes without heating, providing a vapor temperature of 156°C. When the mixture was almost completely dissolved, heating was resumed to provide a reflux at a mixture temperature of 192°C. Refluxing was continued at 194°C for several minutes, at which time half the total charge of catalyst, Catalyst I, was added in 20 ml of Solvent I. The mixture was reheated to reflux at 194°C and reacted for three hours to provide a final reaction temperature of 916°C. Heating was again temporarily discontinued while the remaining charge of catalyst was added to the mixture at 190°C. Heating was resumed to provide a reflux temperature of 195°C. The reaction temperature was reduced to below reflux at 188°C—190°C. The reaction proceeded for three hours, at which time the heating was discontinued and the mixture allowed to cool to 165°C. Carrier solvent, Carrier I, was slowly added to the mixture with rapid stirring. The mixture was then cooled to 85°C.

The product mixture contained slight turbidity and was dark amber colored. A portion of the mixture, 30 grams, was removed and the solids recovered by coagulation through the addition of 180 ml isopropanol in a blender. The coagulant was washed twice with approximately 200 ml of distilled water after the isopropanol had been decanted from the blender. The recovered solid product was dried in a Buchner funnel, using a filter cloth and placed in an evacuation oven to dry. The lactone grafted polyether product had a glass transition temperature, T_g of 64°C.

The remaining product, in carrier solution, was retained for coating preparation.

Example 2

Using a procedure similar to that in Example 1, a mixture of components set forth in Table 1 was formulated. The product had a T_g of 39°C.

Example 3

Based on the formulation in Table 1, lactone was weighed into a reactor vessel and heated to about 130°C. Polyether was added and the temperature raised to 155°C. After fifteen minutes, the addition was completed providing a viscous mixture which was slowly stirred. Heating was continued for fifteen minutes and the temperature raised to 160°C at which time the mixture was sparged with nitrogen gas for half an hour. Half of the catalyst, Catalyst I, was charged to the reactor and the mixture heated to 180°C. Stirring was maintained at a low speed and the reaction allowed to continue for three hours. The remaining catalyst was charged to the reactor and the reaction continued for a little under three hours. The resulting product was extremely viscous. The mixture was allowed to cool to room temperature. The product was recovered by coagulation using the procedure as in Example 1, particulated and dried over night to provide 66.6 g of product. The product had a T_g of 39°C.

Example 4

The procedures of Example 3 were substantially repeated based on the formulations set forth in Table 1. The lactone grafted polyether product possessed a T_g of 25°—30°C.

Example 5

The procedures of Example 3 were repeated but using the formulations set forth in Table 1 to provide a lactone grafted polyether product having a T_g of -15°C.

TABLE 1

Lactone Grafted Polyether Preparation

Component	Weight (g)				
	Ex. 1	Ex. 2	Ex. 3	Ex. 4	Ex. 5
Polyether I	600	100	100	600	400
Lactone I	90	30	40	264	508
Solvent I	360	100	—	—	—
Catalyst I ^a	12 ^a	2 ^a	2 ^a	12 ^a	8 ^a
Carrier I	1440	200	—	—	—

a — in drops of approximately 20.6 mg/drop

Examples 6—12: Lactone Grafted Polyether Grafting Analysis

Using the experimental procedures as set forth above, the proportion of lactone reactant was varied with respect to the amount of polyether reactant as set forth in Table 2. The extent and type of grafting was analyzed using carbon-13 nuclear magnetic resonance, i.e., NMR, analysis. The degree of grafting, i.e., the average fraction of hydroxyl groups reacted, was evaluated by analysing the NMR peaks of the carbon atoms adjacent to the oxygen of the unreacted (hydroxy) and reacted (ester) substituents. The graft length, i.e., the average number of repeating lactone residue units per graft, was evaluated based on the NMR peaks of carbon atoms adjacent the terminal (hydroxyl) and chain-linking terminal (ester oxygen) groups. The results of the grafting analysis is set forth in Table 2.

TABLE 2

Lactone Grafted Polyether Grafting Analysis

Example	Caprolactone		Grafting	
	Amount ^a	Mole % ^b	Degree ^c	Length ^d
6	15	27	0.14	2.0
7	15	27	0.15	2.4
8	15	27	0.10	2.5
9	25	38	0.24	2.6
10	25	38	0.14	2.1
11	43	52	0.23	3.9
12	127	76	0.42	5.7

a — parts by weight per 100 parts of polyether reactant

b — calculated on hydroxy equivalents in polyether

c — average fraction of hydroxyl groups reacted

d — average number of lactone residue units per graft.

Examples 13—32 A: Preparation and Evaluation of Coatings

Coating compositions were prepared using the lactone modified polyether product produced in Example I. Control coatings containing the same compositions were also prepared for comparative analysis, except that the lactone modified polyether was substituted with the corresponding unmodified polyether. These control examples are identified by the corresponding example number followed by "A".

The coatings were tested and evaluated using the following procedures:

Coatings Testings and Analysis

Test	Procedure and Evaluation
5 Olsen Button	ASTM E—643—78. The degree of coating integrity was visually observed and reported.
Reverse Impact	ASTM D—2794—69 (1974); with the reported results in (in-lbs) N·m at highest passing of test.
10 Olsen draw	Using first and second deep draw testing described in the instruction manual in the instruction manual entitled "Ductomatic Sheet Metal Tester A—12", Instruction Booklet No. 70—6, Bulletin 85, published by the Olsen Testing Machine Co., pp 3, 8 & 9 (1970). The ability of the coating to withstand partial or complete (failure) delamination is reported.
15 Hardness	Sward Rocker test is disclosed in <i>Paint Testing Manual</i> , G. G. Sward (editor), ASTM publication 500, 13th ed., p. 286 (1972).
Gloss	ASTM D—523; reported at 45° and 60°.

20 The coatings were prepared as follows, with the results set forth in Table 3.

Examples 13—18A

25 These examples describe clear coating compositions free of pigment formulations. The lactone grafted polyether, or corresponding unmodified polyether for the control example, was mixed with the indicated type and amount of crosslinker set forth in Table 3. The mixture also contained 300 parts of Carrier II and 0.4 parts of Cure initiator I. The coatings were applied to standard, cold rolled, steel, (4" × 12") 10.16 × 30.48 cm test panels having a thickness of (0.036") 0.9 mm, using a doctor blade to provide a coating depth of 2 and 4 ml wet, providing a dry film coating of 0.5 and 1.0 ml thicknesses, respectively. The coatings were air dried for between 1 to 48 hours and cured by heating at 177°C for 30 minutes. The coatings were then tested and the results set forth in Table 3.

Examples 19—27A

35 Pigment grinds were prepared on a media mill using ceramic beads and Hegman grind values of 5 or more were obtained. Coatings were prepared containing the indicated amount and type of crosslinker in Table 3 based on 100 weight parts of lactone modified polyether, or unmodified polyether for the control examples. The coating compositions initially contained 247 parts Carrier I, 53 parts Solvent I, 1.7 parts Dispersant I, and the indicated amount of titanium dioxide, TiO₂, pigment.

40 Coated metal substrates were prepared and analyzed as set forth above, except that the curing conditions for Example 24—25A involved heating at 150°C for 45 minutes.

Examples 28—32A

45 Pigment grinds were prepared on a media mill using ceramic beads and Hegman grind values of 4.5 or better obtained. Coating compositions were prepared using the type and amount of crosslinker and zinc pigment, noted in Table 3, based on 100 weight parts of lactone modified polyether, or unmodified polyether in the control examples. The composition initially contained 244 parts Carrier I, 56 parts Solvent I, 6 parts Dispersant I, 20 parts Anti-settling agent I, and 3 parts Drier I.

Coated metal substrates were prepared and tested as in the previous examples.

50

55

60

65

TABLE 3
Coating Compositions and Properties

Example (A=Com- parative Control)	Coating Additives			Coating Analysis				
	Crosslinker (amount) ^a	Pigment (amount) ^a	Olsen Button	Reverse Impact (in-lbs) N-m	Olsen Draw		Hard- ness	Gloss 45° 60°
					First	Second		
13	I(5)	None	P	(>160) >18.08	P	F	—	—
13A	I(5)	None	P	(>160) >18.08	P	F	—	—
14	I(10)	None	F	(140*) 15.82	F	—	—	—
14A	I(10)	None	F	(120) 13.56	F	—	—	—
15	II(7.5)	None	P	(>160) >18.08	P	Delam.	—	—
15A	II(7.5)	None	P	(>160) >18.08	P	Delam.	—	—
16	II(15)	None	P	(>160) >18.08	P	P*	—	—
16A	II(15)	None	P	(>160) >18.08	P	F	—	—
17	III(10)	None	P	(>160) >18.08	P	F	—	—
17A	III(10)	None	P	(>160) >18.08	P	F	—	—
18	III(20)	None	P	(>160) >18.08	P	F	—	—
18A	III(20)	None	P	(>160) >18.08	P	F	—	—
19	None	TiO ₂ (85)	P	(>160) >18.08	P (1/8") 3.2 mm	Delam.*	59*	61* 95*
19A	None	TiO ₂ (85)	P	(>160) >18.08	P (1/2") 12.7 mm	Delam.	50	54 76
20	I(5)	TiO ₂ (85)	F	(>160) >18.08	—	—	74*	35* 57*
20A	I(5)	TiO ₂ (85)	F	(>160) >18.08	—	—	48	22 39
21	II(10)	TiO ₂ (85)	F	(60*) 6.78	—	—	76*	38* 61*
21A	II(10)	TiO ₂ (85)	F	(20) 2.26	—	—	47	27 46
22	II(7.5)	TiO ₂ (85)	P	(>160) >18.08	P (1/16") 1.6 mm	Delam.*	80*	24 40
22A	II(7.5)	TiO ₂ (85)	P	(>160) >18.08	P (1/2") 12.7 mm	Delam.	53	24 37
23	II(15)	TiO ₂ (85)	P	(>160) >18.08	P (1/8") 3.2 mm	Delam.	83*	16* 24*
23A	II(15)	TiO ₂ (85)	P	(>160) >18.08	P (3/8") 9.52 mm	Delam.	50	15 23
24	III(10)	TiO ₂ (85)	P	(>160) >18.08	(3/8") 9.52 mm	Delam.*	48*	9* 12*
24A	III(10)	TiO ₂ (85)	P	(>160) >18.08	(1/2") 12.7 mm	Delam.	46	8 10

TABLE 3 (continued)

Coating Compositions and Properties

Example (A=Com- parative Control)	Coating Additives		Coating Analysis						
	Crosslinker (amount) ^a	Pigment (amount) ^a	Olsen Button	Reverse Impact (in-lbs) N·m	Olsen Draw		Hard- ness	Gloss	
					First	Second		45°	60°
25	III(20)	TiO ₂ (85)	P	(>160) >18.08	(5/8") 15.9 mm Delam.	—	73	9	12
25A	III(20)	TiO ₂ (85)	—	—	—	—	—	—	—
26	IV(9)	TiO ₂ (85)	Good*	(>160) >18.08	—	—	54*	57*	105*
26A	IV(9)	TiO ₂ (85)	Fair	(>160) >18.08	—	—	39	49	84
27	IV(18)	TiO ₂ (85)	Fair*	(>160) >18.08	—	—	64*	55*	101*
27A	IV(18)	TiO ₂ (85)	Poor	(>160) >18.08	—	—	59	49	87
28	None	Zinc(660)	P	(>160) >18.08	P*	—	—	—	—
28A	None	Zinc(660)	P	(>160) >18.08	F	—	—	—	—
29	II(7.5)	Zinc(660)	Cracked	(60) 6.78	F	—	—	—	—
29A	II(7.5)	Zinc(660)	Cracked	(100) 11.30	F	—	—	—	—
30	II(15)	Zinc(660)	Cracked	(120) 13.56	Sl.F*	—	—	—	—
30A	II(15)	Zinc(660)	Cracked	(120) 13.56	Sev.F	—	—	—	—
31	IV(6.2)	Zinc(660)	P	(>160) >18.08	P	—	—	—	—
31A	IV(6.2)	Zinc(660)	P	(>160) >18.08	P	—	—	—	—
32	IV(12.5)	Zinc(660)	P	(>160) >18.08	P	—	—	—	—
32A	IV(12.5)	Zinc(660)	P	(>160) >18.08	P	—	—	—	—

* — Superior performance over comparative control

a — parts by weight per 100 parts lactone grafted polyethers.

(1) a lactone of the formula:



wherein D is the residue of a dihydroxy aromatic hydrocarbon, E—OH is the hydroxy residue of an epoxide, G is either hydrogen or the residue of a capped or uncapped epoxide; and n is sufficient to provide a weight average molecular weight of at least 30,000.

25 2. The composition of claim 1 wherein said polyether is substantially free of 1,2-epoxy groups.

wherein D, E, G, R₁, R₂, m and n are as defined previously; p is from 0.01n to n; and q is ≥ 0 .

R_1 and R_2 are hydrogen; and m is 5.

⁵⁵ wherein R₆, R₇, R₈, R₉ and R₁₀ are individually hydrogen or methyl and X is an electron donating group.

6. The composition of claim 5 wherein R₆, R₇, R₈, R₉ and R₁₀ are hydrogen; and X is halogen.

⁶⁵ wherein Ar and Ar' are individually aromatic divalent hydrocarbons; R₃ and R₅ are individually lower alkyl,

0 135 916

halogen, or lower alkoxy; R₄ is a covalent bond or divalent radical; x and y are from 0 to a maximum value corresponding to the number of substitutable sites on Ar and Ar', respectively; and z is 0 or 1.

8. The composition of claim 7 wherein Ar and Ar' are phenylene; R₄ is

$$\begin{array}{c} \text{CH}_3 \\ | \\ -\text{C}- \\ | \\ \text{CH}_3 \end{array};$$

9. The composition of claim 1 wherein each R_1 and R_2 is hydrogen; and m is 5.

10. The composition of any of claims 1—9 additionally containing a carrier, a crosslinker and a cure initiator.

11. The composition of claim 10 additionally containing a pigment.

12. A coated article comprising a deformable substrate, e.g. sheet metal, wire or an elastic material, which is coated with the composition of any of claims 1—11.

13. A coated article comprising a deformable substrate which is coated with a cured composition of any of claims 1—11.

14. A process for producing a coated, deformed article which comprises:

(1) coating a deformable article with a coating composition containing a binder which is a high molecular weight polymer which is the reaction product of

(a) a lactone of the formula:

$$\begin{array}{c} \text{R}_1 \\ | \\ \text{---}(\text{C})\text{---} \\ | \\ \text{R}_2 \end{array} \quad \text{m} \quad \begin{array}{c} \text{O} \\ | \\ \text{C}=\text{O} \end{array}$$

(1)

wherein each R₁ and R₂ is individually hydrogen or lower alkyl, and m is from 3 to 12; and

(b) a hydroxyalkoxy phenoxy polyether having the average formula:

$$\text{G}-\left[\text{O}-\text{D}-\text{O}-\overset{\text{OH}}{\underset{|}{\text{E}}} \right]_n-\text{O}-\text{D}-\text{O}-\text{G}$$

(11)

wherein D is the residue of a dihydroxy aromatic hydrocarbon, E—OH is the hydroxy residue of an epoxide, G is either hydrogen or the residue of a capped or uncapped epoxide; and n is sufficient to provide a weight average molecular weight of at least 30,000; and

(2) drying said coating article; and

(3) deforming said article.

15. A pre-coated, deformed article produced by the process of claim 14.

Patentansprüche

1. Überzugsmittel, umfassend ein Bindemittel für verformbare Substrate, dadurch gekennzeichnet, 50 daß das Bindemittel ein hoch molekulares Polymer ist, das das Reaktionsprodukt ist aus (1) einem Lacton der Formel

$$\begin{array}{c} \text{R}_1 \\ | \\ \text{---}(\text{C})\text{---} \\ | \\ \text{R}_2 \end{array} \quad \text{m} \quad \begin{array}{c} \text{O} \\ | \\ \text{C}=\text{O} \end{array}$$

(1)

worin jedes R_1 und R_2 jeweils Wasserstoff oder Niederalkyl ist und m einen Wert von 3 bis 12 hat; und

(2) einem Hydroxylalkoxyphenoxypolyether mit der durchschnittlichen Formel

$$\text{G}-\left[\text{O}-\text{D}-\text{O}-\overset{\text{OH}}{\underset{|}{\text{E}}} \right]_n-\text{O}-\text{D}-\text{O}-\text{G}$$

(11)

worin D er Rest eines aromatischen Dihydroxykohlenwasserstoffs ist, E—OH der Hydroxyrest eines Epoxids ist, G entweder Wasserstoff oder der Rest eines gegebenenfalls mit einer Blockierungsgruppe versehen Epoxides ist und n ausreicht, um ein Gewichtsmittel des Molekulargewichtes von mindestens 30 000 zu ergeben.

- $$\begin{array}{c}
 \text{R}_1 \\
 | \\
 \text{10 } \text{---} \text{C} \text{---} \text{C} \text{---} \text{O} \text{---} \text{C} \text{---} \text{C} \text{---} \text{OH} \\
 || \quad | \quad | \quad || \quad | \\
 \text{O} \quad \text{R}_2 \quad \text{R}_2 \quad \text{O} \quad \text{R}_2 \\
 | \\
 \text{O} \\
 | \\
 \text{15 } \text{G} \text{---} \text{O} \text{---} \text{D} \text{---} \text{O} \text{---} \text{E} \text{---} \text{O} \text{---} \text{D} \text{---} \text{O} \text{---} \text{E} \text{---} \text{O} \text{---} \text{D} \text{---} \text{O} \text{---} \text{G} \\
 | \quad | \quad | \quad | \quad | \quad | \quad | \quad | \quad | \quad | \\
 \text{O} \quad \text{OH} \quad \text{O} \quad \text{OH} \quad \text{O} \quad \text{OH} \quad \text{O} \quad \text{OH} \quad \text{O} \quad \text{OH} \\
 \text{p} \quad \text{n-p}
 \end{array}
 \quad (V)$$

4. Mittel nach irgendeinem der Ansprüche 1 bis 3, worin D




- $$\begin{array}{c}
 \text{R}_6 \\
 | \\
 \text{X}-\text{C}-\text{C}-\text{C}-\text{R}_{10} \\
 | \quad | \quad | \\
 \text{R}_7 \quad \text{R}_8 \quad \text{R}_9
 \end{array}
 \begin{array}{c}
 \diagup \quad \diagdown \\
 \text{O}
 \end{array}
 \quad (IV)$$

6. Mittel nach Anspruch 5, worin R_6 , R_7 , R_8 , R_9 und R_{10} Wasserstoff sind und X Halogen ist.

- $$45 \quad \text{HO}-\left[\overset{\text{(R}_3\text{)}_x}{\underset{|}{\text{Ar}}} - \text{(R}_4\text{)} - \overset{\text{(R}_5\text{)}_y}{\underset{|}{\text{Ar}'}} \right]_7 - \text{OH} \quad (\text{III})$$

8. Mittel nach Anspruch 7, worin Ar und Ar' Phenylen sind; R₄




11. Mittel nach Anspruch 10, das zusätzlich eine Pigment enthält.

- 14


13. Überzogener Gegenstand, umfassend ein verformbares Substrat, das mit einem ausgehärteten Mittel nach irgendeinem der Ansprüche 1 bis 11 überzogen ist.

14. Verfahren zur Herstellung eines überzogenen, geformten Gegenstandes, das umfaßt

- (1) das Überziehen eines verformbaren Gegenstandes mit einem Überzugsmittel, enthaltend ein Bindemittel, das ein hochmolekulares Polymer ist, das das Reaktionsprodukt ist aus
(a) einem Lacton der Formel

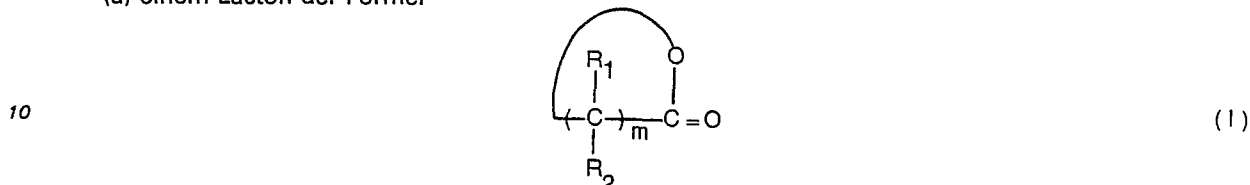

worin jedes R₁ und R₂ jeweils Wasserstoff oder Niederalkyl ist; und m einen Wert von 3 bis 12 hat; und
(b) einem Hydroxyalkoxyphenoxyether mit der durchschnittlichen Formel



worin D der Rest eines aromatischen Dihydroxykohlenwasserstoffs ist; E—OH der Hydroxyrest eines Epoxides ist; G entweder Wasserstoff oder der Rest eines gegebenenfalls mit einer Blockierungsgruppe versehenen Epoxides ist und n ausreicht, um ein Gewichtsmittel des Molekulargewichtes von mindestens 30 000 zu ergeben;

(2) das Trocknen dieses überzogenen Gegenstandes und


(3) das Verformen dieses Gegenstandes.

15. Ein vorher überzogener, verformter Gegenstand, hergestellt nach dem Verfahren von Anspruch 14.

Revendications


1. Composition de revêtement comprenant un liant pour substrats déformables, caractérisée en ce que ledit liant est un polymère de haut poids moléculaire qui est le produit de réaction:

(1) d'une lactone de formule:

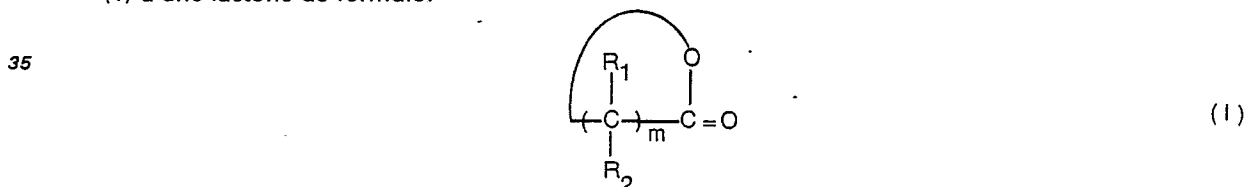

dans laquelle chaque substituant R₁ et R₂ représente individuellement l'hydrogène ou un groupe alkyle inférieur, et m a une valeur de 3 à 12; et


(2) un hydroxyalkoxyphénoxypolyéther de formule moyenne:



dans laquelle D est le résidu d'un hydrocarbure aromatique dihydroxylique, E—OH est le résidu hydroxylique d'un époxyde, G représente l'hydrogène ou le résidu d'un époxyde protégé ou non protégé; et n a une valeur suffisante pour donner une moyenne en poids du poids moléculaire d'au moins 30 000.

2. Composition suivant la revendication 1 dans laquelle le polyéther est pratiquement dépourvu de groupes 1,2-époxy.


3. Composition suivant la revendication 1 ou la revendication 2, dans laquelle le polymère répond à la formule moyenne:

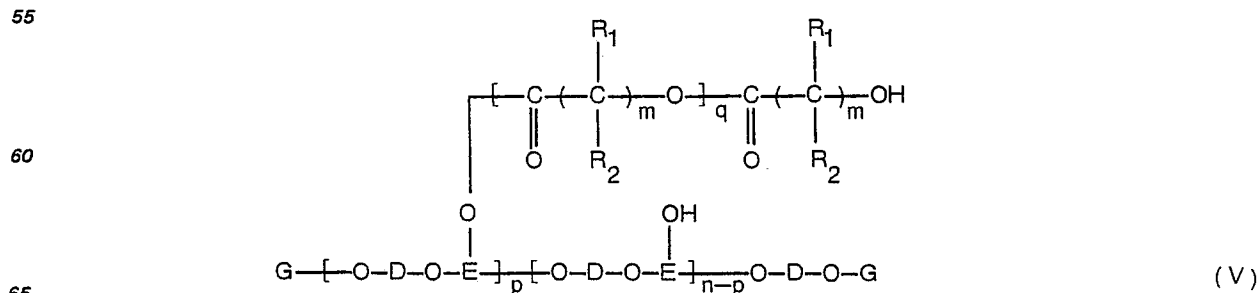

0 135 916

dans laquelle D, E, G, R₁, R₂, m et n répondent aux définitions précitées: P a une valeur de 0,01n à n; et q est supérieur ou égal à 0.

4. Composition suivant l'une quelconque des revendications 1 à 3, dans laquelle D représente

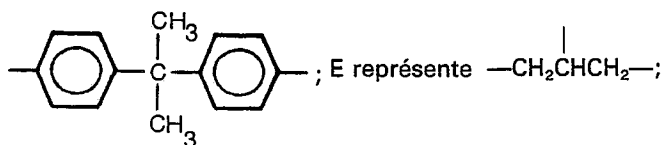

R₁ et R₂ représentent l'hydrogène; et m est égal à 5.

5. Composition suivant la revendication 1, dans laquelle l'époxyde répond à la formule:



20 dans laquelle R₆, R₇, R₈, R₉ et R₁₀ représentent individuellement l'hydrogène ou un groupe méthyle et X est un groupe donneur d'électrons.


6. Composition suivant la revendication 5, dans laquelle R₆, R₇, R₈, R₉ et R₁₀ représentent l'hydrogène; et X est un halogène.

7. Composition suivant une ou plusieurs des revendications 1 à 6, dans laquelle l'hydrocarbure aromatique dihydroxylique répond à la formule:



35 dans laquelle Ar et Ar' représentent individuellement des hydrocarbures aromatiques divalents; R₃ et R₅ représentent individuellement un groupe alkyle inférieur, halogéno ou alkoxy inférieur; R₄ est une liaison covalente ou un radical divalent; x et y ont une valeur allant de zéro à une valeur maximale correspondant au nombre de sites substituables sur, respectivement; Ar et Ar'; et z a la valeur 0 ou 1.

8. Composition suivant la revendication 7, dans laquelle Ar et Ar' sont des groupes phénylène; R₄ représente



45 x et y ont chacun la valeur 0; et z a la valeur 1.

9. Composition suivant la revendication 1, dans laquelle chaque substituant R₁ et R₂ représente l'hydrogène; et m est égal à 5.

10. Composition suivant l'une quelconque des revendications 1 à 9, contenant en outre un support, un agent de réticulation et un initiateur de durcissement.

50 11. Composition suivant la revendication 10, contenant en outre un pigment.

12. Article revêtu comprenant un substrat déformable, par exemple une feuille métallique, un fil métallique ou une matière élastique, qui est revêtu de la composition suivant l'une quelconque des revendications 1 à 11.

13. Article revêtu comprenant un substrat déformable qui est revêtu d'une composition durcie suivant l'une quelconque des revendications 1 à 11.

14. Procédé de production d'un article revêtu, déformé, qui consiste:

(1) à revêtir un article déformable d'une composition de revêtement contenant un liant qui est un polymère de haut poids moléculaire qui est le produit de réaction

(a) d'une lactone de formule:




0 135 916

dans laquelle chaque substituant R_1 et R_2 représente individuellement l'hydrogène ou un groupe alkyle inférieur, et m a une valeur de 3 à 12; et

(b) d'un hydroxyalkoxyphénoxypolyéther de formule moyenne:

5



10

dans laquelle D est le résidu d'un hydrocarbure dihydroxylique aromatique, E—OH est le résidu hydroxylique d'un époxyde, G est l'hydrogène ou le résidu d'un époxyde protégé ou non protégé; et n a une valeur suffisante pour donner une moyenne en poids du poids moléculaire d'au moins 30 000; et

(2) à sécher ledit article revêtu; et

(3) à déformer ledit article.

15. Article revêtu préalablement, déformé, produit par le procédé suivant la revendication 14.

15

20

25

30

35

40

45

50

55

60

65