

①②

EUROPEAN PATENT APPLICATION

②① Application number: **84111668.4**

⑤① Int. Cl.⁴: **D 06 F 58/02**

②② Date of filing: **29.09.84**

③① Priority: **30.09.83 AU 1644/83**

⑦① Applicant: **WYBORN, Kenneth George, Swallow Road Industrial Estate, South Grafton NSW 2461 (AU)**

④③ Date of publication of application: **24.04.85**
Bulletin 85/17


⑦② Inventor: **WYBORN, Kenneth George, Swallow Road Industrial Estate, South Grafton NSW 2461 (AU)**

⑧④ Designated Contracting States: **AT BE CH DE FR GB IT LI NL SE**

⑦④ Representative: **Prüfer, Lutz H., Dipl.-Phys., Harthausen Strasse 25d, D-8000 München 90 (DE)**

⑤④ **Clothes dryer.**

⑤⑦ A clothes dryer has, within a cabinet, a vacuum chamber in which a perforated drum is rotatable, a loading doorway in the cabinet, through which clothes to be dried can be fed into the drum, being provided with a door which, when closed, seals the vacuum chamber. A motor rotates the drum and a vacuum pump withdraws air and water vapour from the vacuum chamber and the contained drum, electric heating elements in the chamber heating the drum and its contents.

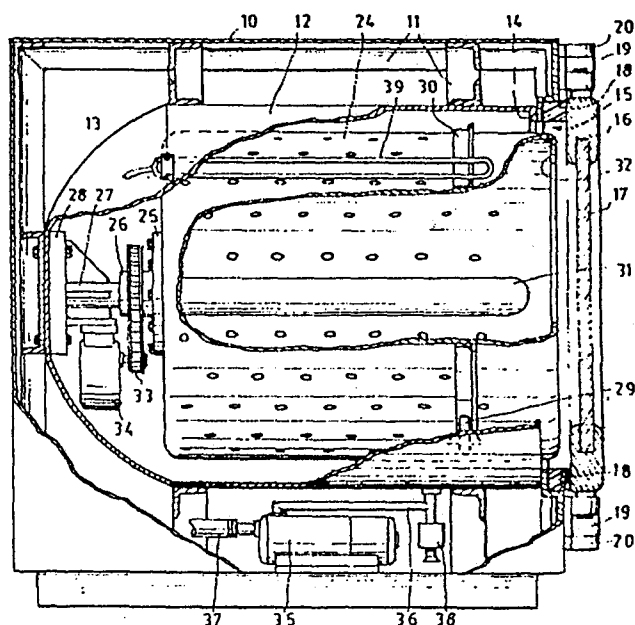

"A CLOTHES DRYER"

This invention relates to a clothes dryer.

A domestic clothes dryer of well-known type consists normally of a cabinet containing a rotary
5 perforated cylindrical drum, its axis horizontal, and with a number of inwardly extending vanes, clothes to be dried being fed into the drum through a hinged door in the cabinet, the drum then being heated electrically, as it is rotated by a motor, for the extraction of
10 moisture.

Clothes dryers of this type are generally effective, but have fairly high running costs.

The present invention has been devised with the general object of providing a clothes dryer which,
15 though simple and economical to manufacture, is also quick and inexpensive in operation.

The invention resides broadly in a clothes dryer of the type including a chamber, a perforated rotary drum within the chamber, a loading doorway in
20 the chamber through which clothes may be loaded into the drum, a door for closing the doorway, drive means for rotating the drum and heating means for heating its contents, wherein sealing means are provided for making an air-tight seal between the closed door and the load-
25 ing doorway, and evacuating means are provided for creating a partial vacuum within the chamber and the drum therein to vaporize moisture in the clothes and withdraw air and water vapour. Preferably there is provided a valve-controlled air inlet to the chamber, for breaking
30 the partial vacuum therein and permitting the door to be opened at the conclusion of the drying. Other features of the invention will become apparent from the following description.

A preferred embodiment of the invention is
35 shown in the accompanying drawing, wherein:-

-2-

FIG. 1 is a front elevational view of a clothes dryer according to the invention, and

FIG. 2 is a partly broken-away side elevational view of the clothes dryer.

5 The clothes dryer illustrated includes a cabinet 10 of sheet metal fixed upon a rigid main frame 11.

10 A vacuum chamber 12 is rigidly mounted within the main frame 11, and is substantially cylindrical, its axis horizontal, with a domed rear end 13. The front end of the vacuum chamber has an inturned peripheral flange 14 which is secured and sealed to the periphery of a loading opening 15 in the front of the cabinet 10. The loading opening may be closed by a
15 circular door 16 with a strong transparent window 17 and a resiliently compressible sealing gasket 18 secured about its rear face. The door 16 is mounted between a pair of arms 19 hinged at 20 to one side of the front of the cabinet 10 and engaging trunnions 21 at the top
20 and bottom of the door in such manner that the door is allowed limited pivotal movement to ensure that when the door is closed its sealing gasket 18 will be completely seated about the loading opening 15. The door may be opened by a handle 22.

25 A cylindrical perforated drum 24 is rotatably mounted coaxially within the vacuum chamber 12, its closed rear end being bolted to a circular flange 25 on the front end of a hub 26 rotatably mounted, with suitable anti-friction bearings (not shown) on a shaft
30 27 rigidly secured to and extending forwardly of a mounting plate 28 fixed to the middle part of the domed rear end 13 of the vacuum chamber 12. The front part of the drum is supported by a pair of rollers 29 rotatably mounted in the lower part of the vacuum chamber 12
35 and engaging a circumferential rail 30 about the drum.

- 3 -

The drum 24 has a number of inwardly extending tumbler vanes 31, and at its front is an inturned peripheral retaining flange 32.

The drum 24 may be rotated by a chain drive at 33 from an electric motor and gearbox assembly 34 mounted within the rear of the vacuum chamber 12.

The vacuum chamber 12 and contained drum 24 may be evacuated, when the door 16 is closed, by an electrically driven vacuum pump 35. An air line 36 leads from the vacuum chamber to the intake of the vacuum pump, the exhaust of which is connected to a waste pipe 37. To relieve the vacuum in the chamber 12, a solenoid-operated valve 38 may be opened to admit air to the air line 36.

Two electric heating elements 39 are mounted within the upper part of the vacuum chamber 12, clear of the drum 24.

The various controls, switches and indicator lights, indicated generally at 40, for the electric integers of the apparatus, are mounted on the front panel of the cabinet 10.

In use, the door 16 is opened and clothes to be dried are loaded through the loading opening 15 and into the perforated drum 24. The door is closed, a time control is set and by means of the appropriate switch, the vacuum pump 35 is operated to evacuate the vacuum chamber 12, so that the sealing gasket 18 of the door 16 is brought firmly onto its seating about the loading opening. At the same time the motor 34 is operated to rotate the perforated drum 24, and the heating elements 39 are energised.

The evacuation of the vacuum chamber and the rotating drum containing the tumbled clothes rapidly vaporizes the moisture in the garments and the heat emitted from the electric elements compensates for loss of latent heat of vaporization. When the pre-set time

. cycle has been completed, the heating elements are automatically switched off, the rotation of the drum is stopped, the operation of the vacuum pump is discontinued, and the solenoid valve 38 is opened to admit
5 atmospheric air to the vacuum chamber and drum. The door may then be opened and the dried clothes removed.

It will be found that the clothes drier is particularly economical and efficient in operation. The partial vacuum created within the vacuum chamber 12 and
10 the contained drum 24 by the vacuum pump rapidly vaporises and withdraws moisture in the clothes, and this action is accelerated by the tumbling of the clothes in the rotating drum, while any chilling due to loss of latent heat of vaporisation is avoided by the provision
15 of the heating element 37.

20

25

30

35

CLAIMS:

1. A clothes dryer of the type including a chamber, a perforated drum rotatable within the chamber, a loading doorway in the chamber through which clothes may be loaded into the drum, a door for closing the doorway, drive means for rotating the drum and heating means for heating the contents of the drum, wherein:

sealing means are provided for effecting an air-tight seal between the closed door and the loading doorway, and

evacuating means are provided for creating a partial vacuum within the chamber and the drum contained therein to vaporize moisture in the clothes and withdraw air and water vapour.

2. A clothes dryer according to Claim 1 wherein:

the evacuating means include a motor-driven vacuum pump connected by an air line to the interior of the chamber, and

a valve-controlled air inlet to the chamber is provided for admitting atmospheric air to the chamber.

3. A clothes dryer according to Claim 1 or Claim 2 wherein:

the drum is open at its front end, its rear end being closed and rotatable on a shaft fixed to the rear end of the chamber, and the drive means is a drive from a motor within the chamber to the drum.

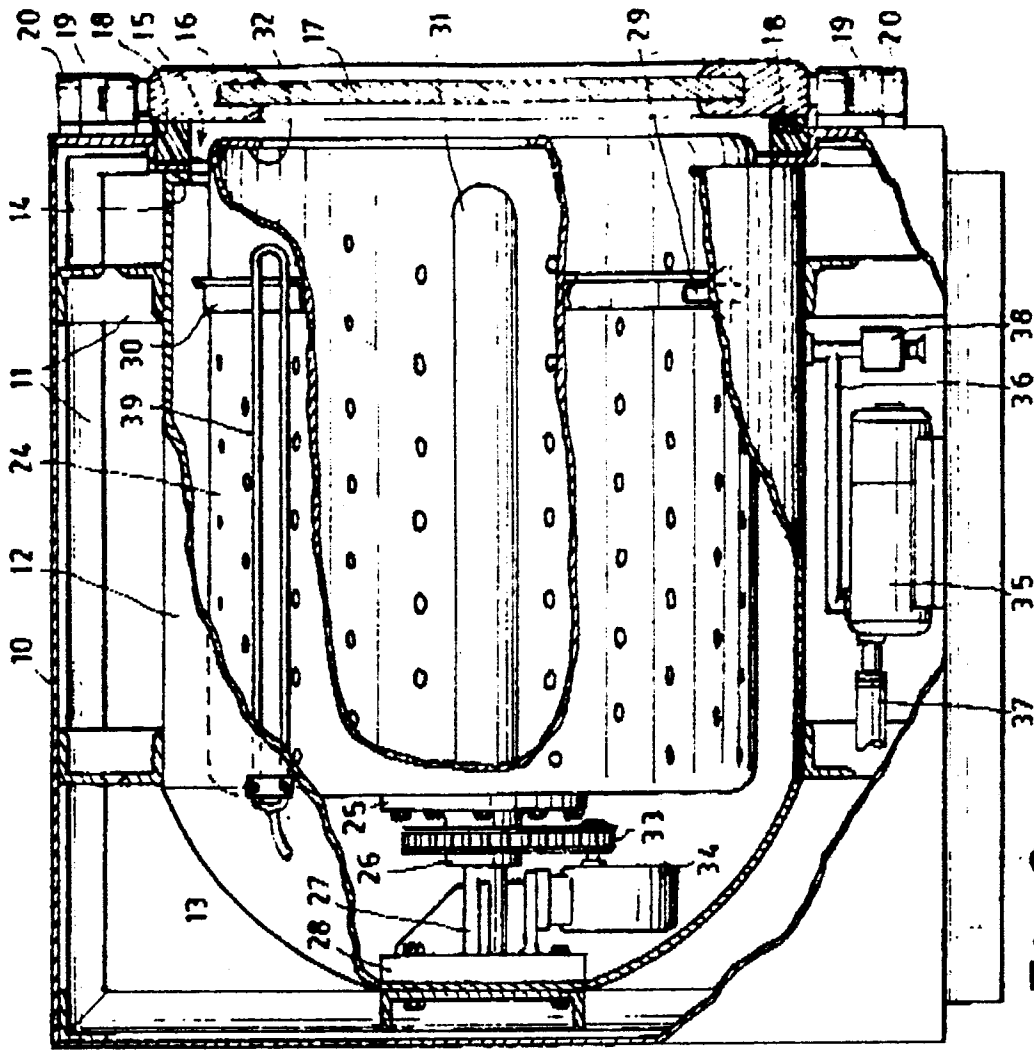


Fig. 2.

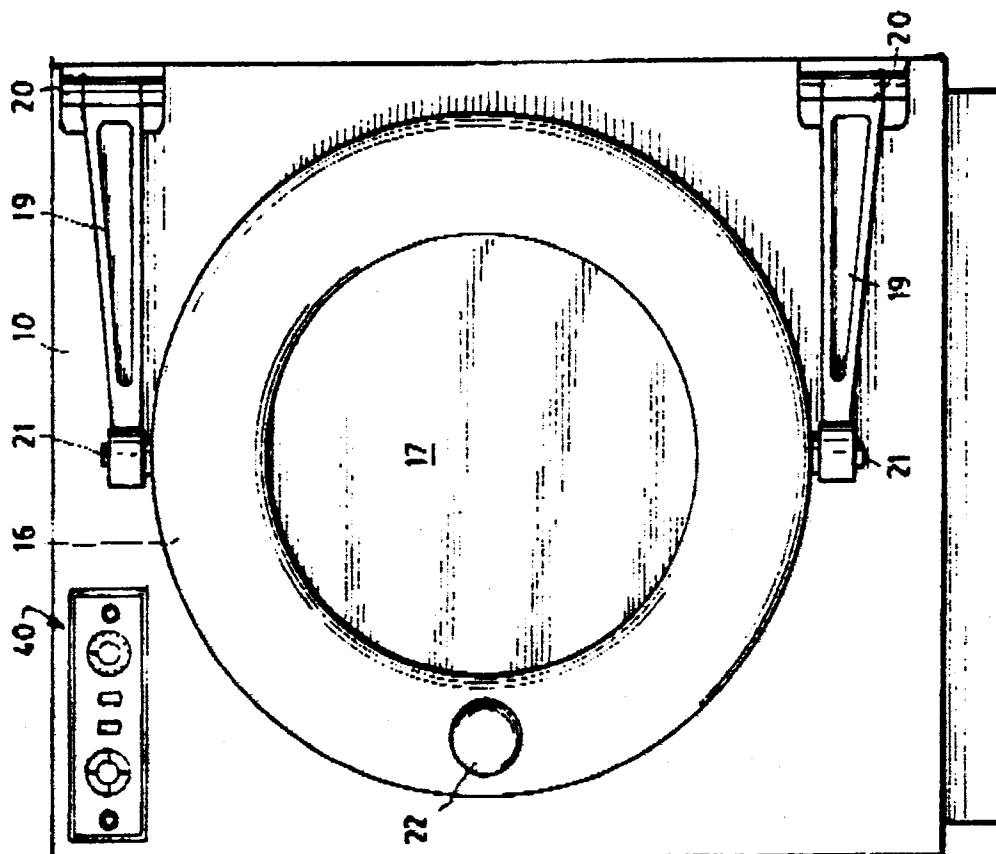


Fig. 1.