

**EUROPEAN PATENT SPECIFICATION**

- (45) Date of publication of patent specification: **30.11.88**      (51) Int. Cl.<sup>4</sup>: **B 65 B 25/14, B 65 B 57/16**  
(21) Application number: **84112299.7**  
(22) Date of filing: **12.10.84**

(54) **Method of and apparatus for wrapping reams of paper or the like.**

- |  |  |
|--|--|
| <p>(30) Priority: <b>18.10.83 US 543085</b></p> <p>(43) Date of publication of application:<br/><b>29.05.85 Bulletin 85/22</b></p> <p>(45) Publication of the grant of the patent:<br/><b>30.11.88 Bulletin 88/48</b></p> <p>(84) Designated Contracting States:<br/><b>BE CH DE FR GB IT LI NL SE</b></p> <p>(56) References cited:<br/><b>US-A-3 568 591</b></p> | <p>(70) Proprietor: <b>PEMCO COMPANY</b><br/><b>3333 Crocker Avenue</b><br/><b>Sheboygan Wisconsin 53081 (US)</b></p> <p>(72) Inventor: <b>Vorachek, Michael J.</b><br/><b>724 Dartmouth Drive</b><br/><b>Sheboygan Falls Wisconsin 53085 (US)</b><br/>Inventor: <b>Entringer, Guy P.</b><br/><b>1020 Custer Avenue</b><br/><b>Sheboygan Wisconsin 53081 (US)</b><br/>Inventor: <b>Meives, Otis E.</b><br/><b>Route 1</b><br/><b>Cleveland Wisconsin 53015 (US)</b><br/>Inventor: <b>Lynch, Gary L.</b><br/><b>3501 Main Avenue</b><br/><b>Sheboygan Wisconsin 53081 (US)</b><br/>Inventor: <b>Lutzke, Anthony J.</b><br/><b>Route 2</b><br/><b>Elkhart Lake Wisconsin 53020 (US)</b></p> <p>(74) Representative: <b>Herrmann, Günther</b><br/><b>c/o Körber AG Patentabteilung Kampchaussée</b><br/><b>8-32</b><br/><b>D-2050 Hamburg 80 (DE)</b></p> |
|--|--|

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

## Description

This invention relates to a method of and to an apparatus for wrapping articles, and more particularly to a method of and to an apparatus for wrapping block-shaped units, such as reams of paper, in wrappers constituted by sheets of paper or other suitable wrapping material. For the sake of simplicity, reference is made herein to "reams"; however, it is to be understood that the improved method and apparatus are equally suited for the wrapping of other commodities and that such reference is not intended to limit the scope of the claims. A ream generally comprises a stack of five hundred sheets of paper, e.g., 215.9 by 279.4mm (8" by 11") or 215.9 by 355.6mm (8½" by 14"). Such reams are presently produced in vast quantities by an apparatus called a "sheeter" which cuts paper webs into sheets of the desired size (e.g., 215.9 by 279.4mm) and assembles the sheets into reams of five hundred sheets each.

The method and apparatus of the present invention belong to the same field as the methods and apparatus disclosed in U. S. Patents Nos. 4,029,194, 4,073,375, 4,193,491, 3,458,026, 4,203,694, 3,533,496, 3,861,120, 4,279,116, 3,213,591, and 4,011,155, and in applicant's literature describing its Model 66 wrapping apparatus (designed to operate at speeds of between 20 and 41 reams per minute) and its Model 35 and 36 wrapping apparatus (designed to operate at speeds of up to 60 and up to 80 reams per minute, respectively).

Wrapping of reams of paper, and especially wrapping of reams at relatively high production rates, presents special problems. First of all, it is difficult to maintain the integrity of the reams (i.e., to maintain all sheets of a ream in accurate register). Secondly, problems are encountered because the reams are delivered to the wrapping apparatus with slight spacing irregularities between successive reams (in other words, the reams are randomly received, i.e., they are not equally spaced from one another), and the rate at which the reams are delivered is not necessarily fixed relative to the speed at which the wrapping apparatus is operated (i.e., the sheeter, the ream delivery system and the wrapping apparatus may not share a common drive). The spacing variations between the reams and the differences between the delivery rate of the reams and cycling rate of the wrapping apparatus cause the reams to be delivered periodically in and out of phase with the cycle of the wrapping apparatus. This can result in jamming of the wrapping apparatus.

Problems are further encountered in connection with the operation of the web positioning and wrapper sheet transferring portions of the wrapping apparatus which position and supply wrapper blanks for wrapping around the reams. These aspects of the wrapping operation are particularly important because the wrapping sheet is often imprinted. Unless these operations

are properly carried out, the web may be cut through the imprint or the wrapper sheet may be wrapped around the ream with the imprint improperly positioned on the ream. Prior art methods and apparatus for accomplishing web positioning and wrapper sheet transfer have utilized electronic controls (e.g., printed circuit boards) for controlling the drives for the web positioning and wrapper sheet transferring mechanisms. Such electronic controls have been able to effect positioning of the web and wrapper sheets, but with rapid acceleration and deceleration of the web and wrapper sheets. The time constraints under which the web must be paid out, positioned and cut, and under which the cut wrapping sheet must be subsequently transferred to assume a proper position for draping around the ream require operating speeds which can involve jerky starts and stops of the apparatus using such prior art techniques. Damage to the web and wrapper sheet and undesirable excessive wear upon the components of the wrapping apparatus can result. Moreover, such prior art solutions are expensive.

Still further, problems are encountered in operating the cutting mechanism. Conventional reciprocating guillotine type cutting blade mechanisms generate excessive noise, and prior art rotary cutting mechanisms which are disposed above the path of the web are difficult to adjust and to replace and they interfere with the positioning of the following wrapper sheet transfer mechanism (in the form of a vacuum belt at the underside of which the wrapper sheet is held by suction) in such a way that the cut wrapper sheet is held against curling along its cut edge.

Finally, problems are encountered in handling of the reams during outfeed (which commences while the reams are in the process of being wrapped by the wrapping means) so as to ensure that the reams are not damaged. High-speed motion must be imparted to each ream as it is being acted upon by the wrapping means so as to effect its removal from the wrapping station in a highly expeditious manner in order to permit entry of the next-following web. And yet, such high-speed motion must be imparted to the stationary ream without damaging the ream or knocking the ream out of alignment. A greater variation in the speeds and a more gradual acceleration of the overhead discharge conveyor, which effects removal or outfeed of each ream being acted upon, by the wrapping means than has been possible with conventional apparatus is required.

The aforementioned problems become particularly acute when the wrapping apparatus is operated at speeds in excess of 100 reams per minute. The prior methods and apparatus have worked satisfactorily at lower speeds of 60-80 reams per minute, but they have proved unsatisfactory and unreliable at higher operating speeds, namely at speeds in excess of 100 reams per minute. They either cannot operate at such speeds at all, or they cannot sustain such speeds,

i.e., they have a very short service life at such speeds.

An object of the present invention is to overcome the aforementioned problems in such a way as to permit routine operation at speeds in excess of 100 reams per minute. The present method and apparatus are not merely an improvement over prior art methods and apparatus but rather represent a "second (or third) generation" wrapping method and apparatus which overcome the aforementioned problems in novel and unique ways so as to permit operation of the wrapping apparatus at speeds which, for industry conceptions, are significantly higher than in and unattainable with conventional methods and apparatus.

An additional object of the invention is to provide an improved method of and an improved apparatus for wrapping reams of paper or other block-shaped piles or units at a relatively high production rate without affecting the integrity of the units.

Another object of the invention is to provide a novel and unique method of and a novel apparatus for coupling the sheeter and wrapping apparatus so as to automatically and continuously synchronize their operations.

A further object of the invention is to provide a novel and unique method of and a novel apparatus for adjusting the wrapping apparatus to keep it in phase with the sheeter.

An additional object of the invention is to provide a novel and unique method of and a novel apparatus for adjusting the positions of the reams which are discharged by the sheeter in the event that the positions of the discharged reams are not always the same relative to the position of the sheeter.

A further object of the invention is to provide a novel and improved wrapping apparatus which can accommodate variances in spacing between successive reams to be wrapped.

Another object of the invention is to provide a novel and improved method of and a novel and improved apparatus for effecting desired spacing between reams which are delivered to wrapping means of the wrapping apparatus so that randomly received reams can be routinely handled without requiring operation of the wrapping apparatus and sheeter at different speeds.

Another object of the invention is to provide a novel and improved method of and a novel and improved apparatus for feeding reams to be wrapped to continuously operable wrapping means of the wrapping apparatus which cycles at a steady rate.

An additional object of the invention is to provide a novel and improved method of and a novel and improved apparatus for conveying reams to wrapping means and for delaying conveyance of the reams to the wrapping means without damage to the reams.

Another object of the invention is to provide a novel and improved method of and a novel and improved apparatus for effecting precise control

of wrapper web positioning and wrapper sheet transferring means keyed to cycling of the wrapping apparatus.

A further object of the invention is to provide a novel and improved method of and a novel and improved apparatus for coupling the drives for the wrapper web positioning and wrapper sheet transfer means to the drive of the wrapping apparatus so as to avoid sudden starts and stops and possible damage to the web or wrapper sheets.

Another object of the invention is to provide a novel and improved wrapper web cutting mechanism which ensures adequate support of the wrapper sheet which is cut off so as to avoid curling.

An additional object of the invention is to provide a novel and improved wrapper web cutting mechanism which facilitates convenient replacement and adjustment of the cutting means.

A further object of the invention is to provide a novel and improved method of and a novel and improved apparatus for expeditiously discharging wrapped reams without damage.

Another object of the invention is to provide a wrapping apparatus which is of relatively simple construction, which is reliable in operation, and which has a long service life.

The improved method comprises the step of feeding successive reams one after the other to a wrapping apparatus which cycles continuously at a steady rate with a ream being receivable by wrapping means of the wrapping apparatus only during a selected portion of each cycle of the wrapping means. The reams to be fed to the wrapping apparatus are randomly delivered from a sheeter, one at a time and at an average rate. The method further comprises the step of electronically coupling the sheeter and the wrapping apparatus so that they operate in synchronism at the same speed. The reams coming from the sheeter are monitored and the operation of the wrapping apparatus is modified to conform the cycle phases of the sheeter and wrapping apparatus. The reams are fed in a straight line, one at a time, to a holding or delaying station where a ream may dwell for a certain interval of time. Each ream which has been delivered to the holding station is fed further forward in a continuation of the straight-line motion in time for delivery to the wrapping means of the wrapping apparatus during the selected portion of the cycle of the wrapping means when the latter is positioned to receive and wrap a ream. The feeding of a randomly received ream to the holding station occurs at a relatively low speed while the transport through and away from the holding station takes place at a higher speed. The feeding forward of a ream which has been delivered to the holding station too late for delivery to the wrapping means during the selected portion of a cycle is deferred until the next-following cycle of the wrapping means. A ream which has been delayed at the holding station is rapidly accelerated to the

higher speed and thus moves ahead of any following ream which may have been in contact with it while it was delayed inasmuch as the following ream is still travelling at the lower speed. The components at the holding station are operated in phased relation to delivery of a delayed ream through and away from the holding station so as to reduce the likelihood of contact of components at the holding station with the delayed ream, which contact could be deleterious to the integrity of the ream.

The improved method further comprises the steps of positioning the wrapper web, subdividing the wrapper web into wrapper sheets, and transferring the wrapper sheets. The web positioning and wrapper sheet transfer means are coupled to the main drive for the wrapping apparatus so that, dependent upon the required length of the wrapper sheets, the wrapper web will move to a certain extent prior to cutting and the wrapper sheets will move to a different extent (possibly even to the same extent as the wrapper web) after cutting in a gradually accelerating, constant, gradually decelerating motion keyed to the cycle of the wrapping apparatus, thus avoiding sudden start and stop motions. The cutting means is disposed below the wrapper web such that a larger portion of the wrapper sheet which is cut off can be supported by the transfer means against curling.

The improved method further comprises controlled removal of reams being acted upon by the wrapping means of the wrapping apparatus from the wrapping means and all the way to ultimate discharge from the wrapping apparatus. Reams which are in the process of being wrapped by the wrapping means are engaged by overhead conveyor means travelling at a significantly reduced rate of speed. After initial engagement, the overhead conveyor means progressively accelerates the reams to a high speed so as to expeditiously move the reams from the wrapping means without jarring the reams or causing misalignment of their sheets. Before engaging the next-following ream, the overhead conveyor means is decelerated so that, upon initial engagement of the next-following ream, no bouncing or jarring of the next-following ream occurs.

The improved wrapping apparatus comprises conveying apparatus for feeding reams one after the other to wrapping means which cycles continuously at a steady rate with a ream being receivable by the wrapping means only during a selected portion of each cycle. The reams to be fed to the wrapping means are randomly delivered to the conveying apparatus from a sheeter, one at a time and at an average rate. The wrapping apparatus further comprises delaying or holding means for delaying reams which are fed by the conveying apparatus so as to ensure that they are delivered to the wrapping means during the selected portions of the respective cycles, namely when the receiving means is able to receive and handle the reams. The wrapping apparatus further comprises an electronic line shaft for coupling the sheeter and the wrapping apparatus so as to

synchronize their operation, and a phase adjust loop which is incorporated into the electronic line shaft for adjusting the phase relationship between the positions of the reams on the sheeter and in the wrapping apparatus.

The novel wrapping apparatus further comprises positioning means for advancing a web of paper to be cut into wrapper sheets to a predetermined position where it is cut, and means for transferring each wrapper sheet to an overlying position with respect to the ream about which it is to be draped. The positioning and transfer means comprise an independent DC servo motor which is connected to a cam unit driven by the main drive of the wrapping apparatus and whose velocity is determined by the velocity curve of the cam unit as if the motor and the cam unit were mechanically coupled. Means is provided for readily varying the relationship between the velocities of the motor of the positioning and transfer means and the cam unit so that different-size wrapper sheets can easily be produced as needed. The cutting means is a rotary cutting means which is mounted beneath the web and acts against a counterknife mounted above the web, thus permitting the transfer means which is disposed above the web to more fully support the web which is cut off as a wrapper sheet and to thereby avoid curling of the cut edge of the wrapper sheet. Such mounting of the counterknife above the rotary knife facilitates access for repair or replacement and for convenient adjustment.

The improved wrapping apparatus also comprises overhead discharge conveyor means which operates at varying rates of speed under the control of a conjugate cam. The overhead conveyor means initially engages reams being processed by the wrapper means at a relatively low speed in order to avoid jarring and bouncing of the reams as well as to avoid damage to the reams. The overhead conveyor means then progressively accelerates the reams to expedite their removal from the wrapping means. Thereafter, the speed of the overhead conveyor means remains constant until it is about to engage the next-following ream, at which point the overhead conveyor means is rapidly decelerated such that it is again moving at the lower speed, whereupon it engages the next-following ream.

The invention will be described in greater detail with reference to the accompanying drawings in which:

Figure 1 is a plan view showing the locations of components of the resolver phase adjusting system of the invention;

Figure 2 is a schematic view showing the connections between various components of the resolver phase adjusting system;

Figure 3 is a plan view showing the locations of components at the holding station;

Figure 4 is a schematic view showing the connections between various components at the holding station;

Figure 5 is a timing graph for various components of the apparatus;

Figure 6 is a plan view showing the locations of various components of the web positioning and wrapper sheet transfer system in the improved apparatus;

Figure 7 is a schematic view showing the connections between various components of the web positioning and wrapper sheet transfer system;

Figure 8 is a schematic view showing the mechanical connections between various components of the improved apparatus;

Figure 8A is a schematic view showing the mechanical connections between various components of the web positioning system;

Figure 8B is a schematic view showing the mechanical connections between various components of the wrapper sheet transfer system;

Figure 9 is a top plan view of an embodiment of the improved apparatus;

Figure 10 is a side elevational view of the embodiment of Figure 9;

Figure 11 is an end elevational view of the embodiment of Figure 9;

Figure 12 is a schematic perspective view of the ream wrapping sequence in the embodiment of Figure 9;

Figure 13A is a top plan view of one-half of the infeed conveyor of the embodiment of Figure 9;

Figure 13B is a top plan view of the other half of the infeed conveyor of the embodiment of Figure 9;

Figure 14A is a side elevational view of the one-half of the infeed conveyor shown in Figure 13A;

Figure 14B is a side elevational view of the other half of the infeed conveyor shown in Figure 13B;

Figure 15A is a top plan view of one-half of the structure over which the upper reaches of the infeed conveyor section of Figure 13A travel and of the associated guide rails and stop gates at the holding station of Figure 3;

Figure 15B is a top plan view of the other half of the structure over which the upper reaches of the infeed conveyor section of Figure 13B travel and of the associated guide rails;

Figure 16A is a side elevational view of the one half of the structure, guide rails and stop gates at the station which is shown in Figure 15A;

Figure 16B is a side elevational view of that (other) half of the structure which is shown in Figure 15B;

Figure 17A is a top plan view of one-half of discharge conveyor of the embodiment of Figure 9;

Figure 17B is a top plan view of the other half of the discharge conveyor of the embodiment of Figure 9;

Figure 18A is a side elevational view of the one half of the discharge conveyor shown in Figure 17A;

Figure 18B is a side elevational view of that (other) half of the discharge conveyor which is shown in Figure 17B;

Figure 19 is a top plan view of the shear assembly including the web positioning and

wrapper sheet transfer system of the embodiment of Figure 9;

Figure 20 is a side elevational view of the shear assembly of Figure 19;

Figure 21 is an enlarged vertical sectional view as seen in the direction of arrows from the line 21-21 of Figure 19;

Figure 22 is a top plan view of the wrapper sheet folding assembly in the embodiment of Figure 9;

Figure 23 is a side elevational view of the folding assembly of Figure 22;

Figure 24 is an end elevational view of the folding assembly of Figure 22, looking in an upstream direction;

Figure 25 is a top plan view of the compression assembly in the embodiment of Figure 9; and

Figure 26 is a side elevational view of the compression assembly of Figure 25.

Figure 1 shows a wrapping apparatus or ream wrapper 100 and a sheeter 200 as well as various components of a resolver phase adjusting system for regulating the operation of the wrapping apparatus 100 so as to synchronize it with the operation of the sheeter 200. The resolver phase adjusting system comprises an electrical line shaft between the sheeter 200 and the wrapping apparatus 100, and such line shaft has a phase adjust loop. When the electrical line shaft is activated, the wrapping apparatus 100 operates as if it were mechanically coupled to the sheeter 200 and follows both the speed and position of the sheeter. The purpose of the phase adjust loop is to adjust the phase of the wrapping apparatus 100 so as to align it with the positions of the reams on the discharge conveyor of the sheeter 200.

The wrapping apparatus 100 includes an infeed section 102, a shearing assembly 104, a wrapping section 106, an overhead discharge section 108, an electrical enclosure 110 and a compression assembly 112. Within the electrical enclosure 110 are the following components of the resolver phase adjusting system (shown schematically in Figure 2): a programmable controller 1, a servo pulse width modulated drive 5, a transducer interface 6 and an electronic relay 7. Mounted on the wrapping apparatus 100 are the following components of the resolver phase adjusting system: a rotating cam limit switch and pulse generating disc 3, a DC servo motor 4 which is the main drive for the wrapping apparatus 100, a reversible stepping motor 8, a dynamic differential input/output phase adjuster drive 9, a counter proximity switch 10, a slave resolver or feedback assembly 11, and a tachometer generator 12. Mounted on the sheeter 200 are the following components of the resolver phase adjusting system: a master feedback assembly or resolver 11', a master tachometer generator 12' and a photoelectric product detector eye 2. The slave resolver 11 is mechanically coupled to the wrapping apparatus 100. The resolver 11' and the tachometer generator 12' are mechanically coupled to the sheeter 200 and essentially provide

a position and velocity reference. Signals from the master and slave resolvers 11' and 11, respectively, are summed into the transducer interface board 6. The output of the transducer interface board 6 transmits an analog signal which is proportional to the position error of the two resolvers (11' and 11). The position error signal, along with the speed reference command from the tachometer generator 12' coupled to the sheeter 200, provide the reference command for the pulse width modulated (P.W.M.) drive 5. The P.W.M. drive 5 controls the velocity of the motor 4. The tachometer generator 12 monitors the speed of the motor 4 and provides the velocity feedback signal.

The connections between the various components of the resolver phase adjusting system are shown in Figure 2. Such connections and the nature of the resolver phase adjusting system itself will be best understood by considering the operation of the resolver phase adjusting system. Initially, when the operator presses the line drive set push button to begin operation and the speed of the sheeter (source of stacks, piles or reams) 200 is below 40 reams per minute, the wrapping apparatus 100 will run at a preset speed. At such time, the drive motor 4 for the wrapping apparatus is merely speed-regulated and the electrical line shaft between the sheeter and the wrapping apparatus is inactive. When the sheeter 200 reaches a speed of 40 reams per minute, which is indicated by the amplitude of the signal from the tachometer generator 12' that is located on the sheeter 200, the voltage sensing relay 7 is energized. This activates the electrical line shaft, switching the speed reference command from the present speed potentiometer 13 to the tachometer generator 12' located on the sheeter 200, and opens up a contact that is connected to the sheeter so that the speed of the sheeter cannot increase. At this point, the phase adjusting loop is also activated. When the leading edge of the first ream blocks the product detector eye 2, the programmable controller 1 ascertains whether or not to advance the position of the wrapping apparatus by sensing the position of the rotating cam limit switch 3. The wrapping apparatus always advances when initial synchronisation occurs to ensure that a back-to-back ream condition will not take place at the holding station. In addition, at the time the leading edge of the first ream blocks the ream detector eye 2, the programmable controller 1 begins to count pulses from the pulse generating cam 3 in order to determine how far out of the timing window the ream is. A pulse is produced every 20 degrees of machine rotation. After the programmable controller 1 has ascertained by how many pulses the ream is out of the window, it energizes the stepping motor 8 in either the forward or reverse direction so as to advance or retard the slave resolver 11. The stepping motor 8 is mechanically coupled to the dynamic differential input/output phase adjuster 9. Through such coupling, the relative shaft position relationship between the

resolver 11' on the sheeter 200 and the resolver 11 on the wrapping apparatus 100 is changed. When the stepping motor 8 is energised in either the forward or reverse direction, the counter proximity switch 10 located on the shaft of the stepping motor 8 produces a count proportional to the number of revolutions of the stepping motor shaft such that the stepping motor will remain energised until the count that was established by the pulse generating cam 3 reaches zero. It will remain energized until a count representative of one-half the timing window area has also expired. The resultant position of the resolver shaft will have changed, which will send the phase correction error signal through the transducer interface 6 and speed up or slow down the motor 4 to correct the phase error. As additional reams are detected by the product detector eye 2, the phase adjustment system continues to advance or retard the position of the wrapping apparatus 100 with respect to the position of the ream. When the ream detector eye 2 has seen three reams in the timing window (the timing window is a cam located on the timing cam 3), the programmable controller 1 energises a contact that enables the sheeter 200 to increase its speed.

The following commercially available products sold under the indicated company/product names may be used in the resolver phase adjusting system according to Figures 1 and 2: The programmable controller 1 can be an Allen Bradley Mini PLC 2/15 programmable controller. The photoelectric eye 2 can be a Banner electric eye consisting of an emitter ET-1 and a receiver RT-3. The timing unit 3 can be a Gemco #1983-12-08-D-L1 rotating cam limit switch and S-580-B pulse generating disc. The DC main drive motor 4 can be a DC servo motor Inland #TT4503-1000-B. The servo pulse width modulated drive 5 can be an #A2274 NC740 pulse width modulated drive. The transducer interface board 6 can be a Systrol A0902 transducer interface. The voltage sensing relay 7 can be a Systrol #A0907 electronic relay 5 Amp. The reversible electric stepping motor 8 can be a Superior #M092-FD08 stepping motor. The dynamic differential input/output phase adjuster drive 9 can be a Candy dynamic differential #DD-1A input/output phase adjuster drive. The proximity switch 10 can be a Turck #B15-G18-AN7 NPN output proximity switch. Each of the resolvers or feedback assemblies 11 and 11' can be a Systrol #1127-0000-MOD-705 feedback assembly. The tachometer generators 12 and 12' can each be a Wertronic #601A100-1 flange mount 100 VDC 5 PY tachometer generator. Finally, the present speed potentiometer 13 can be an Allen Bradley 2½ Watt 10K potentiometer.

Figure 3 shows the components at a holding station or ream stop gate system of the wrapping apparatus 100. The holding station is a part of the infeed section 102 of the wrapping apparatus 100. The components of the holding station operate in conjunction with other components of the infeed section 102 shown in Figures 13A, 13B, 14A, 14B, 15A, 15B, 16A and 16B to ensure the establish-

ment of a desired spacing between reams which are delivered by the infeed section 102 to the wrapping section 106 of the wrapping apparatus 100 and to ensure that the reams which are supplied to the wrapping section 106 are delivered in phase with the operation of the wrapping section 106 such that they can be routinely handled by the wrapping section when it is operating at a steady rate.

The holding station comprises a photoelectric eye 14 for monitoring the reams which are delivered to the infeed section 102 of the wrapping apparatus 100, stop gates 15 in the nature of air cylinders with shock pads driven by air valves 16 (see Figure 4) provided downstream of the photoelectric eye 14 in order to prevent the flow of reams under certain undesirable conditions indicated by the programmable controller 1 and timing unit 3.

The connections between the various components of the holding station are shown in Figure 4. Such connections and the nature of the holding station itself will be best understood by considering the operation of the holding station. When a ream is detected by the photoelectric eye 14, the stop gates 15 will close if the ream is out of a predetermined timing window set by the timing unit 3. This will prevent the ream from travelling further until such time as the infeed timing window on the timing unit 3 is detected. Such detection will entail energisation of the solenoid-operated air valve 16 and open the gates 15. The gates 15 will remain open until another ream has been detected outside of the timing window. If two reams are discharged into the infeed section 102 of the wrapping apparatus 100 next to each other with no gap separating them, the conveying means of the infeed section shown in Figures 13A et. seq. will accelerate the first ream to a higher rate of speed than the speed at which the next-following ream is moving, thus separating the first ream from the next-following ream and creating a gap therebetween. When the photoelectric eye 14 detects the trailing edge of the first ream, it starts to count pulses which are transmitted by the counter disc of the timing unit 3. One pulse is generated every 20 degrees of the cycle of the wrapping apparatus 100. The gap which develops between the two reams will be too narrow to have placed them both in phase, i.e., if the first falls in the timing window the second will follow too soon afterwards to fall into the next-following window. Therefore, the photoelectric eye 14 will sense that the next-following ream is not within the window and will transmit a signal to close the gates 15. However, the gates 15 will not close immediately but rather after two counts. This provides adequate time for the first ream to clear the gates 15 before they again close. The second ream will be held by the stop gates 15 until the infeed timing window is again detected. At such time, the stop gates 15 will open again. If, rather than two reams being discharged into the infeed section 102 in abutting relation, actual contact between two previously spaced apart

reams takes place because the first ream is delayed by the gates 15 at the holding station when it is out of phase with the window of the wrapping section 106, then once the gates 15 open to release the first ream, the system will operate in the aforementioned manner as if the reams had been delivered to the infeed section 102 in abutment.

The following commercially available products sold under the indicated company/product names may be used in the holding station of Figures 3 and 4: The photoelectric eye 14 can be a Banner emitter, receiver electric eye, emitter ET-1, receiver RT-3. The air cylinder with shock pads 15 can be a Tom Thumb #AUT-I-1/8-1/2-B air cylinder with shock pads. The air valve 16 can be a MAC #224B-121C air valve.

Figure 5 is a timing graph for various components of the wrapping apparatus 100. The wrapping section 106 of the wrapping apparatus 100 comprises an outside elevator, an inside elevator, a rear tucker, a rear underfolder, a front underfolder, a loader finger advance and a loader finger raise shown in Figures 9, 10, 22, 23 and 24. The seven curves designated by letters A-G inclusive reflect the extent of movement of the aforementioned seven elements of the wrapping section 106 at various points during the machine cycle from zero to 360 degrees. The overhead discharge section 108 of the wrapping apparatus 100 comprises overhead conveyor means which acts to remove reams from the wrapping section under the control of a novel and improved camming means. The curve designated by the letter H reflects the extent of movement of the overhead conveyor means. Specifically, the outside elevator (curve A) commences its upward movement at zero degrees; it reaches its fully raised position at 125 degrees; it reaches its fully lowered (or original) position at 225 degrees; and it dwells from 225 degrees to zero degrees. The inside elevator (curve B) also commences its upward movement at zero degrees and reaches its fully raised position at 125 degrees. However, the inside elevator begins to descend at 125 degrees and reaches a slightly lowered dwell position at 150 degrees. The inside elevator dwells at the slightly lowered position from 150 degrees to 160 degrees; thereafter, the downward movement of the inside elevator commences again and the inside elevator finally reaches its fully lowered position at 260 degrees and dwells in such position from 260 degrees to zero degrees. The rear tucker (curve C) commences its outward movement at 142 degrees; it completes such outward movement at 282 degrees; it dwells from 282 degrees to 302 degrees; then moves to its fully retracted position at 72 degrees where it again dwells from 72 degrees to 142 degrees. The rear underfolder (curve D) commences its outward movement at 113 degrees; it completes such outward movement at 223 degrees; it dwells from 223 degrees to 273 degrees, at which point it starts its retraction stroke; it is fully retracted at 53 degrees, and it dwells from 53 degrees to 113



degrees. The front underfolder (curve E) starts out at 85 degrees for an 8-inch ream (108 degrees for a 9-inch ream); it completes its outward movement at 165 degrees (188 degrees for a 9-inch ream); it dwells from 165 to 275 degrees (188 to 298 degrees for a 9-inch ream); it is fully retracted at 355 degrees (18 degrees for a 9-inch ream); and it again dwells from 355 to 85 degrees (18 to 108 degrees for a 9-inch ream). The loader finger advance (curve F) commences at 180 degrees; this finger completes its outward movement at 360 degrees; it dwells from 360 to 20 degrees; and it is fully retracted at 180 degrees. The loader finger raise (curve G) starts up at 168 degrees; this finger completes its upward movement at 228 degrees; it dwells from 228 degrees to 3 degrees; it is fully lowered at 78 degrees; and it dwells from 78 to 168 degrees. The overhead discharge conveyor is continuously in motion, i.e., it cycles between a slow speed at 165 degrees when it picks up reams and a high speed but it never stops moving.

Figures 6 and 7 show various components of a web positioning and wrapper sheet transferring system of the wrapping apparatus. Such system includes optical incremental encoders 17, 17' and 17a, rate multiplier units with encoder interfaces 18, 18' and 18a, system 55 logic boards 19 and 19', servo controllers 20 and 20' each consisting of a panel mounting unit with an 8KW power supply and an internal shunt regulator and a servo controller consisting of two plug-in assemblies, servomotors 21 and 21' with type B winding tachometers 22 and 22', respectively, and mounting adapter 7 couplings for mounting encoders 17 and 17', respectively, the programmable controller 1, a conjugate cam 23 and thumbwheel switches 24 and 24'.

The purpose of the web positioning and wrapper sheet transfer system is to cut webs of paper to specific lengths, and then to transfer the lengths to a specific location. The two independent DC servomotors 21 and 21' control these functions. One motor 21 is coupled to nip rollers 26 shown in Figures 8A, 19, 20 and 21 and serving to feed the web to a rotary shear 28 that cuts the web. The length of web that is fed by the feed nip rollers 26 determines the cut-off length of the resulting wrapper sheet. The velocity at which the feed nip rollers 26 travel is determined by a velocity curve that is generated by the conjugate cam 23. The second motor 21' is coupled to vacuum transfer belts 30 shown in Figures 8B, 19, 20 and 21 and serving to transfer the cut wrapper sheet to a specific location. The transfer belts 30 follow the velocity curve which is generated for the feed nip rollers 26. However, the actual index distance of the transfer belts 30 is completely independent from that of the feed nip rollers 26.

The input shaft 32 of the conjugate cam 23 is rotated at a constant velocity. The output shaft 34 of the cam 23 generates a velocity curve which is similar to a modified sine curve. An optical incremental encoder 17a is mechanically coupled to the output of the cam 23. The encoder 17a

generates a pulse train representative of the velocity curve generated by the cam 23. This pulse train is transmitted to the rate multiplier units 18 and 18' via conditioner board 18a. The machine operator selects the desired shear cut-off length by manipulating the thumbwheel switches 24 and 24'. Two switches 24 and 24' are provided to enable the operator to control both the transfer distance and cutoff length independently. The information from the thumbwheel switches 24 and 24' is transmitted to the programmable controller 1 and is processed therein. After the information is processed, it is transmitted to the rate multiplier units 18 and 18'. These units receive the pulse train and transmit a pulse train command. However, the frequency of pulses to each individual system 55 control logic board 19 and 19' changes depending upon the multiplier factor that is generated by the programmable controller 1. The system 55 control logic boards 19 and 19' receive position command signals from their respective rate multiplier units 18 and 18'. They also receive direction signals from the pulse conditioner board 18a such that the drives 20 and 21' follow the master encoder 17a in both directions. The system 55 control logic boards 19 and 19' transmit a position error or current command signal to the pulse width modulated drives 20 and 20'. Each of the system 55 control logic boards 19 and 19' is a closed loop system that controls both the velocity and the position of the associated motor 21 or 21'. The position error signals which are transmitted to the drives 20 and 20' control the velocities and positions of both motors 21 and 21'. The drives 20 and 20' can produce torque at zero speed and each has a zero dead band such that the shafts of the servomotors 21 and 21' follow the cam 23 as if they were mechanically coupled.

The web positioning and wrapper sheet transfer system can be operated to handle wrapping paper with preprinted registration marks. For the nip roller 26 to rotate, a position error is generated by pulses transmitted by the rate multiplier unit 18 to the system 55 logic board 19. These pulses are stored in an up/down counter. While the rate multiplier unit 18 is putting pulses to the up count, rotation of the motor 21 puts pulses to the down count, trying to achieve a zero count in the counter. When running a preprinted wrapper, the nip roller system is programmed to feed a sheet about 1/4" longer than the length of the printed sheet. When the nip rollers 26 approach the end of their cycle, an electric eye senses the presence of the register mark on the wrapper. At this point, the electric eye prevents the rate multiplier unit 18 from transmitting any more pulses to the system 55 logic board 19. It also sends a 1-millisecond pulse to the system 55 logic board 19 to reset the counter to zero. The nip roller drive 21 then comes to a stop, sending pulses to the counter while decelerating, and reverses to get the counter back to zero, i.e., to where the electric eye originally sensed the register mark.



Commercially available items sold under the following company/product names can be used as the indicated components. The optical incremental encoders 17a, 17 and 17' can be B.E.I. #H25G-SB-1250A-B2C SM18-5 optical incremental encoders. The pulse conditioner board 18a and the rate multiplier units 18 and 18' can be C.S.R. RMU-T-4 rate multiplier units with encoder interfaces. The system 55 logic boards 19 and 19' can be C.S.R. #1583 system 55 logic boards. The PWM servo drives 20 and 20' can be NC700 servo controllers each consisting of an A2318 panel mounting unit with 8KW power supply and an internal shunt regulator and A2273 NC730 servo controller consisting of two plug-in assemblies. Each of the DC servomotors 21 and 21' can be an Inland #TT-4501-1200-B DC servomotor with a type B winding, tachometer 22 and 22' and a mounting adapter 7 coupling for mounting a BEI H25G encoder 17 and 17'. The conjugate cam 23 can be a P-250-P1.5 H20-270 MSC.33 Camco cam unit. The thumbwheel switches 24 and 24' can be C.S.R. thumbwheel switches.

Figure 8 shows the mechanical connections between various components of the improved production line. In particular, Figure 8 shows the mechanical coupling of the dynamic differential input/output phase adjustor drive 9, the rotating cam limit switch and pulse generating disc 3, the resolver 11 of the wrapping apparatus 100 and the stepping motor 8 of the resolver phase adjusting drive 9. In addition, there is shown the mechanical coupling between the conjugate cam 23 and the optical incremental encoder 17a of the web positioning and wrapper sheet transfer system. Various other components of the web positioning and wrapper sheet transfer system are shown in Figures 19, 20 and 21.

Figure 8 also depicts the mechanical coupling of components of the improved production line which will be discussed hereinafter. For example, Figure 8 shows the mechanical coupling of various components of the infeed section 102, which components are shown in Figures 13A, 13B, 14A, 14B, 15A, 15B, 16A and 16B. Figure 8 also shows the mechanical coupling of various components of the wrapping section, which components are shown in Figures 9, 10, 11, 22, 23, and 24. In addition, Figure 8 shows the mechanical coupling of various components of the discharge section 108, which components are shown in Figures 17A, 17B, 18A and 18B, to the main drive 4 for the wrapping apparatus 100 through the medium of a novel conjugate cam 38 which will be described more fully hereinafter.

Figure 8A shows the mechanical coupling of the motor 21 to the feed nip rollers 26.

Figure 8B shows the mechanical coupling of the motor 21' to the pulleys 29 over which the vacuum transfer belts 30 are trained.

Figures 9, 10 and 11 show the basic physical layout of the wrapping apparatus 100 which forms part of the improved production line. The piles, stacks or reams to be wrapped are delivered to the infeed section 102. The infeed section 102

comprises a conveying mechanism 40 (Figure 13A) having variable speed first conveyor means 48 operated at the same speed as the discharge conveyors or feeding means of the sheeter or source 200, second conveyor means 50 disposed upstream of the stop gates 15 at the holding station shown in Figure 3, third conveyor means 52 which operates at a higher speed than the conveyor means 50 so that the conveyor means 50 initially slows down the reams which are being received from the sheeter 200 and thereafter the conveyor means 52 accelerates the reams so as to ensure that desired spacing between the reams is effected, and fourth conveyor means 54 (Figure 13B) for delivering the reams released from the holding station to the phased flights or loading fingers 56 (FIG. 13B) of the wrapping section 106 of the wrapping apparatus 100 and for subsequent transfer to elevator means. Simultaneously, i.e., while the ream is being delivered to the elevator means 58, the shearing assembly 104 is advancing a length of wrapping material off a spool 60 of wrapping material, positioning the web above a rotary shear such that the rotary shear cuts off a desired wrapper sheet length, and transferring the wrapper sheet to a position in which the sheet overlies the ream on the elevator means 58. As the elevator means 58 raises such ream, mechanisms are provided for wrapping the wrapper sheet around the ream so that the sheet assumes a tubular shape. Thereafter, other known mechanisms glue the overlying sides of the wrapper sheet and subsequently fold and glue the ends of the wrapper sheet. Once the ream has been elevated by the elevator means 58 and partially wrapped, it is engaged by the overhead discharge mechanism 108. The overhead discharge mechanism 108 comprises a pair of belts or chains 62 which carry pusher members or arms 64 for engaging the partially wrapped reams on the elevator means 58 and for transferring them to the left, as seen in Figure 9. Once folding and glueing of the ends of the wrapper sheet about the ream is completed, the overhead discharge mechanism 108 delivers the ream to the compression assembly 112 which applies pressure to the ends of the wrapped reams to ensure adequate sealing.

Figure 10 shows the various components of the wrapping apparatus 100 from another perspective. The operation of the overhead discharge mechanism 108 will be more readily understood from a review of Figure 10. The chains or belts 62 which carry the pusher members or arms 64 are shown by phantom lines. These chains or belts form part of a conveyor means 36 (Figure 8) of the mechanism 108. Figure 10 shows how the pusher arms 64 first come in behind the reams which are raised by the elevator means 58 in a counter-clockwise motion from the left, as seen in Figure 10, and thereafter urge the partially wrapped reams to the right, as seen in Figure 10, toward the compression assembly 112.

FIG. 11 is an end elevational view of the apparatus of Figure 9 showing on a larger scale

certain details of the shear assembly 104. The web of wrapping material fed from the spool 60 by the feed nip rollers 26 driven by the motor 21 passes between the rotary shear 28 and a stationary counterknife 66. Once a selected length of web is cut off by the rotary shear 28 in cooperation with the stationary counterknife 66, the resultant wrapper sheet is advanced in a direction to the right as seen in Figure 11 by the vacuum transfer belts 30 driven by the motor 21' to a position overlying the elevator means 58 and shown by phantom lines Figure 11 and denoted by the letter S.

Figure 12 shows generally the stages through which successive reams pass in the wrapping sequence. After passing through the holding station past the photoelectric eye 14 and gates 15, a ream is placed on the elevator means 58 and the wrapper sheet S is cut from the web W and is transferred to a position in which it overlies the ream. Subsequently, when the elevator means 58 raises the ream, the wrapper sheet S is folded down around the sides of the ream and tucked underneath the ream so that parallel marginal portions of the wrapper sheet are in overlapping relationship. The pusher arms 64 of the overhead discharge conveyor mechanism thereupon come in behind the partially wrapped ream by moving in the direction denoted by the arrow P, engaging the partially wrapped ream and shifting it in the direction of arrows Q while the wrapping means 106 completes folding and glueing of the ends of the wrapper sheet about the ream as shown.

The various components of the infeed section 102 are shown in Figures 13A, 13B, 14A, 14B, 15A, 15B, 16A and 16B. The infeed section 102 comprises the infeed conveying mechanism 40 and the photoelectric eye 14 and stop gates 15 of the holding station. The infeed conveying mechanism 40 comprises the aforementioned first, second, third and fourth conveyor means 48, 50, 52 and 54, a composite table 68 and side guide rails 70. The conveyor means 48, 50, 52 and 54 comprise belts trained over pulleys and tensioning members in a manner well known in the art, and the upper reaches of such belts are trained over the table 68.

Figures 17A, 17B, 18A and 18B show the aforesaid components of the overhead discharge conveyor means 36 of the discharge section 108. The overhead discharge conveyor means 36 comprises two sets of double chains 62, a series of pusher arms 64 (also referred to as paddles, flights, fingers, tines or entraining elements) carried by each set of double chains, and pulleys 72 around which the double chains are trained in the same manner as was accomplished in applicant's prior Model 35 and Model 36 ream wrappers.

Figures 19, 20 and 21 show various components of the web positioning and wrapper sheet transfer system and their positions relative to the other components of the apparatus. The cut sheets are fed in an upward direction as seen

in Figure 19, and products to be wrapped are fed from the right to the left, as seen in Figure 19. The rotary cutter 28 is continuously cycled with the apparatus irrespective of whether a length of wrapper has been advanced. The wrapper is fed from the right to the left, as seen in Figure 20, and from left to right as seen in the reverse view of Figure 21.

Figures 22, 23 and 24 show various components of the top folding portion of the wrapping section. Those components of this section which accomplish the folding are the same as the components previously employed in applicant's Model 35 and 36 ream wrappers. Prior art systems showing such wrapping sections are disclosed in U.S. Patents Nos. 3,861,120 and 3,213,591. As the product is raised on elevator means 58, the cut wrapper sheet is draped around the product by downwardly extending plates (not shown) such that the product/wrapper sheet configuration is as shown at stage I in Figure 12. As the product is elevated, front and rear underfolding plates (not shown) move underneath the product to drape the wrapper sheet around the product so that the product/wrapper sheet configuration is as shown at stage II in Figure 12. Thereafter, the product is engaged by the overhead discharge conveyor system 108 and it begins to move from the left to the right, as seen in Figures 22 and 23. The ends of the wrapper sheet are tucked in about the product by stationary front tuckers 152 and movable rear tuckers (not shown). The tucked in ends are thereafter creased by the action of plates 154 and then the top and bottom end flaps are folded against the ends of the product as the product continues to travel under the urging of the overhead conveying system 108.

Figures 25 and 26 show various components of the compression assembly 112 which comprises a belting arrangement whereby the wrapped product is advanced by conveyor belts 170 which engage and compress the folded sides of the wrapped product to ensure proper setting of the glue.

## Claims

1. A machine, particularly for wrapping reams of paper sheets or analogous piles into sheets (S) of wrapping material, wherein a conveyor system of a sheeter (200) or an analogous source feeds piles at regular or random intervals to the wrapping station of a wrapping apparatus (100) having means for confining successive piles in sheets of wrapping material, characterised by means (110) for electronically synchronising the velocity of operation of the wrapping apparatus (100) with the rate of delivery of piles by the conveyor system (102).

2. A machine according to Claim 1, characterised in that the synchronising means (110) comprises means (1-3) for automatically and continuously adjusting the position of the wrapping apparatus (100) relative to the positions of

piles which are fed by the conveyor system of the source (200).

3. A machine according to Claim 1 or 2, characterised in that the synchronising means (110) comprises means (14-16) for automatically and continuously controlling the spacing between the piles which are being fed to the wrapping apparatus (100).

4. A machine according to one of Claims 1 to 3, characterised in that the confining means of the wrapping apparatus comprises wrapping means (106) for applying sheets (S) of wrapping material (W) to the piles and in that the synchronising means (110) comprises means (1) for controlling the advancement of piles which are received from the conveyor system of the source (200) to the wrapping means (106) so as to effect the delivery of piles to the wrapping means (106) in phase with the operation of the wrapping means.

5. A machine according to Claim 1, characterised in that the synchronising means (110) comprises phase adjust loop means (1-3) for automatically adjusting the phase relationship between the source (200) and the wrapping apparatus (100) and means (14-16) for automatically adjusting the spacing between the piles which are received from the conveyor system of the source (200) prior to delivery to the wrapping means (106) and for controlling the delivery of piles to the wrapping means (106) so as to effect such delivery in phase with the operation of the wrapping means.

6. A machine according to Claim 5, characterised in that the synchronising means (110) further comprises first signal generating means (11', 12') which is mechanically coupled to the source (200) and is arranged to generate a first position and velocity reference signal, second signal generating means (11, 12) mechanically coupled to the wrapping apparatus (100) and arranged to generate a second position and velocity reference signal, means (6) for comparing the two signals and for generating a third signal which is proportional to the position error of the source (200) and the wrapping apparatus (100), and means (4, 5) for adjusting the operation of the wrapping apparatus (100) in response to the third signal and the velocity portion of the first signal.

7. A machine according to Claim 6, characterised in that the first signal generating means (11', 12') comprises a master resolver (11') and a master tachometer generator (12') mounted on the source (200) for respectively providing the position and velocity portions of the first reference signal.

8. A machine according to Claim 7, characterised in that the second signal generating means (11, 12) comprises a slave resolver (11) and a slave tachometer generator (12) mounted on the wrapping apparatus (100) for respectively providing the position and velocity portions of the second reference signal.

9. A machine according to Claim 8, characterised in that the signal comparing means (6) comprises a transducer interface board for sum-

ming the position signals received from the master and slave resolvers (11', 11) and for transmitting an analog third signal which is proportional to the position error of the master and slave resolvers.

10. A machine according to Claim 9, characterised in that the means (4, 5) for adjusting the operation of the wrapping apparatus (100) in response to the third signal comprises a pulse width modulated drive (5) and a motor (4), and in that the third signal, together with the velocity portion of the first signal, provides the reference command for the pulse width modulated drive (5) which, in turn, controls the velocity of the motor (4).

11. A machine according to Claim 5, characterised in that the phase adjust loop means (1-3) comprises means (2) for detecting the presence of piles at an infeed position (102) of the wrapping apparatus (100), means (3) for generating pulses based upon the operation of the wrapping apparatus (100) in response to activation by the detecting means (2), signal generating means (1) for monitoring the pulse generating means (3), and means (8, 11, 12) for adjusting the position of the wrapping apparatus (100) in response to signals from the monitoring means (1).

12. A machine according to Claim 11, characterised in that the means (8, 11, 12) for adjusting the position of the wrapping apparatus (100) comprises a slave resolver (11) for controlling the position of the wrapping apparatus (100) and a stepping motor (8) for advancing or retarding the slave resolver (11).

13. A machine according to Claim 12, characterised by the provision of means (9) for altering the coupling between the source (200) and the wrapping apparatus (100) in response to pulses which are generated by the pulse generating means (3).

14. A machine according to Claim 5, characterised in that the means (14-16) for adjusting the spacing between the piles which are received from the conveyor system of the source (200) comprises means for slowing down the piles which are about to be wrapped and means for thereafter accelerating the piles.

15. A machine according to Claim 14, characterised by the provision of means (14) for monitoring the spacing between successive piles and means (15) for holding the piles against further movement in the absence of desired spacing.

16. A machine according to Claim 15, characterised in that the monitoring means comprises a photoelectric detector (14) and the holding means comprises fluid-operated openable and closable gates (15) and valves (16) which control the operation of the gates.

17. A machine according to Claim 15, characterised by the provision of means for delaying the closing of the gates (15) to thus prevent the gates (15) from interfering with the feeding of piles.

18. A machine according to Claim 16, characterised in that the phase adjust loop means

comprises means (3) defining a timing window corresponding to those portions of the operation of the wrapping apparatus (100) during which the wrapping apparatus is capable of receiving piles for wrapping and means (1) for delaying reopening of the gates (15) until the timing window is registered.

19. A method of wrapping block-shaped commodities particularly piles of paper sheets which are received by a wrapping apparatus (100) from a sheeter (200) or an analogous source, into sheets (S) of paper or like wrapping material, characterised in that the wrapping apparatus (100) is electronically coupled to the source (200) so as to automatically and continuously synchronise the velocity of operation of the wrapping apparatus with the rate of delivery of commodities from the source.

20. A method according to Claim 19, characterised by continuous and automatic adjustment of the position of the wrapping apparatus (100) relative to the commodities which are received from the source (200).

21. A method according to Claim 19 or 20, characterised by automatic and continuous controlling of the spacing between the commodities which are received from the source (200).

22. A method according to one of Claims 19 to 21, characterised in that the wrapping apparatus (100) is operated continuously and in that the delivery to the wrapping apparatus of commodities which are received from the source (200) is controlled so as to effect the delivery of commodities to the wrapping apparatus in phase with continuous operation of the wrapping apparatus.

23. A method according to one of Claims 19 to 22, characterised by automatic adjustment of the phase relationship between the source (200) and the wrapping apparatus (100) and by automatic adjustment of the spacing between commodities which are delivered by the source prior to introduction of such commodities into the wrapping apparatus.

#### Patentansprüche

1. Maschine, insbesondere zum Einhüllen von Stapeln aus Papierbögen oder ähnlichen Stapeln in Zuschnitte (S) aus Verpackungsmaterial, bei der ein Fördersystem einer Stapelvorrichtung (200) zum Bilden von Stapeln oder einer analogen Stapelquelle Stapel in regelmäßigen oder unregelmäßigen Intervallen der Verpackungsstation einer Verpackungsvorrichtung zuführt, welche eine Einrichtung zum Einhüllen aufeinanderfolgender Stapel in Verpackungsmaterialzuschnitte aufweist, gekennzeichnet durch eine Einrichtung (110) zum elektronischen Synchronisieren der Arbeitsgeschwindigkeit der Verpackungsvorrichtung (100) mit der Abgaberate der Stapel vom Fördersystem (102).

2. Maschine nach Anspruch 1, dadurch gekennzeichnet, daß die Synchronisiereinrichtung (110) Einstellmittel (1 bis 3) zum automatischen und kontinuierlichen Einstellen der Arbeitsposition

der Verpackungsvorrichtung (100) relativ zur Position der vom Fördersystem der Stapelquelle (200) zugeführten Stapel aufweist.

3. Maschine nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Synchronisiereinrichtung (110) Steuermittel (14 bis 16) zum automatischen und kontinuierlichen Steuern des Abstands zwischen den der Verpackungsvorrichtung (100) zugeführten Stapeln aufweist.

4. Maschine nach einem der Ansprüche 1 bis 3, dadurch gekennzeichnet, daß die Einhüleinrichtung der Verpackungsvorrichtung Einschlagmittel (106) zum Zuführen von Zuschnitten (S) eines Verpackungsmaterials (W) zu den Stapeln aufweist und daß die Synchronisiereinrichtung (110) eine Steueranordnung (1) zum Steuern der Förderung der vom Fördersystem der Stapelquelle (200) übernommenen Stapel zu dem Einschlagmittel (106) aufweist, um die Abgabe der Stapel zu dem Einschlagmittel (106) in Phase mit dem Arbeitstakt des Einschlagmittels zu bewirken.

5. Maschine nach Anspruch 1, dadurch gekennzeichnet, daß die Synchronisiereinrichtung (110) eine Phasensteueranordnung (1 bis 3) zum automatischen Einstellen der Phasenbeziehung zwischen der Stapelquelle (200) und der Verpackungsvorrichtung (100) und Steuermittel (14 bis 16) zum automatischen Einstellen des Abstandes zwischen den vom Fördersystem der Stapelquelle (200) übernommenen Stapeln vor ihrer Abgabe an das Einschlagmittel (106) und zum Steuern der Stapelabgabe an das Einschlagmittel (106) aufweist, derart, daß diese Stapelabgabe in Phase mit dem Arbeitstakt des Einschlagmittels erfolgt.

6. Maschine nach Anspruch 5, dadurch gekennzeichnet, daß die Synchronisiereinrichtung (110) weiter aufweist einen ersten Signalgeber (11', 12'), der mechanisch mit der Stapelquelle (200) verbunden und ein erstes Lage- und Geschwindigkeitsreferenzsignal erzeugend ausgebildet und angeordnet ist, einen zweiten Signalgeber (11, 12), der mechanisch mit der Verpackungsvorrichtung (100) verbunden und ein zweites Lage- und Geschwindigkeitsreferenzsignal erzeugend ausgebildet und angeordnet ist, einen Komparator (6) zum Vergleichen der beiden Signale und zum Erzeugen eines dritten Signals, welches der Positionsdifferenz von Stapelquelle (200) und Verpackungsvorrichtung (100) entspricht, und ein Einstellmittel (4, 5) zum Einstellen des Arbeitstaktes der Verpackungsvorrichtung (100) in Abhängigkeit vom dritten Signal und dem Geschwindigkeitsanteil des ersten Signals.

7. Maschine nach Anspruch 6, dadurch gekennzeichnet, daß der erste Signalgeber (11', 12') einen ersten Lagedetektor (11') und einen ersten Tachogenerator (12') aufweist, die zum Erfassen der Lage- und Geschwindigkeitsanteile des ersten Referenzsignals an der Stapelquelle (200) angeordnet sind.

8. Maschine nach Anspruch 7, dadurch gekennzeichnet, daß der zweite Signalgeber (11, 12) einen zweiten Lagedetektor (11) und einen zweiten Tachogenerator (12) aufweist, die zum Erfassen der Lage- und Geschwindigkeitsanteile des

zweiten Referenzsignals an der Verpackungsvorrichtung (100) angeordnet sind.

9. Maschine nach Anspruch 8, dadurch gekennzeichnet, daß der Komparator (6) eine Auswerterschaltung zum Addieren der vom ersten und zweiten Lagedetektor (11', 11) empfangenen Lagesignale und zum Übermitteln eines entsprechenden dritten Signals aufweist, welches der Lagedifferenz des ersten und des zweiten Lagedetektors entspricht.

10. Maschine nach Anspruch 9, dadurch gekennzeichnet, daß das Einstellmittel (4, 5) zum Einstellen der Arbeitsposition der Verpackungsvorrichtung (100) in Abhängigkeit vom dritten Signal eine impulsbreitenmodulierte Treiberschaltung (5) und einen Motor (4) aufweist und daß das dritte Signal zusammen mit dem Geschwindigkeitsanteil des ersten Signals das Steuersignal für die impulsbreitenmodulierte Treiberschaltung (5) darstellt, die ihrerseits die Geschwindigkeit des Motors (4) steuert.

11. Maschine nach Anspruch 5, dadurch gekennzeichnet, daß die Phasensteueranordnung (1 bis 3) Detektormittel (2) zum Erfassen des Vorhandenseins von Stapeln in einer Zuführposition (102) der Verpackungsvorrichtung (100), einen Impulsgenerator (3) zum Erzeugen von Impulsen in Abhängigkeit von dem Arbeitsablauf der Verpackungsvorrichtung (100) nach einer Aktivierung durch die Detektormittel (2), eine Steuereinheit (1) zum Überwachen des Impulsgenerators (3) und Einstellmittel (8, 11, 12) zum Einstellen der Arbeitsposition der Verpackungsvorrichtung (100) in Abhängigkeit von Signalen der Steuereinheit (1) aufweist.

12. Maschine nach Anspruch 11, dadurch gekennzeichnet, daß das Einstellmittel (8, 11, 12) zum Einstellen der Arbeitsposition der Verpackungsvorrichtung einen Lagedetektor (11) zum Steuern der Arbeitsposition der Verpackungsvorrichtung (100) und einen Schrittmotor (8) zum Beschleunigen oder Verzögern des Lagedetektors (11) aufweist.

13. Maschine nach Anspruch 12, dadurch gekennzeichnet, daß ein Mittel (9) zum Ändern der Kupplung zwischen der Stapelquelle (200) und der Verpackungsvorrichtung (100) in Abhängigkeit von den Impulsen des Impulsgenerators (3) vorgesehen ist.

14. Maschine nach Anspruch 5, dadurch gekennzeichnet, daß das Steuermittel (14 bis 16) zum Einstellen des Abstands zwischen den vom Fördersystem der Stapelquelle (200) übernommenen Stapeln Verzögerungsmittel zum Verlangsamen der zu verpackenden Stapel und Beschleunigungsmittel zum darauffolgenden Beschleunigen der Stapel aufweist.

15. Maschine nach Anspruch 14, dadurch gekennzeichnet, daß Detektormittel (14) zum Erfassen des Abstands zwischen aufeinanderfolgenden Stapeln und Haltemittel (15) zum Zurückhalten der Stapel für den Fall des Abweichens vom gewünschten Abstand vorgesehen sind.

16. Maschine nach Anspruch 15, dadurch gekennzeichnet, daß das Detektormittel einen

fotoelektrischen Detektor (14) und das Haltemittel hydraulisch oder pneumatisch betätigbare Sperrorgane (15) und die Betätigung der Sperrorgane steuernde Ventile (16) aufweist.

5 17. Maschine nach Anspruch 15, dadurch gekennzeichnet, daß Verzögerungsmittel zum Verzögern des Schließens der Sperrorgane (15) vorgesehen sind, um Störungen der Stapelförderung durch die Sperrorgane zu verhindern.

10 18. Maschine nach Anspruch 16, dadurch gekennzeichnet, daß die Phasensteueranordnung ein Zeitglied aufweist, welches ein Zeitfenster definiert, das mit den Abschnitten des Arbeitszyklus der Verpackungsvorrichtung (100) korrespondiert, während denen die Verpackungsvorrichtung zur Aufnahme von zu verpackenden Stapeln bereit ist, und daß die Phasensteueranordnung Verzögerungsmittel (1) zum Verzögern des Öffnens der Sperrorgane (15) bis zum Vorliegen eines Zeitfensters aufweist.

15 19. Verfahren zum Einhüllen blockartiger Gegenstände, insbesondere von Stapeln aus Papierbögen in Zuschnitte (S) aus Papier oder ähnlichem Hüllmaterial, bei dem die Gegenstände aus einer Stapelvorrichtung (200) oder einer analogen Quelle von einer Verpackungsvorrichtung (100) aufgenommen werden, dadurch gekennzeichnet, daß die Verpackungsvorrichtung elektronisch mit der Quelle (200) gekoppelt ist und daß die Arbeitsgeschwindigkeit der Verpackungsvorrichtung automatisch und kontinuierlich mit der Abgaberate der Gegenstände von der Quelle synchronisiert wird.

20 20. Verfahren nach Anspruch 19, dadurch gekennzeichnet, daß die Arbeitsposition der Verpackungsvorrichtung (100) automatisch und kontinuierlich relativ zu den von der Quelle (200) übernommenen Gegenständen eingestellt wird.

25 21. Verfahren nach Anspruch 19 oder 20, dadurch gekennzeichnet, daß automatisch und kontinuierlich der Abstand zwischen den von der Quelle (200) übernommenen Gegenständen gesteuert wird.

30 22. Verfahren nach einem der Ansprüche 19 bis 21, dadurch gekennzeichnet, daß die Verpackungsvorrichtung (100) kontinuierlich betrieben wird und daß die Abgabe der Gegenstände von der Quelle (200) zur Verpackungsvorrichtung (100) so gesteuert wird, daß sie in Phase mit dem kontinuierlichen Betrieb der Verpackungsvorrichtung erfolgt.

35 23. Verfahren nach einem der Ansprüche 19 bis 22, dadurch gekennzeichnet, daß die Phasenbeziehung zwischen der Quelle (200) und der Verpackungsvorrichtung (100) automatisch eingestellt wird und daß der Abstand zwischen den von der Quelle abgegebenen Gegenständen automatisch eingestellt wird, bevor diese in die Verpackungsvorrichtung eingeführt werden.

#### Revendications

1. Une machine, prévue en particulier pour envelopper des rames de feuilles de papier ou des piles analogues, dans des feuilles (S) de matière

d'enveloppement, dans laquelle un système de transport d'une machine à couper en feuilles (200) ou d'une source analogue débite des piles à des intervalles réguliers ou aléatoires vers le poste d'enveloppement d'un appareil d'enveloppement (100) comportant des moyens pour empaqueter des piles successives dans des feuilles de matière d'enveloppement, caractérisée par des moyens (110) destinés à synchroniser de façon électronique la vitesse de fonctionnement de l'appareil d'enveloppement (100) sur la cadence à laquelle le système de transport (102) débite des piles.

2. Une machine selon la revendication 1, caractérisée en ce que les moyens de synchronisation (110) comprennent des moyens (1-3) destinés à régler automatiquement et continuellement la position de l'appareil d'enveloppement (100) par rapport aux positions de piles que débite le système de transport de la source (200).

3. Une machine selon la revendication 1 ou 2, caractérisée en ce que les moyens de synchronisation (110) comprennent des moyens (14-16) destinés à commander automatiquement et continuellement l'écartement entre les piles qui sont fournies à l'appareil d'enveloppement (100).

4. Une machine selon l'une des revendications 1 à 3, caractérisée en ce que les moyens d'empaquetage de l'appareil d'enveloppement comprennent des moyens d'enveloppement (100) destinés à appliquer sur les piles des feuilles (S) de matière d'enveloppement (W), et en ce que les moyens de synchronisation (110) comprennent des moyens (1) destinés à commander l'avance vers les moyens d'enveloppement (106) de piles qui sont reçues à partir du système de transport de la source (200), de façon à fournir des piles aux moyens d'enveloppement (106) en phase avec le fonctionnement des moyens d'enveloppement.

5. Une machine selon la revendication 1, caractérisée en ce que les moyens de synchronisation (110) comprennent une boucle de réglage de phase (1-3) destinée à régler automatiquement la relation de phase entre la source (200) et l'appareil d'enveloppement (100), et des moyens (14-16) destinés à régler automatiquement l'écartement entre les piles qui sont reçues à partir du système de transport de la source (200), avant qu'elles soient fournies aux moyens d'enveloppement (106), et destinés à commander la fourniture des piles aux moyens d'enveloppement (106), de façon que cette fourniture s'effectue en phase avec le fonctionnement des moyens d'enveloppement.

6. Une machine selon la revendication 5, caractérisée en ce que les moyens de synchronisation (110) comprennent en outre des premiers moyens de génération de signal (11', 12') qui sont accouplés mécaniquement à la source (200) et qui sont conçus de façon à produire un premier signal de référence de position et de vitesse, des seconds moyens de génération de signal (11, 12) qui sont accouplés mécaniquement à l'appareil d'enveloppement (100) et qui sont conçus de façon à produire un second signal de référence de position et de vitesse, des moyens (6) destinés à

comparer les deux signaux et à produire un troisième signal qui est proportionnel à l'erreur de position entre la source (200) et l'appareil d'enveloppement (100), et des moyens (4, 5) destinés à régler le fonctionnement de l'appareil d'enveloppement (100) sous la dépendance du troisième signal et de la partie de vitesse du premier signal.

7. Une machine selon la revendication 6, caractérisée en ce que les premiers moyens de génération de signal (11', 12') comprennent un résolveur maître (11') et un générateur tachymétrique maître (12'), montés sur la source (200) pour fournir respectivement les parties de position et de vitesse du premier signal de référence.

8. Une machine selon la revendication 7, caractérisée en ce que les seconds moyens de génération de signal (11, 12) comprennent un résolveur esclave (11) et un générateur tachymétrique esclave (12), montés sur l'appareil d'enveloppement (100) pour produire respectivement les parties de position et de vitesse du second signal de référence.

9. Une machine selon la revendication 8, caractérisée en ce que les moyens de comparaison de signal (6) comprennent une carte d'interface de transducteur pour faire la somme des signaux de position reçus à partir des résolveurs maître et esclave (11', 11), et pour émettre un troisième signal analogique qui est proportionnel à l'erreur de position des résolveurs maître et esclave.

10. Une machine selon la revendication 9, caractérisée en ce que les moyens (4, 5) prévus pour régler le fonctionnement de l'appareil d'enveloppement (100) sous la dépendance du troisième signal, comprennent un système d'entraînement en modulation d'impulsions en largeur (5) et un moteur (4), et en ce que le troisième signal, conjointement à la partie de vitesse du premier signal, procure l'ordre de référence pour le système d'entraînement en modulation d'impulsions en largeur (5), qui commande à son tour la vitesse du moteur (4).

11. Une machine selon la revendication 5, caractérisée en ce que la boucle de réglage de phase (1-3) comprend des moyens (2) destinés à détecter la présence de piles dans une position d'entrée (102) de l'appareil d'enveloppement (100), des moyens (3) destinés à produire des impulsions sur la base du fonctionnement de l'appareil d'enveloppement (100) sous l'effet de l'activation des moyens de détection (2), des moyens de génération de signal (1) destinés à contrôler les moyens de génération d'impulsion (3), et des moyens (8, 11, 12) destinés à régler la position de l'appareil d'enveloppement (100) sous la dépendance de signaux provenant des moyens de contrôle (1).

12. Une machine selon la revendication 11, caractérisée en ce que les moyens (8, 11, 12) destinés à régler la position de l'appareil d'enveloppement (100) comprennent un résolveur esclave (11) qui est destiné à commander la position de l'appareil d'enveloppement (100), et

un moteur pas à pas (8) qui est destiné à avancer ou à retarder le résolveur esclave (11).

13. Une machine selon la revendication 12, caractérisée par l'existence de moyens (9) destinés à modifier le couplage entre la source (200) et l'appareil d'enveloppement (100), sous la dépendance d'impulsions qui sont produites par les moyens de génération d'impulsions (3).

14. Une machine selon la revendication 5, caractérisée en ce que les moyens (14-16) destinés à régler l'écartement entre les piles qui sont reçues à partir du système de transport de la source (200), comprennent des moyens qui sont destinés à ralentir les piles qui sont sur le point d'être enveloppées, et des moyens destinés à accélérer ensuite les piles.

15. Une machine selon la revendication 14, caractérisée par l'existence de moyens (14) destinés à contrôler l'écartement entre des piles successives, et de moyens (15) destinés à faire en sorte que les piles marquent un temps d'attente, en arrêtant leur mouvement, en l'absence de l'écartement désiré.

16. Une machine selon la revendication 15, caractérisée en ce que les moyens de contrôle comprennent un détecteur photoélectrique (14), et les moyens d'attente comprennent des taquets (15) qu'on peut ouvrir et fermer par l'action d'un fluide, et des valves (16) qui commandent le fonctionnement des taquets.

17. Une machine selon la revendication 15, caractérisée par l'existence de moyens destinés à retarder la fermeture des taquets (15) pour empêcher que les taquets (15) ne gênent l'avance de piles.

18. Une machine selon la revendication 16, caractérisée en ce que la boucle de réglage de phase comprend des moyens (3) qui définissent une fenêtre temporelle correspondant aux parties du fonctionnement des moyens d'enveloppement (100) pendant lesquelles l'appareil d'enveloppement est capable de recevoir des piles à envelop-

per, et des moyens (1) destinés à retarder la réouverture des taquets (15) jusqu'à l'obtention de la coïncidence avec la fenêtre temporelle.

19. Un procédé pour envelopper des produits en forme de bloc, en particulier des piles de feuilles de papier qu'un appareil d'enveloppement (100) reçoit à partir d'une machine à couper en feuilles (200) ou d'une source analogue, ces produits étant enveloppés dans des feuilles (S) de papier ou d'une matière d'enveloppement similaire, caractérisé en ce que l'appareil d'enveloppement (100) est en couplage électronique avec la source (200), de façon à synchroniser automatiquement et continuellement la vitesse du fonctionnement de l'appareil d'enveloppement sur la cadence avec laquelle la source fournit des produits.

20. Un procédé selon la revendication 19, caractérisé par un réglage continu et automatique de la position de l'appareil d'enveloppement (100) par rapport aux produits qui sont reçus à partir de la source (200).

21. Un procédé selon la revendication 19 ou 20, caractérisé par une commande automatique et continue de l'écartement entre les produits qui sont reçus à partir de la source (200).

22. Un procédé selon l'une des revendications 19 à 21, caractérisé en ce que l'appareil d'enveloppement (100) fonctionne continuellement, et en ce que la fourniture à l'appareil d'enveloppement de produits qui sont reçus à partir de la source (200) est commandée de façon que les produits soient fournis à l'appareil d'enveloppement en phase avec le fonctionnement continu de l'appareil d'enveloppement.

23. Un procédé selon l'une des revendications 19 à 22, caractérisé par un réglage automatique de la relation de phase entre la source (200) et l'appareil d'enveloppement (100), et par un réglage automatique de l'écartement entre des produits qui sont fournis par la source, avant l'introduction de ces produits dans l'appareil d'enveloppement.

45

50

55

60

65

15



FIG. 1

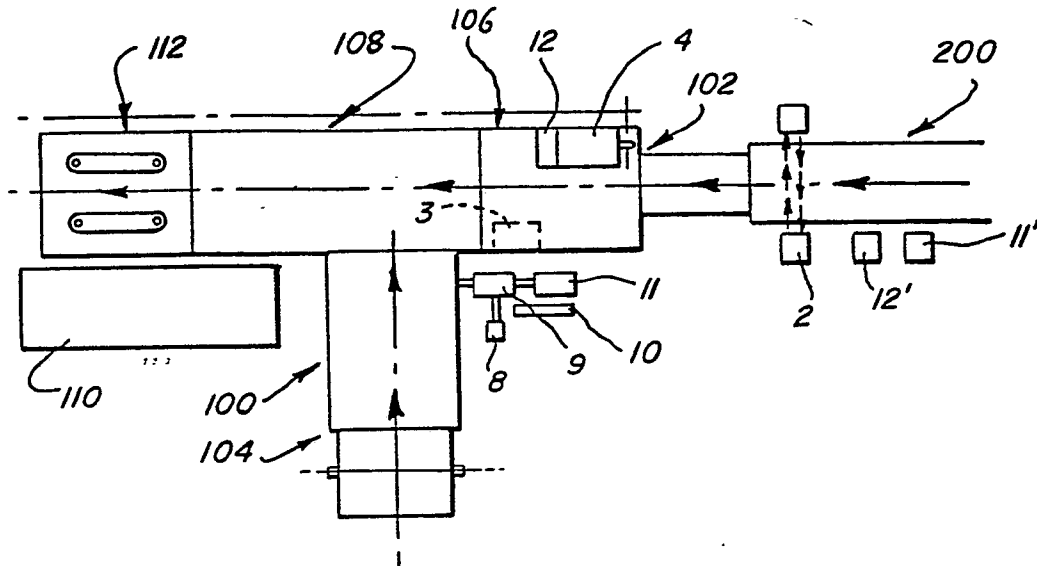
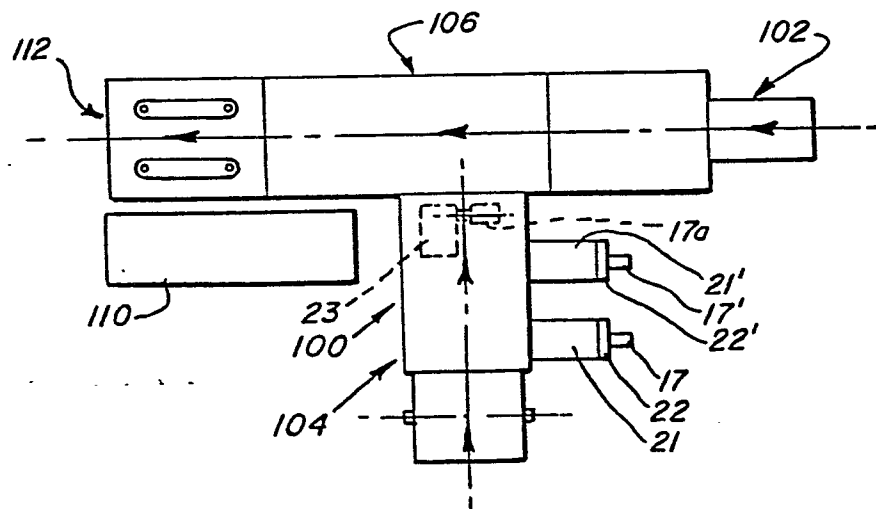
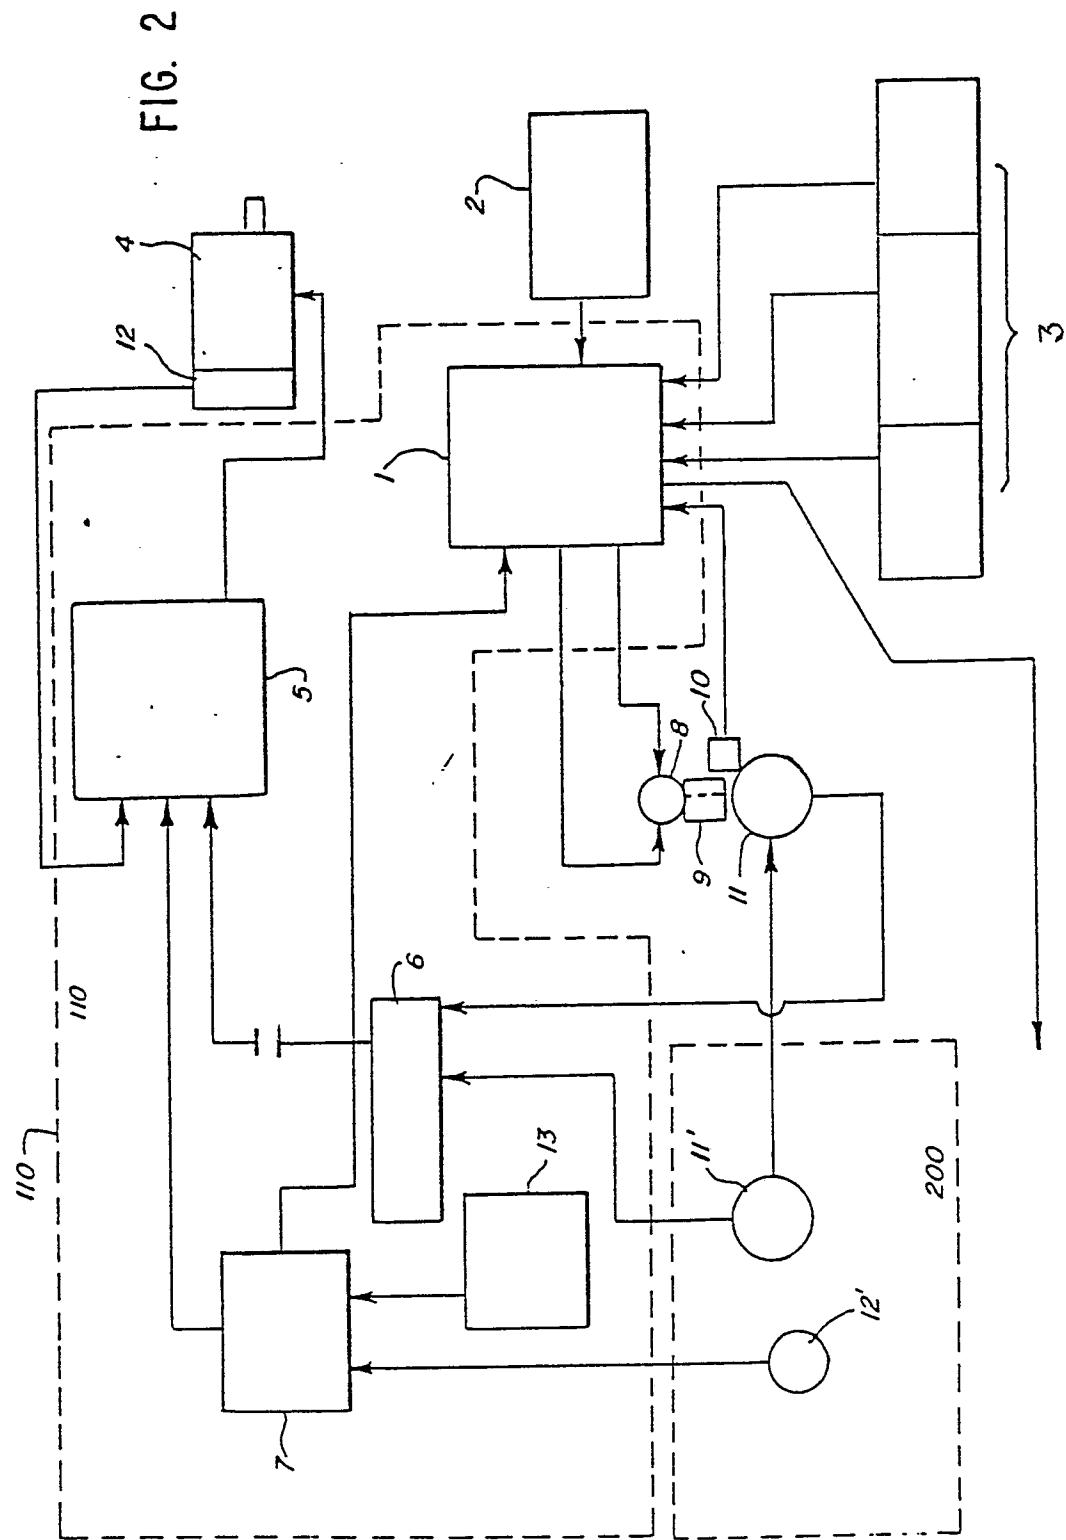


FIG. 6





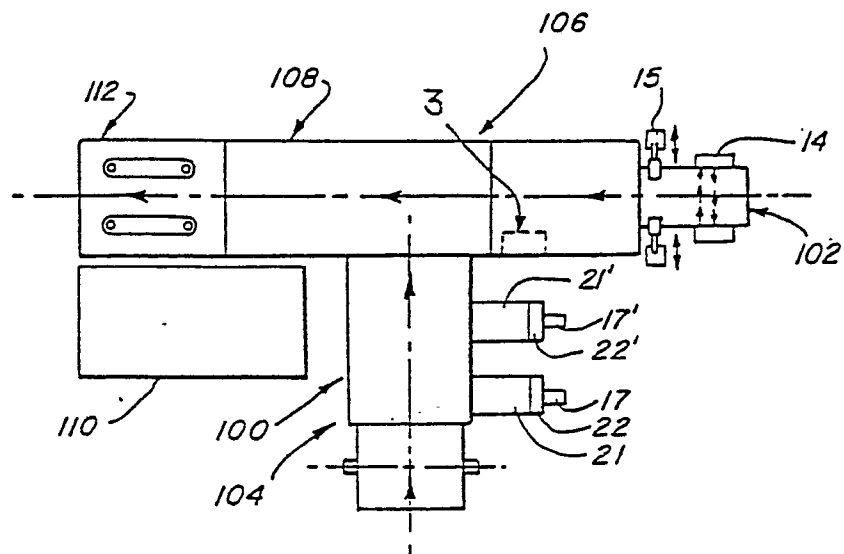
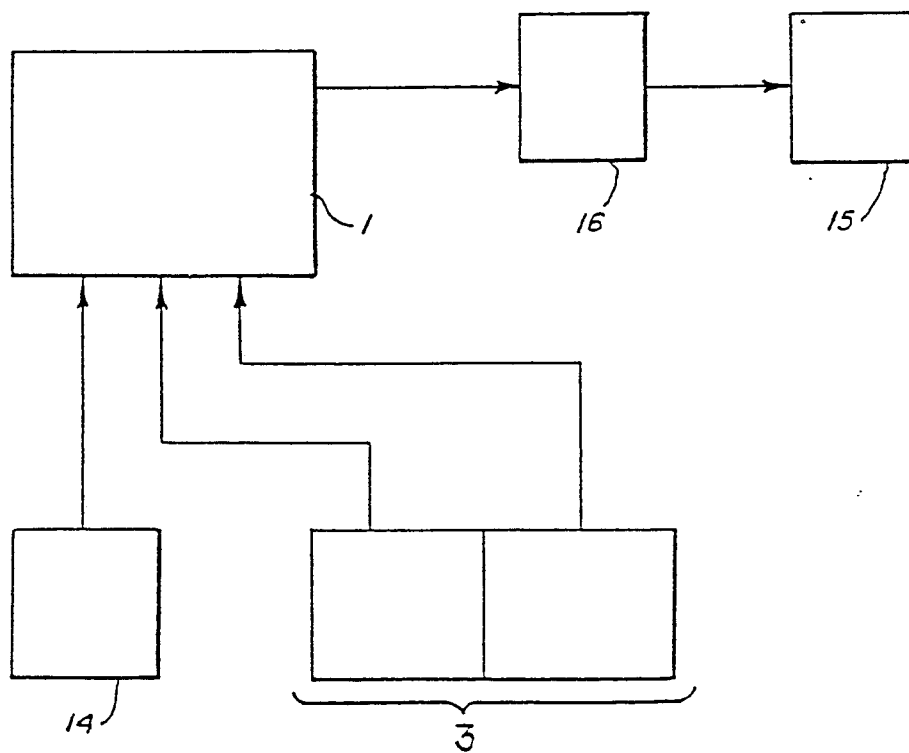


FIG. 3

FIG. 4



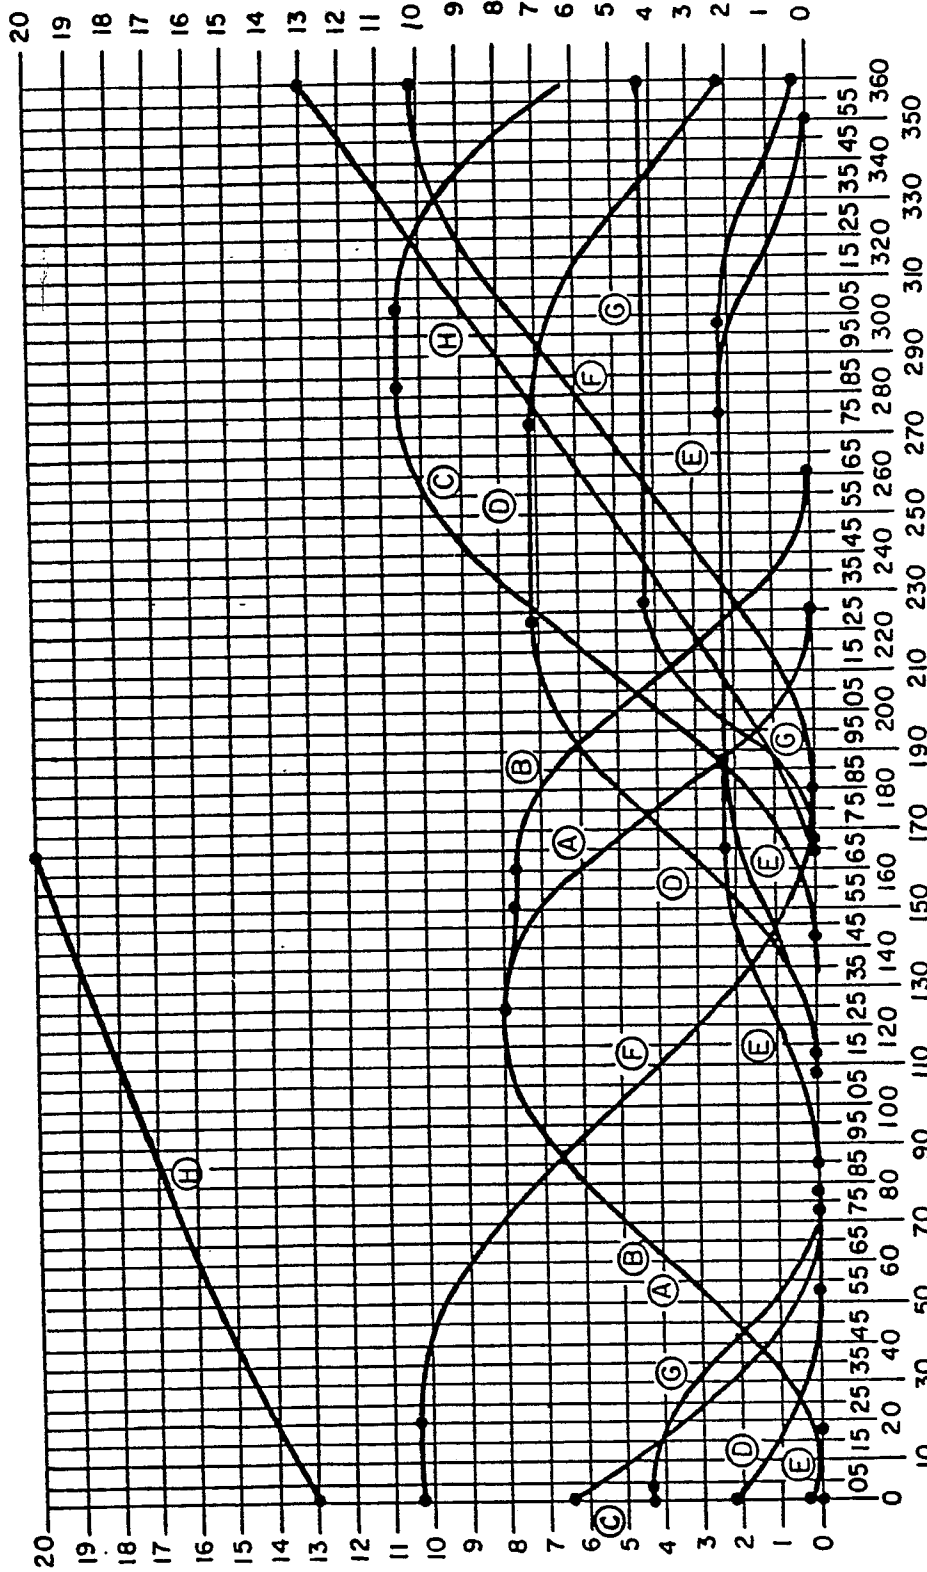
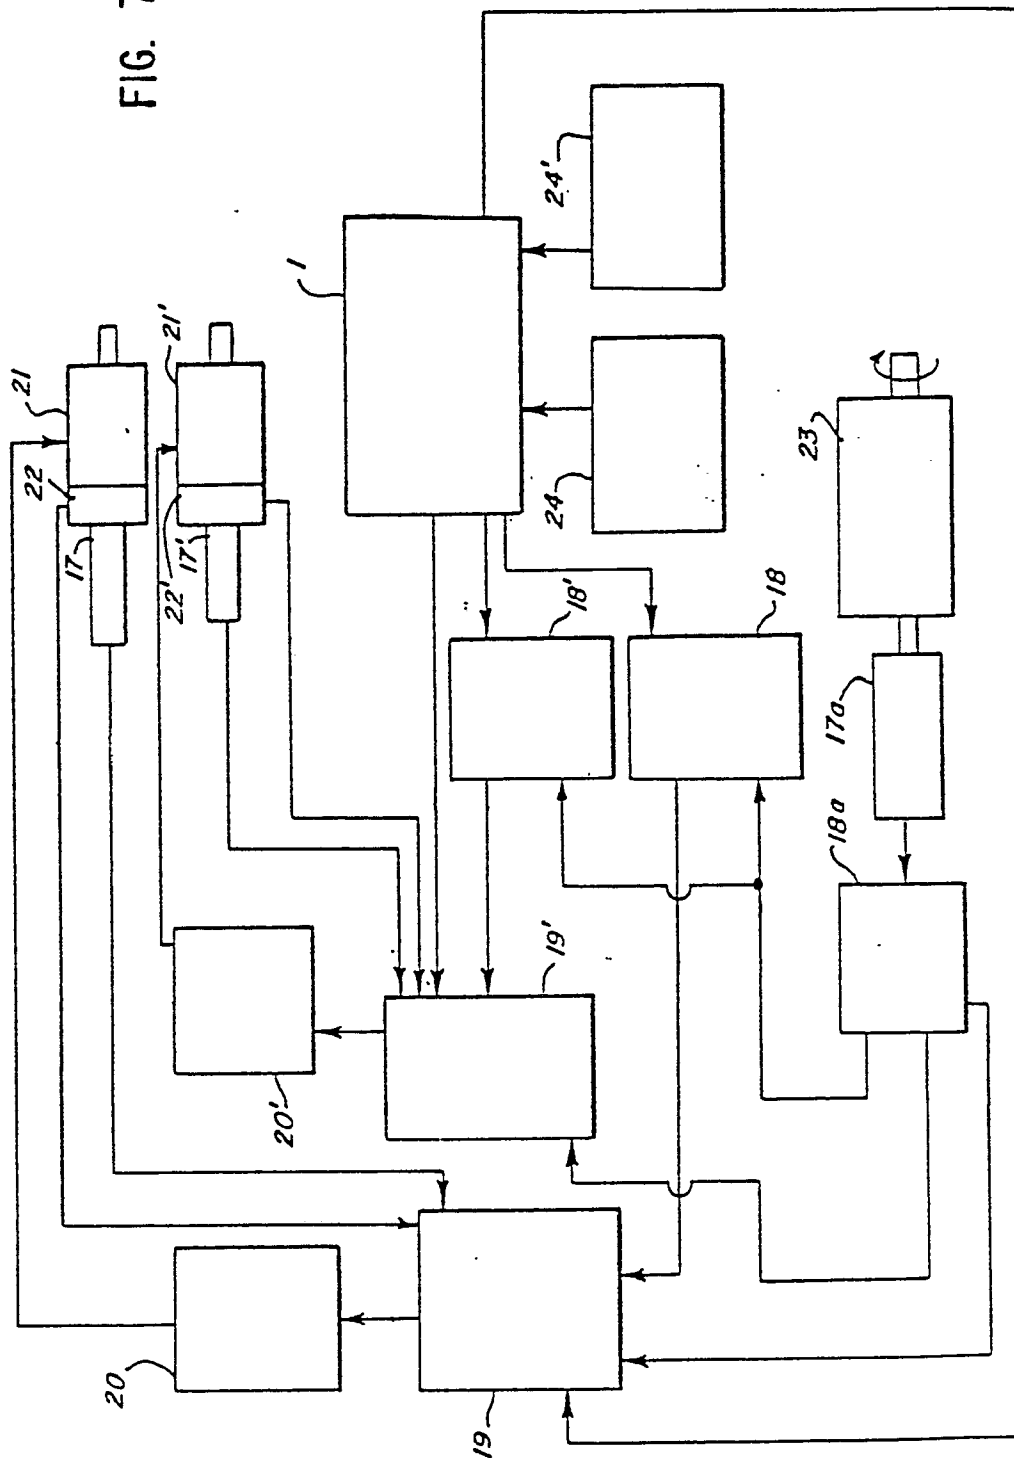
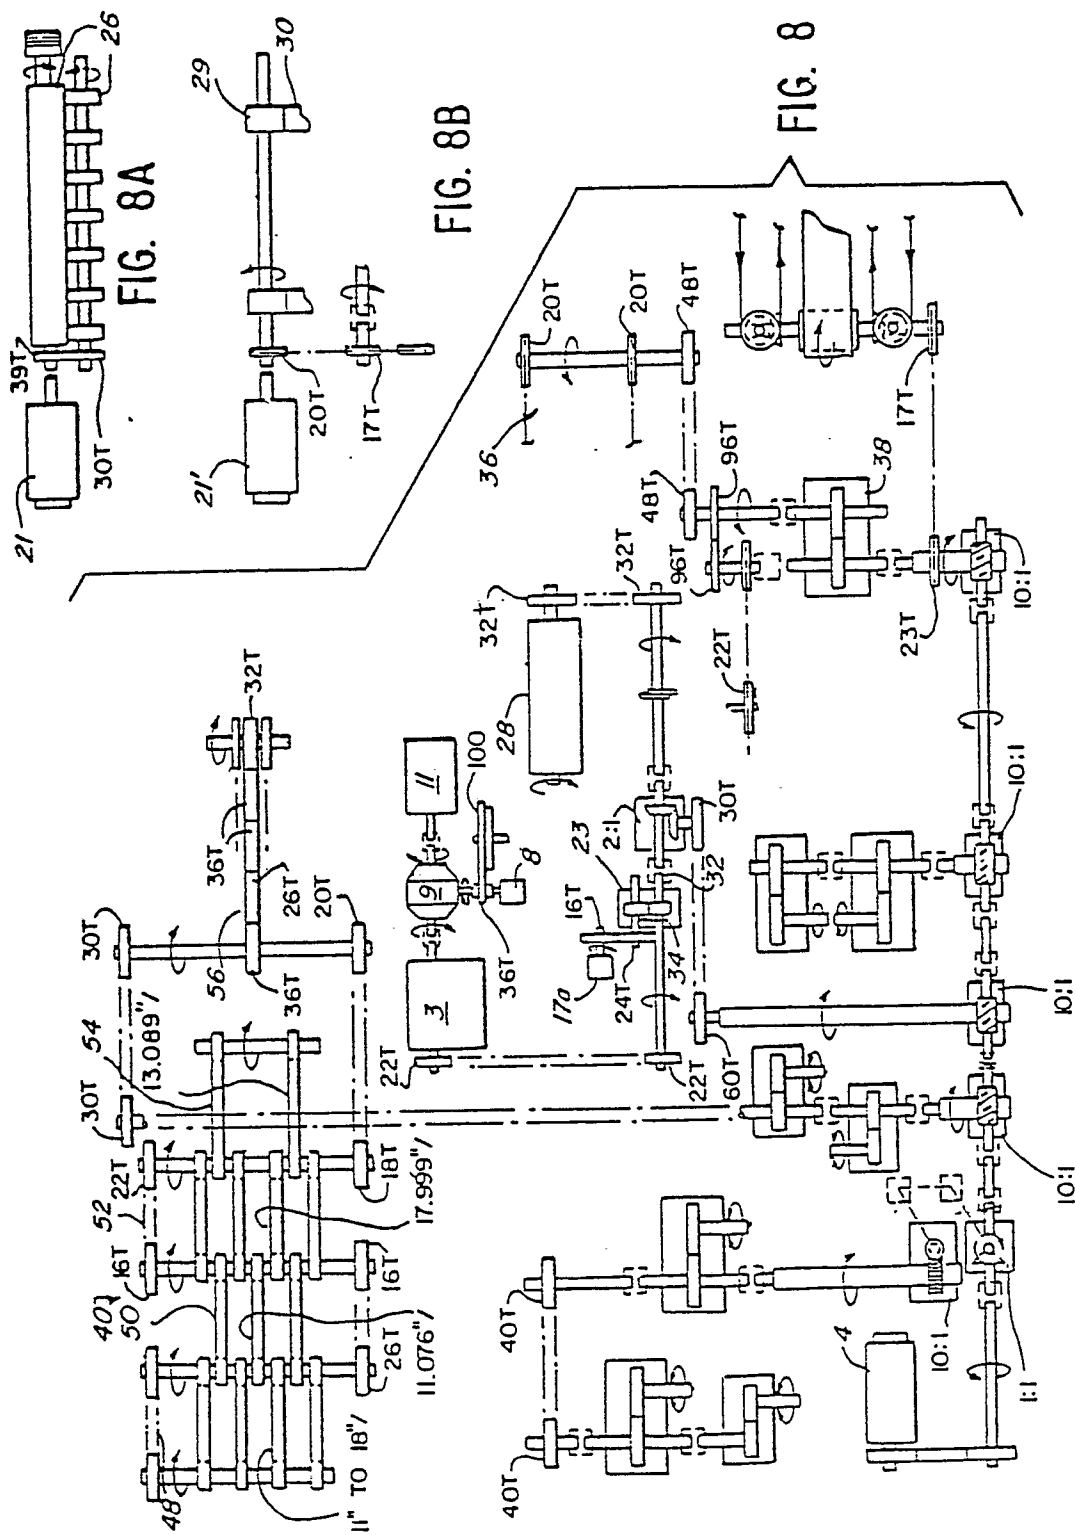


FIG. 5

FIG. 7





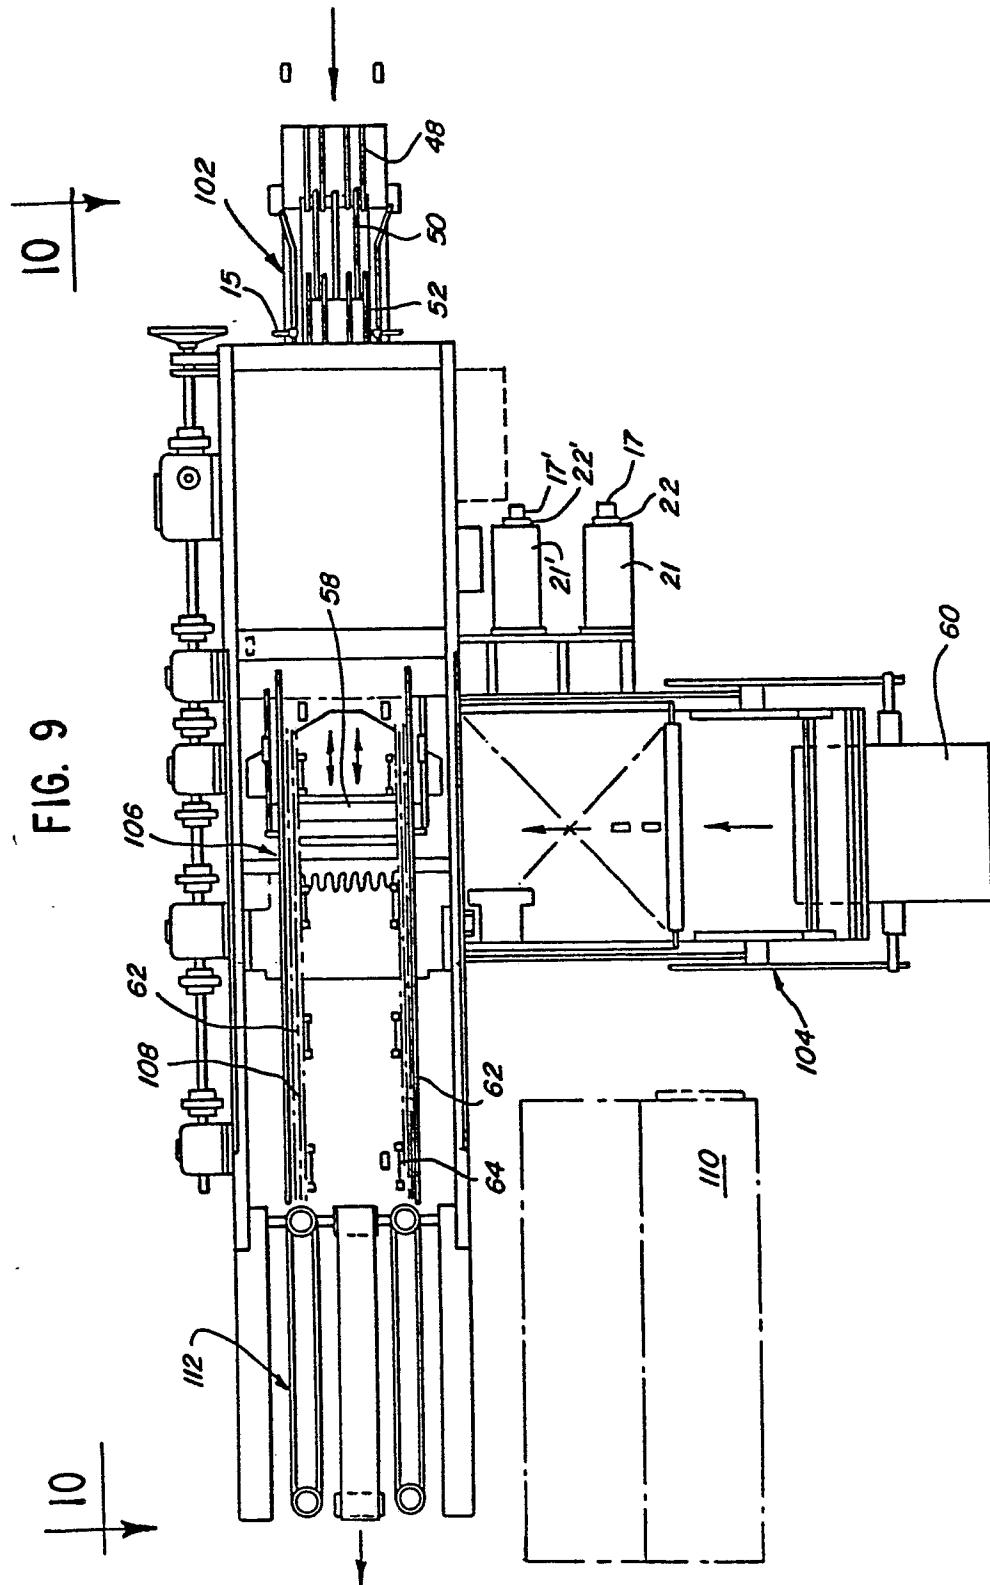




FIG. 10

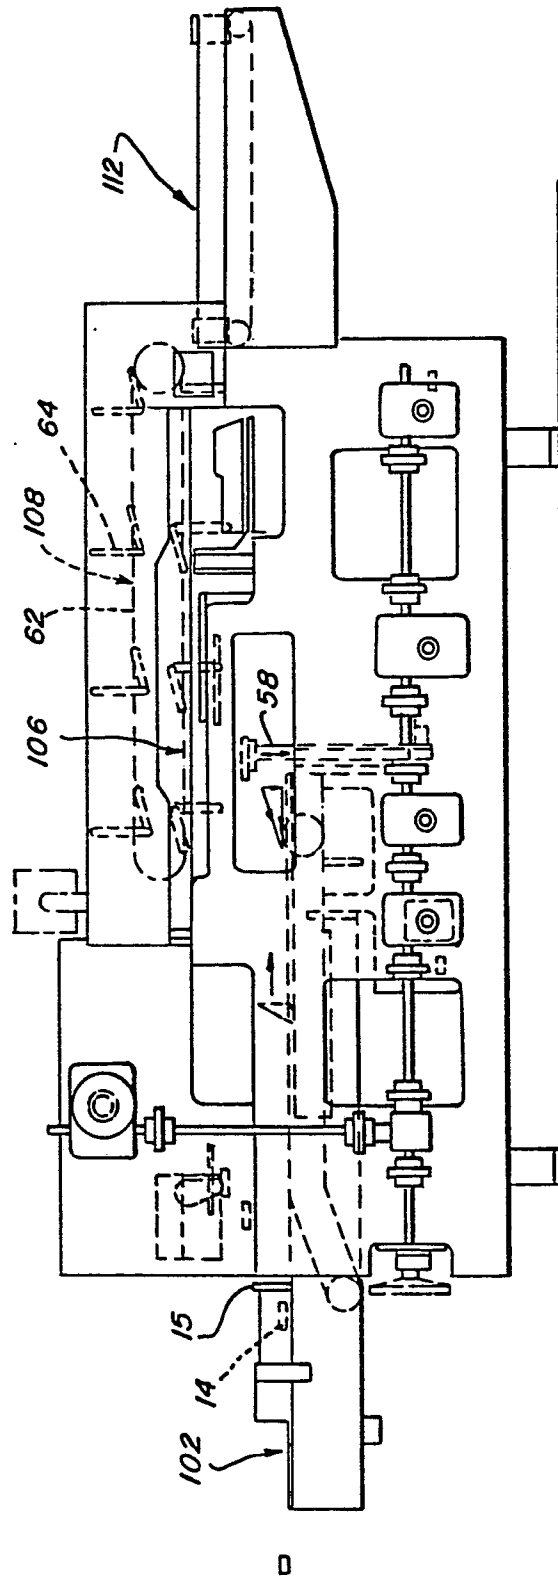


FIG. 11

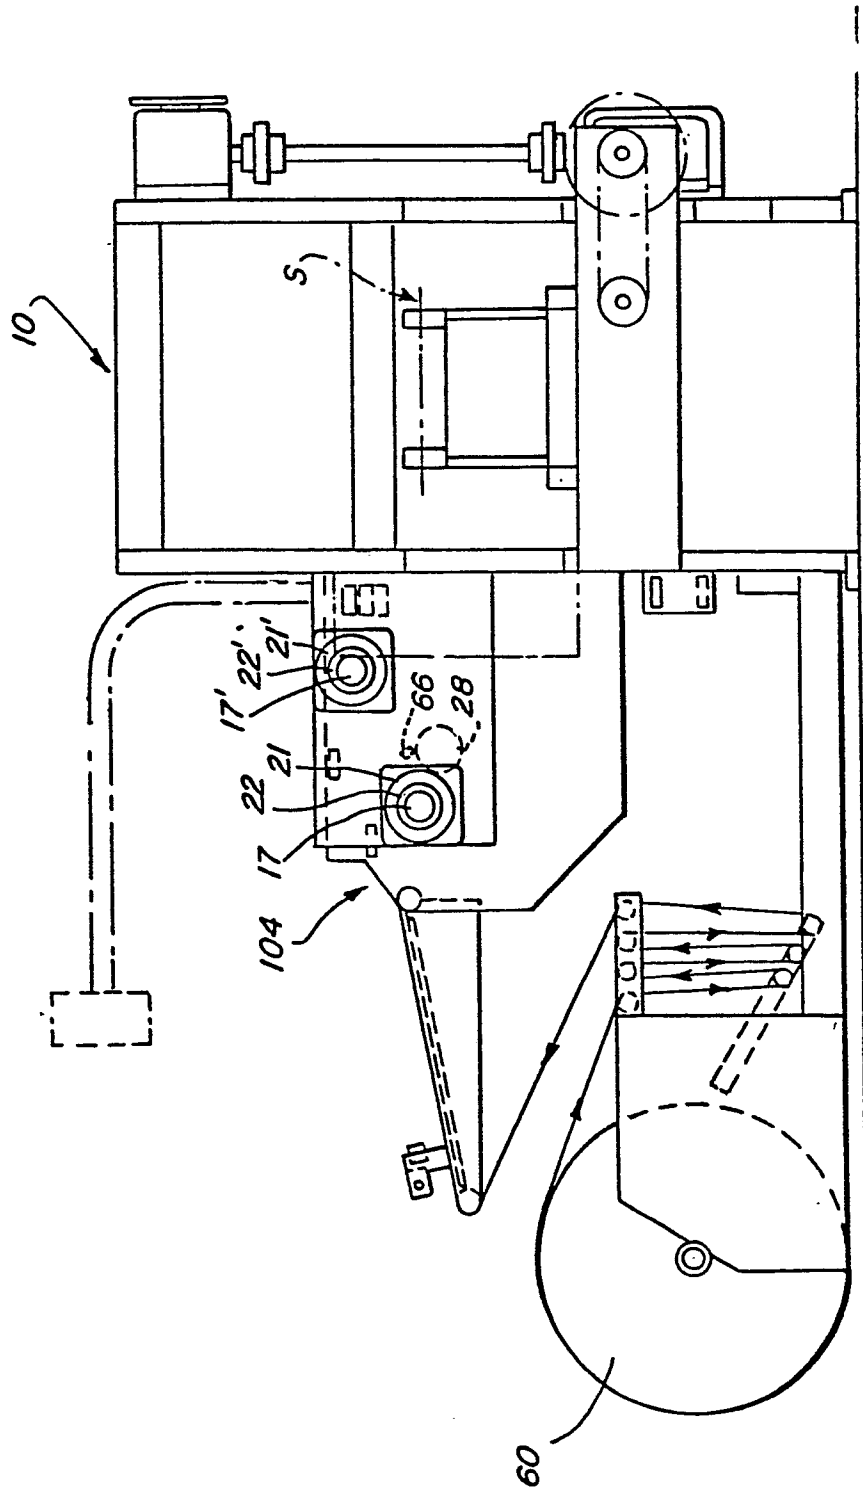


FIG. 12

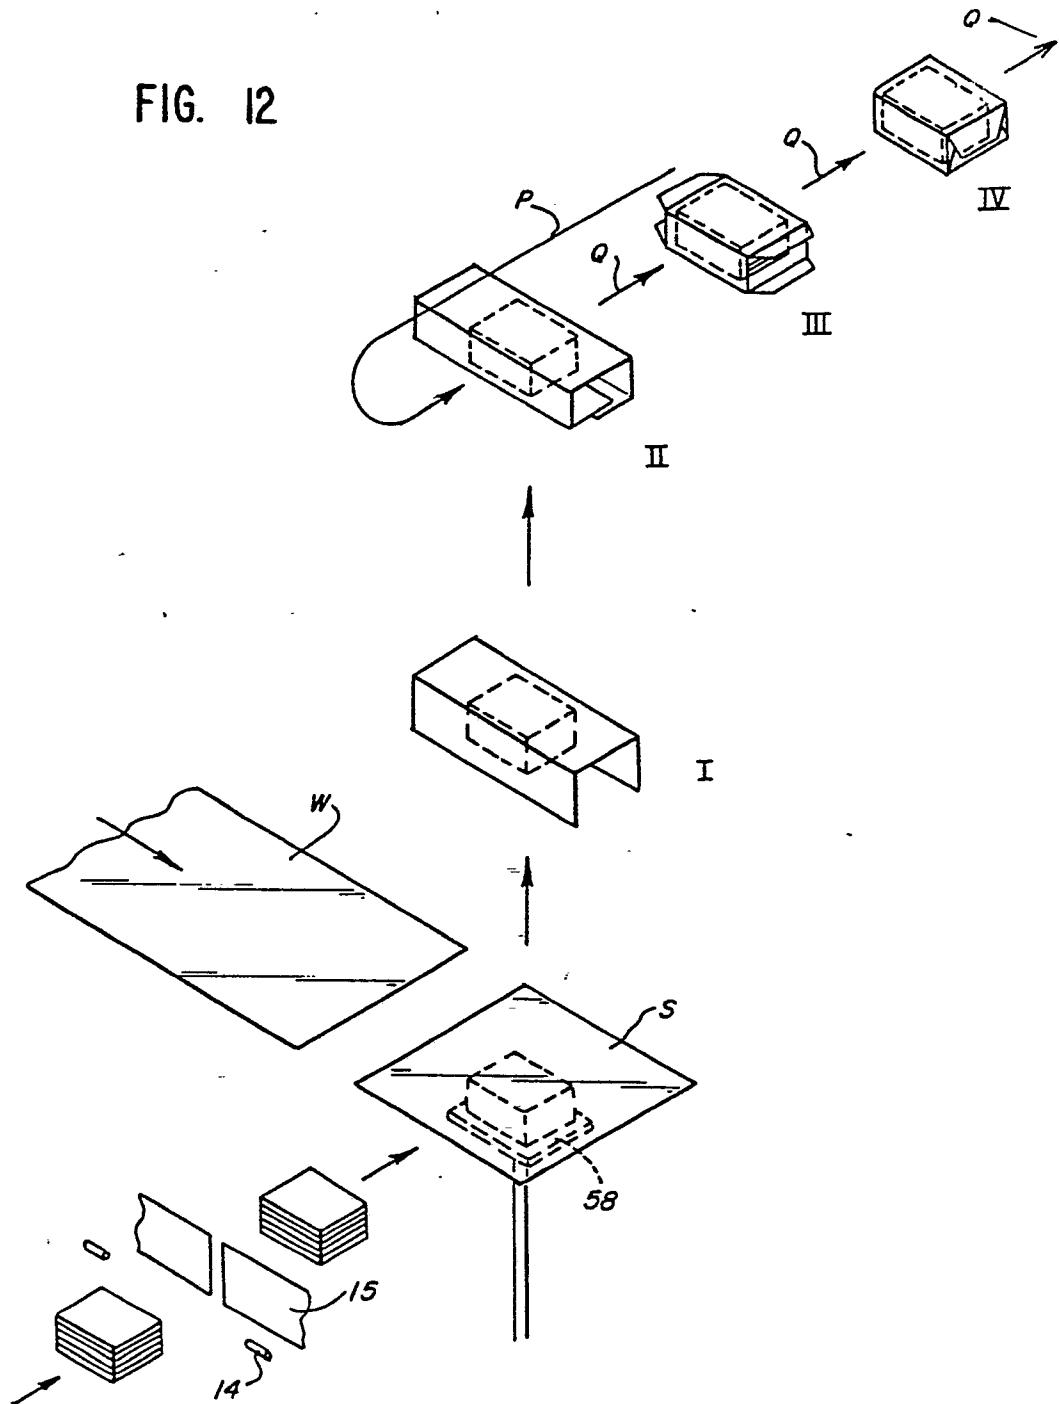


FIG. 13A

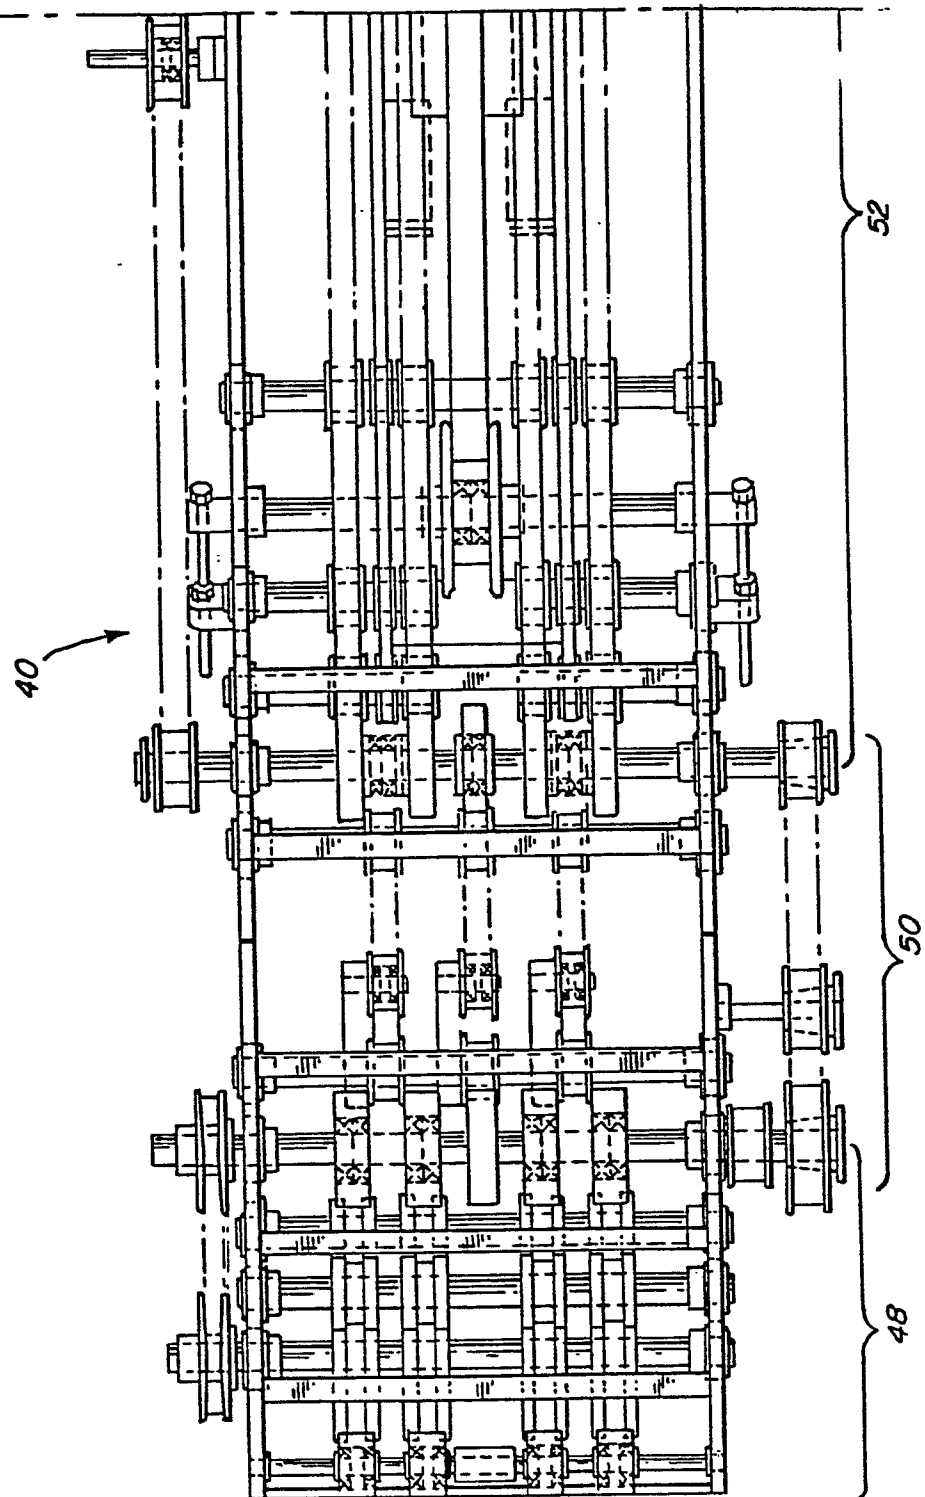


FIG. 13B

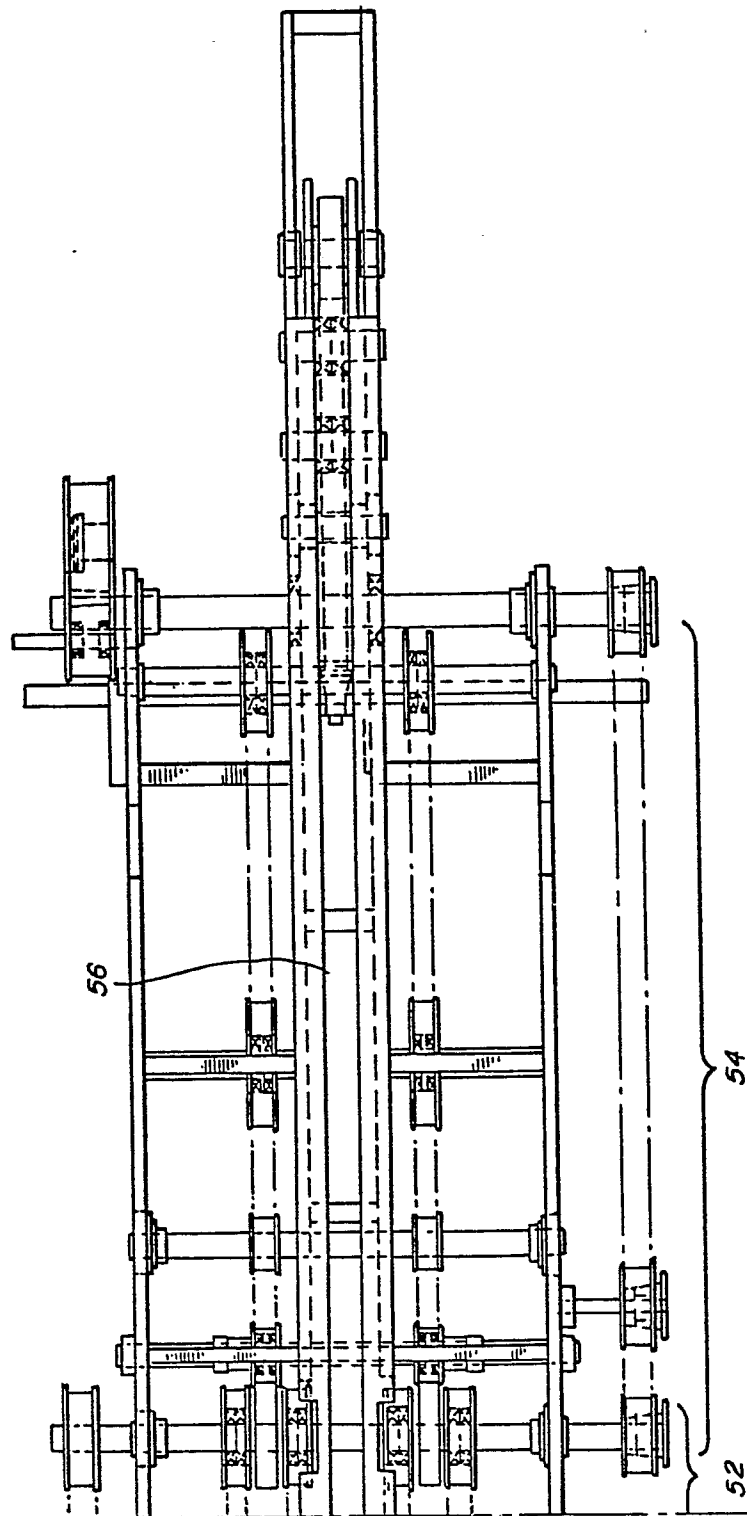


FIG. 14A

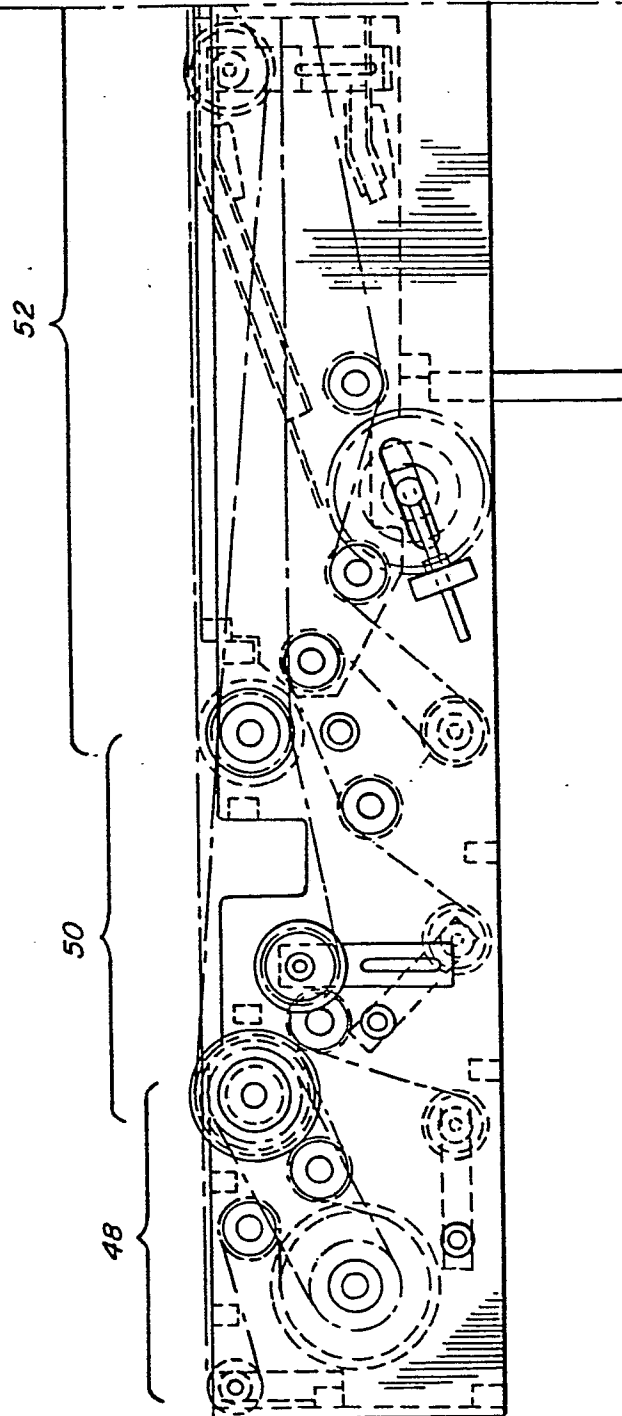


FIG. 14B

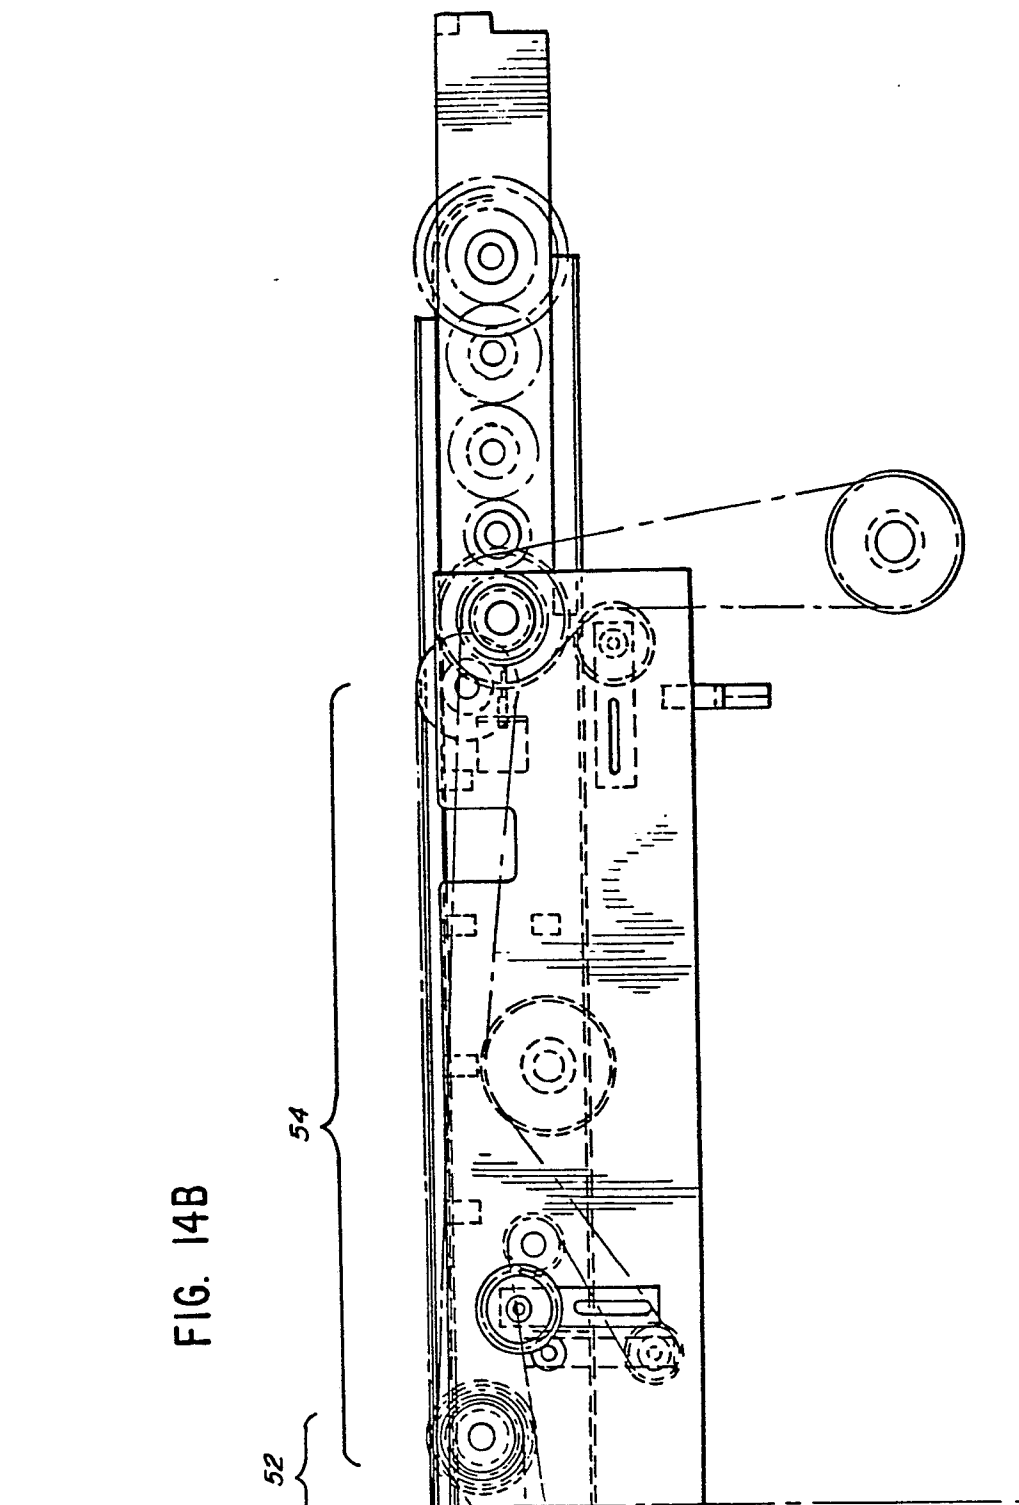
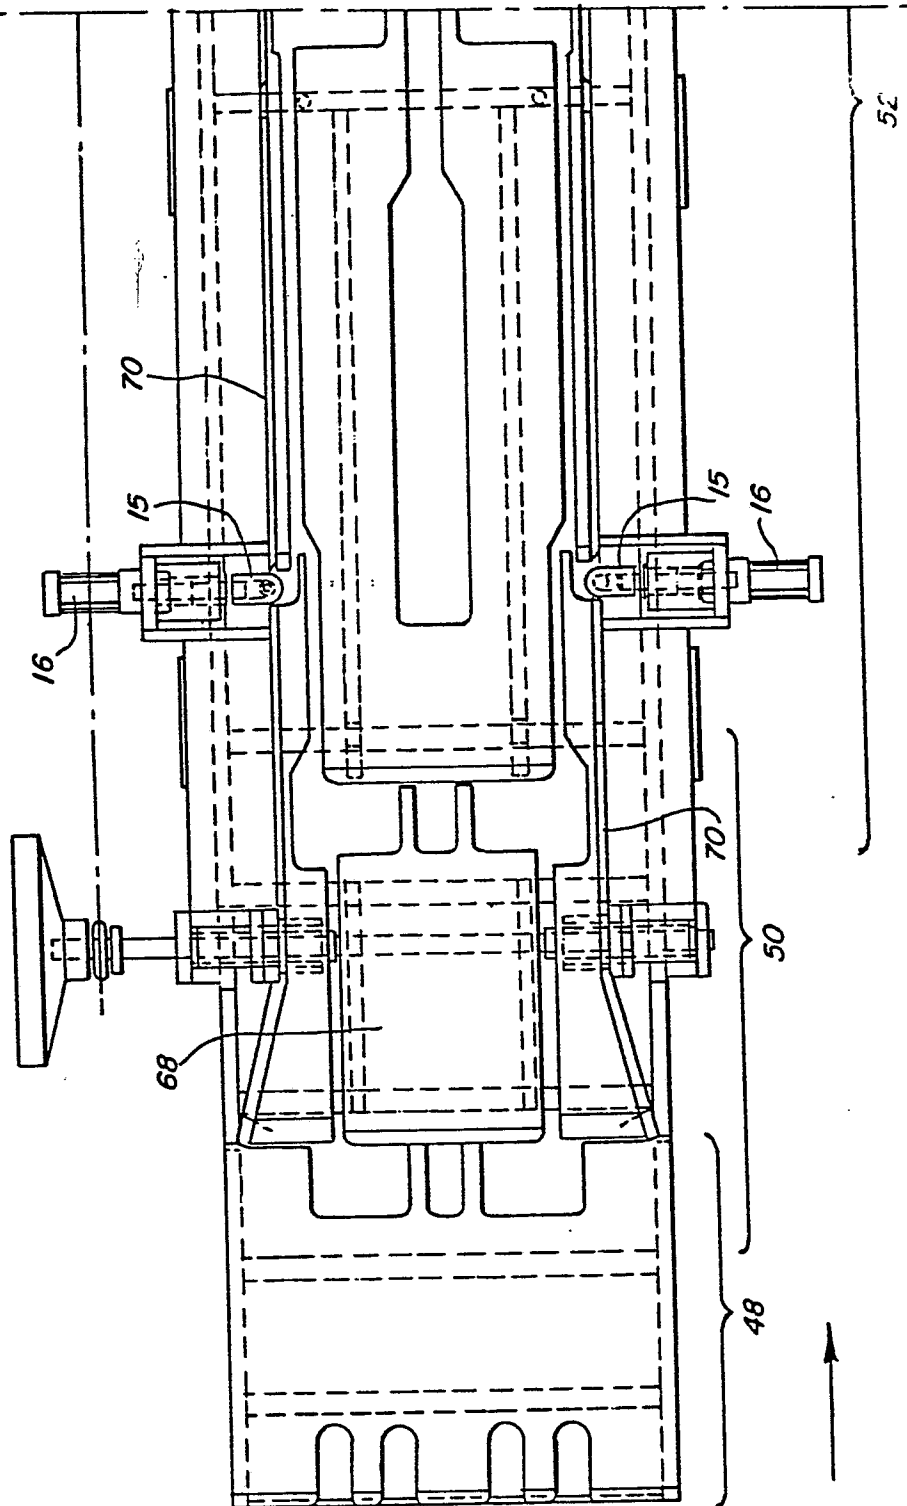




FIG. 15A



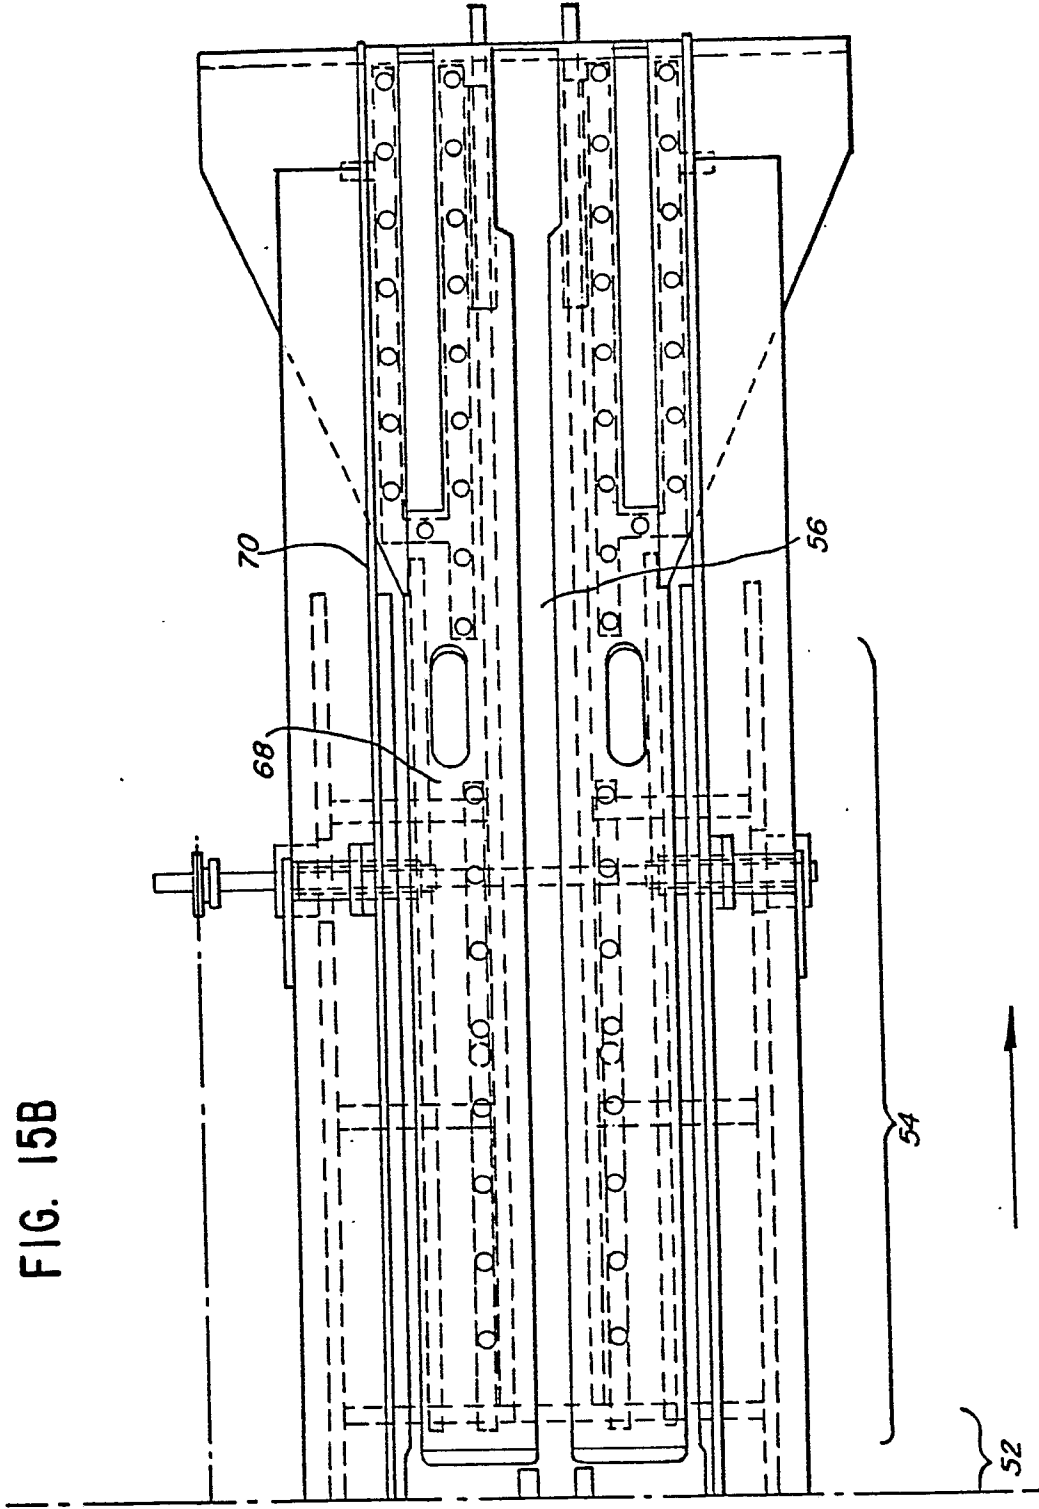


FIG. 16A

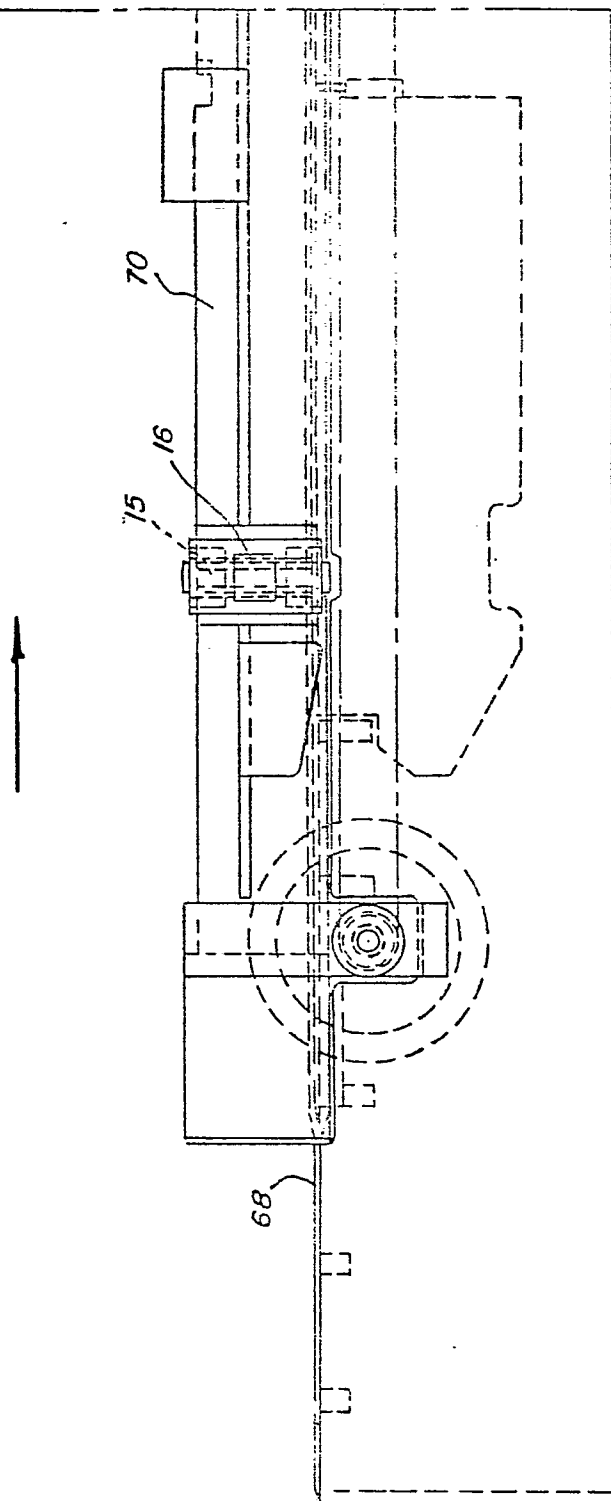


FIG. 16B

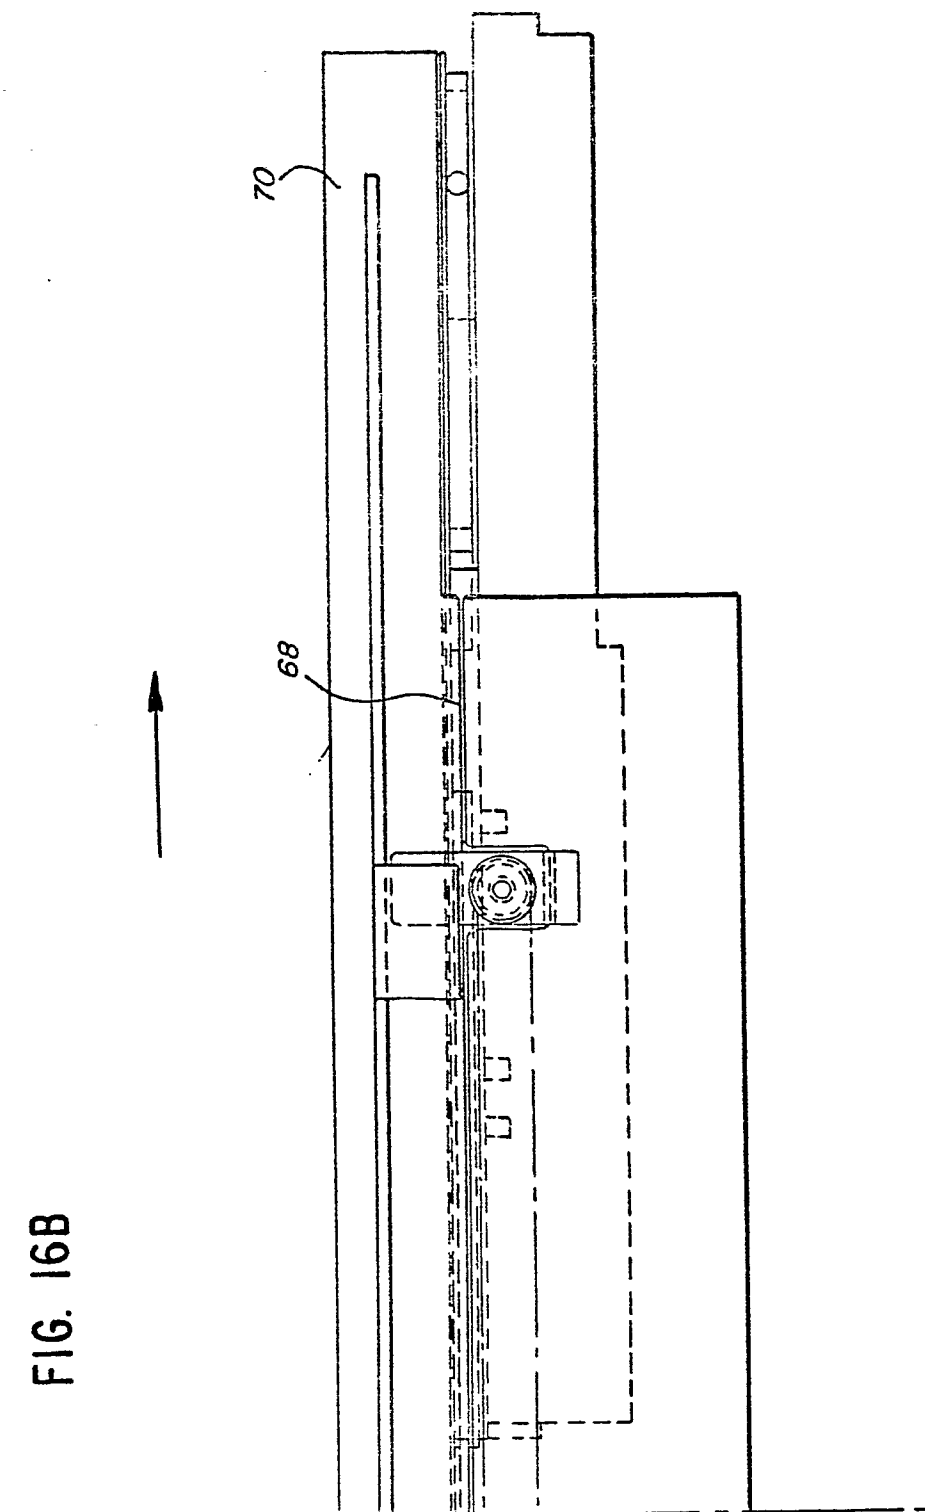
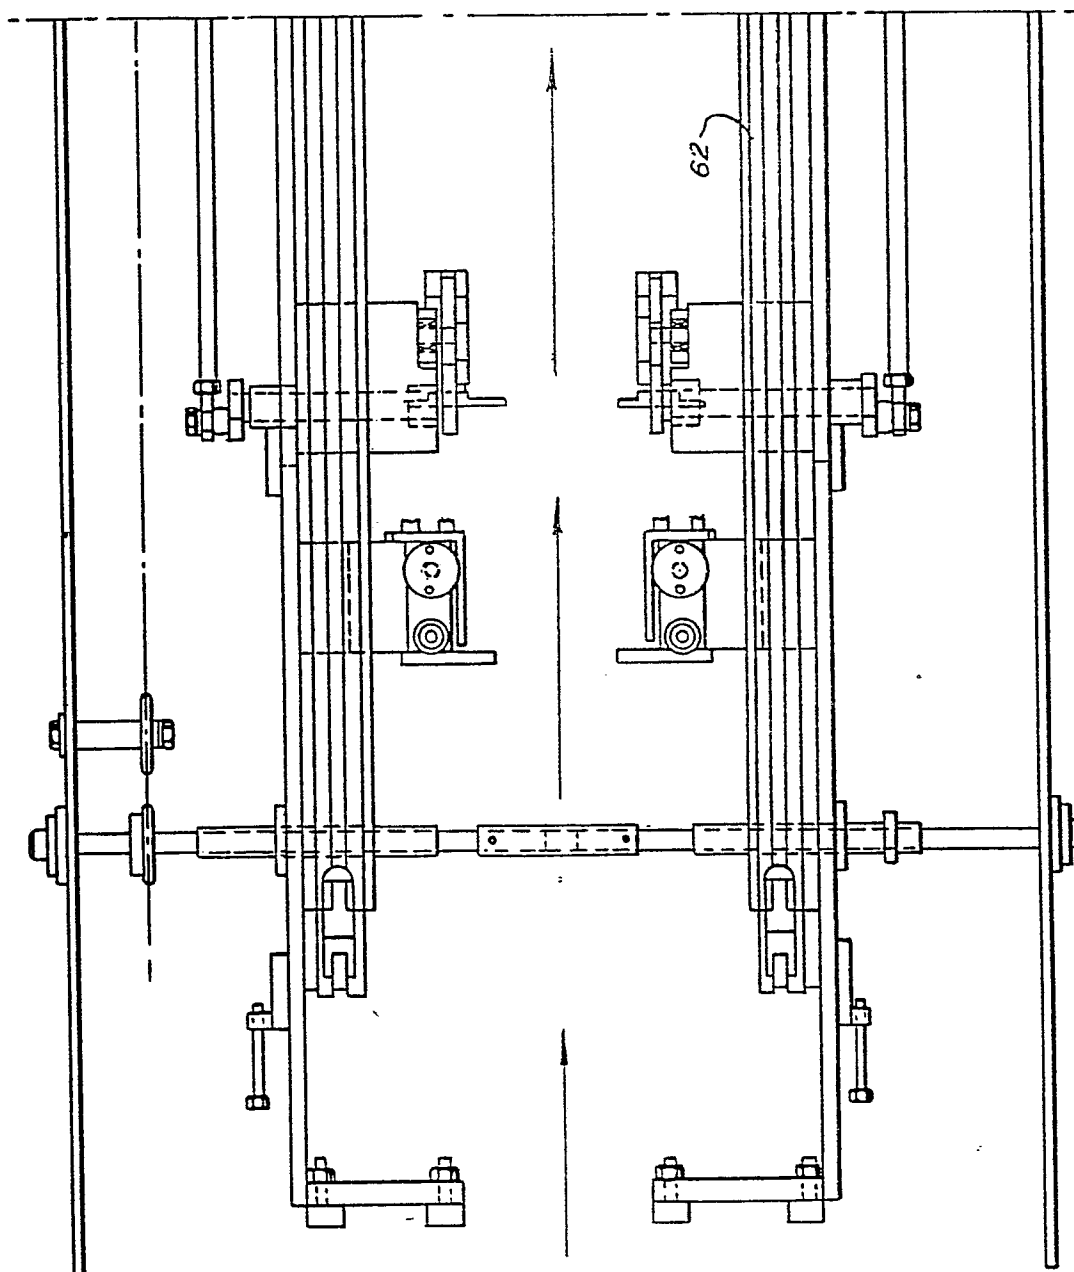


FIG. 17A



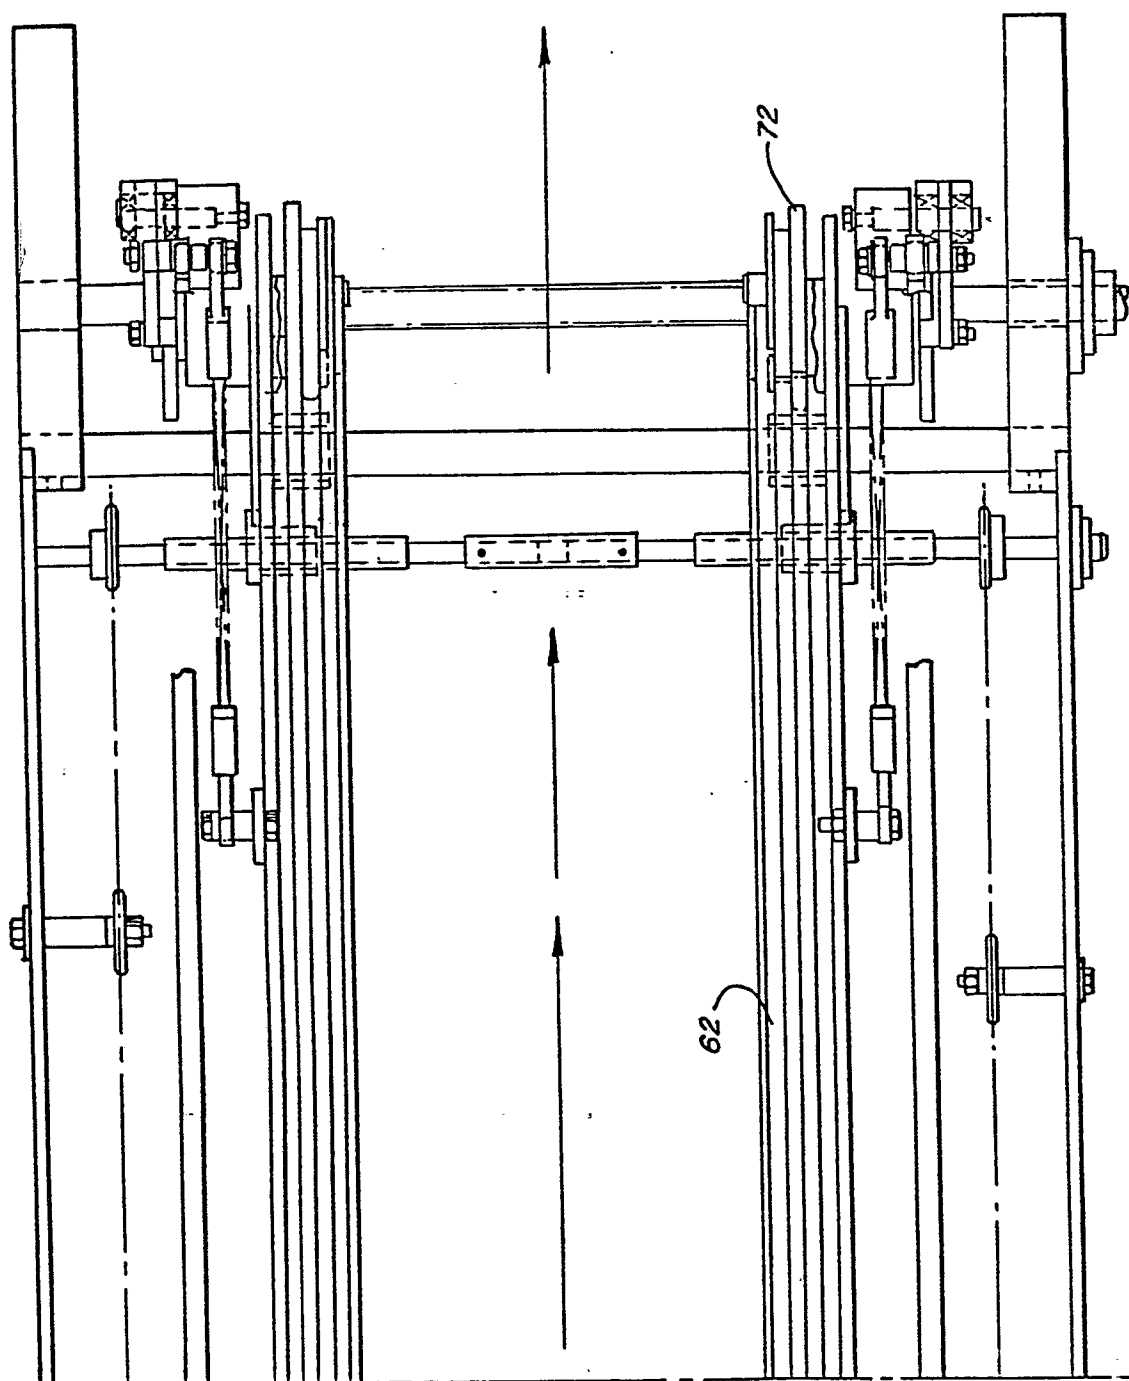


FIG. 17B

FIG. 18A

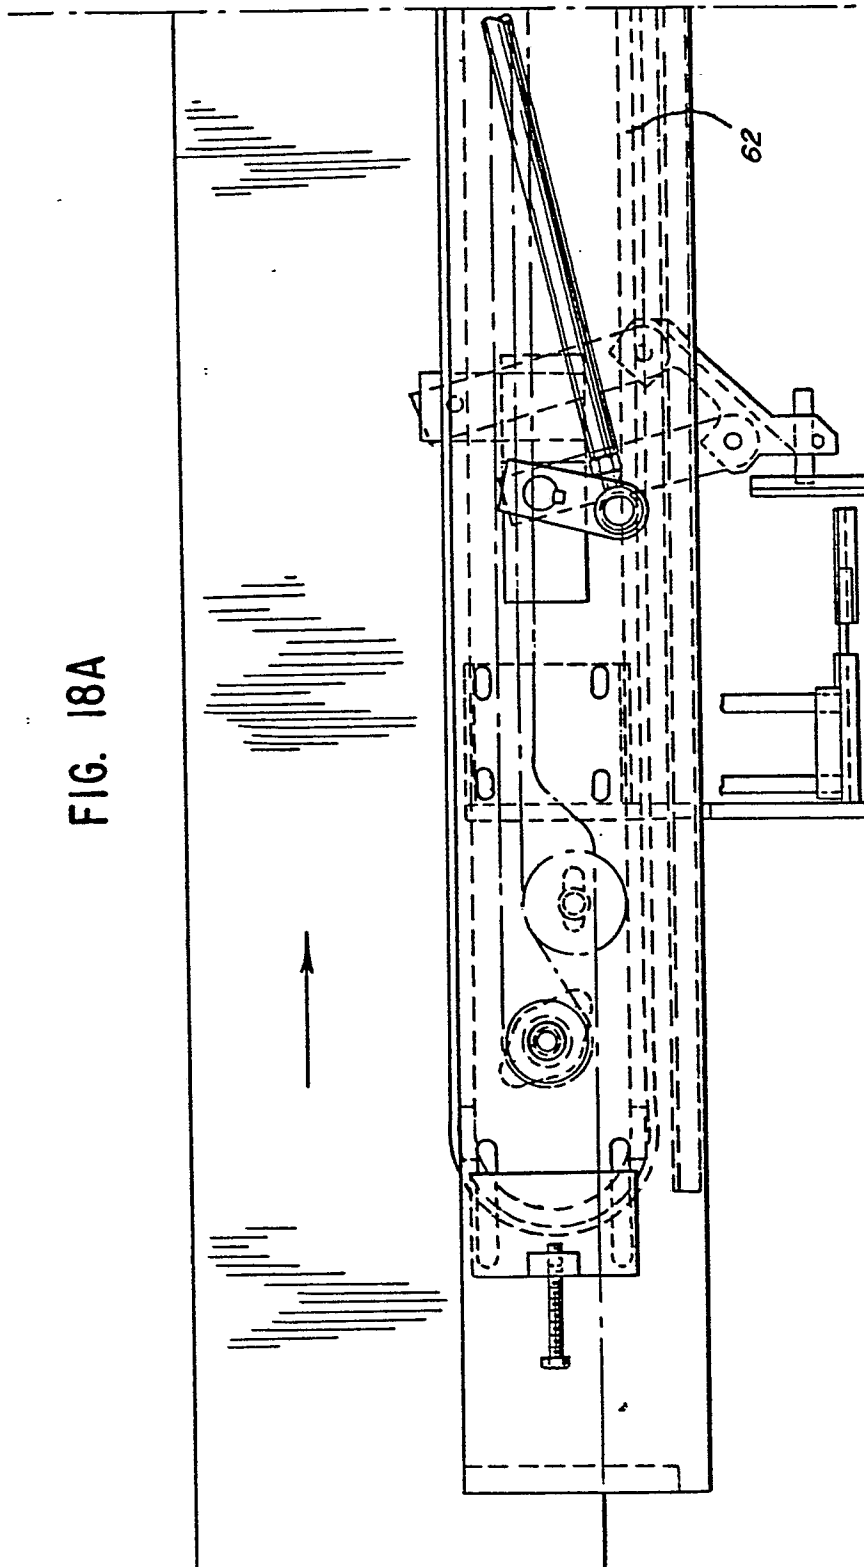




FIG. 18B

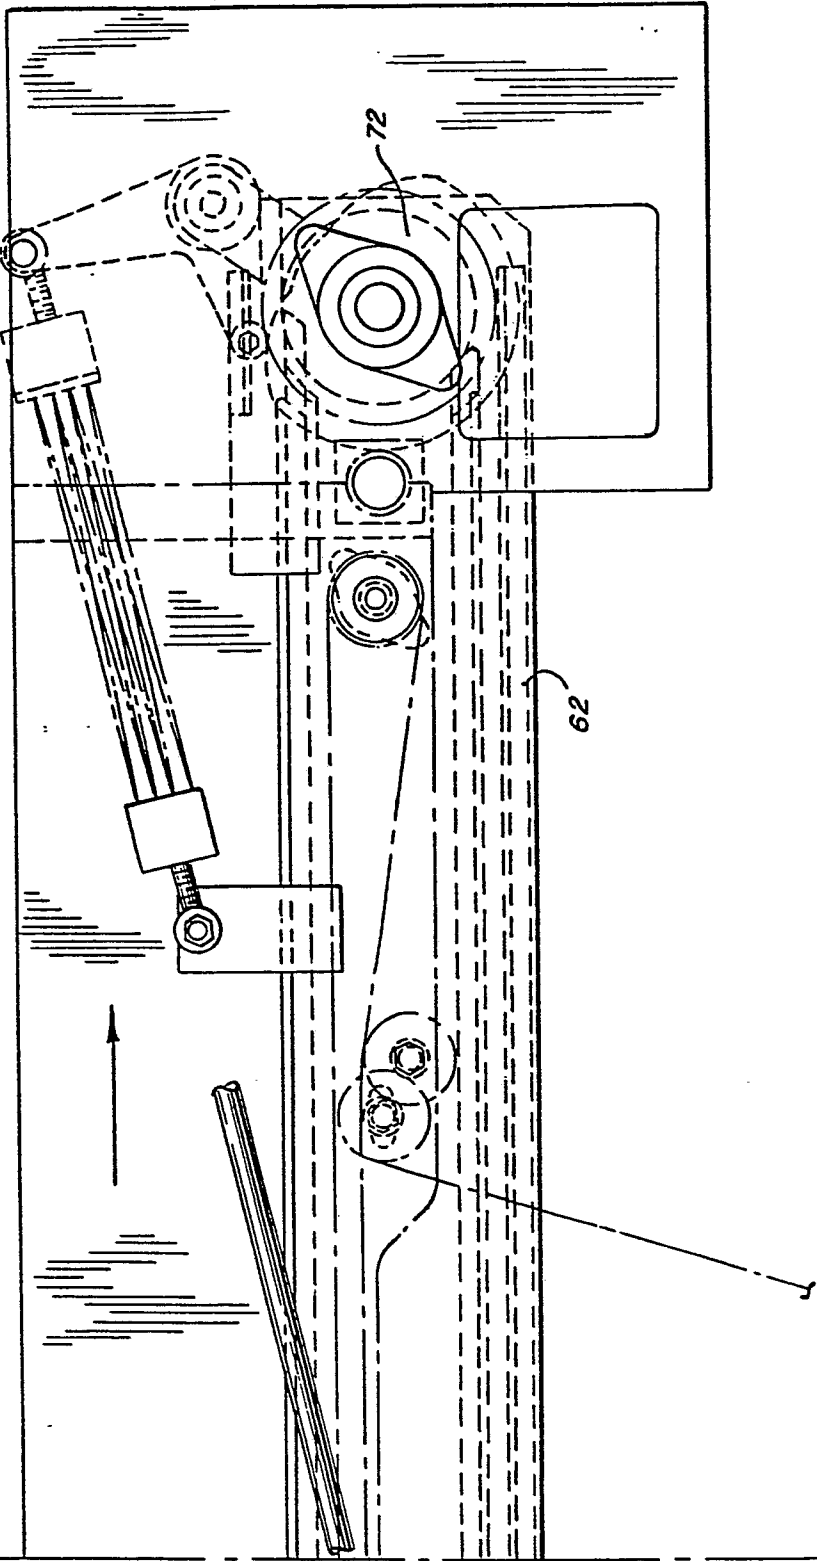


FIG. 19

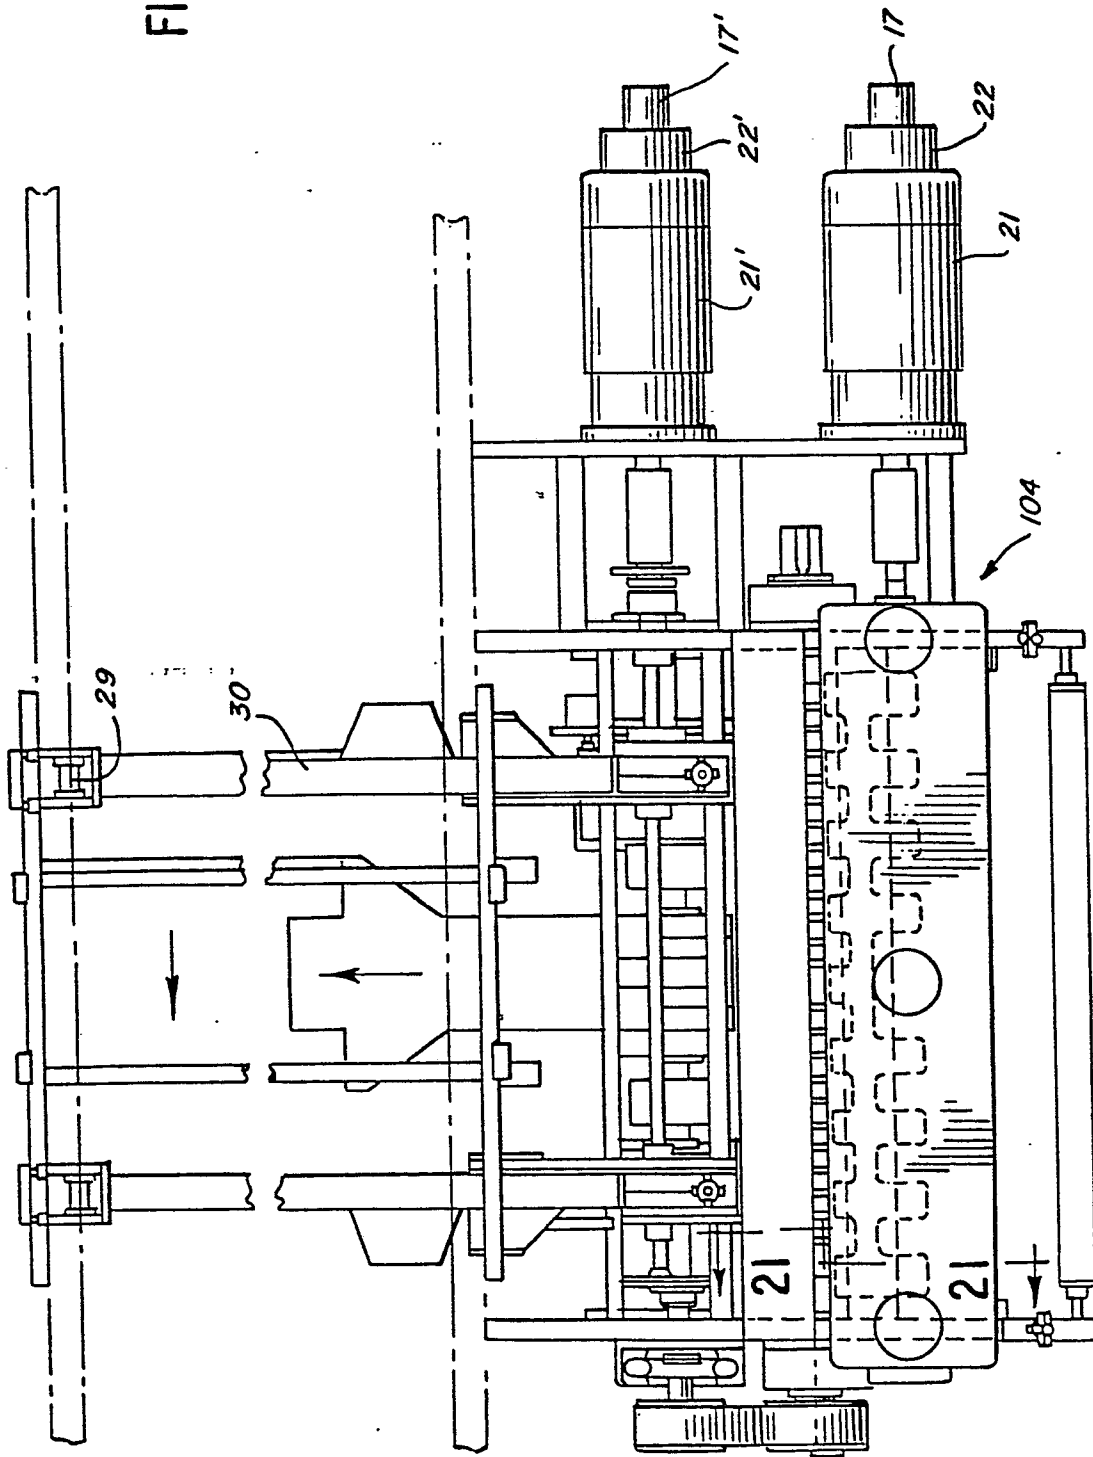


FIG. 20

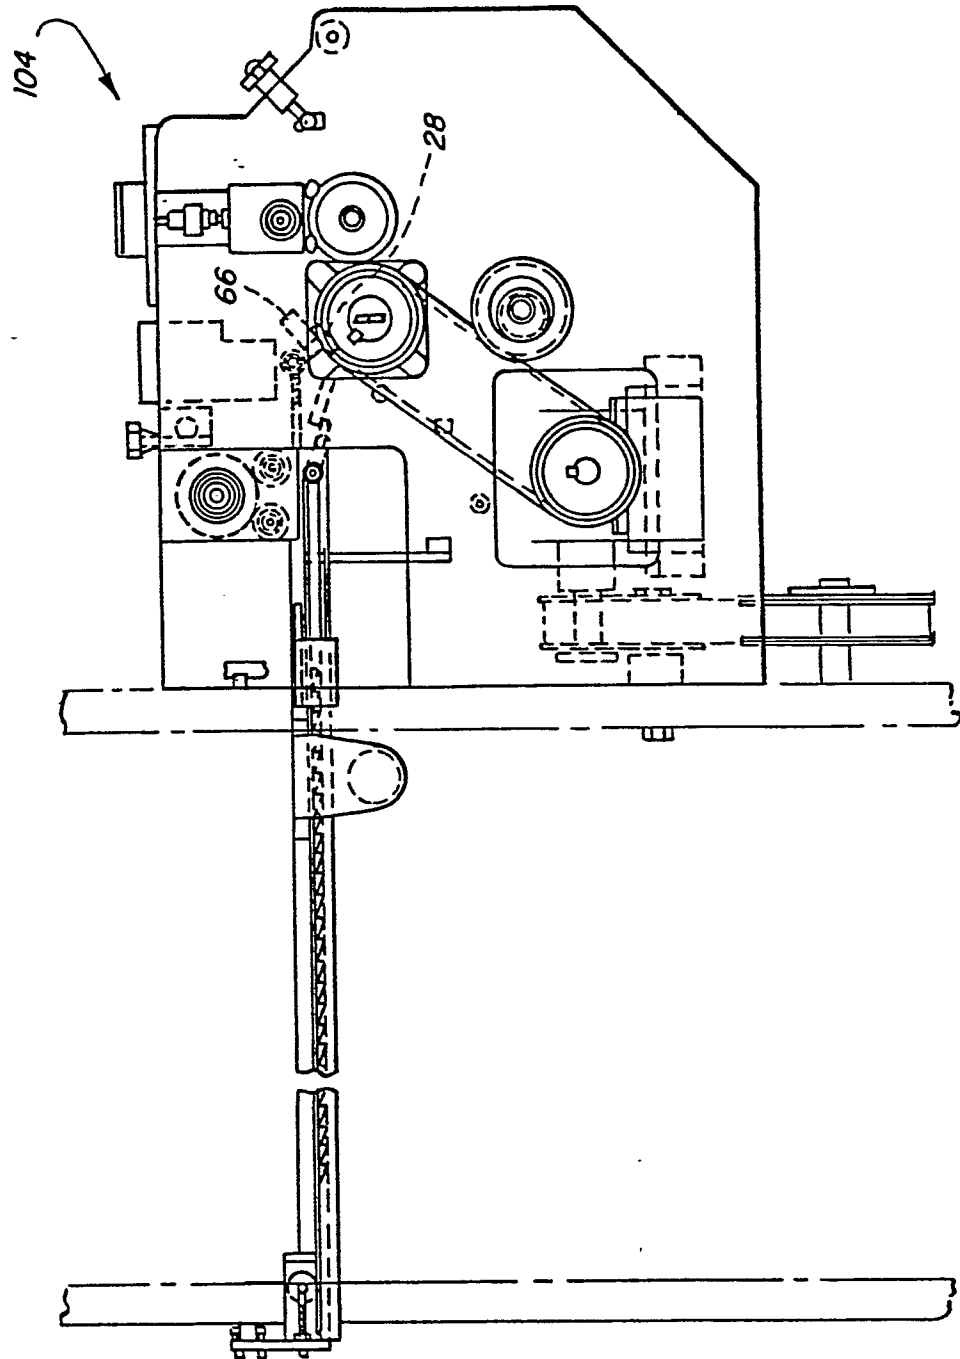


FIG. 21

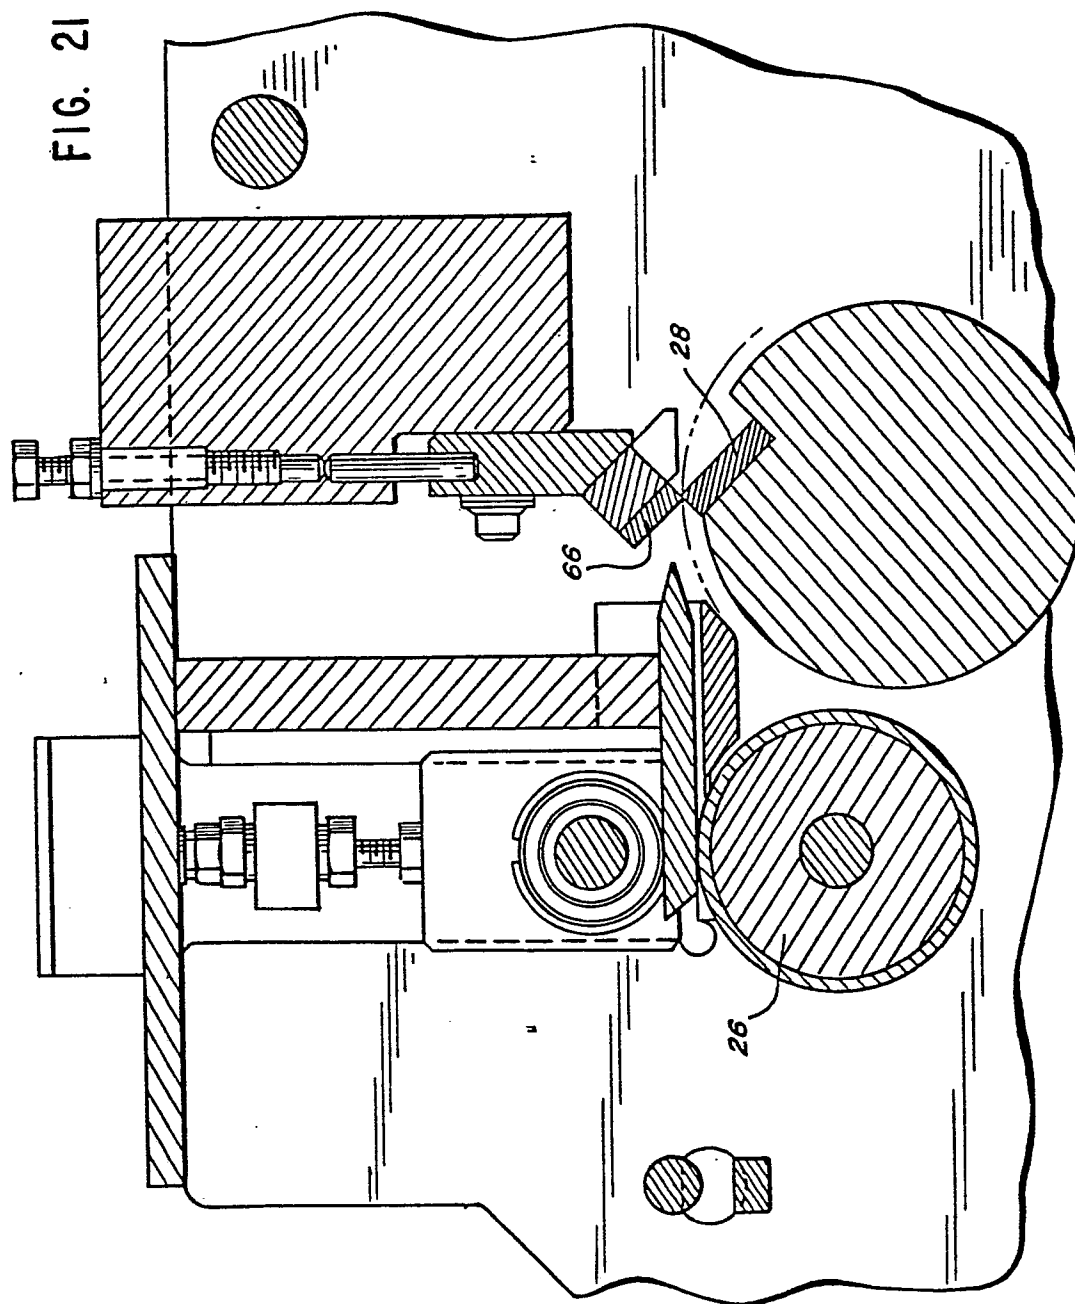


FIG. 22

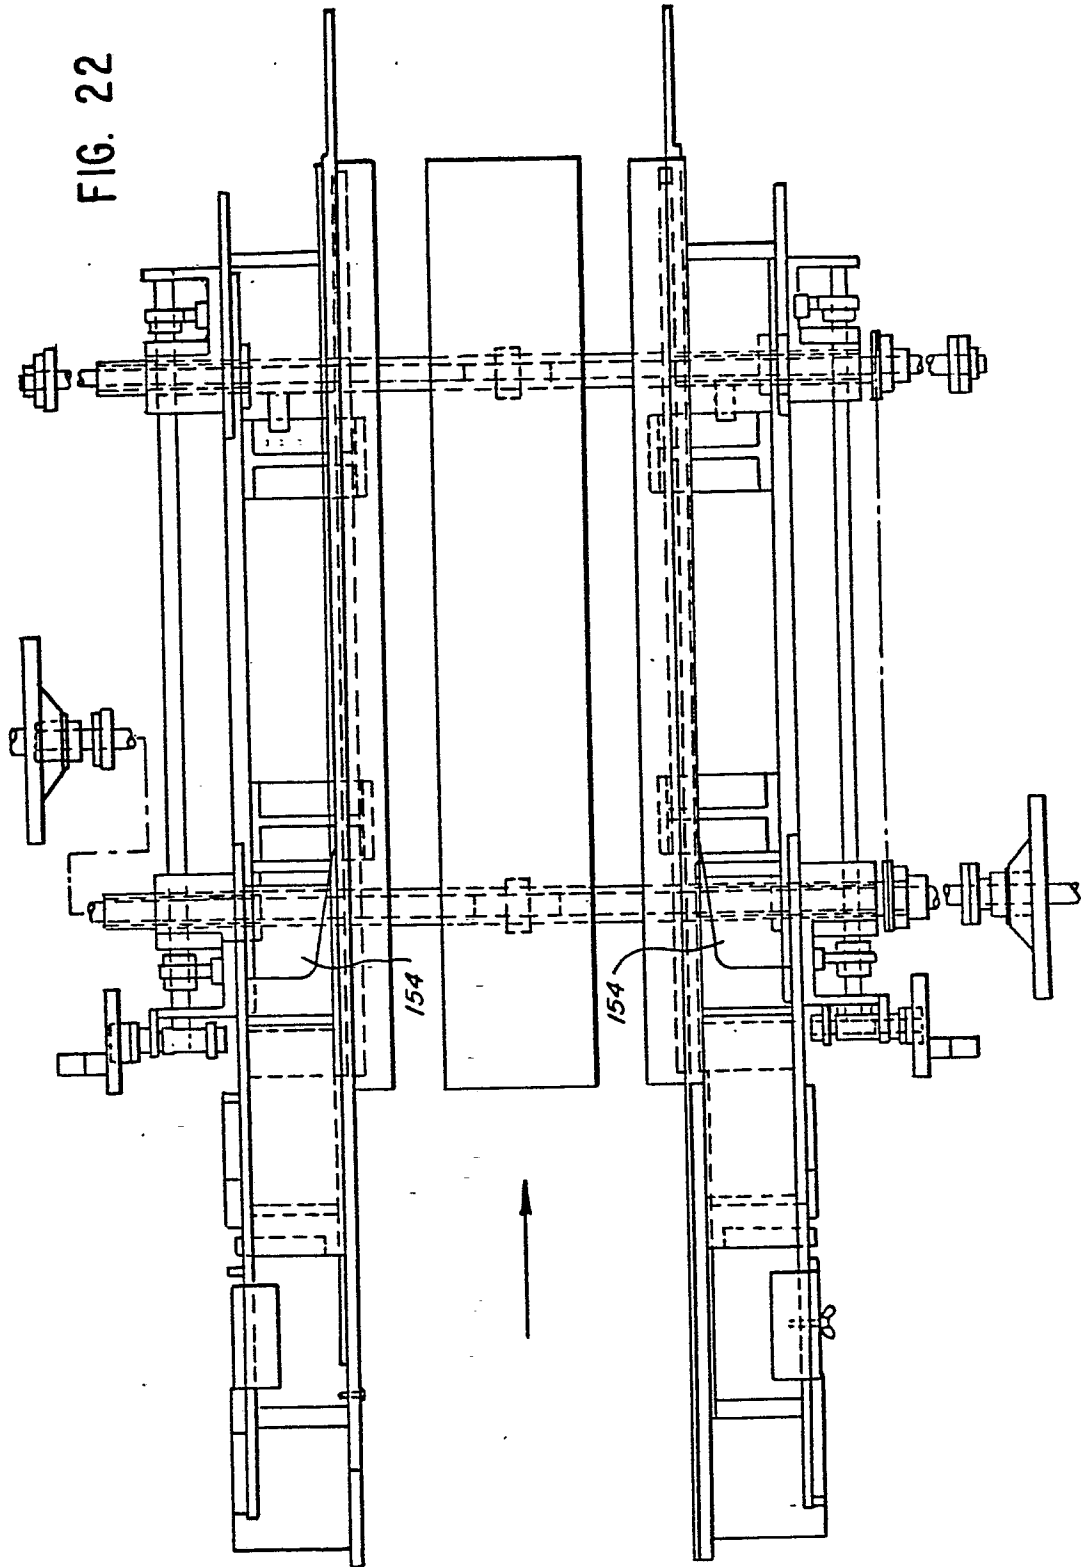


FIG. 23

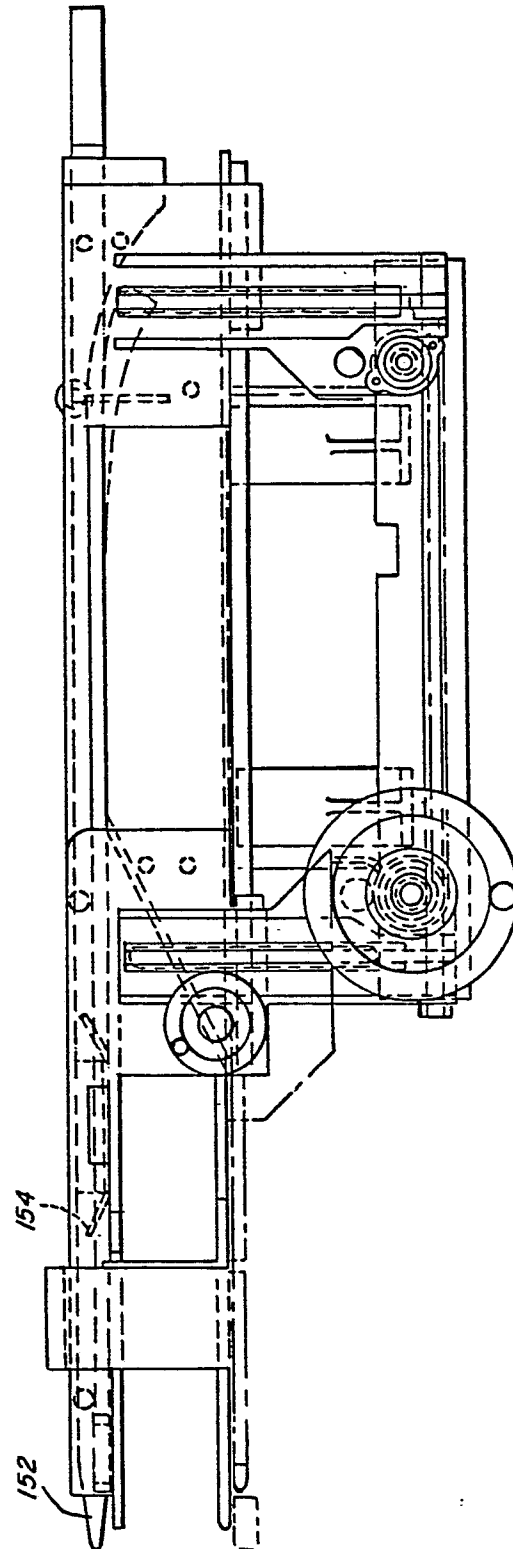
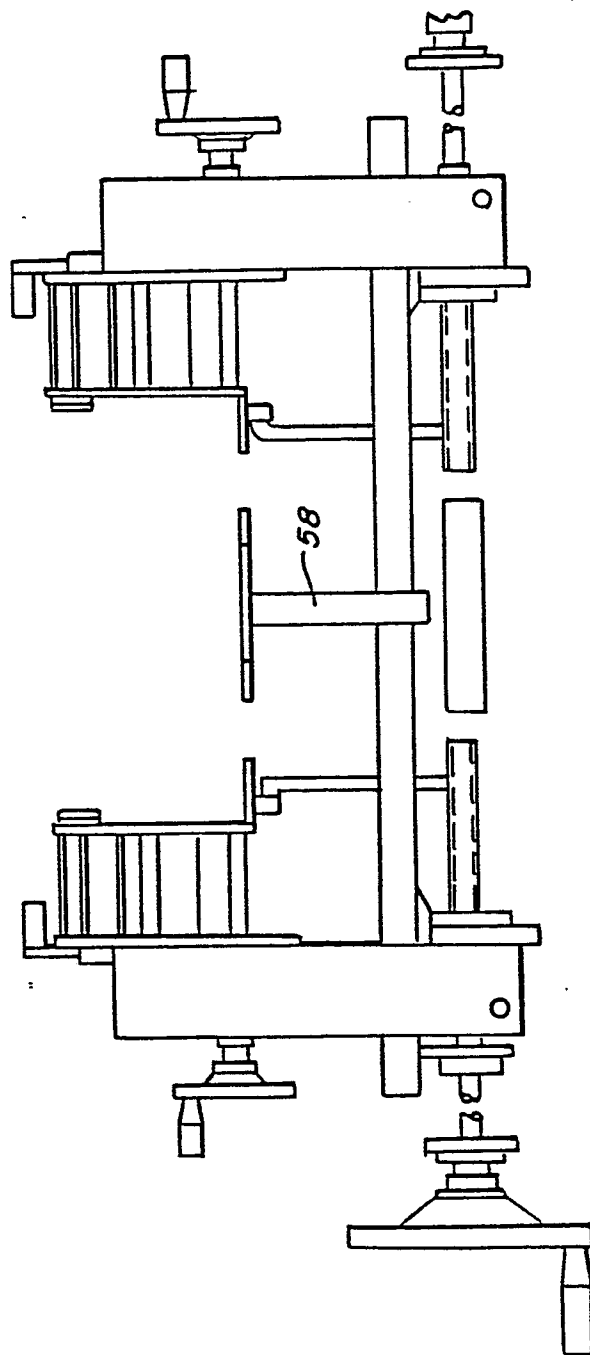


FIG. 24



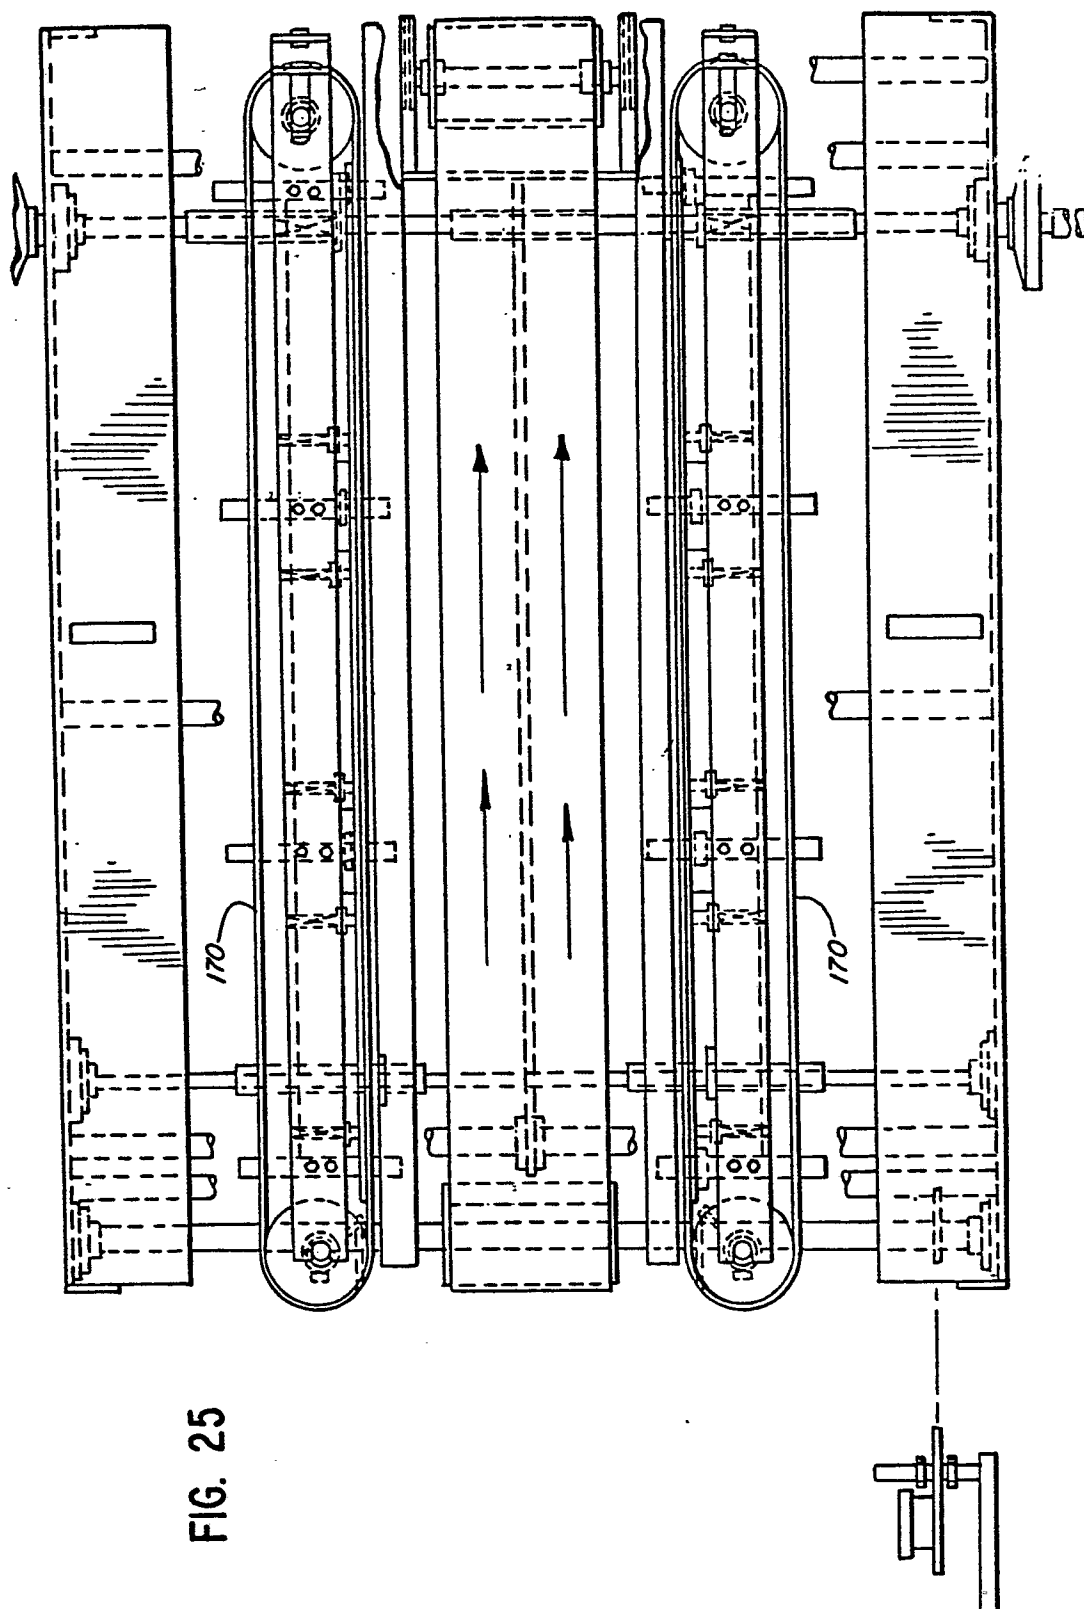


FIG. 25



FIG. 26

