

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 147 759 B1

(12)

EUROPEAN PATENT SPECIFICATION

- (45) Date of publication of patent specification: **24.07.91** (51) Int. Cl.⁵: **D04H 1/64, A61L 2/06, A61L 2/08**
(21) Application number: **84115554.2**
(22) Date of filing: **15.12.84**

(54) **Latex containing odor inhibitors.**

(30) Priority: **27.12.83 US 565689**

(43) Date of publication of application:
10.07.85 Bulletin 85/28

(45) Publication of the grant of the patent:
24.07.91 Bulletin 91/30

(84) Designated Contracting States:
AT BE DE FR GB IT NL SE

(56) References cited:
EP-A- 0 084 809
US-A- 3 318 722
US-A- 3 539 434
US-A- 4 107 120

(73) Proprietor: **The B.F. GOODRICH Company**
Dept. 0015 WHB-6 500 South Main Street
Akron, Ohio 44318(US)

(72) Inventor: **Shah, Pravinchandra Kantilal**
921 Oliver Street
Sheffield Lake Ohio 44054(US)
Inventor: **Antlfinger, George John**
156 Berkshire Road
Avon Lake Ohio 44012(US)

(74) Representative: **von Kreisler, Alek,**
Dipl.-Chem. et al
Deichmannhaus am Hauptbahnhof
W-5000 Köln 1(DE)

EP 0 147 759 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description**BACKGROUND OF THE INVENTION**

5 A nonwoven fabric is a textile structure consisting of a mat of fibers held together with a bonding material. The fibers can be partially oriented or they can be completely randomly distributed. Latex is often used as the binder for the fibers in nonwoven fabrics.

Nonwoven fabrics are popular owing to the simplicity and economy of their production since the traditional weaving operations are not used; hence, less equipment, less space, and fewer personnel are required. Nonwoven fabrics can also be produced from what would normally be considered as waste fibers, and useful characteristics are obtained which may not be provided by woven or knitted fabrics.

Enormous quantity of fibers are consumed annually in applications of nonwoven fabrics such as clothing, interliners, filters, automotive door panels, heat and electrical insulation, packaging, sanitary napkins, fillers for quilted structures, wiping cloths, towels, masks, wall coverings, shoe uppers and liners, curtains and draperies, tea bags, simulated leather, gaskets, luggage, ribbons, and diapers.

US-A-4,107,120 discloses how the low temperature properties of resin-treated textiles are improved by using as the resin an acrylic emulsion polymer wherein the latex particles have a core-shell structure. The latex particles comprise 30-60 % by weight of a polymeric core and 70-40 % by weight of a polymeric shell wherein said core is formed by emulsion polymerization of a first monomer composition which provides a Tg of -20 °C or lower and said shell is formed on said core by emulsion polymerization of a second monomer which provides a Tg of 60 °C to -10 °C. The crosslinking is carried out in the presence of a crosslinking monomer.

US-A-3,539,434 relates to non-woven materials and particularly papers treated with acrylate polymer latices which have improved resistance to aging when protected with an antioxidant and chelating agent in combination. It is shown that if a non-woven material is impregnated with different α,β -monoolefinically unsaturated monocarboxylic acids or mixtures thereof, a phenolic-type antioxidant and a polycarboxylic acid-amine-type chelating agent help to retain the physical properties of said non-woven material.

In the medical/surgical field, nonwoven fabrics are used in surgical drapes, surgical caps and gowns, as wraps for surgical instruments and the like. The surgical use requires that the fabric used be sterilized. In the case of latex-impregnated fabric used for drapes, gowns and caps, such items are wrapped and sealed in polyolefin bags and then are sterilized with gamma ray radiation. At time of use, the bags are opened and the doctors and nurses put on the caps and gowns and use the drapes to cover the patient during surgery. When the bags are opened, they often emit odors. In the case of the wraps, after being washed, surgical instruments are stacked in a tray and then wrapped in the latex-impregnated nonwoven fabric and sterilized in steam. After steam sterilization, the wrapped instrument trays are removed from the sterilization unit. When the door to the sterilization unit is opened to remove the wrapped instrument tray, an odor is emitted from the fabric that can be quite potent.

Therefore, in order to sell nonwoven fabric bonded with a latex, the post-sterilization odor should be minimized.

In the past, antioxidants have been added to unsaturated latexes to prevent degradation of the unsaturated polymer backbone in the presence of air, ozone, heat, and light. Examples of unsaturated latexes include polybutadiene, poly(butadiene-styrene), poly(butadiene-acrylonitrile), polyisoprene, and polychloroprene. Saturated latexes are prepared by homopolymerizing esters of acrylic or methacrylic acids or copolymerizing esters of acrylic or methacrylic acids with other vinyl monomers such as acrylonitrile, styrene, vinyl chloride, and vinyl acetate. The saturated latexes do not need protection of antioxidants and whenever antioxidants were added to saturated latexes, they were added for colloidal stabilization, which is unrelated to the antioxidant function.

Hydrophilic acrylic latexes based on poly(ethyl acrylate) have been available in the past for bonding nonwoven fibers. Such latexes were prepared by polymerizing in excess of 90 weight parts ethyl acrylate; less than 5 parts of each N-methylol acrylamide, acrylamide, or acrylonitrile; a low level of an emulsifier; and less than 1 weight part of an antioxidant selected from hindered and partially hindered phenols, such as a mixture of 2,2'-di-t-butyl Bisphenol A, 2-t-butyl-2'- α -methylbenzyl Bisphenol A, 2,6-di-t-butylphenol, 2-t-butyl-isopropylphenol, etc. The antioxidant was added as an emulsion to provide additional colloidal stability.

SUMMARY OF THE INVENTION

This invention relates to nonwoven fabrics bonded with latexes comprising 65 to 85 weight parts of a soft hydrophobic monomer, 10 to 30 weight parts of a hard hydrophobic monomer, 0.1 to 5 weight parts of an unsaturated carboxylic acid, and 0.1 to 5 parts of an N-alkylol acrylamide or methacrylamide, said latex having admixed thereto 0.01 to 5 weight parts of an odor inhibition agent selected from amine-type antioxidants, and hindered or partially hindered phenols.

In detail, this invention relates to a sterilized nonwoven fabric that has a reduced odor on sterilization comprising nonwoven fibers bonded with a latex prepared by free radical initiation comprising a preponderance of a soft hydrophobic monomer having Tg in the range of -80°C to -20°C , a lesser amount of a hard hydrophobic monomer having Tg in the range of $+40^{\circ}\text{C}$ to $+120^{\circ}\text{C}$, a small amount of an unsaturated carboxylic acid and a small amount of N-alkylol acrylamide or methacrylamide, characterized in that said latex having admixed therein a sufficient amount of an emulsifier and 0.01 to 5 weight parts per 100 weight parts of latex solids of an odor inhibition agent selected from amine-type antioxidants and hindered phenols that have the function of reducing the odor that is generated on sterilization of the nonwoven fabric.

15 DETAILED DESCRIPTION OF THE INVENTION

This invention is based on a latex that is used as a binder in making nonwoven fabrics that are used in medical/surgical applications. This latex, when used as a binder for making nonwoven fabrics, provides a balance of softness, physical strength, hydrophobicity, adhesion, low skin toxicity, and minimal odor after sterilization. All of these properties are requisites for a fabric that is used in medical/surgical applications.

The acrylic latex of this invention is prepared by free radical polymerization of 65 to 85 weight parts soft hydrophobic monomer, 10 to 30 weight parts of hard hydrophobic monomer, 0.1 to 5 weight parts of an unsaturated carboxylic acid, and 0.1 to 5 weight parts of an N-alkylol acrylamide or methacrylamide. Polymerization is carried out in the presence of 0.1 to 2 weight parts of a suitable free radical initiator and usually with less than one weight part of an emulsifier. To this latex is admixed about 0.01 to 5 weight parts of an odor inhibition agent selected from hindered or partially hindered phenols and amine-type antioxidants. The odor inhibition agents, as defined herein, also include free radical terminators or shortstops. In a preferred embodiment, free radical polymerization is carried out in the presence of 0.3 to 1 part of a free radical initiator and 0.1 to 0.5 part of an emulsifier with the monomers to be polymerized including 70 to 80 parts of a soft hydrophobic monomer, 15 to 25 parts of a hard hydrophobic monomer, 0.5 to 4 parts of unsaturated carboxylic acid, and 0.5 to 4 parts of N-alkylol acrylamide or methacrylamide. Amount of the odor inhibition agent in the preferred embodiment is in the range of 0.1 to 1 part, based on the weight of latex solids.

Typical polymerizations for the preparation of the latexes described herein are conducted by charging the reactor with appropriate amount of water, emulsifier and a portion of the initiator sufficient to initiate polymerization. The reactor is then evacuated, heated to the initiation temperature of about 80°C and charged with a portion of the monomer premix which has been previously prepared by mixing water, emulsifier, the monomers, and polymerization modifiers, if any are employed. After the initial monomer charge has been allowed to react for a period of time, the proportioning of the remaining monomer premix is begun, the rate of proportioning being varied depending on the polymerization temperature, the particular initiator employed, and the amount of the monomer(s) being polymerized. After all the monomer premix has been charged, the final addition of initiator is made and the reactor and the latex heated with agitation for a length of time necessary to achieve the desired conversion. The pH of the latex is generally in the range of about 2 to 7.

In the latex, the particle size may be in the range of about 300nm (3000 angstroms). A generally satisfactory particle size may be, however, from 50 to 500nm (500 to 5000 angstroms). The total solids of the latexes may be varied up to about 70% and may relate to the fluidity wanted in the composition. Generally, it is desired to use a latex containing 45 to 55% solids.

Suitable soft hydrophobic monomers that can be used to prepare the latex of this invention include those monomers homopolymers of which have Tg falling within the range of -80°C to -20°C , preferably -60 to -30°C . Specific examples of such monomers include n-butyl acrylate, 2-ethylhexyl acrylate, and isobutyl acrylate. Preferred soft hydrophobic monomers are acrylic monomers that include n-butyl acrylate and isobutyl acrylate. Since ethyl acrylate forms a hydrophilic polymer, it is excluded from the class of monomers defined herein.

For purposes of this invention, suitable hard hydrophobic monomers are those that form homopolymers having Tg in the range of $+40^{\circ}\text{C}$ to $+120^{\circ}\text{C}$, preferably $+80$ to $+110^{\circ}\text{C}$. Specific examples of such hard hydrophobic monomers include styrene, α -methyl styrene, methyl methacrylate, butyl methacrylate, and 2-ethylhexyl methacrylate. Preferred monomers in this class include styrene and methyl methacrylate.

A small amount of an acid is used in conjunction with N-alkylol acrylamide to facilitate curing at a lower temperature. Suitable acids for this purpose include monounsaturated, diunsaturated, monocarboxylic and dicarboxylic acids generally containing at least 3 carbon atoms and up to about 12 carbon atoms, preferably 3 to 6 carbon atoms. Such acids include acrylic, methacrylic, itaconic, fumaric, and maleic. Preferred acids
 5 are acrylic, methacrylic, and itaconic.

A small amount of N-alkylol acrylamide is also included in the polymerization formulation as a cross-linking agent. Such amides are derivatives of acrylic and methacrylic acids that contain 1 to 10, preferably 1 to 4 carbon atoms in the alkyl group. This class of amides includes N-methylol acrylamide, N-methylol methacrylamide, n and iso-butoxy methyl acrylamide. Preferred example of such amides is N-methylol
 10 acrylamide.

The usual types of surfactants that can be used herein include anionic and nonionic emulsifiers. Suitable anionic emulsifiers include alkali metal or ammonium salts of the sulfates of alcohols containing 8 to 18 carbon atoms such as sodium lauryl sulfate, alkali metal and ammonium salts of sulfonated petroleum and paraffin oils, sodium salts of sulfonic acids, alkylaryl sulfonates, alkali metal and ammonium salts of
 15 sulfonated dicarboxylic acid esters, and the like. Nonionic emulsifiers, such as octyl or nonylphenyl polyethoxyethanol, can also be used. Latices of excellent stability can be prepared with emulsifiers selected from alkali metal and ammonium salts of aromatic sulfonic acids, alkylaryl sulfonates, long chain alkyl sulfonates, and poly(oxyalkylene) sulfonates.

Commonly used free radical initiators include the various peroxygen compounds such as persulfates, benzoyl peroxide, t-butyl hydroperoxide, and cumene hydroperoxide; and azo compounds such as azodiisobutyronitrile and dimethylazodiisobutyrate. Particularly useful initiators are the water-soluble peroxygen compounds such as hydrogen peroxide and the sodium, potassium and ammonium persulfates used by themselves or in an activated redox system. Typical redox systems include alkali metal persulfates in combination with a reducing substance such as polyhydroxyphenols and oxidizable sulfur compounds, a
 20 reducing sugar, dimethylaminopropionitrile, a diazomercaptan compound, and a water-soluble ferrous sulfate compound. Polymer latices with excellent stability can be obtained using alkali metal and ammonium persulfate initiators. The amount of initiator used will generally be in the range of 0.1 to 3% by weight, based on the weight of the monomers, preferably between 0.2 to 1%. The initiator can be charged at the outset of the polymerization, however, incremental addition of the initiator throughout polymerization can
 25 also be employed.

The latexes described herein can be compounded with, or have mixed herein, other known ingredients before impregnation and before curing. Such ingredients include curing agents, fillers, water repellent materials, plasticizers, antioxidants or stabilizers, antifoaming agents, dyeing adjuvants, pigments, and other compounding aids. Furthermore, thickeners or bodying agents may be added to the polymer latices so as
 30 to control the viscosity of the latexes and thereby achieve the proper flow properties for the particular application desired.

The odor inhibition agent can be added during polymerization of the latex or to the latex any time before the latex is used to form a nonwoven fabric or it can be added with other compounding ingredients either by itself or together with the compounding ingredients. Following addition of the odor inhibition agent,
 35 the latex is cured on the nonwoven fabric. The odor inhibition agent is selected from fully hindered and partially hindered phenols and amine-type antioxidants. The phenols can be partially or fully hindered, meaning that one or both of the ortho positions to the hydroxyl group on the benzene ring are substituted, preferably with tertiary alkyl groups of 4 to 6 carbon atoms each. As defined above, the hindered phenolic antioxidants also include free radical terminators or shortstops, especially the oil-soluble shortstops, such as
 40 di-t-amyl hydroquinone. However, shortstops are not considered to be hindered phenols or antioxidants in the conventional chemical parlance. The amine-type of antioxidants include ketone-amine condensation products, diaryldiamines, diarylamines, and ketone-diarylamine condensation products.


Within the class of partially and fully hindered phenols is the group of hindered phenolic antioxidants that can function as odor inhibition agents in the manner described herein. Examples of suitable hindered
 45 phenolic antioxidants that can be admixed with an acrylic latex in order to reduce odor upon sterilization with irradiation or steam, include the following:

(1) phenolic compounds having the general formula



55


wherein Q is



5


A is

10



15

20 R is hydrogen or lower alkyl, R' is lower alkyl, R'' is alkyl group having from 6-24 carbon atoms, W is an integer from 1 to 4. Illustrative examples of the compounds shown above are



25

di-n-octadecyl(3,5-di-t-butyl-4-hydroxy-5-methylbenzyl) malonate and di-n-octadecyl α (3,5-di-t-butyl-4-hydroxy-5-methylbenzyl) malonate.

30 (2) Phenolic compounds having the general formula

Q-R

illustrative examples of which are 2,6-di-t-butylphenol, 2,4,6-tri-t-butylphenol, 2,6-dimethylphenol, and 2-methyl-4,6-di-t-butylphenol.

35

(3) Phenolic compounds having the formula

Q-C_wH_{2w}-Q

40 illustrative examples of which are 2,2'-methylene-bis(6-t-butyl-4-methylphenol), and 4,4'-butylidene-bis(2,6-di-t-butylphenol).

(4) Phenolic compounds having the formula

R-O-Q

45

illustrative examples of which are 2,5-di-t-butylhydroquinone and 2,6-di-t-butyl-4-hydroxyanisole.

(5) Phenolic compounds having the formula


Q-S-Q

50

illustrative examples of which are 4,4'-thiobis-(2-t-butyl-5-methylphenol) and 2,2'-thiobis-(6-t-butyl-4-methylphenol).

(6) Phenolic compounds having the formula


55



illustrative example of which is octadecyl-(3,5-dimethyl-4-hydroxybenzylthio)-acetate.

(7) Phenolic compounds having the formula


5



wherein T is hydrogen, R or q as defined above, illustrative examples of which are 1,1,3-tris(3,5-dimethyl-4-hydroxyphenyl)-propane and 1,1,5,5-tetrakis-(3-t-butyl-4-hydroxy-6-methylphenyl)-n-pentane.

(8) phenolic compounds having the formula

15



20


wherein B¹, B², and B³ are hydrogen, methyl or Q, provided that when B¹ and B³ are Q then B² is hydrogen or methyl and when B³ is Q then B¹ and B² are hydrogen or methyl.

Illustrative example of such compound is 1,4-di(3,5-di-t-butyl-4-hydroxybenzyl)-2,3,5,6-tetramethylbenzene.

25

(9) Phenolic compounds having the formula

30




35

wherein Z is NHQ, -S-D or -O-Q; D is alkyl group having from 6-12 carbon atoms or -C_wH_{2w})-S-R". Illustrative example of such compounds is 2,4-bis-(n-octylthio)-6-(3,5-di-t-butyl-4-hydroxyaniline)-1,3,5-triazine.

(10) Phenolic compounds having the formula

40




45

wherein Z' is -O-Q, -S-D or -S(C_wH_{2w})-SD. Illustrative example of such compounds is 2,3-bis-(3,5-di-t-butyl-4-hydroxyphenoxy)-6-(n-octylthio)-1,3,5-triazine.

(11) Phenolic compounds having the formula


50



55

wherein p is an integer from 2 to 4 and R''' is a tetravalent radical selected from aliphatic hydrocarbons having from 1 to 30 carbon atoms, aliphatic mono and dithioethers having from 1 to 30 carbon atoms, and aliphatic mono and diethers having from 1 to 30 carbon atoms. Illustrative example of such compounds is 1,2-propylene glycol bis-[3-(3,5-di-t-butyl-4-hydroxyphenyl)propionate].


(12) Phenolic compounds having the formula



5

Illustrative examples of such compounds are dioctadecyl 3,5-di-*t*-butyl-4-hydroxybenzylphosphonate and di-*n*-octadecyl 1-(3,5-di-*t*-butyl-4-hydroxy-phenyl)-ethanephosphonate.

Preferred hindered phenolic antioxidants include trifunctional hindered phenols based alkylated benzenes, isocyanuric acid, and on hydrocinnamic acid. Preferred hindered phenolic antioxidants also include the alkylated hydroquinones and phenols having the following general structures A, B, C and D:

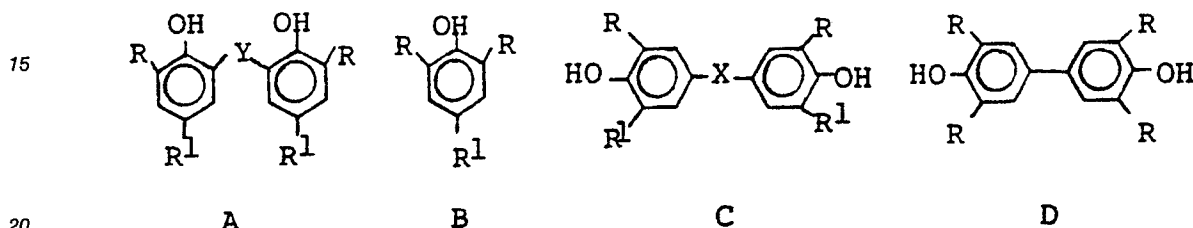

where R groups are individually selected from hydrogen and alkyl groups of 1 to 12 carbon atoms with at least one R group being selected from the alkyl groups; R¹ groups are individually selected from lower alkyl groups and hydroxyl groups; X is selected from lower alkylene groups and sulfur; and Y is selected from lower alkylene groups and sulfur. More preferably, the R groups are individually selected from hydrogen and alkyl groups of 3 to 12 carbon atoms, especially tertiary alkyl groups of 4 to 8 carbon atoms such as *t*-amyl and *t*-butyl, with at least one of the R groups being selected from the alkyl groups; the R¹ groups are selected from hydroxyl and alkyl groups of 1 to 3 carbon atoms; X is either methylene or sulfur; and Y is either methylene or sulfur.

Specific examples of the preferred hindered phenolic antioxidants include 2,2'-methylene-bis(4-ethyl-6-*t*-butylphenol) sold as AO425, 2,2'-methylene-bis(4-methyl-6-nonylphenol) sold as Naugawhite, 2,2'-methylene-bis(4-*t*-butyl-6-*t*-butylphenol) sold as Isonox 128, 2,2'-methylene-bis(4-methyl-6-*t*-butylphenol) sold as AO 2246, 2,2'-thio-bis(4-methyl-6-*t*-butylphenol) sold as CAO-6, 4,4'-thio-bis(3-methyl-6-*t*-butylphenol) sold as Santowhite Crystals, butylated reaction product of *p*-cresol and dicyclopentadiene that is sold under the trade name of Wingstay L[®], 1,3,5-trimethyl-2,4,6-tris (3,5-*t*-butyl-4-hydroxybenzyl) benzene sold as AO330, di-*ti*-amyl hydroquinone, 3,5-di-*t*-butyl-4-hydroxyhydrocinnamic acid triester with 1,3,5-tris (2-hydroxyethyl)-*s*-triazine-2,4,6-(1H, 3H, 5H) trione that is available as Agerite SKT and Goodrite 3125, and 2,6-di-*t*-butyl-4-methylphenol, known as BHT. Also preferred in this group is the reaction product of 4,4-isopropylidene-di-phenol, isobutylene, and styrene which includes 2,2'-di-*t*-butyl bisphenol A, 2-*t*-butyl-2'- α -methylbenzyl bisphenol A, 2,6-di-*t*-butylphenol, and 2-*t*-butyl-4-isopropylphenol. This type of antioxidant is available under the trade name Superlite antioxidant.

Examples of suitable amine-type antioxidants include ketone-amine condensation products such as the polymeric dihydrotrimethylquinoline and 6-ethoxy-1,2-dihydro-2,2,4-tri-methylquinoline; diaryldiamines such as N,N'-diphenyl-*p*-phenylenediamine and N,N'-di- β -naphthyl-*p*-phenylenediamine; diarylamines include alkylated diphenylamines such as mono-octyl diphenylamine and dioctyl diphenylamine; and ketone-diarylamine condensation products that include complex mixtures obtained by the reaction of diphenylamine and acetone.

The preferred amine-type of antioxidants suitable for purposes herein are the diaryldiamines, especially N,N'-di- β -naphthyl-*p*-phenylenediamine.

After admixing the odor inhibiting agent to the acrylic latex, the latex is compounded with fluorocarbons, cationic additives, and other additives to prevent static build-up and achieve other results. The finished latex is then applied to the web or mat of fibers in any suitable fashion such as by spraying, dipping, roll-transfer, or the like. Application of the latex to the fibers is preferably made at room temperature to facilitate cleaning of the associated apparatus. The solids concentration of the latex can be in the range of 5% to 60% by weight, and preferably from 5% to 35% when applied by dipping. When applied by roll-transfer, solids concentration of the latex is generally about 50% whereas with the spraying technique, it is in a range widely.

The proportion of the latex polymer that is applied to the web or mat is such as to provide 10 to 100%,

preferably 25% to 40% by weight of the polymer, based on the total weight of the polymer and fibers. After application of the latex to the fibrous web, the impregnated or saturated web is dried either at room temperature or at elevated temperature. The web is subjected, either after completion of the drying or as the final step of the drying stage itself, to a baking or curing operation which may be effected at a temperature of 98.9 to 260 °C (210 ° to 500 ° F) for a period which may range from about one-half hour at the lower temperatures to as low as five seconds at the upper temperatures. The conditions of drying and curing are controlled so that no appreciable deterioration or degradation of the fibers or polymer occurs. preferably the curing is effected at a temperature Preferably, the curing is effected at a temperature of 115.5 °C to 176.7 °C (240 ° to 350 ° F) for a period under 3 minutes.

The fibers that are bonded with the latices described herein are formed into nonwoven mats or webs in which they are ordered or are randomly distributed. The fibers may comprise natural textile fibers such as jute, sisal, ramie, hemp and cotton, as well as many of the artificial organic textile fibers including rayon, those of cellulose esters such as cellulose acetate, vinyl resin fibers such as those of polyvinyl chloride and copolymers thereof, polyacrylonitrile and copolymers thereof, polymers and copolymers of olefins such as ethylene and propylene, condensation polymers such as polyimides or nylon types, polyesters, and the like. The fibers used can be those of a single composition or mixtures of fibers in a given web.

The preferred fibers for purposes herein are hydrophilic, especially cellulosic fibers, and blends of hydrophobic and hydrophilic fibers. Examples of hydrophobic fibers include polyester, polypropylene, and nylon fibers.

The acrylic latexes described herein, together with an odor inhibition agent admixed therein, can be further compounded with fluorocarbons, cationic additives, and other additives, in order to reduce static build-up, to obtain repellency, and achieve other results. The finished latex is then used to bond fibers which are subsequently formed into a nonwoven fabric, which, in turn, is used to make products that are used in the medical/surgical applications. Examples of such products, as already disclosed, include surgical caps, gowns, drapes, and wraps for surgical instruments. Since surgical uses require sterilized fabric, such products are wrapped in a plastic bag and sterilized, as by gamma ray irradiation. The plastic bag can be any suitable plastic including polyolefins, polyesters, polyvinyl chloride, and the like. The instrument wrap is used to wrap surgical instruments and then is sterilized, as with steam.

Sterilization by irradiation is generally accomplished using cobalt 60 at about 2.5 mega rads. Sterilization with steam is accomplished by the following schedule:

- (a) 5 minutes to heat up to 135 °C (275 ° F),
- (b) 5 minutes at 135 °C (275 ° F), and
- (c) 5 minutes to cool before opening autoclave.

As was already mentioned, nonwoven fabrics bonded with acrylic latexes and subjected to sterilization conditions noted above produced foul odors that have been described as acidic and irritating to eyes and nose. A sample of finished acrylic latex, prepared in absence of an odor inhibition agent and used as a bonding agent for making a nonwoven fabric composed mostly of cellulosic fibers and a smaller amount of polyester fibers, gave an odor panel rating of 3.2 on sterilization of the fabric. This acrylic latex was prepared by polymerizing certain monomers in the presence of about 0.5 weight part sodium persulfate initiator and about 0.5 weight part of sodium lauryl sulfate emulsifier. The latex was prepared by polymerizing the following monomers, in the indicated amounts, at about 80 °C:

(a)	n-butyl acrylate	75 wt. parts
(b)	styrene	20 wt. parts
(c)	glacial acrylic acid	3 wt. parts
(d)	N-methylol acrylamide	2 wt. parts

The polymerization procedure utilized consisted of the initial preparation in a premix pot of a premix of the monomers, some water and some emulsifier. Remainder of water and emulsifier were added to a reactor which was then heated to the polymerization temperature of about 80 °C. While heating to the polymerization temperature, a portion of the initiator was added to the reactor. After reaching the desired temperature, the premix was added at a controlled rate. Once all of the premix was added to the reactor, remainder of the initiator was also added to the reactor and the reaction was maintained for about two hours under constant agitation. When the desired conversion of 99% + was reached, the latex was cooled and stripped. The resulting latex had 47.5% solids.

Different samples of the acrylic latex described above were prepared by admixing antioxidants and then

further compounding the latexes with fluorocarbons, cationic agents, and other materials, before using the finished latexes to form nonwoven fabrics from which surgical products were made. The surgical products were packed in a plastic bag and sterilized by gamma ray irradiation. procedure used in preparing latex, nonwoven fabric, and sterilization was identical in each case except for inclusion of different odor inhibition agents in the latex samples.

The odor rating was obtained by opening a pack of nonwoven fabric that was sterilized with gamma radiation. The pack was opened in a closed room measuring about 3.05m by 3.05m (10' by 10'). Each pack contained 16.7m² (20 square yards) of a nonwoven fabric, all of which was spread out in the room. After the fabric laid spread out in the room for 5 minutes, a panel of 10 persons entered the room and rated the odor intensity on a scale of 1 to 5, defined as follows:

- 1 = neutral
- 2 = slightly offensive
- 3 = mildly offensive
- 4 = moderately offensive
- 5 = extremely offensive

A number of odor inhibition agents were evaluated in this manner, results of which are tabulated in Table I below, which indicate the level of agent on dry basis, admixed with the acrylic latex, and the resulting averaged odor rating:

20

TABLE I

<u>Additive</u>	<u>Amount</u>	<u>Odor Rating</u>
None	0	3.2
Wingstay® 29	0.5 phr	2.7
Wingstay L®	0.5 phr	2.1
Antioxidant SP®	0.5 phr	2.9
Naugawhite®	0.5 phr	2.5
Agerite White®	0.5 phr	2.5
BHT®	0.5 phr	2.5
Santowhite Crystals®	0.5 phr	2.4
AO 425®	0.5 phr	2.4
Superlite®	0.5 phr	2.4
Agerite SKT®	0.5 phr	2.7
Goodrite® 3125	0.5 phr	2.4
A0330®	0.5 phr	2.7
DTAHQ	0.5 phr	2.5

45

Wingstay 29 is a p-oriented styrenated diphenylamine, Wingstay L is a butylated reaction product of p-cresol and dicyclopentadiene, Antioxidant SP stabilizer is a styrenated phenol containing 1 to 3 styrene groups attached to the benzene ring, Naugawhite is 2,2' -methylene-bis(4-methyl-6-t-butylphenol), Agerite White is N,N'-dinaphthyl-p-phenylene diamine, BHT is 2,6-di-t-butyl-4-methyl-phenol, Santowhite Crystals is 4,4'-thio-bis(3-methyl-6-t-butylphenol), AO 425 is 2,2'-methylene-bis(4-ethyl-6-t-butylphenol), and Superlite is a reaction product of bisphenol A, isobutylene, and styrene reacted at about 70° C under 0-10 psig of pressure for a period of about 4 1/2 hours in presence of a clay catalyst.

Additionally, A0330 is 1,3,5-trimethyl-2,4,6-tris (3,5-t-butyl-4-hydroxybenzyl) benzene, DTAHQ is di-t-amyl hydroquinone, and both Agerite SKT and Goodrite 3125 are 3,5-di-t-butyl-4-hydroxyhydrocinnamic acid triester with 1,3,5-tris (2-hydroxyethyl)-s-triazine-2,4,6-(1H,3H,5H)trione.

When styrene was replaced with the same weight of methyl methacrylate in the preparation of the latex sample with 0.5 phr of Superlite stabilizer, otherwise prepared and tested identically as described above, the fabric gave an odor rating of 2.0.

The data presented in Table I has a statistical deviation of ± 0.5 unit for any single determination, however, the above data represents averages of many determinations.


The latexes described herein are adapted for use as binders for fibers which are made into nonwoven fabrics. These fabrics have applications in the medical/surgical field which require repellancy to body fluids such as blood, urine, and perspiration. The repellency is measured in terms of repellency to alcohol and saline solution. Due to the particular applications wherein the nonwoven fabric comes in contact with human body, the latexes of this invention require properties such as softness, physical strength, hydrophobicity, low skin toxicity, adhesion during forming of the nonwoven fabric, and of course, minimal odor after sterilization.

To obtain a hydrophobic latex that will have the repellency property, it is necessary to select hydrophobic monomers and to have a low content of anionic emulsifier since it is known that hydrophobicity of the latex can be increased by reducing the level of emulsifier. Also, hydrophobicity of the latex can be enhanced by compounding the latex with materials such as fluorocarbons. An anionic emulsifier level of 3 phr, per 100 parts of dry latex, is normally considered high whereas less than 1.0 phr is normally considered to be low. A high content of anionic emulsifier in a latex recipe will not result in a repellent latex, however, the desired repellency may result if the latex is compounded with materials such as fluorocarbons. A higher level of nonionic emulsifier of up to about 5 phr can be used, relative to anionic emulsifier, to maintain repellency. The use of an unsaturated acid in conjunction with a N-alkylol acrylamide allows the curing to proceed more efficiently and at a lower temperature. However, in the past, an acid-containing latex made on a commercial scale had to contain in excess of 1.0 phr emulsifier to remain stable and whenever amount of emulsifier was less than 1.0 phr, the resulting latex was unstable, meaning that it contained floc, i.e., agglomerated particles.

Selection of specific soft and hard hydrophobic monomers, as described herein, allows the preparation of a soft, repellent latex by the use of a low level of an emulsifier. This is the first time that it was possible to produce a hydrophobic polymer in a low-emulsifier recipe and this is also the first time that it was possible to successfully combine carboxyl and N-alkylol acrylamide chemistry in a low-emulsifier recipe to produce a stable, soft, and repellent latex. Previous work appeared to require the functionality of acrylamide and N-alkylol acrylamide.

Claims

1. Sterilized nonwoven fabric that has a reduced odor on sterilization comprising nonwoven fibers bonded with a latex prepared by free radical initiation comprising a preponderance of a soft hydrophobic monomer having T_g in the range of -80°C to -20°C , a lesser amount of a hard hydrophobic monomer having T_g in the range of $+40^\circ\text{C}$ to $+120^\circ\text{C}$, a small amount of an unsaturated carboxylic acid and a small amount of N-alkylol acrylamide or methacrylamide, characterized in that said latex having admixed therein a sufficient amount of an emulsifier and 0.01 to 5 weight parts per 100 weight parts of latex solids of an odor inhibition agent selected from amine-type antioxidants and hindered phenols that have the function of reducing the odor that is generated on sterilization of the nonwoven fabric.
2. Nonwoven fabric of claim 1 that is repellent to body fluids wherein said latex is prepared by polymerizing, in presence of 0.1 to 2 weight parts of an initiator and less than 1.0 weight part of anionic emulsifier, 65 to 85 weight parts of a soft monomer, 10 to 30 weight parts of a hard monomer, 0.1 to 5 weight parts of an unsaturated carboxylic acid containing 3 to 12 carbon atoms, and 0.1 to 5 weight parts of N-alkylol acrylamide or methacrylamide containing 1 to 10 carbon atoms in the alkyl group.
3. Nonwoven fabric of claim 2 wherein said odor inhibition agent is selected from alkylated hydroquinones and phenols, ketone-amine condensation products, diarylamines, diaryldiamines, ketone-diarylamine condensation products, and mixtures thereof.
4. Nonwoven fabric of claim 2 made from at least a preponderance of cellulose fibers and sterilized by irradiation or steam, wherein said odor inhibition agent is selected from the following structures A, B, C and D:

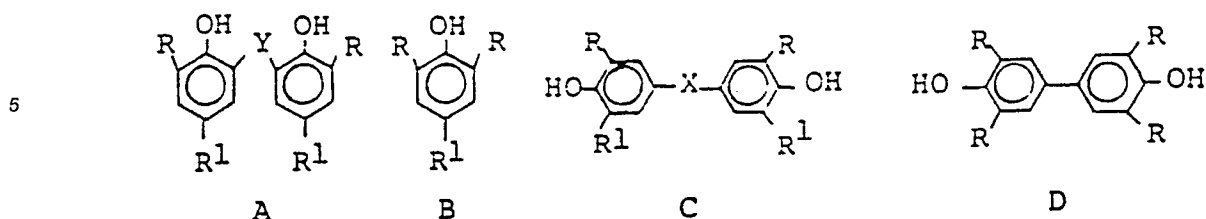

10

where R groups are individually selected from hydrogen and alkyl groups of 1 to 12 carbon atoms, with at least one R group being selected from the alkyl groups; R¹ groups are individually selected from hydroxyl and lower alkyl groups; and X and Y are selected from lower alkylene groups and sulfur.

- 15 5. Nonwoven fabric of claim 2 wherein said odor inhibition agent is selected from 2,2'-methylene-bis(4-ethyl-6-t-butylphenol); 2,2'-methylene-bis(4-methyl-6-nonylphenol); 2,2'-methylene-bis(4-t-butyl-6-t-butylphenol); 2,2-methylene-bis(4-methyl-6-t-butylphenol); butylated reaction product of p-cresol and dicyclopentadiene, 2,6-di-t-butyl-4-methylphenol; reaction product of 4,4-isopropylidene-diphenol, isobutylene, and styrene; 2,2'-thio-bis(4-methyl-6-t-butylphenol); 4,4'-thio-bis(3-methyl-6-t-butylphenol);
- 20 1,3,5-trimethyl-2,4,6-tris(3,5-t-butyl-4-hydroxybenzyl)benzene; di-t-amyl hydroquinone; 3,5-di-t-butyl-4-hydroxyhydrocinnamic acid triester with 1,3,5-tris(2-hydroxyethyl)-s-triazine-2,4,6-(1H,3H,5H) trione; polymeric dihydrotrimethylquinoline; 6-ethoxy-1,2-dihydro-2,2,4-trimethylquinoline; N,N'-diphenyl-p-phenylene-diamine; N,N'-di-β-naphthyl-p-phenylenediamine; alkylated diphenylamines; reaction products of diphenylamine and acetone; and mixtures thereof.

25

6. Nonwoven fabric of claim 5 made from fibers selected from natural, synthetic, and mixtures of such fibers, and sterilized by irradiation or steam wherein said soft monomer is selected from n-butyl acrylate, 2-ethylhexyl acrylate, isobutyl acrylate, and mixtures thereof; said hard monomer is selected from styrene, α-methyl styrene, methyl methacrylate, and mixtures thereof; said N-alkylol acrylamide or
- 30 methacrylamide is selected from N-methylol acrylamide and methacrylamide, N-butylol acrylamide and methacrylamide, n- and iso-butoxy methyl acrylamide, and mixtures thereof; and said unsaturated acid is selected from acrylic acid, methacrylic acid, itaconic acid, fumaric acid, maleic acid, and mixtures thereof.

- 35 7. Method of making sterilized nonwoven fabric having reduced odor on sterilization comprising bonding nonwoven fibers with a latex, forming a nonwoven fabric from the bonded fibers, and sterilizing said nonwoven fabric; said nonwoven fibers are bonded with a latex prepared by free radical initiation comprising a preponderance of a soft hydrophobic monomer having T_g in the range of -80 °C to -20 °C, a lesser amount of a hard hydrophobic monomer having T_g in the range of +40 °C to +120 °C, a
- 40 sufficient amount of an unsaturated carboxylic acid and a small amount of N-alkylol acrylamide or methacrylamide characterized in that said latex having admixed therein a small amount of an emulsifier, and 0.01 to 5 weight parts per 100 weight parts of latex solids of an odor inhibition agent selected from hindered phenols and amine-type antioxidants that have the function of reducing the odor that is generated on sterilization of the nonwoven fabric.


45

8. Method of claim 7 wherein said odor inhibition agent is selected from alkylated hydroquinones and phenols, ketone-amine condensation products, diarylamines, diaryldiamines, ketone-diarylamine condensation products, and mixtures thereof.

- 50 9. Method of claim 7 wherein said agent is selected from 2,2'-methylene-bis(4-ethyl-6-t-butylphenol); 2,2'-methylene-bis(4-methyl-6-nonylphenol); 2,2'-methylene-bis(4-t-butyl-6-t-butylphenol); 2,2-methylene-bis(4-methyl-6-t-butylphenol); butylated reaction product of p-cresol and dicyclopentadiene, 2,6-di-t-butyl-4-methylphenol; reaction product of 4,4-isopropylidene-diphenol, isobutylene, and styrene; 2,2'-thio-bis(4-methyl-6-t-butylphenol); 4,4'-thio-bis(3-methyl-6-t-butylphenol); 1,3,5-trimethyl-2,4,6-tris(3,5-t-butyl-4-hydroxybenzyl)benzene; di-t-amyl hydroquinone; 3,5-di-t-butyl-4-hydroxyhydrocinnamic acid triester
- 55 with 1,3,5-tris(2-hydroxyethyl)-s-triazine-2,4,6-(1H,3H,5H)trione; polymeric dihydrotrimethylquinoline; 6-ethoxy-1,2-dihydro-2,2,4-trimethylquinoline; N,N'-diphenyl-p-phenylene-diamine; N,N'-di-β-naphthyl-p-phenylenediamine; alkylated diphenylamines; and reaction products of diphenylamine and acetone; and

mixtures thereof.

10. Method of claim 9 made from at least a preponderance of cellulose fibers and sterilized by irradiation or steam wherein said soft monomer is selected from n-butyl acrylate, 2-ethylhexyl acrylate, isobutyl acrylate, and mixtures thereof; said hard monomer is selected from styrene, α -methyl styrene, methyl methacrylate, and mixtures thereof; said N-alkylol acrylamide or methacrylamide is selected from N-methylol acrylamide and methacrylamide, N-butylol acrylamide and methacrylamide, n-and iso-butoxy methyl acrylamide, and mixtures thereof; and said unsaturated acid is selected from acrylic acid, methacrylic acid, itaconic acid, fumaric acid, maleic acid, and mixtures thereof.
11. A latex prepared by free radical initiation comprising a preponderance of a soft hydrophobic monomer having Tg in the range of -80°C to -20°C , a lesser amount of a hard hydrophobic monomer having Tg in the range of $+40^{\circ}\text{C}$ to $+120^{\circ}\text{C}$, a small amount of an unsaturated carboxylic acid and a small amount of N-alkylol acrylamide or methacrylamide characterized in that said latex having admixed therein a sufficient amount of an emulsifier, and 0.01 to 5 weight parts per 100 weight parts of latex solids of an odor inhibition agent selected from amine-type antioxidants and hindered phenols that have the function of reducing the odor that is generated on sterilization of the nonwoven fabric bonded therewith.
12. Latex of claim 11 wherein said latex is prepared by polymerizing, in presence of 0.1 to 2 weight parts of an initiator and less than 1.0 weight part of anionic emulsifier, 65 to 85 weight parts of a soft monomer, 10 to 30 weight parts of a hard monomer, 0.1 to 5 weight parts of an unsaturated carboxylic acid containing 3 to 12 carbon atoms, and 0.1 to 5 weight parts of N-alkylol acrylamide or methacrylamide containing 1 to 10 carbon atoms in the alkyl group.
13. Latex of claim 12 wherein said odor inhibition agent is selected from alkylated hydroquinones and phenols, ketone-amine condensation products, diarylamines, diaryldiamines, ketone-diarylamine condensation products, and mixtures thereof.
14. Latex of claim 12 wherein said odor inhibition agent is selected from the following structures A, B, C and D:

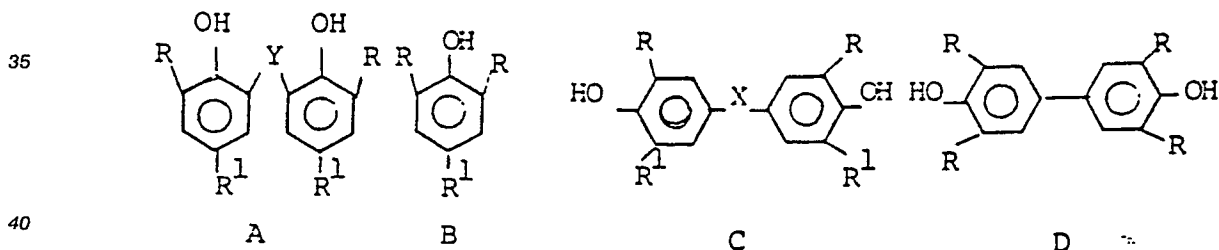


where R groups are individually selected from hydrogen and alkyl groups of 1 to 12 carbon atoms, with at least one R group being selected from the alkyl groups; R¹ groups are individually selected from hydroxyl and lower alkyl groups; and X and Y are selected from lower alkylene groups and sulfur.

15. Latex of claim 12 wherein said agent is selected from 2,2'-methylene-bis(4-ethyl-6-t-butylphenol); 2,2'-methylene-bis(4-methyl-6-nonylphenol); 2,2'-methylene-bis(4-t-butyl-6-t-butylphenol); 2,2'-methylene-bis(4-methyl-6-t-butylphenol); butylated reaction product of p-cresol and dicyclopentadiene, 2,6-di-t-butyl-4-methylphenol; reaction product of 4,4-isopropylidene-diphenol, isobutylene, and styrene; 2,2'-thio-bis(4-methyl-6-t-butylphenol); 4,4'-thio-bis(3-methyl-6-t-butylphenol); 1,3,5-trimethyl-2,4,6-tris(3,5-t-butyl-4-hydroxybenzyl)benzene; di-t-amyl hydroquinone; 3,5-di-t-butyl-4-hydroxyhydrocinnamic acid triester with 1,3,5-tris(2-hydroxyethyl)-s-triazine-2,4,6-(1H,3H,5H) trione; polymeric dihydrotrimethylquinoline; 6-ethoxy-1,2-dihydro-2,2,4-trimethylquinoline; N,N'-diphenyl-p-phenylene-diamine; N,N'-di- β -naphthyl-p-phenylenediamine; alkylated diphenylamines; and reaction products of diphenylamine and acetone; and mixtures thereof.
16. Latex of claim 15 wherein said soft monomer is selected from n-butyl acrylate, 2-ethylhexyl acrylate,

isobutyl acrylate, and mixtures thereof; said hard monomer is selected from styrene, α -methyl styrene, methyl methacrylate, and mixtures thereof; said N-alkylol acrylamide or methacrylamide is selected from N-methylol acrylamide and methacrylamide, N-butylol acrylamide and methacrylamide, n- and isobutoxy methyl acrylamide, and mixtures thereof; and said unsaturated acid is selected from acrylic acid, methacrylic acid, itaconic acid, fumaric acid, maleic acid, and mixtures thereof.

Revendications

1. Etoffe non tissée stérilisée à odeur réduite à la stérilisation, comprenant des fibres non tissées liées avec un latex préparé par initiation par radicaux libres, comprenant une prépondérance d'un monomère hydrophobe souple ayant une T_v dans la plage de -80 à -20°C , une quantité moindre d'un monomère hydrophobe rigide ayant une T_v dans la plage de $+40$ à $+120^\circ\text{C}$, une petite quantité d'un acide carboxylique insaturé et une petite quantité d'un N-alkylolacrylamide, ou -méthacrylamide, caractérisée en ce que ledit latex comporte, mélangées dans celui-ci, une quantité suffisante d'un émulsifiant et de 0,01 à 5 parties en poids, pour 100 parties en poids de solides de latex, d'un agent d'inhibition d'odeur choisi parmi des antioxydants de type amine et des phénols à empêchement stérique, qui ont la fonction de réduire l'odeur qui est engendrée lors de la stérilisation de l'étoffe non tissée.
2. Etoffe non tissée selon la revendication 1, qui repousse les liquides de l'organisme, dans laquelle ledit latex est préparé par polymérisation, en présence de 0,1 à 2 parties en poids d'un amorceur et de moins de 1,0 partie en poids d'un émulsifiant enionique, de 65 à 85 parties en poids d'un monomère souple, de 10 à 30 parties en poids d'un monomère rigide, de 0,1 à 5 parties en poids d'un acide carboxylique insaturé contenant de 3 à 12 atomes de carbone, et de 0,1 à 5 parties en poids d'un N-alkylolacrylamide ou -méthacrylamide contenant de 1 à 10 atomes de carbone dans le groupe alkyle.
3. Etoffe non tissée selon la revendication 2, dans laquelle ledit agent d'inhibition d'odeur est choisi parmi des phénols et hydroquinones alkylés, des produits de condensation de cétone-amine, des diarylamine, des diaryldiamines, des produits de condensation de cétone-diarylamine, et des mélanges de ceux-ci.
4. Etoffe non tissée selon la revendication 2, fabriquée à partir d'au moins une prépondérance de fibres cellulosiques, et stérilisée par irradiation ou à la vapeur, dans laquelle ledit agent d'inhibition d'odeur est choisi parmi les structures A, B, C et D suivantes:

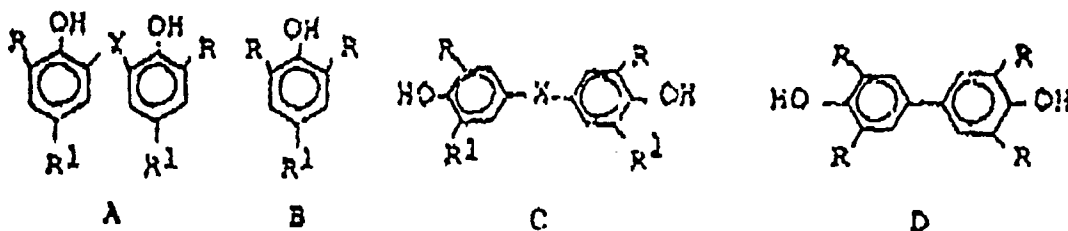

dans lesquelles les groupes R sont choisis individuellement parmi des atomes d'hydrogène et des groupes alkyle ayant de 1 à 12 atomes de carbone, au moins un groupe R étant choisi parmi les groupes alkyle; les groupes R¹ sont choisis individuellement parmi des groupes hydroxy et alkyle inférieurs; et X et Y sont choisis parmi des groupes alkylène inférieurs et des atomes de soufre.

5. Etoffe non tissée selon la revendication 2, dans laquelle ledit agent d'inhibition d'odeur est choisi parmi le 2,2'-méthylène-bis(4-éthyl-6-tert-butylphénol); le 2,2'-méthylène-bis(4-méthyl-6-nonylphénol); le 2,2'-méthylène-bis(4-tert-butyl-6-tert-butylphénol); le 2,2'-méthylène-bis(4-méthyl-6-tert-butylphénol); un produit de réaction butylé de p-crésol et dicyclopentadiène; le 2-6-di-tert-butyl-4-méthyl-phénol; un produit de réaction de 4,4-isopropylidènediphénol, isobutylène et styrène; le 2,2'-thio-bis(4-méthyl-6-tert-butylphénol); le 4,4'-thio-bis(3-méthyl-6-tert-butylphénol); le 1,3,5-triméthyl-2,4,6-tris(3,5-tert-butyl-4-hydroxybenzyl)benzène; la di-tert-amyl-hydroquinone; le triester 3,5-di-tert-butyl-4-hydroxyhydrocinnamique avec la 1,3,5-tris(2-hydroxyéthyl)-triazine-s-2,4,6-(1H,3H,5H)-trione; une dihydrotriméthylquinoléine polymère; la 6-éthoxy-1,2-dihydro-2,2,4-triméthylquinoléine; la N,N'-diphényl-p-phénylène-diamine; la N,N'

di- β -naphtyl-p-phénylènediamine; des diphenylamines alkylées, des produits de réaction de diphenylamine et acétone; et des mélanges de ceux-ci.

6.

5 Ftoffe non tissée selon la revendication 5, fabriquée à partir de fibres choisies parmi des fibres naturelles, synthétiques et des mélanges de celles-ci, et stérilisée par irradiation ou à la vapeur, dans laquelle ledit monomère souple est choisi parmi l'acrylate de n-butyle, l'acrylate de 2-éthylhexyle, l'acrylate d'isobutyle et des mélanges de ceux-ci; ledit monomère rigide est choisi parmi le styrène, 1' α -méthylstyrène, le méthacrylate de méthyle et des mélanges de ceux-ci; ledit N-alkylolacrylamide ou -méthacrylamide est choisi parmi le N-méthylolacrylamide et -méthacrylamide, le N-butylolacrylamide et -méthacrylamide, le n- et iso-butoxyméthylacrylamide et des mélanges de ceux-ci; et ledit acide insaturé est choisi parmi l'acide acrylique, l'acide méthacrylique, l'acide itaconique, l'acide fumarique, l'acide maléique et des mélanges de ceux-ci.
7.

15 Procédé de fabrication d'une étoffe non tissée stérilisée à odeur réduite à la stérilisation, comprenant la liaison de fibres non tissées avec un latex, la formation d'une étoffe non tissée à partir des fibres liées et la stérilisation de ladite étoffe non tissée; lesdites fibres non tissées sont liées avec un latex préparé par initiation par radicaux libres, comprenant une prépondérance d'un monomère hydrophobe souple ayant une Tv dans la plage de -80 à -20 °C, une quantité moindre d'un monomère hydrophobe rigide ayant une Tv dans la plage de +40 à +120 °C, une quantité suffisante d'un acide carboxylique insaturé et une petite quantité d'un N-alkylolacrylamide ou -méthacrylamide, caractérisé en ce que ledit latex comporte, mélangées dans celui-ci, une petite quantité d'un émulsifiant et de 0,01 à 5 parties en poids, pour 100 parties en poids de solides de latex, d'un agent d'inhibition d'odeur choisi parmi des phénols à empêchement stérique et des antioxydants de type amine, qui ont la fonction de réduire l'odeur qui est engendrée lors de la stérilisation de l'étoffe non tissée.
8.

25 Procédé selon la revendication 7, dans lequel ledit agent d'inhibition d'odeur est choisi parmi des phénols et hydroquinones alkylés, des produits de condensation de cétone-amine, des diarylamines, des diaryldiamines, des produits de condensation de cétone-diarylamine, et des mélanges de ceux-ci.
9.


30 Procédé selon la revendication 7, dans lequel ledit agent est choisi parmi le 2,2'-méthylène-bis(4-éthyl-6-tert-butylphénol); le 2,2'-méthylène-bis(4-méthyl-6-nonylphénol); le 2,2'-méthylène-bis(4-tert-butyl-6-tert-butylphénol); le 2,2'-méthylène-bis(4-méthyl-6-tert-butylphénol); un produit de réaction butylé de p-crésol et dicyclopentadiène; le 2,6-di-tert-butyl-4-méthylphénol; un produit de réaction de 4,4-isopropylidène-diphénol, isobutylène et styrène; le 2,2'-thio-bis(4-méthyl-6-tert-butylphénol); le 4,4'-thio-bis(3-méthyl-6-tert-butylphénol); le 1,3,5-triméthyl-2,4,6-tris(3,5-tert-butyl-4-hydroxybenzyl)benzène; la di-tert-amyl-hydroquinone; le triester 3,5-di-tert-butyl-4-hydroxyhydrocinnamique avec la 1,3,5-tris(2-hydroxyéthyl)-triazine-s-2,4,6-(1H,3H,5H)-trione; une dihydrotriméthylquinoléine polymère; la 6-éthoxy-1,2-dihydro-2,2,4-triméthylquinoléine; la N,N'-diphényl-p-phénylène-diamine; la N,N'-di- β -naphtyl-p-phénylènediamine; des diphenylamines alkylées et des produits de réaction de diphenylamine et acétone; et des mélanges de ceux-ci.
10.

45 Procédé selon la revendication 9, pour la fabrication d'une étoffe non tissée stérilisée à partir d'au moins une prépondérance de fibres de cellulose et stérilisée par irradiation ou à la vapeur, dans lequel ledit monomère souple est choisi parmi l'acrylate de n-butyle, l'acrylate de 2-éthylhexyle, l'acrylate d'isobutyle et des mélanges de ceux-ci; ledit monomère rigide est choisi parmi le styrène, 1' α -méthylstyrène, le méthacrylate de méthyle et des mélanges de ceux-ci; ledit N-alkylolacrylamide ou -méthacrylamide est choisi parmi le N-méthylolacrylamide et -méthacrylamide, le N-butylolacrylamide et -méthacrylamide, le n- et isobutoxyméthylacrylamide et des mélanges de ceux-ci; et ledit acide insaturé est choisi parmi l'acide acrylique, l'acide méthacrylique, l'acide itaconique, l'acide fumarique, l'acide maléique et des mélanges de ceux-ci.
11.

55 Latex préparé par initiation par radicaux libres, comprenant une prépondérance d'un monomère hydrophobe souple ayant une Tv dans la plage de -80 à -20 °C, une quantité moindre d'un monomère hydrophobe rigide ayant une Tv dans la plage de +40 à +120 °C, une petite quantité d'un acide carboxylique insaturé et une petite quantité d'un N-alkylolacrylamide ou -méthacrylamide, caractérisé en ce que ledit latex comporte, mélangées dans celui-ci, une quantité suffisante d'un émulsifiant et de 0,01 à 5 parties en poids pour 100 parties en poids de solides de latex, d'un agent d'inhibition d'odeur choisi parmi des antioxydants de type amine et des phénols à empêchement stérique qui ont la

fonction de réduire l'odeur qui est engendrée lors de la stérilisation de l'étoffe non tissée liée à celui-ci.

12. Latex selon la revendication 11, dans lequel ledit latex est préparé par polymérisation, en présence de 0,1 à 2 parties en poids d'un amorceur et de moins de 1,0 partie en poids d'un émulsifiant anionique, de 65 à 85 parties en poids d'un monomère souple, de 10 à 30 parties en poids d'un monomère rigide, de 0,1 à 5 parties en poids d'un acide carboxylique insaturé contenant de 3 à 12 atomes de carbone, et de 0,1 à 5 parties en poids d'un N-alkylolacrylamide ou méthacrylamide contenant de 1 à 10 atomes de carbone dans le groupe alkyle.
13. Latex selon la revendication 12, dans lequel ledit agent d'inhibition d'odeur est choisi parmi des phénols et hydroquinones alkylés, des produits de condensation de cétone-amine, des diarylamines, des diaryldiamines, des produits de condensation de cétone-diarylamine et des mélanges de ceux-ci.
14. Latex selon la revendication 12, dans lequel ledit agent d'inhibition d'odeur est choisi parmi les structures A, B, C et D suivantes:

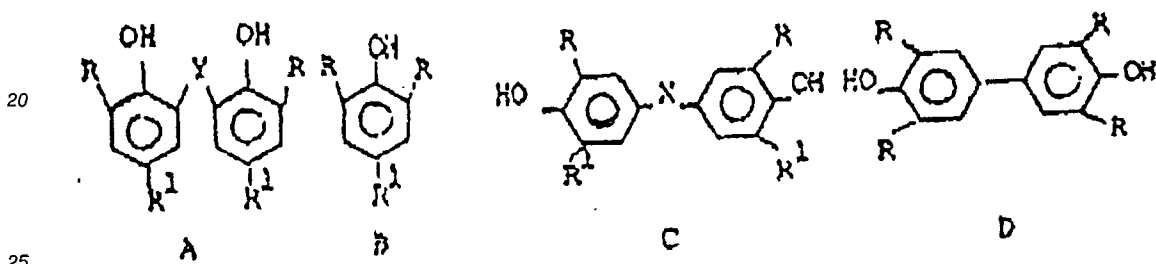

dans lesquelles les groupes R sont choisis individuellement parmi des atomes d'hydrogène et des groupes alkyle ayant de 1 à 12 atomes de carbone, au moins un groupe R étant choisi parmi les groupes alkyle; les groupes R1 sont choisis individuellement parmi des groupes hydroxy et alkyle inférieurs; et X et Y sont choisis parmi des groupes alkylène inférieurs et des atomes de soufre.


15. Latex selon la revendication 12, dans lequel ledit agent est choisi parmi le 2,2'-méthylène-bis(4-éthyl-6-tert-butylphénol); le 2,2'-méthylène-bis(4-méthyl-6-nonylphénol); le 2,2'-méthylène-bis(4-tert-butyl-6-tert-butylphénol); le 2,2'-méthylène-bis(4-méthyl-6-tert-butylphénol); un produit de réaction butylé de p-crésol et dicyclopentadiène; le 2,6-di-tert-butyl-4-méthylphénol; le produit de réaction de 4,4-isopropylidène-diphénol, isobutylène et styrène; le 2,2'-thio-bis(4-méthyl-6-tert-butylphénol); le 4,4'-thio-bis(3-méthyl-6-tert-butylphénol); le 1,3,5-triméthyl-2,4,6-tris(3,5-tert-butyl-4-hydroxybenzyl)benzène; la di-tert-amyl-hydroquinone; le triester 3,5-di-tert-butyl-4-hydroxyhydrocinnamique avec la 1,3,5-tris(2-hydroxyéthyl)-triazine-s-2,4,6-(1H,3H,5H)-trione; une dihydrotriméthylquinoléine polymère; la 6-éthoxy-1,2-dihydro-2,2,4-triméthylquinoléine; la N,N'-diphényl-p-phénylène-diamine; la N,N'-di-β-naphtyl-p-phénylènediamine; des diphenylamines alkylées et des produits de réaction de diphenylamine et acétone; et des mélanges de ceux-ci.
16. Latex selon la revendication 15, dans lequel ledit monomère souple est choisi parmi l'acrylate de n-butyle, l'acrylate de 2-éthylhexyle, l'acrylate d'isobutyle et des mélanges de ceux-ci; ledit monomère rigide est choisi parmi le styrène, 1'α-méthylstyrène, le méthacrylate de méthyle et des mélanges de ceux-ci; ledit N-alkylolacrylamide ou -méthacrylamide est choisi parmi le N-méthylolacrylamide et -méthacrylamide, le N-butylolacrylamide et -méthacrylamide, le n-et iso-butoxyméthylacrylamide et des mélanges de ceux-ci; et ledit acide insaturé est choisi parmi l'acide acrylique, l'acide méthacrylique, l'acide itaconique, l'acide fumarique, l'acide maléique et des mélanges de ceux-ci.

Patentansprüche

1. Sterilisierter Vliesstoff mit verringertem Geruch nach der Sterilisation, umfassend Vlies-Fasern, die mittels eines Latex gebunden sind, das durch Initiierung freier Radikale hergestellt ist, umfassend eine überwiegende Menge eines weichen hydrophoben Monomers mit einem Tg-Wert im Bereich von -80 °C bis -20 °C, eine geringere Menge eines harten hydrophoben Monomers mit einem Tg-Wert im Bereich von +40 °C bis +120 °C, eine kleine Menge einer ungesättigten Carbonsäure und eine

kleine Menge eines N-Alkylolacrylamids oder -methacrylamids, dadurch gekennzeichnet, daß dem Latex eine ausreichende Menge eines Emulgators und 0,01 bis 5 Gew.-Teile, auf 100 Gew.-Teile der Latex-Feststoffe, eines geruchshemmenden Mittels zugesetzt sind, das ausgewählt ist aus Antioxidationsmitteln vom Amin-Typ und gehinderten Phenolen, die die Funktion haben, den Geruch zu verringern, der bei der Sterilisation des Vliesstoffs erzeugt wird.

2. Vliesstoff nach Anspruch 1, der gegen Körperflüssigkeiten abstoßend wirkt, wobei der Latex durch Polymerisieren von 65 bis 85 Gew.-Teilen eines weichen Monomers, 10 bis 30 Gew.-Teilen eines harten Monomers, 0,1 bis 5 Gew.-Teilen einer ungesättigten Carbonsäure mit 3 bis 12 Kohlenstoff-Atomen und 0,1 bis 5 Teilen eines N-Alkylolacrylamids oder -methacrylamids mit 1 bis 10 Kohlenstoff-Atomen in der Alkyl-Gruppe in Gegenwart von 0,1 bis 2 Gew.-Teilen eines Initiators und weniger als 1,0 Gew.-Teil eines anionischen Emulgators hergestellt ist.
3. Vliesstoff nach Anspruch 2, worin das geruchshemmende Mittel aus alkylierten Hydrochinonen und Phenolen, Keton-Amin-Kondensationsprodukten, Diarylaminen, Diaryldiaminen, Keton-Diarylamin-Kondensationsprodukten und deren Mischungen ausgewählt ist.
4. Vliesstoff nach Anspruch 2, der aus wenigstens einer überwiegenden Menge Cellulose-Fasern hergestellt und durch Bestrahlung oder mittels Dampf sterilisiert ist, worin das geruchshemmende Mittel aus den folgenden Strukturen A, B, C und D ausgewählt ist,

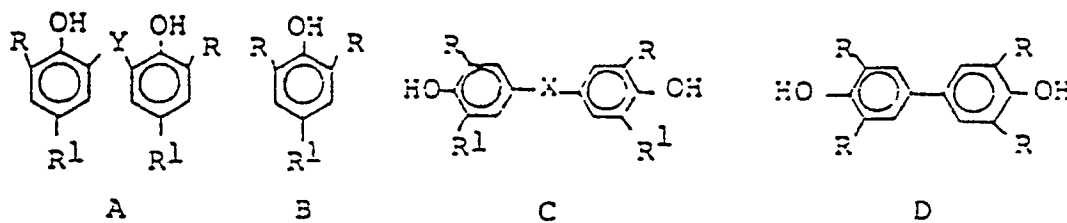

worin

die Gruppen R unabhängig aus Wasserstoff und Alkyl-Gruppen mit 1 bis 12 Kohlenstoff-Atomen ausgewählt sind, wobei wenigstens eine Gruppe R aus den Alkyl-Gruppen ausgewählt ist, die Gruppen R¹ unabhängig aus Hydroxyl und niederen Alkyl-Gruppen ausgewählt sind und X und Y aus niederen Alkylen-Gruppen und Schwefel ausgewählt sind.

5. Vliesstoff nach Anspruch 2, worin das geruchshemmende Mittel aus
 - 2,2'-Methylen-bis(4-ethyl-6-t-butylphenol),
 - 2,2'-Methylen-bis(4-methyl-6-nonylphenol),
 - 2,2'-Methylen-bis(4-t-butyl-6-t-butylphenol),
 - 2,2'-Methylen-bis(4-methyl-6-t-butylphenol),
 - dem butylierten Reaktionsprodukt von p-Cresol und Dicyclopentadien,
 - 2,6-Di-t-butyl-4-methylphenol,
 - dem Reaktionsprodukt von 4,4-Isopropyliden-diphenol, Isobutylen und Styrol,
 - 2,2'-Thio-bis(4-methyl-6-t-butylphenol),
 - 4,4'-Thio-bis(3-methyl-6-t-butylphenol),
 - 1,3,5-Trimethyl-2,4,6-tris(3,5-t-butyl-4-hydroxybenzyl)benzol, Di-t-amylhydrochinon,
 - 3,5-Di-t-butyl-4-hydroxyhydrozimtsäure-triester mit 1,3,5-Tris(2-hydroxyethyl)-s-triazin-2,4,6-(1H,3H,5H)-trion,
 - polymerem Dihydrotrimethylchinolin,
 - 6-Ethoxy-1,2-dihydro-2,2,4-trimethylchinolin,
 - N,H'-Diphenyl-p-phenylendiamin
 - N,N'-Di-β-naphthyl-p-phenylendiamin,
 - alkylierten Diphenylaminen,
 - Reaktionsprodukten von Diphenylamin und Aceton und deren Mischungen ausgewählt ist.
6. Vliesstoff nach Anspruch 5, der aus Fasern, die aus natürlichen Fasern, synthetischen Fasern und Mischungen derartiger Fasern ausgewählt sind, hergestellt und durch Bestrahlung oder mittels Dampf

sterilisiert ist, worin das weiche Monomer aus n-Butylacrylat, 2-Ethylhexylacrylat, Isobutylacrylat und deren Mischungen ausgewählt ist;

das harte Monomer aus Styrol, α -Methylstyrol, Methylmethacrylat und deren Mischungen ausgewählt ist,

5 das N-Alkylolacrylamid oder -methacrylamid aus N-Methylolacrylamid und -methacrylamid, N-Butylolacrylamid oder -methacrylamid, n- und iso-Butoxymethylacrylamid und deren Mischungen ausgewählt ist und

die ungesättigte Säure aus Acrylsäure, Methacrylsäure, Itaconsäure, Fumarsäure, Maleinsäure und deren Mischungen ausgewählt ist.

10

7. Verfahren zur Herstellung eines sterilisierten Vliesstoffs mit verringertem Geruch nach der Sterilisation, umfassend das Binden von Vlies-Fasern mittels eines Latex, das Bilden eines Vliesstoffs aus den gebundenen Fasern und das Sterilisieren des Vliesstoffs, wobei die Fasern mittels eines Latex gebunden sind, der durch Initiierung freier Radikale hergestellt ist, umfassend eine überwiegende
15 Menge eines weichen hydrophoben Monomers mit einem Tg-Wert im Bereich von -80°C bis -20°C , eine geringere Menge eines harten hydrophoben Monomers mit einem Tg-Wert im Bereich von $+40^{\circ}\text{C}$ bis $+120^{\circ}\text{C}$, eine ausreichende Menge einer ungesättigten Carbonsäure und eine kleine Menge eines N-Alkylolacrylamids oder -methacrylamids

dadurch gekennzeichnet, daß dem Latex eine ausreichende Menge eines Emulgators und 0,01 bis 5 Gew.-Teile, auf 100 Gew.-Teile der Latex-Feststoffe, eines geruchshemmenden Mittels zugesetzt sind,
20 das ausgewählt ist aus Antioxidationsmitteln vom Amin-Typ und gehinderten Phenolen, die die Funktion haben, den Geruch zu verringern, der bei der Sterilisation des Vliesstoffs erzeugt wird.

8. Verfahren nach Anspruch 7, worin das geruchshemmende Mittel aus alkylierten Hydrochinonen und Phenolen, Keton-Amin-Kondensationsprodukten, Diarylaminen, Diaryldiaminen, Keton-Diarylamin-Kondensationsprodukten und deren Mischungen ausgewählt ist.
25

9. Verfahren nach Anspruch 7, worin das Mittel aus 2,2'-Methylen-bis(4-ethyl-6-t-butylphenol),
2,2'-Methylen-bis(4-methyl-6-nonylphenol),
2,2'-Methylen-bis(4-t-butyl-6-t-butylphenol),
2,2'-Methylen-bis(4-methyl-6-t-butylphenol),
dem butylierten Reaktionsprodukt von p-Cresol und Dicyclopentadien,
2,6-Di-t-butyl-4-methylphenol,
dem Reaktionsprodukt von 4,4-Isopropyliden-diphenol,
35 Isobutylphenol und Styrol,
2,2'-Thio-bis(4-methyl-6-t-butylphenol),
4,4'-Thio-bis(3-methyl-6-t-butylphenol),
1,3,5-Trimethyl-2,4,6-tris(3,5-t-butyl-4-hydroxybenzyl)benzol,
Di-t-amylhydrochinon,
40 3,5-Di-t-butyl-4-hydroxyhydrozimtsäure-triester mit 1,3,5-Tris(2-hydroxyethyl)-s-triazin-2,4,6-(1H,3H,5H)-trion,
polymerem Dihydrotrimethylchinolin,
6-Ethoxy-1,2-dihydro-2,2,4-trimethylchinolin,
N,N'-Diphenyl-p-phenylendiamin
45 N,N'-Di- β -naphthyl-p-phenylendiamin,
alkylierten Diphenylaminen,
Reaktionsprodukten von Diphenylamin und Aceton und deren Mischungen ausgewählt ist.


50 10. Verfahren nach Anspruch 9, worin der Vliesstoff aus wenigstens einer überwiegenden Menge Cellulose-Fasern hergestellt und durch Bestrahlung oder mittels Dampf sterilisiert ist, worin das weiche Monomer aus n-Butylacrylat, 2-Ethylhexylacrylat, Isobutylacrylat und deren Mischungen ausgewählt ist;

das harte Monomer aus Styrol, α -Methylstyrol, Methylmethacrylat und deren Mischungen ausgewählt ist,
55

das N-Alkylolacrylamid oder -methacrylamid aus N-Methylolacrylamid und -methacrylamid, N-Butylolacrylamid oder -methacrylamid, n- und iso-Butoxymethylacrylamid und deren Mischungen ausgewählt ist und

die ungesättigte Säure aus Acrylsäure, Methacrylsäure, Itaconsäure, Fumarsäure, Maleinsäure und deren Mischungen ausgewählt ist.

11. Latex, hergestellt durch Initiierung freier Radikale, umfassend eine überwiegende Menge eines weichen hydrophoben Monomers mit einem Tg-Wert im Bereich von -80°C bis -20°C , eine geringere Menge eines harten hydrophoben Monomers mit einem Tg-Wert im Bereich von $+40^{\circ}\text{C}$ bis $+120^{\circ}\text{C}$, eine kleine Menge einer ungesättigten Carbonsäure und eine kleine Menge eines N-Alkylolacrylamids oder -methacrylamids, dadurch gekennzeichnet, daß dem Latex eine ausreichende Menge eines Emulgators und 0,01 bis 5 Gew.-Teile, auf 100 Gew.-Teile der Latex-Feststoffe, eines geruchshemmenden Mittels zugesetzt sind, das ausgewählt ist aus Antioxidationsmitteln vom Amin-Typ und gehinderten phenolen, die die Funktion haben, den Geruch zu verringern, der bei der Sterilisation des damit gebundenen Vliesstoffs erzeugt wird.
12. Latex nach Anspruch 11, worin das Latex durch Polymerisieren von 65 bis 85 Gew.-Teilen eines weichen Monomers, 10 bis 30 Gew.-Teilen eines harten Monomers, 0,1 bis 5 Gew.-Teilen einer ungesättigten Carbonsäure mit 3 bis 12 Kohlenstoff-Atomen und 0,1 bis 5 Teilen eines N-Alkylolacrylamids oder -methacrylamids mit 1 bis 10 Kohlenstoff-Atomen in der Alkyl-Gruppe in Gegenwart von 0,1 bis 2 Gew.-Teilen eines Initiators und weniger als 1,0 Gew.-Teil eines anionischen Emulgators hergestellt ist.
13. Latex nach Anspruch 12, worin das geruchshemmende Mittel aus alkylierten Hydrochinonen und phenolen, Keton-Amin-Kondensationsprodukten, Diarylaminen, Diaryldiaminen, Keton-Diarylamin-Kondensationsprodukten und deren Mischungen ausgewählt ist.
14. Latex nach Anspruch 12, worin das geruchshemmende Mittel aus den folgenden Strukturen A, B, C und D ausgewählt ist,

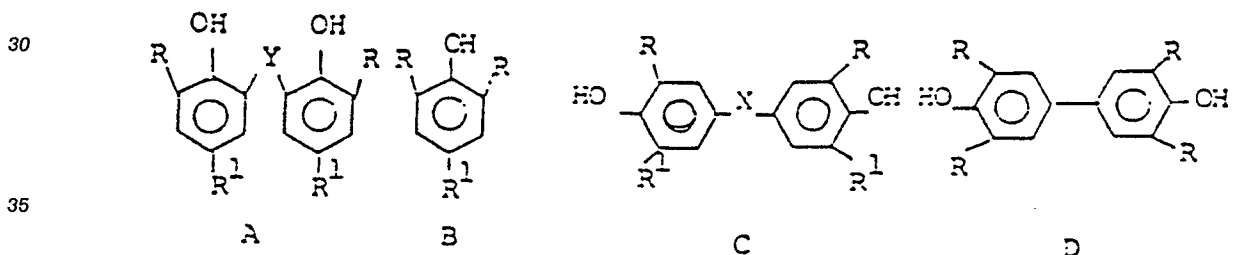

- worin die Gruppen R unabhängig aus Wasserstoff und Alkyl-Gruppen mit 1 bis 12 Kohlenstoff-Atomen ausgewählt sind, wobei wenigstens eine Gruppe R aus den Alkyl-Gruppen ausgewählt ist, die Gruppen R¹ unabhängig aus Hydroxyl und niederen Alkyl-Gruppen ausgewählt sind und X und Y aus niederen Alkyl-Gruppen und Schwefel ausgewählt sind.
15. Latex nach Anspruch 12, worin das Mittel aus 2,2'-Methylen-bis(4-ethyl-6-t-butylphenol), 2,2'-Methylen-bis(4-methyl-6-nonylphenol), 2,2'-Methylen-bis(4-t-butyl-6-t-butylphenol), 2,2'-Methylen-bis(4-methyl-6-t-butylphenol), dem butylierten Reaktionsprodukt von p-Cresol und Dicyclopentadien, 2,6-Di-t-butyl-4-methylphenol, dem Reaktionsprodukt von 4,4-Isopropyliden-diphenol, Isobutylen und Styrol, 2,2'-Thio-bis(4-methyl-6-t-butylphenol), 4,4'-Thio-bis(3-methyl-6-t-butylphenol), 1,3,5-Trimethyl-2,4,6-tris(3,5-t-butyl-4-hydroxybenzyl)benzol, Di-t-amylhydrochinon, 3,5-Di-t-butyl-4-hydroxyhydrozimtsäure-triester mit 1,3,5-Tris(2-hydroxyethyl)-s-triazin-2,4,6-(1H,3H,5H)-

trion,
 polymerem Dihydrotrimethylchinolin,
 6-Ethoxy-1,2-dihydro-2,2,4-trimethylchinolin,
 N,N'-Diphenyl-p-phenylendiamin
 5 N,N'-Di- β -naphthyl-p-phenylendiamin,
 alkylierten Diphenylaminen,
 Reaktionsprodukten von Diphenylamin und Aceton und deren Mischungen
 ausgewählt ist.

- 10 16. Latex nach Anspruch 15, worin
 das weiche Monomer aus n-Butylacrylat, 2-Ethylhexylacrylat, Isobutylacrylat und deren Mischungen
 ausgewählt ist;
 das harte Monomer aus Styrol, α -Methylstyrol, Methylmethacrylat und deren Mischungen ausgewählt
 ist, das N-Alkylolacrylamid oder -methacrylamid aus N-Methylolacrylamid und -methacrylamid, N-
 15 Butylolacrylamid oder -methacrylamid, n- und iso-Butoxymethylacrylamid und deren Mischungen
 ausgewählt ist und
 die ungesättigte Säure aus Acrylsäure, Methacrylsäure, Itaconsäure, Fumarsäure, Maleinsäure und
 deren Mischungen ausgewählt ist.

20

25

30

35

40

45

50

55