

⑫

EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

⑰ Application number: **83901615.1**

⑤① Int. Cl.4: **C 25 D 5/26, C 25 D 3/22**

⑱ Date of filing: **18.05.83**

Data of the international application taken as a basis:

②⑥ International application number:
PCT/JP 83/00147

②⑦ International publication number:
WO 84/04548 (22.11.84 84/27)

④③ Date of publication of application: **17.07.85**
Bulletin 85/29

⑦① Applicant: **KAWASAKI STEEL CORPORATION, 1-28, Kitahonmachi-dori 1-Chome, Chuo-ku, Kobe-Shi Hyogo 651 (JP)**

⑦② Inventor: **MATSUDA, Akira, 1351, Sonno-cho Chiba-shi, Chiba 281 (JP)**
Inventor: **KIMURA, Hajime, 1351, Sonno-cho Chiba-shi, Chiba 281 (JP)**

②④ Designated Contracting States: **DE FR GB**

⑦④ Representative: **Overbury, Richard Douglas et al, HASELTINE LAKE & CO Hazlitt House 28 Southampton Buildings Chancery Lane, London WC2A 1AT (GB)**

⑤④ **PROCESS FOR PRODUCING STEEL STRIP ELECTROPLATED WITH ZINC ON BOTH SIDES IN CHLORIDE BATH.**

⑤⑦ A process for producing steel strip electroplated with zinc on both sides by two plating steps between which is provided a wetting step. A wetting solution to be used in the wetting step is controlled so that its zinc concentration falls within the range of from 0.1 to 50 g/liter, whereby deterioration of the plated surface due to a decrease in the zinc-plating degree is avoided.

EP 0 148 268 A1

A method of producing a both-side
electrogalvanized steel strip in a chloride bath

This invention relates to a method of producing a both-side electrogalvanized steel strip in a chloride bath which is able to form beautiful and glossy plated surfaces by profitable improvement of zinc coating coverage in the electrogalvanizing with the chloride bath.

As a plating system in an electrogalvanizing line, there are two systems, one of which being a simultaneous both-side plating system wherein both sides of steel strip are simultaneously electrogalvanized, and the other of which being a both-side separate plating system composed of two-stage plating wherein one side of steel strip is electrogalvanized in a first plating stage and thereafter the opposed side of steel strip is electrogalvanized in a second plating stage.

The both-side separate plating system has some merits that the changeover between both-side coating and one-side coating can be achieved by merely turning over the passing direction of the steel strip to be coated, and the replacement of used electrode with new electrode can be performed simply and hence the workability is excellent.

As the both-side separate plating system, there are a horizontal type as shown in Fig. 1 and a radial type as shown in Fig. 2. In any case, a wetting

tank 3 is arranged between a first plating cell 1 and a second plating cell 2. A steel strip 4 is passed through the first and second plating cells 1, 2 by means of conductor rolls 5, during which it is subjected to a galvanizing with an electrolyte 7 through an anode 6 arranged opposite to the steel strip 4.

When the steel strip 4 moves from the first plating cell 1 to the second plating cell 2, it is wetted with a wetting solution 8 in the wetting tank 3. This wetting treatment is carried out in order to introduce the steel strip 4 into the second plating cell 2 at a uniformly wetted condition of the non-plated surface, because when the non-plated surface of the steel strip 4 to be introduced into the second plating cell 2 is completely dry or is locally adhered with the electrolyte, it is apt to produce uneven plating by the second plating treatment.

Heretofore, a sulfate bath consisting essentially of zinc sulfate has mainly been used as an acidic electrolyte for the electrogalvanizing. Lately, a chloride bath becomes frequently used instead of the sulfate bath because of the following merits as compared with the sulfate bath:

- (1) Since the electric conductivity is high, the required voltage can be reduced; and
- (2) Since the acceptable current density is high, the high-speed plating is easy.

Incidentally, when the sulfate bath consisting

mainly of zinc sulfate is used as the electrolyte, no care must be particularly taken on the wetting solution in the wetting tank 3. That is, good both-side galvanized steel strip can be obtained by using the electrolyte in itself as the wetting solution.

However, when the chloride bath consisting mainly of zinc chloride is used as the electrolyte, if such an electrolyte in itself is used as the wetting solution in the wetting tank 3, it is confirmed that the zinc coating coverage extremely lowers in a surface to be plated in the second plating cell 2.

The invention is to provide a method of producing a both-side electrogalvanized steel strip in a chloride bath which advantageously solves the aforementioned problems of the prior art in the both-side separate plating system by adding a special means to the wetting treatment prior to the second plating treatment.

The essential feature of the invention is as follows.

That is, the invention lies in a method of producing a both-side electrogalvanized steel strip in a chloride bath by plating one side of the steel strip in a first plating cell, wetting the thus one-side plated steel strip in a wetting tank, and then plating the other non-plated side of the steel strip in a second plating cell, characterized in that concentration of zinc in a chloride wetting solution of the wetting tank

is 0.1 to 50 g/l.

The invention will be described concretely based on the following experimental result.

A cold-rolled steel strip having a thickness of 0.8 mm was degreased, pickled, and then subjected on both sides to an electrogalvanizing at each coating amount of 10 g/m² under the following same plating conditions by varying only the concentration of zinc in the wetting liquid as shown in the following Table 1.

- 10 (a) Plating bath : composition ZnCl₂=200 g/l,
KCl=350 g/l,
temperature 55°C,
pH=5.0
- (b) Line speed : 50 m/min
- 15 (c) Current density : 50 A/dm²
- (d) Plating apparatus: radial type both-side
separate plating
system
first plating
20 cell (bottom surface
plating) → wetting
tank → second plating
cell (top surface
plating)
- 25 (e) Wetting solution : composition ZnCl₂,
temperature 40°C,
pH=4.5

The zinc coating coverage was observed with

respect to the plated surface of each of the steel strips by means of a scanning type electron microscope, and the glossiness of the plated surface (JIS Z8741) was measured by means of a glossmeter. Further, the test specimen was subjected to a humidity cabinet test, and a ratio of red rust produced after 3 days was examined. The thus obtained results are also shown in Table 1.

10

15

20

25

Table 1

Run No.	Concentration of zinc in wetting solution (g/l)	First plating cell (bottom surface)			Second plating cell (top surface)		
		zinc coating coverage (%)	glossiness (%)	corrosion resistance (%)	zinc coating coverage (%)	glossiness (%)	corrosion resistance (%)
1	0	100	50.1	<5	100	28.5	<5
2	0.01	100	50.3	<5	100	35.5	<5
3	0.1	100	49.8	<5	100	48.7	<5
4	1.0	100	50.8	<5	100	50.9	<5
5	10.0	100	50.6	<5	100	50.8	<5
6	50.0	100	49.2	<5	100	50.3	<5
7	75.0	100	50.2	<5	70	30.5	25
8	100.0	100	50.8	<5	40	25.5	50

As apparent from Table 1, all of the bottom surfaces coated in the first plating cell had the zinc coating coverage of 100% and were good in the glossiness and the corrosion resistance according to the humidity cabinet test. In the top surfaces coated in the second plating cell, however, the zinc coating coverage was changed in accordance with the concentration of zinc in the wetting solution. That is, when the zinc concentration is exceeds 50 g/l, the zinc coating coverage rapidly lowers to leave uncoated portions and hence the corrosion resistance and glossiness are deteriorated, while when it is less than 0.1 g/l, the glossiness lowers.

According to the invention, therefore, the concentration of zinc in the wetting solution to be used in the chloride wetting tank is limited to a range of 0.1 to 50 g/l.

Although the reason why the zinc concentration in the wetting tank has an influence on the zinc coating coverage is not clear, it is anticipated that when the steel strip is previously wetted with a solution having high zinc concentration, zinc is adsorbed on the surface of the strip, and when the wetted strip is subjected to subsequent plating, the selective electrodeposition is promoted because crystals grow about the adsorbed zinc. Thus, it is considered that the crystal growth is preferential rather than the nuclear formation so that the strip surface can not uniformly be coated with zinc

and consequently the zinc coating coverage is deteriorated. On the other hand, when the zinc concentration is low, the adsorption of zinc is small, which is considered to have no influence on the subsequent
05 plating.

The composition other than zinc in the wetting solution is not particularly critical, but it is desirable to use the same composition system as in the electrolyte in view of the introduction of the wetted
10 strip into the subsequent plating cell.

The temperature of the wetting liquid is not critical, but it is practically 20-50°C. And also, pH of the wetting solution does not substantially affect the zinc coating coverage and is not restricted,
15 but it is preferably about 3-6.

The wetting treatment may be carried out in the usual manner such as dipping method, spraying method or the like.

The chloride bath to be used in the invention
20 consists mainly of zinc chloride and, if necessary, contains as a conductive assistant a proper amount of at least one substance selected from ammonium chloride, potassium chloride, sodium chloride, aluminum chloride, barium chloride, calcium chloride and magnesium chloride.
25 In general, the concentration of zinc chloride is within a practical range of 100-300 g/l, and the concentration of chloride as the conductive assistant is 100-450 g/l. Furthermore, other additives such as

gloss agent, pH buffer and the like may be added.

As mentioned above, according to the invention, the both-side electrogalvanized steel strip having improved zinc coating coverage, glossiness and corrosion resistance can be produced from the chloride plating cells by adjusting the concentration of zinc in the chloride wetting solution of the wetting tank to a range of 0.1-50 g/l.

The invention will now be described in detail with reference to the accompanying drawings, wherein:

Fig. 1 is a diagrammatical view of a horizontal-type both-side electrogalvanizing line; and

Fig. 2 is a diagrammatical view of a radial-type both-side electrogalvanizing line.

A steel strip was subjected to a both-side electrogalvanizing at a coating weight per one side of 20 g/m² under the following plating conditions using a combination of a chloride plating bath and a wetting solution each having a composition shown in the following Table 2 and then examined with respect to the zinc coating coverage and glossiness to obtain results as shown in Table 2.

Plating conditions

- i) Plating bath : temperature 55°C
pH 5.0
- 05 ii) Wetting solution : temperature 40°C
pH 4.5
- iii) Line speed : 50 m/min
- iv) Current density : 50 A/dm²
- v) Plating system : radial-type both-side
10 separate plating
system
first plating
cell (bottom surface
plating) → wetting
tank → second plating
15 cell (top surface
plating)

20

25

Table 2(a)

Run No.	Composition of plating bath	Composition of wetting solution	Concentration of zinc in wetting solution (g/l)	First plating cell (bottom surface)		Second plating cell (top surface)		Remarks
				zinc coating coverage (%)	glossiness (%)	zinc coating coverage (%)	glossiness (%)	
1	ZnCl ₂ 180 g/l	ZnCl ₂ 10 g/l	4.8	100	50.3	100	51.2	Example according to the invention
	NH ₄ Cl 300 g/l	NH ₄ Cl 20 g/l						
2	ZnCl ₂ 220 g/l	ZnCl ₂ 75 g/l	36	100	44.6	100	43.8	
	NaCl 350 g/l	NaCl 100 g/l						
3	ZnCl ₂ 150 g/l	ZnCl ₂ 1 g/l	0.5	100	38.8	100	39.1	
	AlCl ₃ 200 g/l	AlCl ₃ 2 g/l						
4	ZnCl ₂ 250 g/l	ZnCl ₂ 15 g/l	7.2	100	36.6	100	35.8	
	BaCl ₂ 150 g/l							
5	ZnCl ₂ 200 g/l	ZnCl ₂ 50 g/l	24	100	39.6	100	39.1	
	CaCl ₂ 300 g/l							

Table 2(b)

Run No.	Composition of plating bath	Composition of wetting solution	Concentration of zinc in wetting solution (g/l)	First plating cell (bottom surface)		Second plating cell (top surface)		Remarks
				zinc coating coverage (%)	glossiness (%)	zinc coating coverage (%)	glossiness (%)	
6	ZnCl ₂ 300 g/l	ZnCl ₂ 25 g/l	12	100	42.1	100	43.2	Example according to the invention
	MgCl ₂ 150 g/l	MgCl ₂ 10 g/l						
7	ZnCl ₂ 200 g/l	ZnCl ₂ 10 g/l	4.8	100	50.1	100	50.3	"
	KCl 150 g/l NaCl 150 g/l							
8	ZnCl ₂ 180 g/l	—	0	100	50.2	100	29.6	Comparative Example
	NH ₄ Cl 300 g/l							
9	ZnCl ₂ 220 g/l	ZnCl ₂ 270 g/l	106	100	48.7	50	24.8	"
	NaCl 350 g/l	NaCl 350 g/l						

As apparent from the results of Table 2, the plated steel strips having good zinc coating coverage and glossiness are obtained in the chloride bath having the composition according to the invention. In Run
05 Nos. 8 and 9 wherein the zinc concentration of the wetting solution is outside the range defined in the invention, the glossiness or zinc coating degree of the plated surface is poor.

As apparent from the above examples, according
10 to the invention, the both-side electrogalvanized steel strip having the improved zinc coating coverage and glossiness can be produced in the chloride bath by limiting the zinc concentration of the wetting solution to 0.1-50 g/l.

15 In the production of both-side galvanized steel strips according to the invention, very glossy and beautiful plated surface can be obtained even when being subjected to high-speed electrogalvanizing using a chloride bath, so that mass production can easily be
20 realized in industrial scale and also the reduction of the cost is achieved.

Claim

1. A method of producing a both-side electro-galvanized steel strip in a chloride bath by plating one side of the steel strip in a first plating cell, wetting the thus one-side plated steel strip in a wetting cell, and then plating the other non-plated side of the steel strip in a second plating cell, characterized in that a concentration of zinc in a chloride wetting solution of the wetting tank is 0.1 to 50 g/l.

1/1

FIG. 1


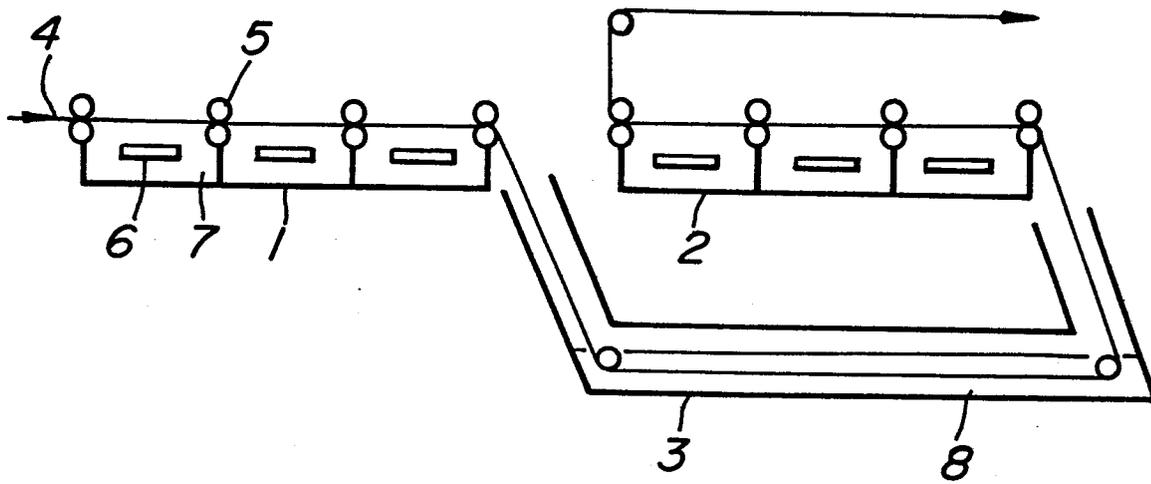


FIG. 2

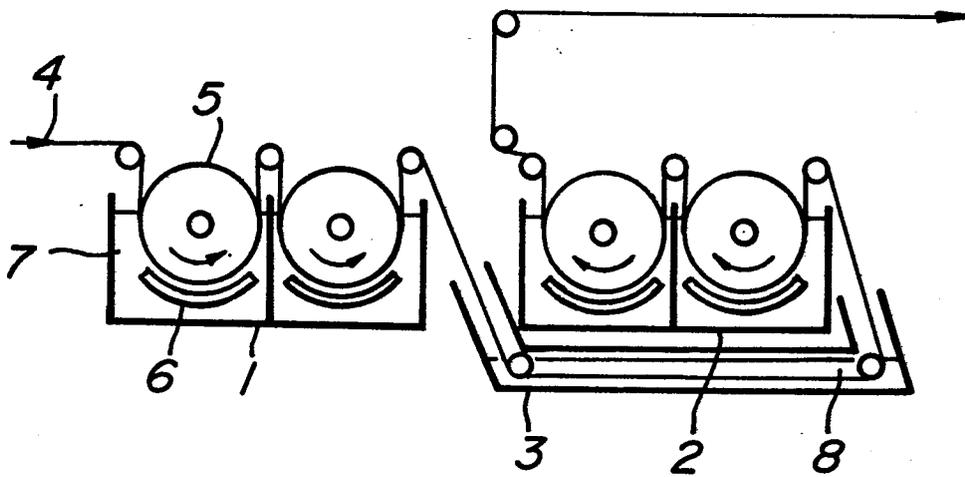

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/JP83/00147
0148268

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ³				
According to International Patent Classification (IPC) or to both National Classification and IPC				
Int. Cl. ³ C25D 5/26, C25D 3/22				
II. FIELDS SEARCHED				
Minimum Documentation Searched ⁴				
Classification System	Classification Symbols			
I P C	C25D 5/26, C25D 3/22			
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁵				
	Jitsuyo Shinan Koho	1926 - 1983		
	Kokai Jitsuyo Shinan Koho	1971 - 1983		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴				
Category [*]	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸		
A	JP,A, 57-89496 (Kawasaki Steel Corp.), 3. June. 1982 (03. 06. 82) Column of Claim	1		
<p>[*] Special categories of cited documents: ¹⁵</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none;"> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </td> <td style="width: 50%; border: none;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> </td> </tr> </table>			<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>			
IV. CERTIFICATION				
Date of the Actual Completion of the International Search ²	Date of Mailing of this International Search Report ²			
August 11, 1983 (11. 08. 83)	August 22, 1983 (22. 08. 83)			
International Searching Authority ¹	Signature of Authorized Officer ²⁰			
Japanese Patent Office				