

⑬



Europäisches Patentamt
European Patent Office
Office européen des brevets

⑪

Publication number:

0 148 545
A1

⑫

EUROPEAN PATENT APPLICATION

⑳

Application number: 84300147.0

㉑

Int. Cl. 4: **B 65 B 21/24**

㉒

Date of filing: 10.01.84

㉓

Date of publication of application: 17.07.85
Bulletin 85/29

㉔

Applicant: **THE MEAD CORPORATION**, Mead World Headquarters Courthouse Plaza Northeast, Dayton Ohio 45463 (US)

㉕

Inventor: **Lebras, Philippe**, 13, rue de la Bievre, F-36000 Chateauroux (FR)

㉖

Designated Contracting States: **AT BE CH DE FR GB IT LI LU NL SE**

㉗


Representative: **Hepworth, John, J.M. Hepworth & Co.** 36 Regent Place, Rugby Warwickshire CV21 2PN (GB)

㉘

Applicator mechanism and method for fitting sleeves onto articles.

㉙

Applicator mechanism for fitting a sleeve (10) to at least one moving bottle (B) comprises supply means (44) holding collapsed sleeves, erecting means (WD) sequentially to bring each sleeve into a set-up condition, transfer means (96-104) to effect downward transfer of the set-up sleeve towards said article to be sleeved and applicator means (106-112) for fitting the sleeve around the article. The applicator means is operable to execute both a downward and forward motion to the sleeve such that the forward motion of the sleeve substantially is synchronized with that of the article during fitment of the sleeve thereto.

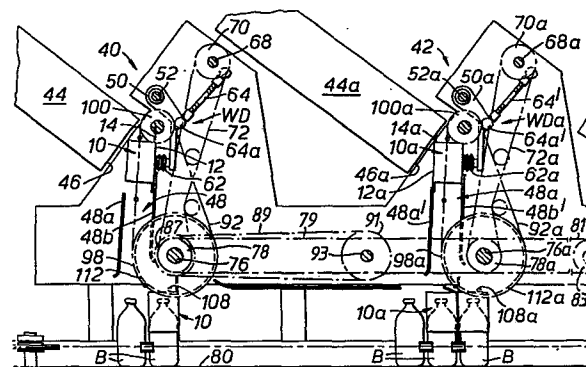

EP 0 148 545 A1

- 1 -

APPLICATOR MECHANISM AND METHOD
FOR FITTING SLEEVES ONTO ARTICLES

This invention relates to an applicator mechanism for fitting an end closure sleeve onto one or more articles in a multiple packaging process. The applicator mechanism is particularly useful for fitting a sleeve onto a pair of
5 bottles at each end of a group of bottles which then has an open-ended wrapper applied thereto which holds together the bottle group to form a multiple unit package. The wrapper has its opposite ends closed by the fitted sleeves thereby forming a totally enclosed package which is suitable for
10 protecting bottled beverages whose organoleptic properties can be affected by ultra-violet light. Such a package is disclosed in our U.S. Patent Application Serial No. filed July 29, 1982 entitled "Article Carrier."

One aspect of the invention provides a mechanism
15 for applying a sleeve to at least one moving article so that the article is introduced through an open base of the sleeve, which apparatus comprises supply means for accommodating a plurality of said sleeves in collapsed

condition, erecting means to bring each sleeve sequentially into a set-up condition and present the set-up sleeve for downward transfer towards the article to be sleeved, transfer means to effect said downward transfer and applicator means for fitting said transferred sleeve around said article, said applicator means being operable to execute both a downward and a forward motion to the sleeve such that the forward motion of the sleeve is substantially synchronized with that of the article, conveyed beneath the mechanism, during fitment of the sleeve onto said article.

Another aspect of the invention provides a method of applying a sleeve to at least one moving article so that the article is introduced through an open base of the sleeve, which method comprises withdrawing a collapsed sleeve from a supply and bringing the sleeve into a set-up condition, transferring the set-up sleeve towards the article to be sleeved, executing a downward and forward motion to the sleeve to complete the transfer step so that the sleeve is fitted around said moving article and such that the forward motion of the sleeve substantially is synchronized with that of the article during fitment of the sleeve thereto.

An embodiment of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 is a perspective view of a closure sleeve suitable for use in the mechanism according to the invention, Figure 2 is a perspective view of a completed package incorporating a closure sleeve at each of its ends,

Figure 3 is a schematic side view of the applicator mechanism according to the invention.

Figure 3a is a schematic perspective view of the main gear trains incorporated in the applicator mechanism;

5 Figure 4 is a schematic end view of the applicator mechanism according to the invention, and

Figures 5 to 7 are schematic views illustrating fitment of a sleeve around a pair of bottles.

10 Referring first to Figure 1, there is shown a closure sleeve 10 suitable for use with the mechanism according to the invention. The sleeve 10 comprises a main panel 12 to the top edge of which an auxiliary panel 14 is hinged along fold line 16. Auxiliary panel 14 is
15 cut away at each end and the fold line 16 stops short of each top end edge of the main panel leaving exposed shoulder portions 18,20 respectively. Side panel 22 is hinged to one side edge of the main panel along fold line 24 and, similarly, composite side panel 26 is hinged to
20 the opposite side edge of the main panel along fold line 28. A back panel 30 is hinged to each of the side panels along fold lines 32,34 respectively and a nesting notch 30a is formed in the upper edge of the back panel. Thus, economy of material is achieved since the closure sleeve
25 can be nested with an adjacent closure sleeve by means of cooperation between auxiliary panel 14 of one blank and nesting notch 30a of an adjoining blank.

A completed package 36 is shown in Figure 2 in
30 which a group of bottles 'B' are accommodated within an open-ended wrapper 38 having end closure sleeves 10 at each end thereof. Each end closure sleeve encloses an endmost pair of bottles within the package and the auxiliary panel 14 is folded inwardly of the package along
35 fold line 16. End panel 38a of the wrapper is folded downwardly in overlapping face contacting relationship with the outer face of the adjacent auxiliary panel 14.

An applicator mechanism for applying a closure
40 sleeve such as that shown in Figure 1, to a pair of bott-

les is illustrated in Figures 3, 3a and 4.

Referring to Figure 3, the applicator mechanism comprises two similar units 40, 42 respectively, mounted in tandem on a packaging machine. The applicator units are both mounted upstream of that part of the machine which applies wrappers, such as wrapper 36 shown in Fig 2, to a group of bottles.

As shown in Figures 3, 3a and 4, the applicator mechanism 40 comprises a hopper 44 in which a supply of closure sleeves 10 are held each with its main and auxiliary panels 12, 14 respectively, facing the open mouth 46 of the hopper. The hopper is mounted in an inclined attitude above a sleeve guide 48 comprising guide plates 48a, 48b such that the hopper mouth 46 is disposed adjacent the path of movement of a sleeve withdrawal device 'WD'. The withdrawal device comprises an oscillatory arm 50 fixedly mounted on a rotary shaft 52 which is journalled at each of its ends in bearings 54 and 56, mounted on vertical face plates 58 and 60, respectively, of the mechanism 40. The arm 50 carries at its free end a pair of vacuum cups 62 for engagement with the main panel of the leading sleeve within the hopper 44. A connecting linkage 64 is pivotally mounted at 64a to the arm 50 intermediate its ends and to a cam 66 carried by rotatable shaft 68 mounted parallel to and above shaft 52. Shaft 68 carries a driven sprocket 70 which is rotated through chain drive 72 and sprocket 74 mounted on shaft 76. Shaft 76 also is journalled in bearings carried by the vertical face plates 58 and 60 and is mounted parallel to and below rotary shaft 52 to be driven from sprocket 78. Sprocket 78 is driven by chain 79 which also is entrained about sprocket 78a carried by shaft 76a of applicator unit 42. Shaft 76a is driven by chain and sprocket drive 81,83 which, in turn, is connected to be driven from the main drive source of the wrapping machine. Thus, shafts 76 and 76a are driven simultaneously from a common drive source. When shaft 76 is rotated drive is transmitted to rotary shaft 68 which causes the oscillatory arm to pivot

through a predetermined arc by virtue of the connecting linkage 64 so that its vacuum cups 62 oscillate towards and away from the mouth 46 of the supply hopper.

5 When the vacuum cups 62 are in abutment with the main panel 12 of the leading sleeve 10 present at the mouth of the hopper, vacuum is applied so that the sleeve is engaged and as the oscillatory arm 50 is pivoted away from the hopper mouth, the sleeve 10 is brought into a set
10 up condition as shown in Figure 3 above sleeve guide 48. In this position the main panel 12 of the sleeve 10 is held adjacent the forward guide plate 48b. Suction is then released so that the vacuum cups 62 are detached
15 ed downwardly through the sleeve guide 48 for fitment over a pair of bottles 'B'.

 A series of bottles 'B' are conveyed in pairs along conveyor base 80 by means of side lugs 82 and 84
20 carried by side lug chains 86 and 88 respectively. The side lug chains are driven by suitable drive means and the arrangement is such that bottle conveying and sleeve transfer are synchronized so that bottles are present when
a sleeve reaches the lower end of the guide 48.

25 Transfer is effected by means of a pair of spaced vertical transfer chains 90,92 which are entrained about sprockets 94,96 and 98,100 respectively. Sprockets
96 and 100 are journaled in the vertical face plates 58
30 and 60 adjacent either side of the oscillatory arm 50 and sprockets 94 and 98 are carried by the rotatable shaft 76. Each of the transfer chains 90 and 92 carry a series of spaced inwardly directed lugs 102,104, respectively, for
engagement with sleeve 10 to effect transfer thereof
35 through the sleeve guide 48.

 The lugs 102,104 engage the upper edge of each of the side panels 22,26 respectively of the sleeve 10 and

push the sleeve downwardly through the guide 48 towards a pair of bottles present on conveyor base 80 adjacent the lower end of guide 48, and on which the sleeve is to be fitted. As the open base of the sleeve approaches the
5 tops of the bottles cam elements 106,108 carried by rotatable cam discs 110,112, respectively, pass through the shoulder portions 18 and 20 of the sleeve and wipe across the top edge of side panels 22 and 26. The cam discs 110 and 112 are mounted on a rotatable sleeve 85 concentric
10 with shaft 76 and are disposed inwardly of sprockets 94 and 98. The sleeve 85 is driven from shaft 76 through a suitable chain and sprocket train. Referring more specifically to Figure 3a, the train incorporates sprocket 87 mounted on shaft 76 which drives, via chain 89 sprocket 91
15 mounted on shaft 93. Shaft 93 also carries sprocket 95 which in turn drives, via chain 97, a sprocket 99 mounted on the sleeve 85. The input to output ratio of this chain and sprocket train is chosen such that cam discs 110 and 112 rotate at a higher speed than the adjacent sprockets 94 and 98. More particularly, this speed differential is such that each cam element arrives simultaneously with successive ones of the lugs (eg., lug 104) at
20 the position shown in Figure 5.

25 The cam elements 106 and 108 wipe across the top edges of the side panels through a pre-determined angle of arc at a greater speed than that of the lugs 102,104 passing around their respective sprockets 94 and 98. This action by the cam elements accelerates the sleeve forwardly whilst simultaneously continuing to exert a downward
30 pressure on the sleeve to seat the sleeve on the bottles. The momentary acceleration is required so that the sleeve movement is altered from a substantially vertical transfer to a horizontal motion necessary to match the linear speed
35 of the bottles to which the sleeve is fitted. The action is more particularly described with reference to Figures 5 to 7.

40 Figures 5 to 7 schematically illustrate the co-operation between the transfer lugs and the cam elements

during seating of a sleeve onto a pair of bottles. Reference is made to transfer lugs 104 and cam element 108 carried by cam disc 112 acting on one side of sleeve 10, it being understood that the opposed components comprising transfer lugs 102 and cam element 106 carried by cam disc 110 act on the other side of the sleeve in like manner.

When sleeve 10 has moved through the sleeve guide 48 to the position shown in Figure 5, in which the open lower end of the sleeve is disposed immediately above the bottle pair 'B', downward pressure is being exerted by transfer lug 104 on the top edge of one side wall of the sleeve. At this time, cam element 108, carried by cam disc 112, also engages the top edge of the side wall. The cam element 108 is then at a position approximately 10° above the diametric datum line 'X-X'. Transfer of the sleeve then continues with force applied for a predetermined period simultaneously by both the lug 104 and cam element 108. When the sleeve has been moved downwardly to the position shown in Figure 6, downward force is continued solely by the cam element 108. This occurs since the arcuate speed of cam element 108 is greater than that of lug 104 passing around sprocket 98. At this time cam element 108 is approximately 10° below diametric line 'X-X'.

As the cam element continues along its arcuate path the sleeve is forced downwardly and forwardly during fitment onto the bottle pair 'B1'. The cam element 108 continues its arcuate movement wiping across the top edge of the side wall of the sleeve so as to execute a forward accelerating force on the sleeve to bring the forward speed of the sleeve into synchronism with that of the bottle pair to which it is applied.

In Figure 7 the cam element has completed execution of the wiping operation whereby the sleeve is seated on the bottle pair 'B'. Once the sleeve is seated, lug 104 passes over the top edge of the sleeve behind the cam

element to continue on its return run towards sprocket 100

The sleeved bottles then proceed along conveyor base 80 to a wrapping station of the machine (not shown).

5

The applicator unit 42 is similar in construction to unit 40 and like reference numerals designate parts with the addition of suffix 'a'. However, in unit 42 the sleeves 10 are accommodated within hopper 42a such that the main panel and auxiliary panel 12, 14 respectively of the sleeve is located adjacent the guide plate 48a so that the back panel 30 of the sleeve is located adjacent the mouth of the hopper. This arrangement is required since it is required to fit one sleeve at each end of a package so that both sleeves of the package have their main panels facing outwardly. The arrangement and timing of operation of unit 42 is such that the bottles sleeved by unit 40 pass beneath unit 42 together with a preselected number of unsleeved bottles pairs until the required pair of bottles to be sleeved by unit 42 is positioned for sleeving. Thus, the bottles sleeved by unit 40 form one end of the package whilst the bottles sleeved by unit 42 form the other end of the package.

10

15

20

CLAIMS

1. Mechanism (40,42) for applying a sleeve (10) to at least one moving article (B) so that the article is introduced through an open base of the sleeve, which apparatus comprises supply means (44) for accommodating a plurality of said sleeves in collapsed condition, erecting means (WD) to bring each sleeve sequentially into a set-up condition and present the set-up sleeve for downward transfer towards the article to be sleeved, transfer means (96-104) to effect said downward transfer and applicator means (106-112) for fitting said transferred sleeve around said article characterised in that said applicator means is operable to execute both a downward and a forward motion to the sleeve such that the forward motion of the sleeve is substantially synchronized with that of the article conveyed beneath the mechanism during fitment of the sleeve onto said article.

2. A method of applying a sleeve (10) to at least one moving article (B) so that the article is introduced through an open base of the sleeve, which method comprises withdrawing a collapsed sleeve from a supply (44) and bringing the sleeve into a set-up condition, transferring the set-up sleeve towards the article to be sleeved, characterised by executing a downward and forward motion to

the sleeve to complete the transfer step so that the sleeve is fitted around said moving article and such that the forward motion of the sleeve substantially is synchronized with that of the article during fitment of sleeve thereto.

1/7

FIG. 1.



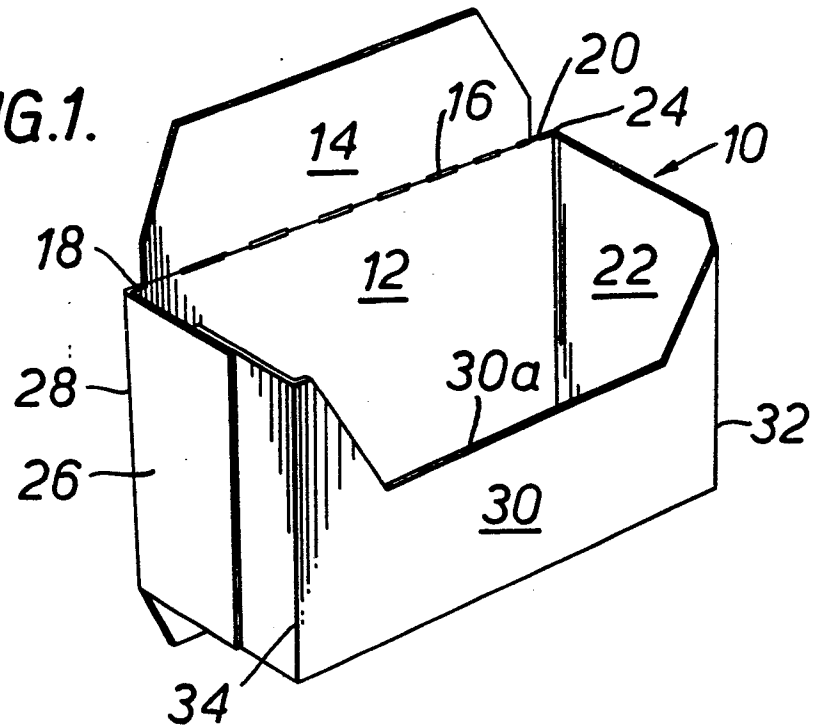



FIG. 2.

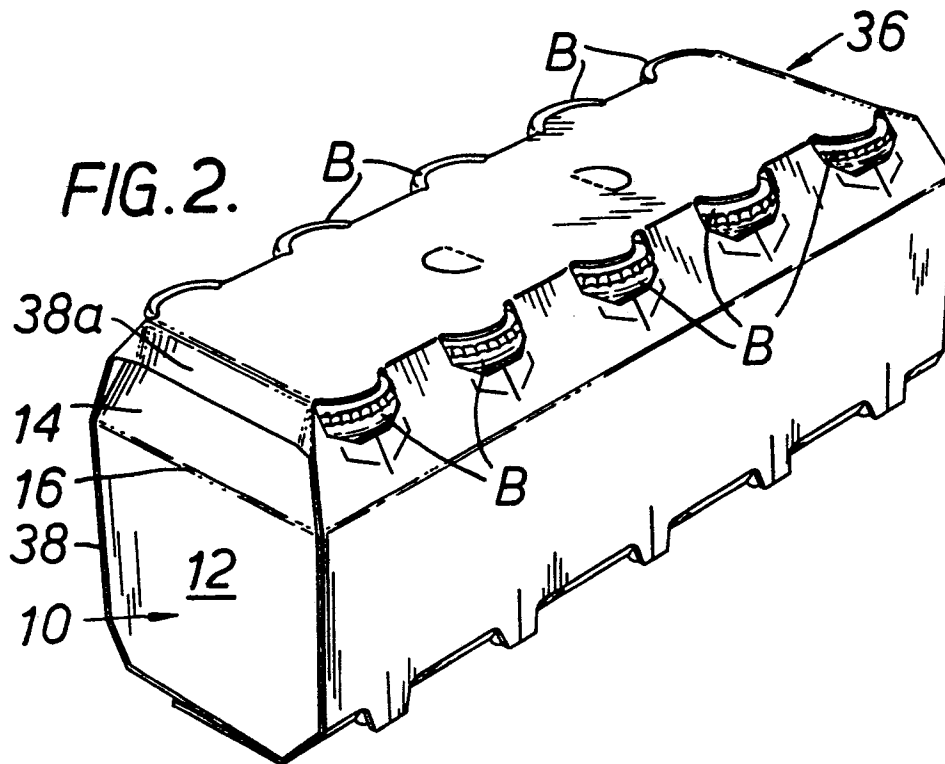

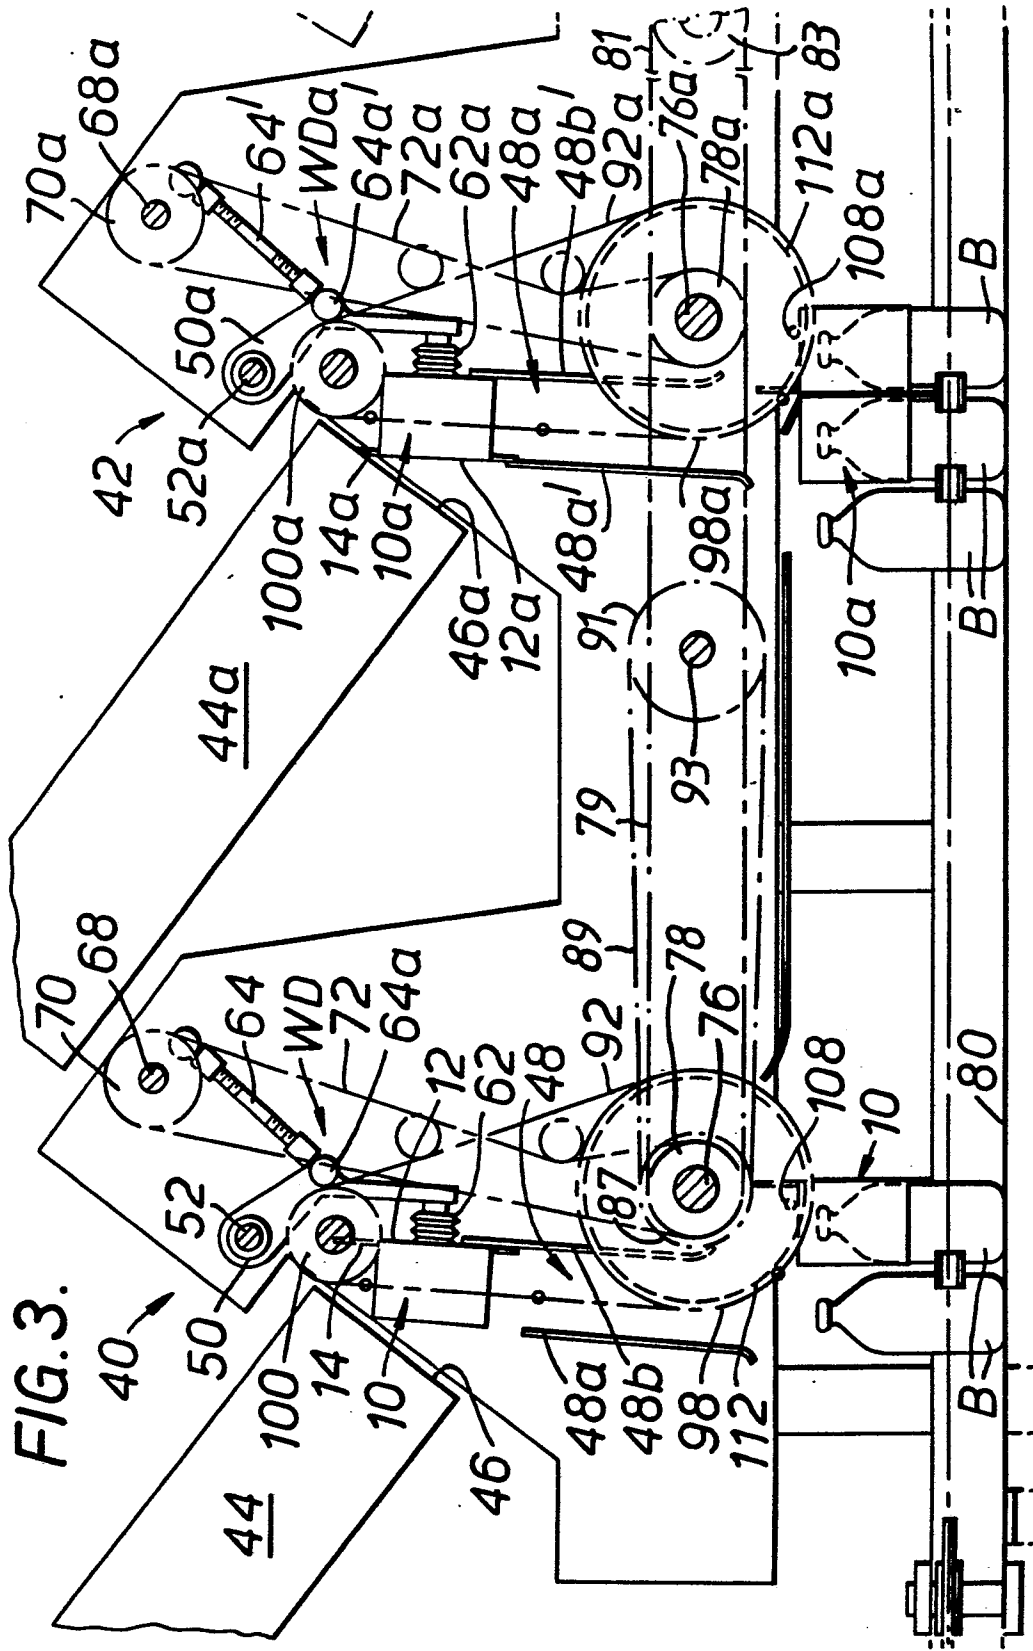


$\frac{3}{12}$

FIG. 3A.

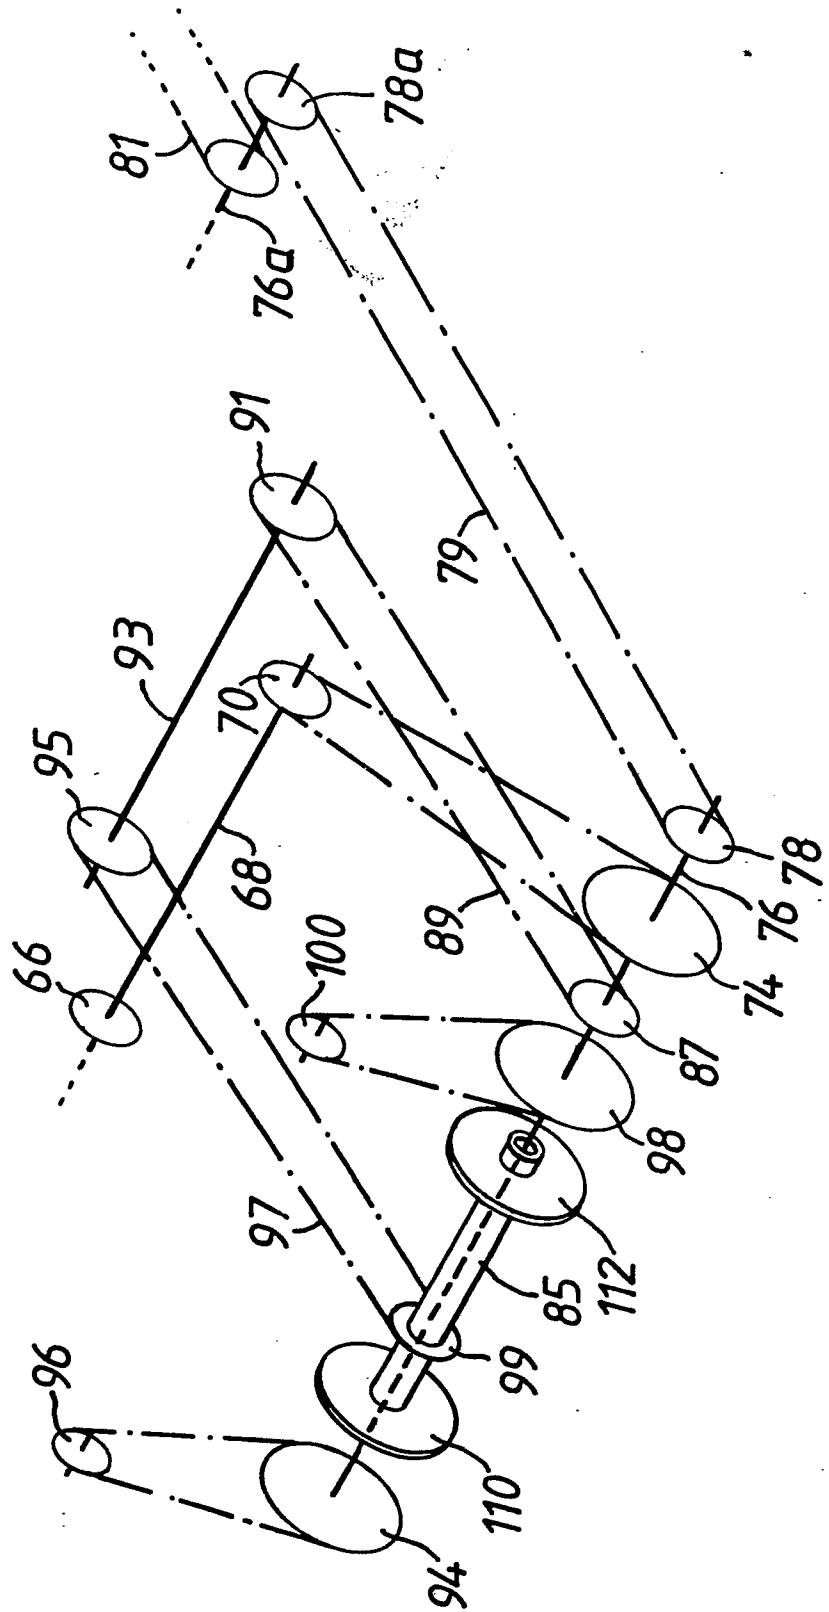


4/7

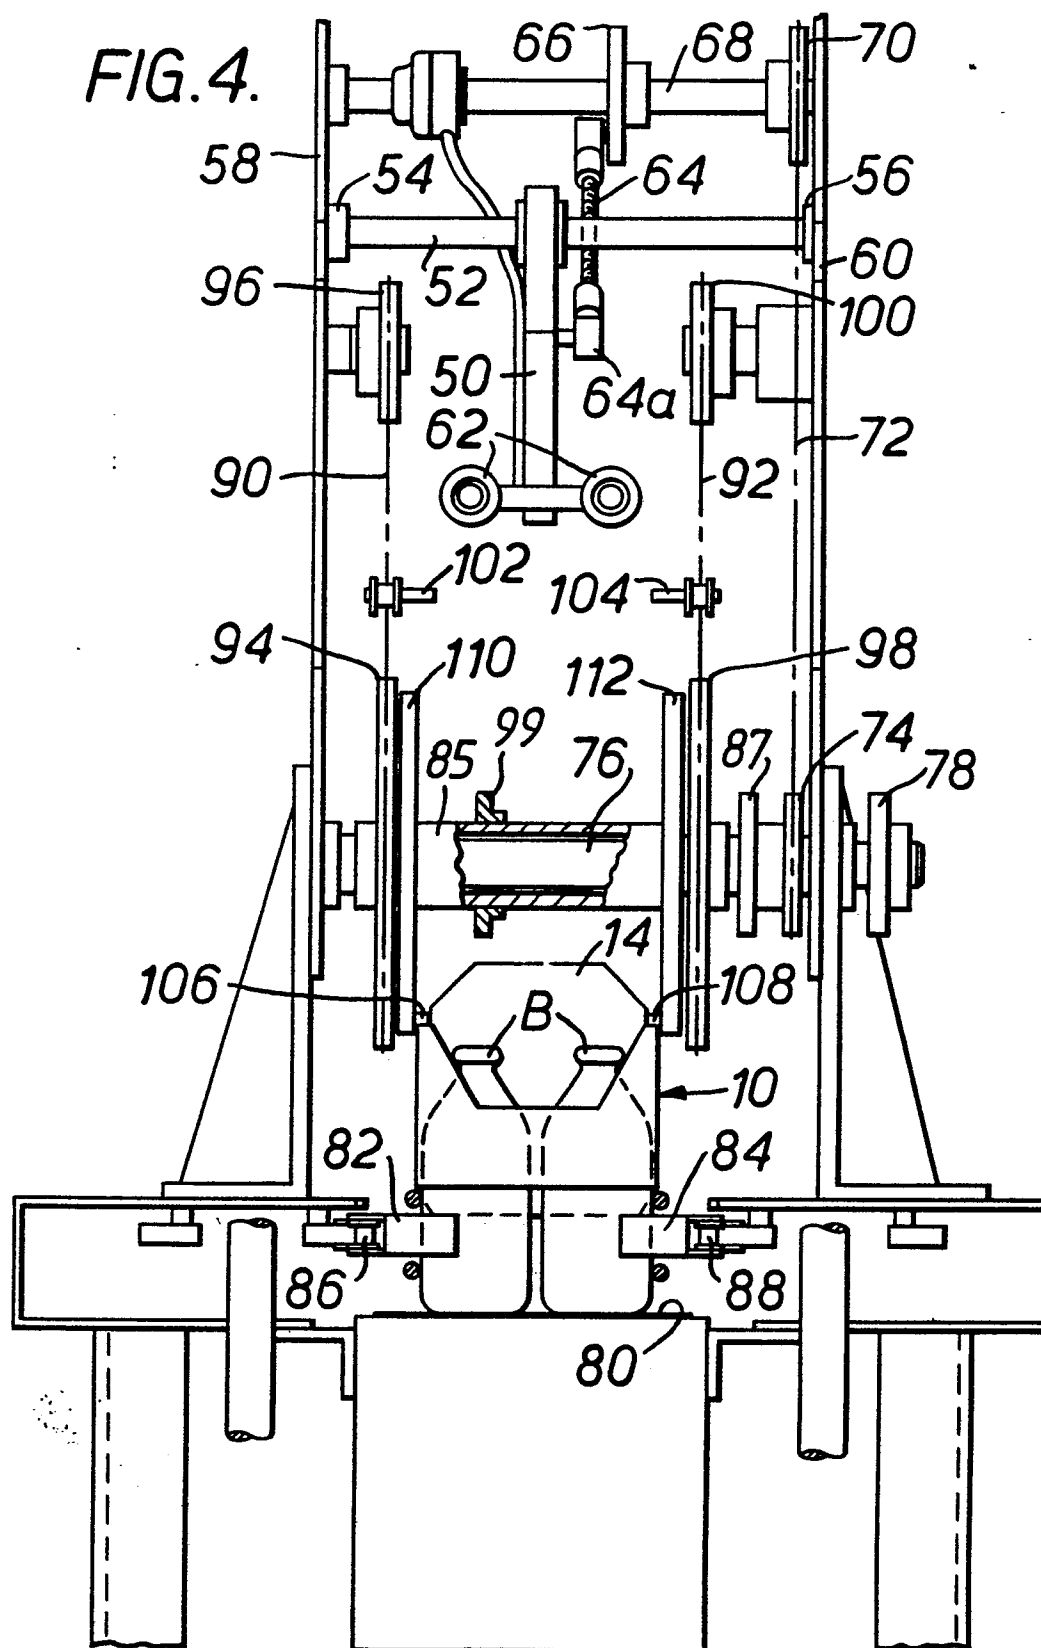



7/7

0148545

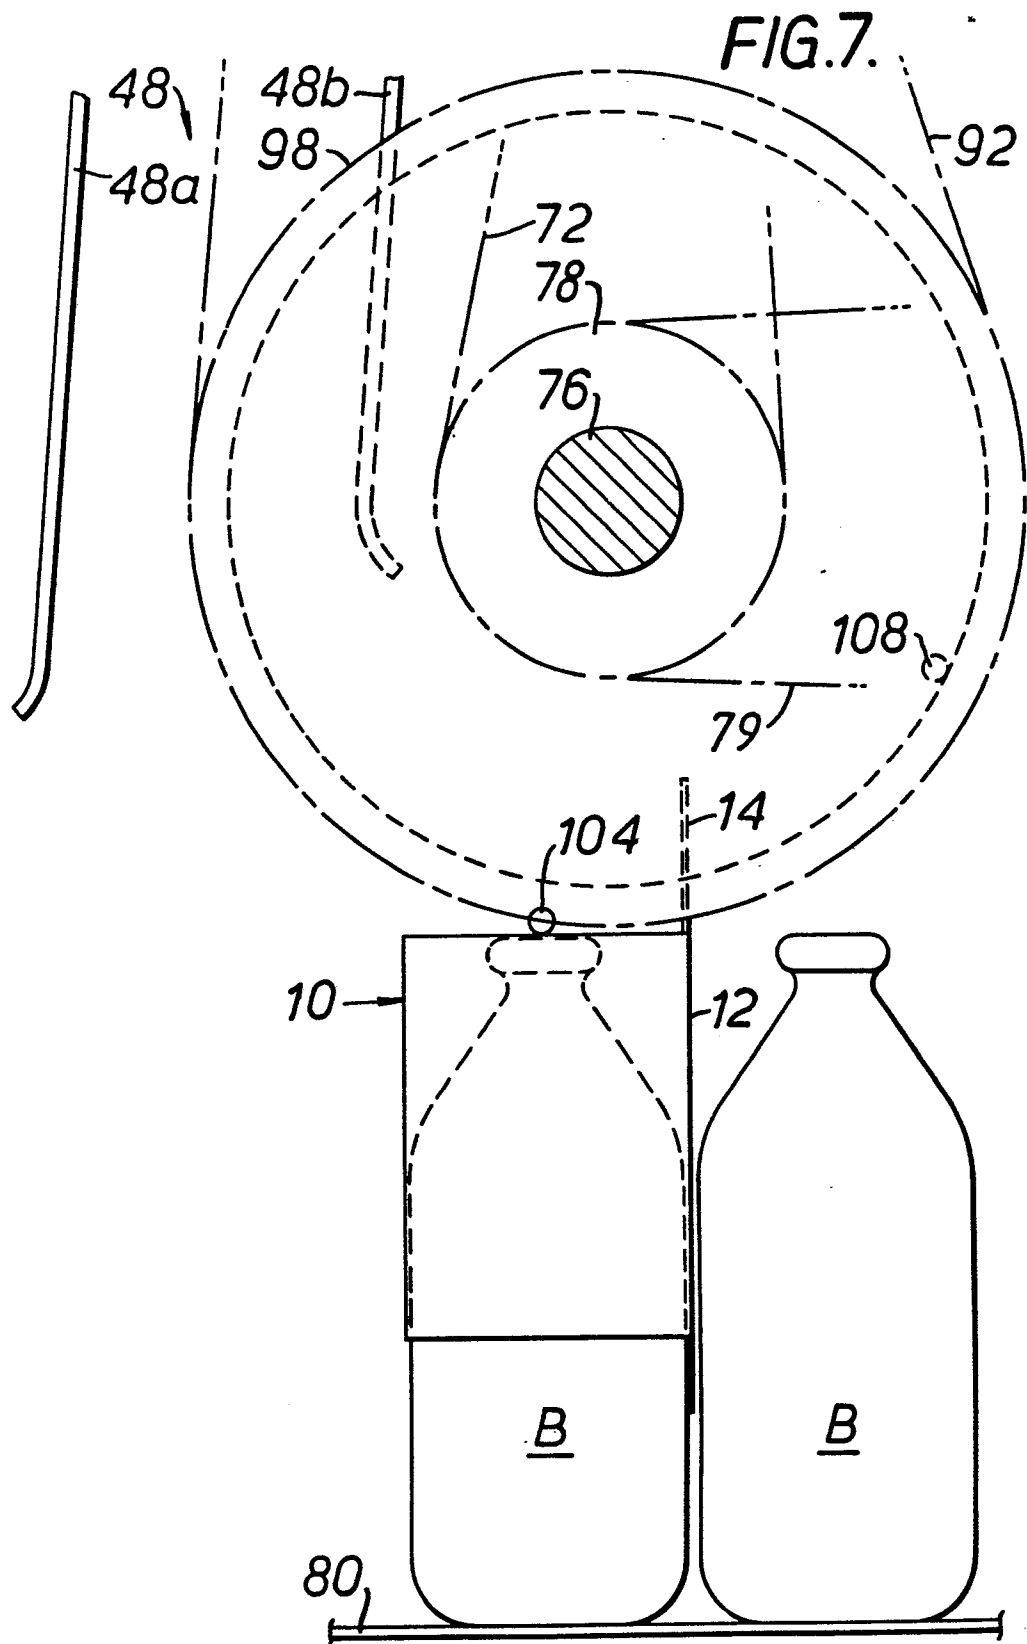



European Patent
Office

EUROPEAN SEARCH REPORT

0148545

Application number

EP 84 30 0147

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. ³)
X	US-A-3 965 643 (OLINKRAFT) * Column 9, line 10 - column 11, line 20; figures 5-17 * -----	1,2	B 65 B 21/24
			TECHNICAL FIELDS SEARCHED (Int. Cl. ³)
			B 65 B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 07-09-1984	Examiner CLAEYS H.C.M.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	