



Europäisches Patentamt
European Patent Office
Office européen des brevets

⑪ Publication number:

0 149 889
B1

⑫

EUROPEAN PATENT SPECIFICATION

④⑤ Date of publication of patent specification: **31.01.90**

⑥① Int. Cl.⁵: **B 65 D 3/22**

⑦① Application number: **84307706.6**

⑦② Date of filing: **08.11.84**

⑤④ **Multi-layered container.**

③⑧ Priority: **19.01.84 GB 8401373**
20.07.84 US 632871

④③ Date of publication of application:
31.07.85 Bulletin 85/31

④⑤ Publication of the grant of the patent:
31.01.90 Bulletin 90/05

⑧④ Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

⑤⑥ References cited:
EP-A-0 098 904
CH-A- 428 411
DE-A-2 425 564
GB-A-2 025 328
US-A-3 717 074

⑦③ Proprietor: **MACMILLAN BLOEDEL LIMITED**
1075 West Georgia Street
Vancouver British Columbia V6E 3R9 (CA)

⑦② Inventor: **Gillard, David F.**
17403 - 101 Avenue
Surrey British Columbia, V3T 4W2 (CA)

⑦④ Representative: **Heath, Derek James et al**
BROMHEAD & CO. 19 Buckingham Street
London WC2N 6EF (GB)

EP 0 149 889 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Description

The present invention relates to a multi-layered flat walled bulk storage bin or container made from collapsible or compressible sheet material such as corrugated board. More particularly, the invention relates to a container formed by winding compressible sheet layers to form a sleeve having flat sides with corners between adjacent sides crushing the corners and having at least two opposite corners bevelled to allow the sleeve to be easily collapsed for storing when not in use.

The conventional manner of making multi-layered containers was to glue several corrugated layers together, score a fold line in the appropriate places and then fold the layers to form a sleeve. This method formed a container with a butt joint, where the two ends butt together or a lap joint where the two ends overlap. Examples of such containers are described in US—A—3717074 and EP—A1—0 098 904 which is a document according to Article 54(3) EPC.

Corrugated board containers may also be made by winding corrugated layers about a mandrel with flat sides and glueing each layer to the adjacent layer to form a sleeve. Containers made by this method have no butt or lap joints and therefore use less material than more conventional containers or bulk bins having the same strength properties.

An example of making a container or bulk bin by winding layers about a mandrel is disclosed in our co-pending U.S. Patent Application 397,990 filed July 14, 1982. In this method, layers are convolutely wound about a mandrel, the corners of each layer are compressed on the mandrel as the container is wound which results in a container that can be more easily folded for storage purposes after it has been made.

The most obvious corner profile for a container is a right angle, which provides maximum concentration of pressure during the crushing step, thus giving the most efficient means of crushing. However, it has been found that the right angle corner would not fold flat when the corner was folded to the fully closed position and had a spring back which required a counter force to flatten it. It has now been found that a multi-layered sleeve can be made by providing bevels on opposing corners of the sleeve and compressing the layers at these bevelled corners, and according to the invention a container is characterised by the features (a) and (b) set fourth in Claim 1. These crushed bevelled corners avoid the spring back that sometime occurs when the finished sleeves are flattened for storage purposes.

The flattened sleeves provide a distinct advantage for conveying, printing and other processes that are applied to the sleeves after forming.

This foldability is a labour saving feature allowing container sleeves to be folded easily by one person without applying force.

The present invention provides a container comprising a multi-layered sleeve having at least

four flat sides with corners between adjacent sides, the sleeve having compressible sheet layers with crushed corners and at least two opposing corners being bevelled corners to allow the sleeve to be collapsed, so fully closed corners have adjacent sides substantially parallel without additional force applied.

The present invention also provides in one embodiment, for the bevelled corners to have an inside bevel width (y), substantially proportional to caliper (x) of the container, where the caliper represents the thickness of the container. In a preferred embodiment, the width (y) is determined according to the formula $y=0.0294+0.347x$, and the width is to the nearest 3.15 mm.

In other embodiments of the invention, four flat sides are provided with two opposing corners being bevelled corners and the bevels are in the range of about 6.3 mm to 19 mm wide. The container is preferably made from a flat sheet liner on the inside and multiple layers of single face corrugated sheet wound on the liner. In other embodiments, all the corners of the container are bevelled and caps are provided to fit over the top and the bottom of the sleeve.

The bevelled corners in a preferred embodiment have a flat inside bevelled surface, at an angle of in the range of about 30° to 60°, preferably 45°. In other embodiments, the inside bevelled surface may be multifaceted or curved.

In drawings which illustrated embodiment of the invention and accompany this specification.

Fig. 1 is an isometric view of a multi-layered container according to one embodiment of the present invention,

Fig. 2 is a top plan view of the container shown in Fig. 1,

Figs. 3, 4 and 5 are detailed plan views showing a right angled corner known in the prior art of a four layered container in the right angled position and fully opened and fully closed folded positions,

Figs. 6, 7 and 8 are detailed plan views showing a preferred bevelled corner of a four layered container in the right angled position and fully opened and fully closed folded positions,

Figs. 9, 10 and 11 are detailed plan views showing a bevelled corner of a four layered container having a wide bevel width, in the right angled position and fully open and fully closed folded position,

Figs. 12, 13 and 14 are detailed plan views showing a preferred bevelled corner of a seven layered container in the right angled position and fully opened and fully closed folded positions,

Fig. 15 is a graph showing the preferred relationship between the inside bevel width (y) and the container caliper (x).

Figs 16, 17, 18 and 19 are detailed plan views showing different types of bevels.

An example of a container 10 or bulk bin is shown in Fig. 1 having three layers 11 of single face corrugated sheet wrapped around a flat sheet liner 12. Whereas a single face corrugated

sheet is illustrated in this embodiment, a foam backed paper would also be applicable depending on the requirements of the container 10. Two bevelled corners 13 oppose each other on the container 10 and have crushed layers at each bevelled corner 13. The other two opposing corners 14 are not bevelled but are crushed so that the container can be folded and lie flat.

The thickness of the sides of the container is referred to as the "Caliper", sometimes as the Board Caliper. Although two bevelled corners 13, provided they are opposite, allow easy folding of the container, it is preferred to bevel all four corners because then it does not matter which corners are fully folded, the container folds flat about all corners.

A bottom cap 15 is shown at the bottom of the container 10 which exactly fits around the sleeve in the open position. The cap 15 is made in a conventional manner, generally of not more than two corrugated layers. A top cap (not shown) may be provided to close the container if required. The top cap may be identical in construction to the bottom cap 15.

Fig. 2 shows a four layered container 10 having four sides and having four bevelled corners 13. Each of the bevelled corners 13 is compressed across the bevel so that the container 10 may be collapsed with either of the pairs of opposing corners opening out to the open or fully closed folded position. Whereas both examples in Figs. 1 and 2 illustrate containers having four sides, it will be understood that a container may be made with more than four sides.

A six or eight sided container may be made with at least two opposite corners being bevelled corners so that the container could be collapsed with the bevelled corners forming the fully closed folded position.

Figs. 3, 4 and 5 illustrate a right angle corner as is known in the prior art. Four layers 11 of single face corrugated sheet layers are formed about a flat sheet liner 12 and glued to each other to form a container. The corners 14 shown right angled in Fig. 3 are compressed. As can be seen in Fig. 4, when the container is folded flat, the corner 14 opens out to the open position to allow the three layers to bend about the flat sheet liner 12 without causing any delamination of the glued layers or between the first layer 11 and the liner 12.

Fig. 5 illustrates a fully closed folded position of the corner 14, and as can be seen, the corner does not fully fold so the inside flat sheet liner 12 is tapered. To make the two inner surfaces parallel, it is necessary to apply pressure to overcome the spring back force. The inability of the corner to fully fold may result from the liner 12 being pinched together at the corner 14. Forming this type of corner completely closed can result in severe damage and loss of structural integrity to the corner and hence to the container.

Figs. 6, 7 and 8 illustrate a four layered container with a bevelled corner 13 having a preferred inside bevel width (y), as shown in Fig. 6 in the right angled position. As can be seen, the

crushing of the layers 11 extends the crushed portion to not just the bevel but right across the face of the bevel so that there is a predominately flat bevelled surface at the corner of the container. When the container is folded flat with the bevelled corner fully opened to the opened position, as shown in Fig. 7, the bevel does not appear. However, when the corner is fully closed as can be seen in Fig. 8, the bevel provides a triangular space 16 which allows the two inner surfaces of the liner 12 to remain substantially flat and parallel to each other. This is the preferred embodiment of the corner and requires no force on the container to fold flat.

Figs. 9, 10 and 11 illustrate another example of a bevel, where the inner bevel width is too wide for the caliper of the container. The right angled position shown in Fig. 9 and the fully open position shown in Fig. 10 are satisfactory, but when the corner is in the fully closed position as shown in Fig. 11, the inside surfaces of the liner 12 do not lie flat and parallel to each other, but are tapered in the reverse direction to that shown in Fig. 5 which has no bevel or too small a bevel. This configuration is acceptable for folding as no spring back occurs, and the container lies flat, however it takes up more space, and the space is wasted when the containers are laid flat one upon the other.

Figs. 12, 13 and 14 illustrate a seven layered container having a preferred inside bevel width (y) as shown in Fig. 12 in the right angled position. Fig. 14 illustrates clearly that the inside surfaces of the liner 12 lie flat and substantially parallel when the corner is in the fully closed position.

To determine the relationship between caliper (x) and inside bevel width (y), a number of tests were carried out on different board calipers for three ply up to ten ply and for different types of corrugated board and it was found that the overall caliper (x) was the key factor, not the different types of ply. The bevel should preferably be flat when the corner was in the fully opened position, and form a triangular space 16 when in the fully closed position. Fig. 15 shows that the relationship between inside bevel width (y) and caliper (x) follows a straight line, and the relationship was according to the formula: $y=0.0294+0.347x$.

It is preferable for ease of manufacture to make the inside width of the bevel to a certain series of fixed increments so that standard mandrels can be used. In one embodiment, the inside bevel widths were made to 6.3 mm, 9.3 mm, 12.7 mm, 15.7 mm, 19 mm. Figures 6, 7 and 8 illustrate 6.3 mm bevel for a container having a caliper of 15 mm.

The shape of the bevels are preferably flat on the inside and at an angle of 45° for symmetry as shown in Fig. 16. However a range of angles, from 30° to 60° can be used as shown in Fig. 17. Furthermore a multifaceted bevel as shown in Fig. 18 may be used or a curved bevel as shown in Fig. 19. The width of bevel (y) is measured between the points on the adjacent inside faces where a change occurs from the flat surface. The shape of

the bevel is arranged so that the inside of the bevel lies flat when the corner is in the fully open position.

The width of the bevel depends partly on the shape and size of the container and the size and the number of layers. It has been found that up to at least six layers can be formed into a container and the preferred bevel is in the order of 6.3 mm although bevels of up to 19 mm may be applicable in certain cases. The measurements represent the inside face width of the bevel. The bevelled corner gives the correct corner geometry necessary to result in corner creases which are easy to fold.

The unique corner requires less labour and less force to fold the box and results in less spring back from a folded sleeve. Furthermore, the sleeve has superior strength due to structural integrity because the corners are not damaged by folding. When a sleeve is wound on a mandrel, the container has no butt joints or cap joints, therefore there are no areas for weaknesses as in corrugated containers made by conventional methods having butt or lap joints. The sleeve may be trimmed by a sawcut at both edges thus providing a perfectly square sleeve for fitting into a cap 15 as shown in Figure 1. The layered container also provides a superior panel rigidity and thus better resists bulging.

The bevelled corners can be utilized with containers made by crushing the corners after the container has been formed, known as "post" crushing or in the case where layers are wound about a mandrel, each layer is crushed as it is wound in accordance with co-pending U.S. Patent Application 397,990 known as "continuous" crushing.

Claims

1. A container (10) of compressible multi-layer material having, between adjacent portions of the container, at least two crushed corners each having two spaced-apart creases on the inner surface of the container and an inner bevel surface between the creases with each crease connecting an adjacent flat side inner surface to the bevelled surface, characterised in that:

a) the container is formed from a sleeve (10) having at least four flat sides with crushed corners (13) between adjacent sides, the sleeve being made by winding a compressible sheet in layers (11) around a mandrel with the layers at the said corners (13) being crushed by being compressed on the mandrel; and

b) a substantially triangular cross-section space (16) bounded by an inner bevel surface and by adjacent portions of the flat side inner surface of adjacent sides of the sleeve is formed at two or more opposing corners (13) of the sleeve when those corners are in a fully-closed position to allow the sleeve to be collapsed to a knocked-down condition with the major portions of the inner surface (12) on the adjacent sides of the sleeve being substantially parallel and in face-to-face contact without additional force applied to hold

the sleeve in the collapsed knocked-down condition.

2. A container according to claim 1, characterised in that the bevelled corners (13) are in the range of about 6.3 mm to 19 mm.

3. A container according to claim 1 or claim 2, characterised in that the bevelled corners (13) have an inside bevel width (y) substantially proportional to caliper (x) of the container based on the formula $y=0.0294+0.347x$.

4. A container according to any one of claims 1—3, characterised in that the inner surface of the sleeve is formed by a flat sheet liner (12), and multiple layers (11) of compressible material are composed of a single-face corrugated sheet wound on the liner.

5. A container according to any one of claims 1—4 characterised in that all the corners (13) between the sides of the container are bevelled corners.

Patentansprüche

1. Behälter (10) aus zusammendrückbarem, mehrschichtigem Werkstoff, der zwischen benachbarten Behälterabschnitten wenigstens zwei gequetschte Ecken aufweist, von denen jede zwei beabstandete Quetschfaltlinien an der Innenfläche des Behälters und eine innere Schrägfläche zwischen den Quetschfaltlinien aufweist, wobei jede Quetschfaltlinie die Innenfläche einer benachbarten ebenen Seite mit der Schrägfläche verbindet, dadurch gekennzeichnet, daß

a) der Behälter ausgehend von einer Hülle (10) geformt ist, welche wenigstens vier ebene Seiten mit gequetschten Ecken (13) zwischen benachbarten Seiten aufweist, wobei die Hülle durch Wickeln einer zusammendrückbaren Bahn in Schichten (11) um einen Dorn hergestellt wird, dabei die Schichten an den Ecken (13) durch Zusammendrücken auf dem Dorn gequetscht werden, und

(b) an zwei oder mehreren sich gegenüberliegenden Ecken (13) der Hülle in der vollen Schließstellung dieser Ecken ein Raum (16) von im wesentlichen dreieckförmiger Querschnittsgestalt gebildet ist, welcher von einer inneren Schrägfläche und benachbarten Abschnitten der Innenflächen von benachbarten ebenen Seiten der Hülle begrenzt ist, damit die Hülle in einen zusammengelegten Zustand zusammengefaltet werden kann, wobei die größeren Abschnitte der Innenfläche (12) an den benachbarten Seiten der Hülle im wesentlichen parallel sind und Fläche-Fläche-Berührung haben, ohne daß eine zusätzliche Kraft ausgeübt wird, um die Hülle im zusammengelegten Zustand zu halten.

2. Behälter nach Anspruch 1, dadurch gekennzeichnet, daß die Schrägecken (13) im Bereich von etwa 6,3 mm bis 19 mm liegen.

3. Behälter nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß die Schrägecken (13) eine innere Anstrahlungsbreite (y) haben, die der Stärke (x) des Behälters nach der Formel $y=0.0294+0,347x$ im wesentlichen proportional ist.

4. Behälter nach einem der Ansprüche 1 bis 3, dadurch gekennzeichnet, daß die Innenfläche der Hülle von einer ebenen Bahndecke (12) gebildet ist, und Mehrfachschichten (11) aus zusammen-drückbarem Werkstoff aus einer auf die Decke gewickelten Einfach-Wellenbahn zusammengesetzt sind.

5. Behälter nach einem der Ansprüche 1 bis 4, dadurch gekennzeichnet, daß alle Ecken (13) zwischen den Seiten des Behälters Schrägecken sind.

Revendications

1. Récipient (10) en matériau multicouche compressible, comprenant, entre des portions voisines du récipient, au moins deux encoignures écrasées présentant chacune deux fronces, espacées l'une de l'autre, sur la surface intérieure du récipient et une surface intérieure en biseau entre les fronces, chaque fronce reliant une surface latérale intérieure plate voisine à la surface en biseau, caractérisé en ce que:

a) le récipient est formé à partir d'un fourreau (12) présentant au moins quatre côtés plats avec des encoignures écrasées (13) entre les côtés voisins, le fourreau étant fabriqué en enroulant en couches (11) une feuille compressible autour d'un mandrin, les couches étant, auxdites encoignures (13), écrasées en étant comprimées sur le mandrin; et

b) un espace (16), de section droite sensiblement triangulaire, limité par une surface intérieur

en biseau et par des portions, voisines, des surfaces latérales intérieures plates des côtés, voisins, du fourreau se forme à deux ou plus encoignures opposées (13) du fourreau lorsque ces encoignures sont en position complètement fermée pour permettre au fourreau de se replier en condition démontée, les majeures portions de la surface intérieure (12) des côtés, voisins, du fourreau étant sensiblement parallèles et en contact face à face sans qu'il soit nécessaire d'appliquer une force pour maintenir le fourreau dans la condition repliée démontée.

2. Récipient selon la revendication 1, caractérisé en ce que les encoignures en biseau (13) sont de l'ordre d'environ 6,3 mm à 1. mm.

3. Récipient selon la revendication 1 ou la revendication 2, caractérisé en ce que les encoignures en biseau (13) ont une largeur intérieure (y) du biseau sensiblement proportionnelle au calibre (x) du récipient sur la base de la formule $y=0,0294+0,347x$.

4. Récipient selon l'une quelconque des revendications 1 à 3, caractérisé en ce que la surface intérieure du fourreau est formée par une doublure en feuille plate (12); et en ce que des couches multiples (11) de matériau compressible sont composées d'une feuille ondulée simple face enroulée sur la doublure.

5. Récipient selon l'une quelconque des revendications 1 à 4, caractérisé en ce que toutes les encoignures (13) entre les côtes du récipient sont des encoignures en biseau.

35

40

45



50




55




60




65



5

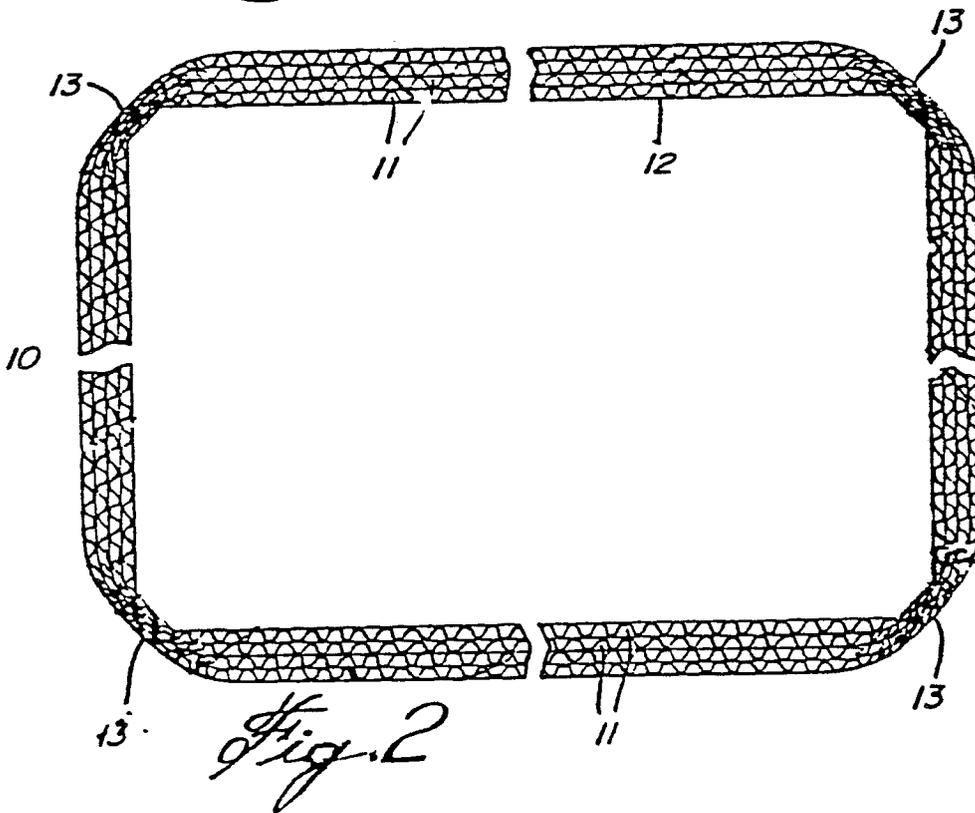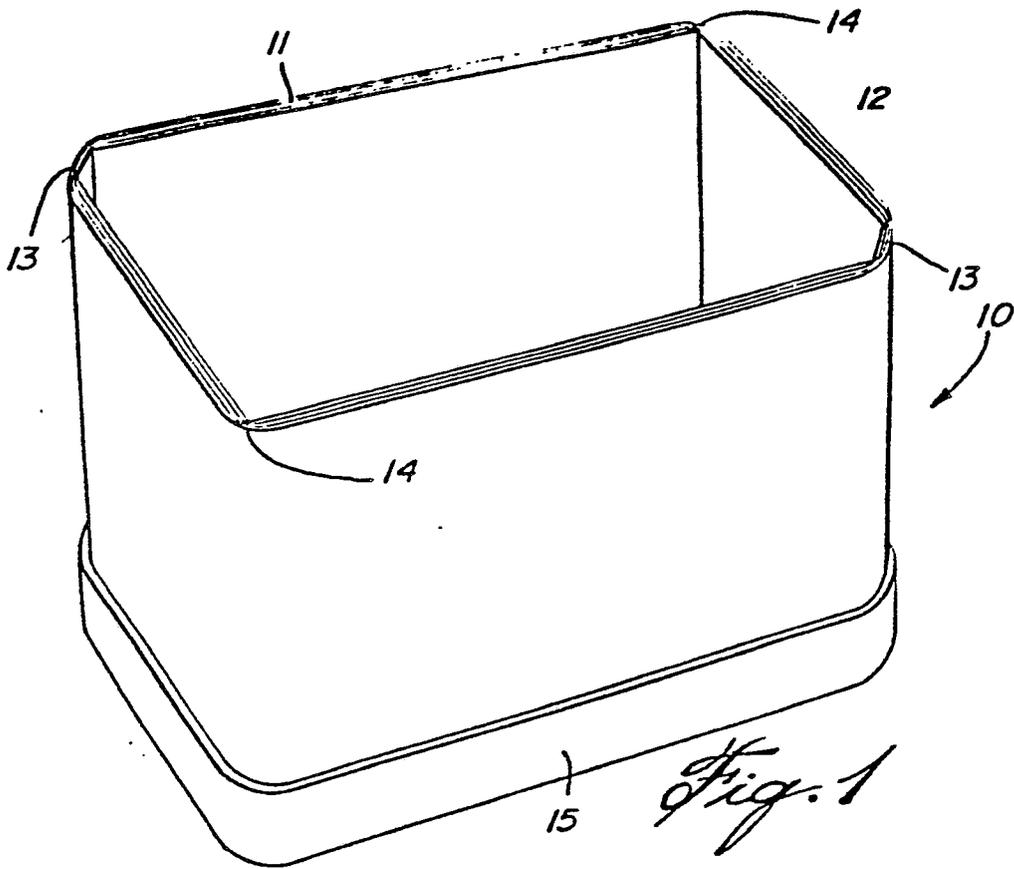


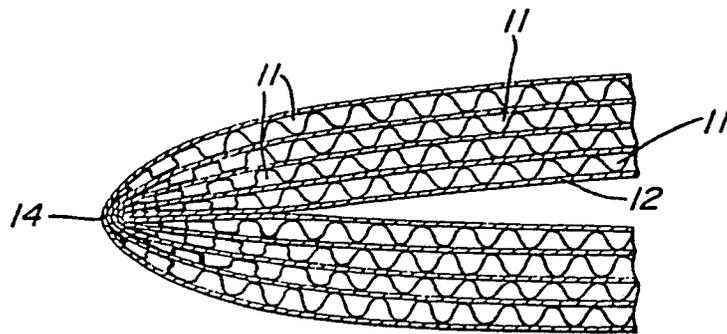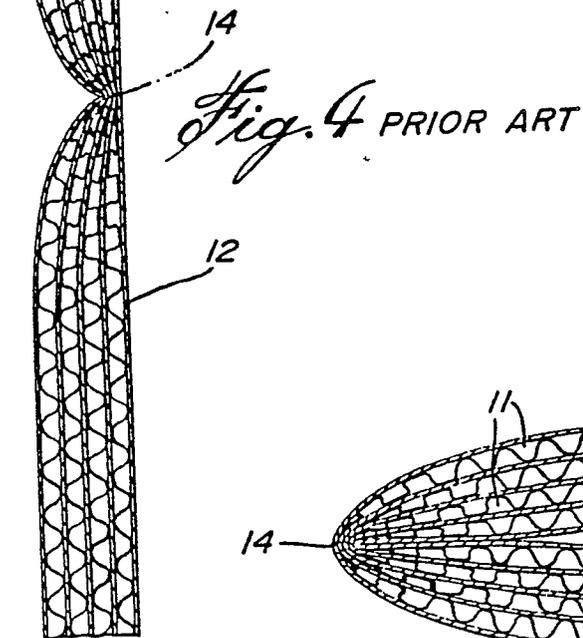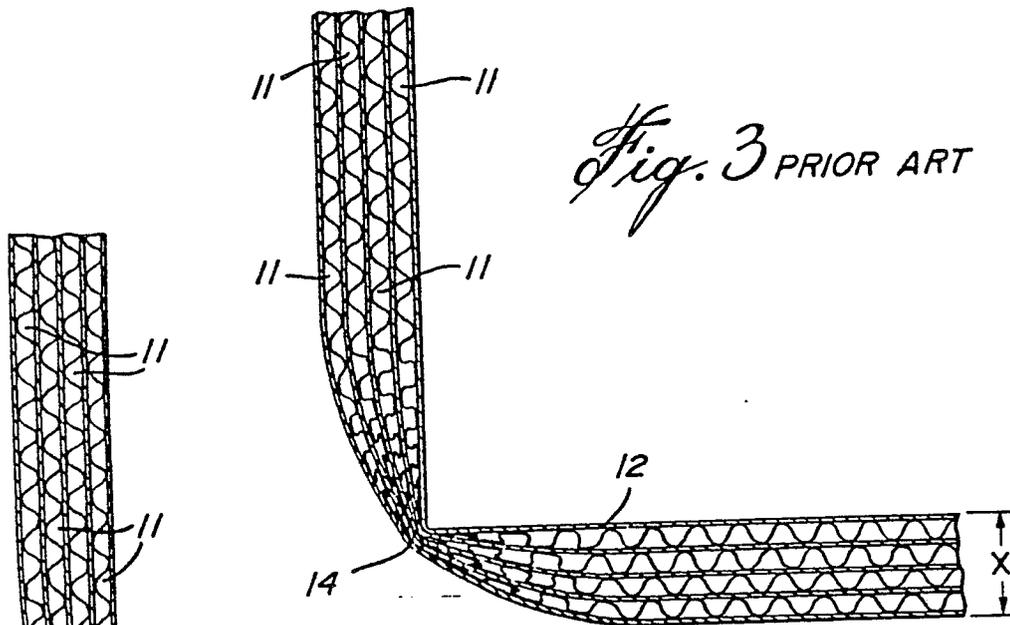

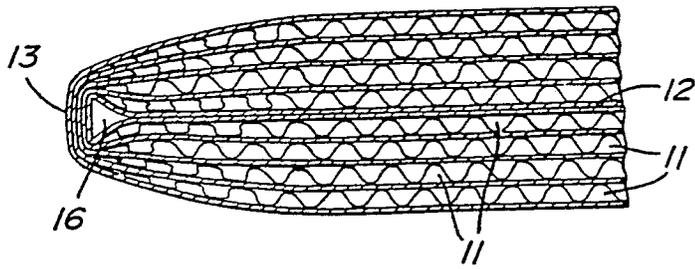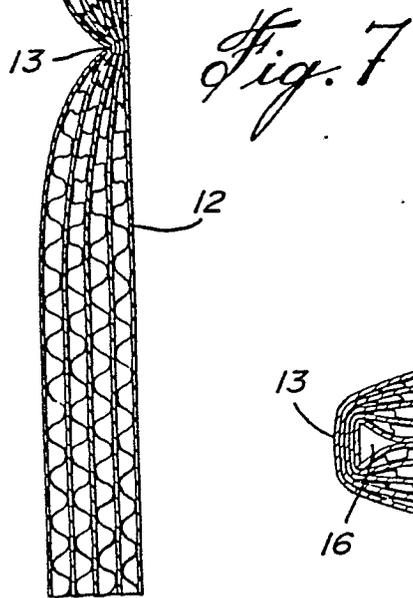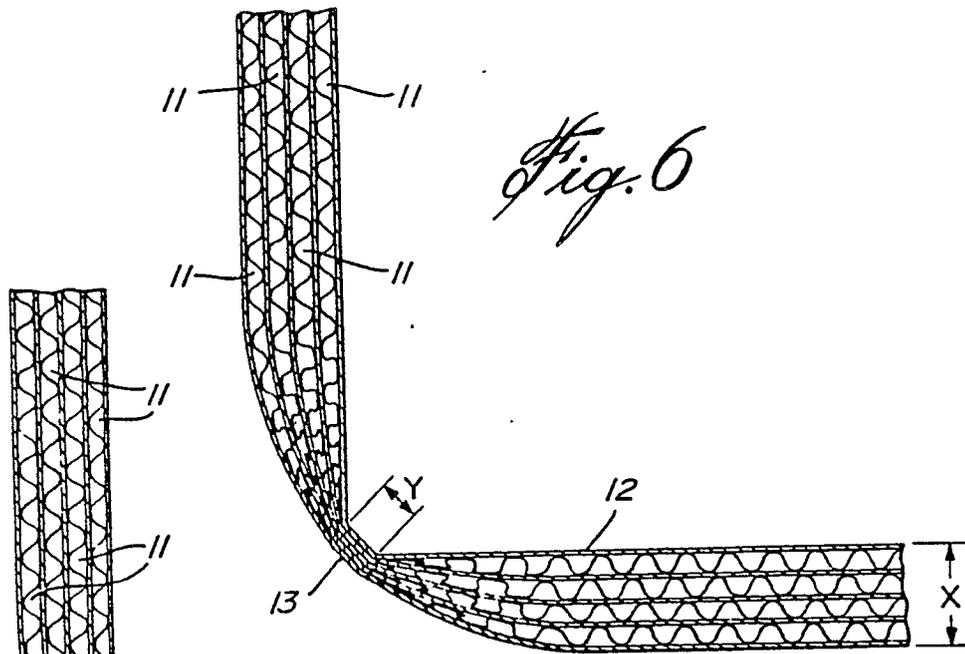

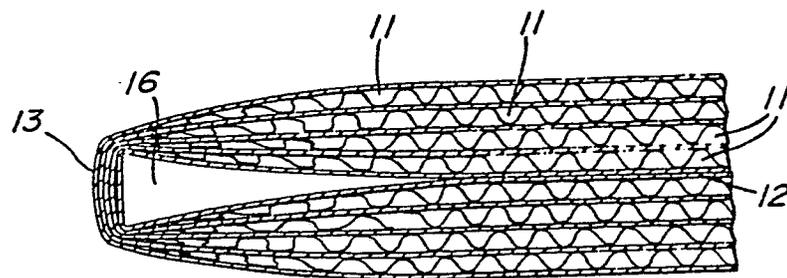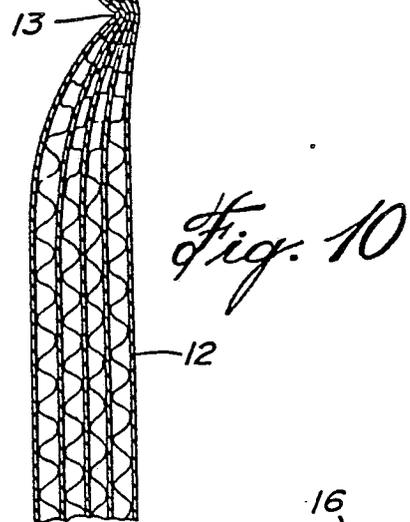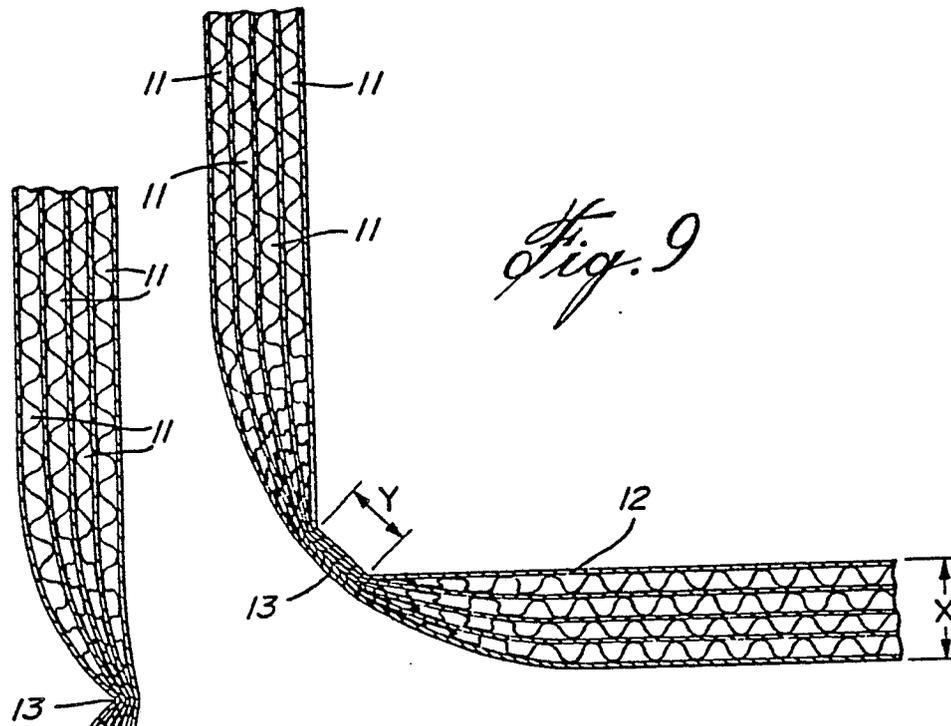

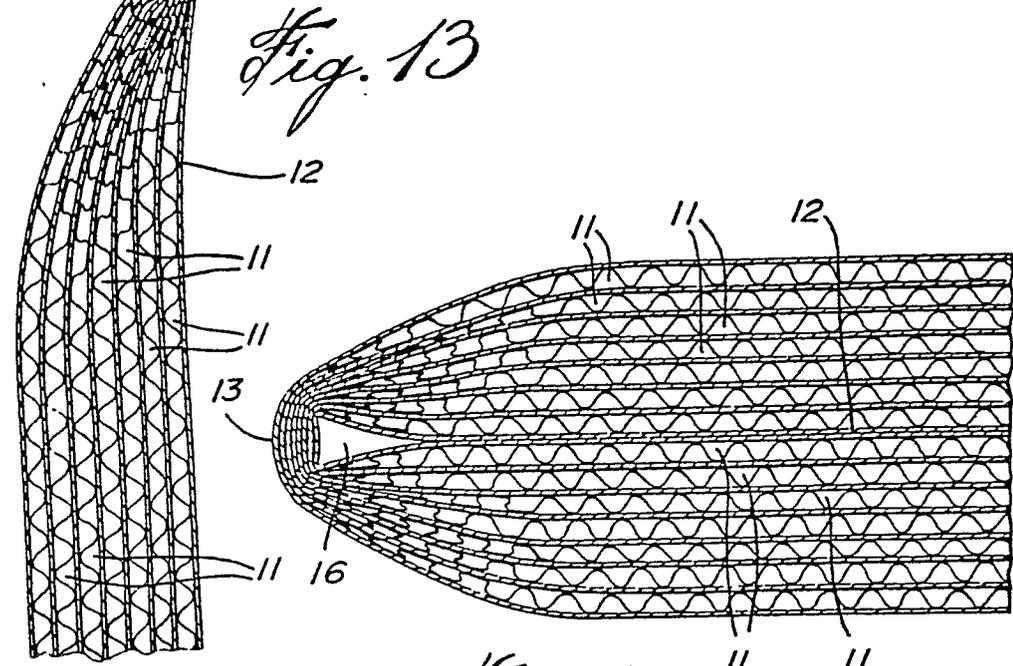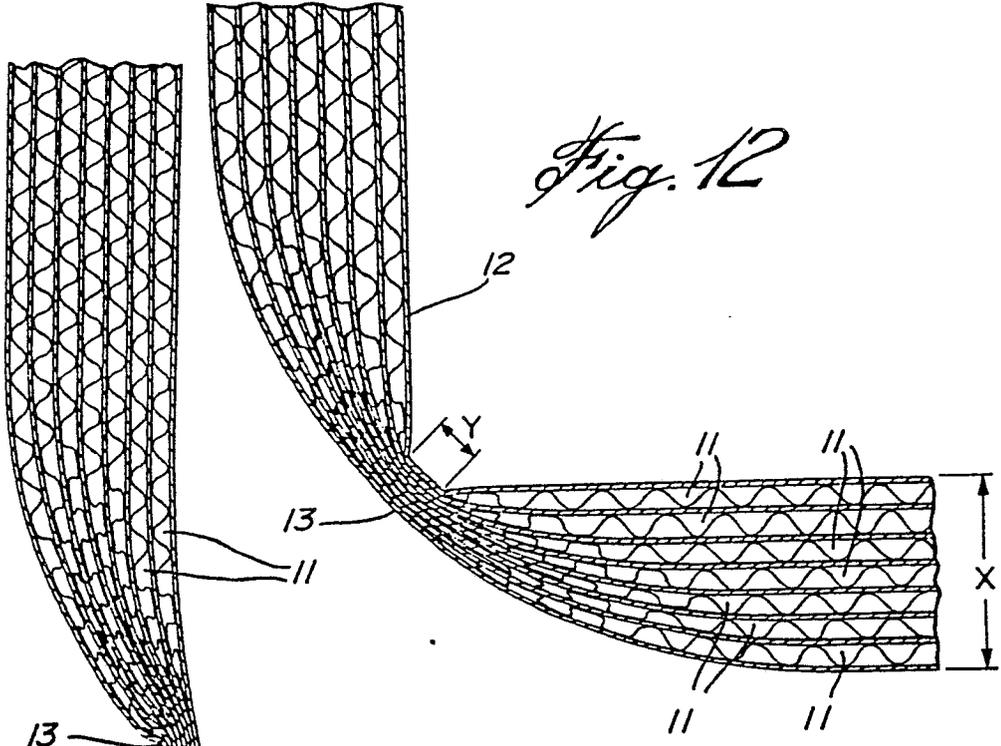

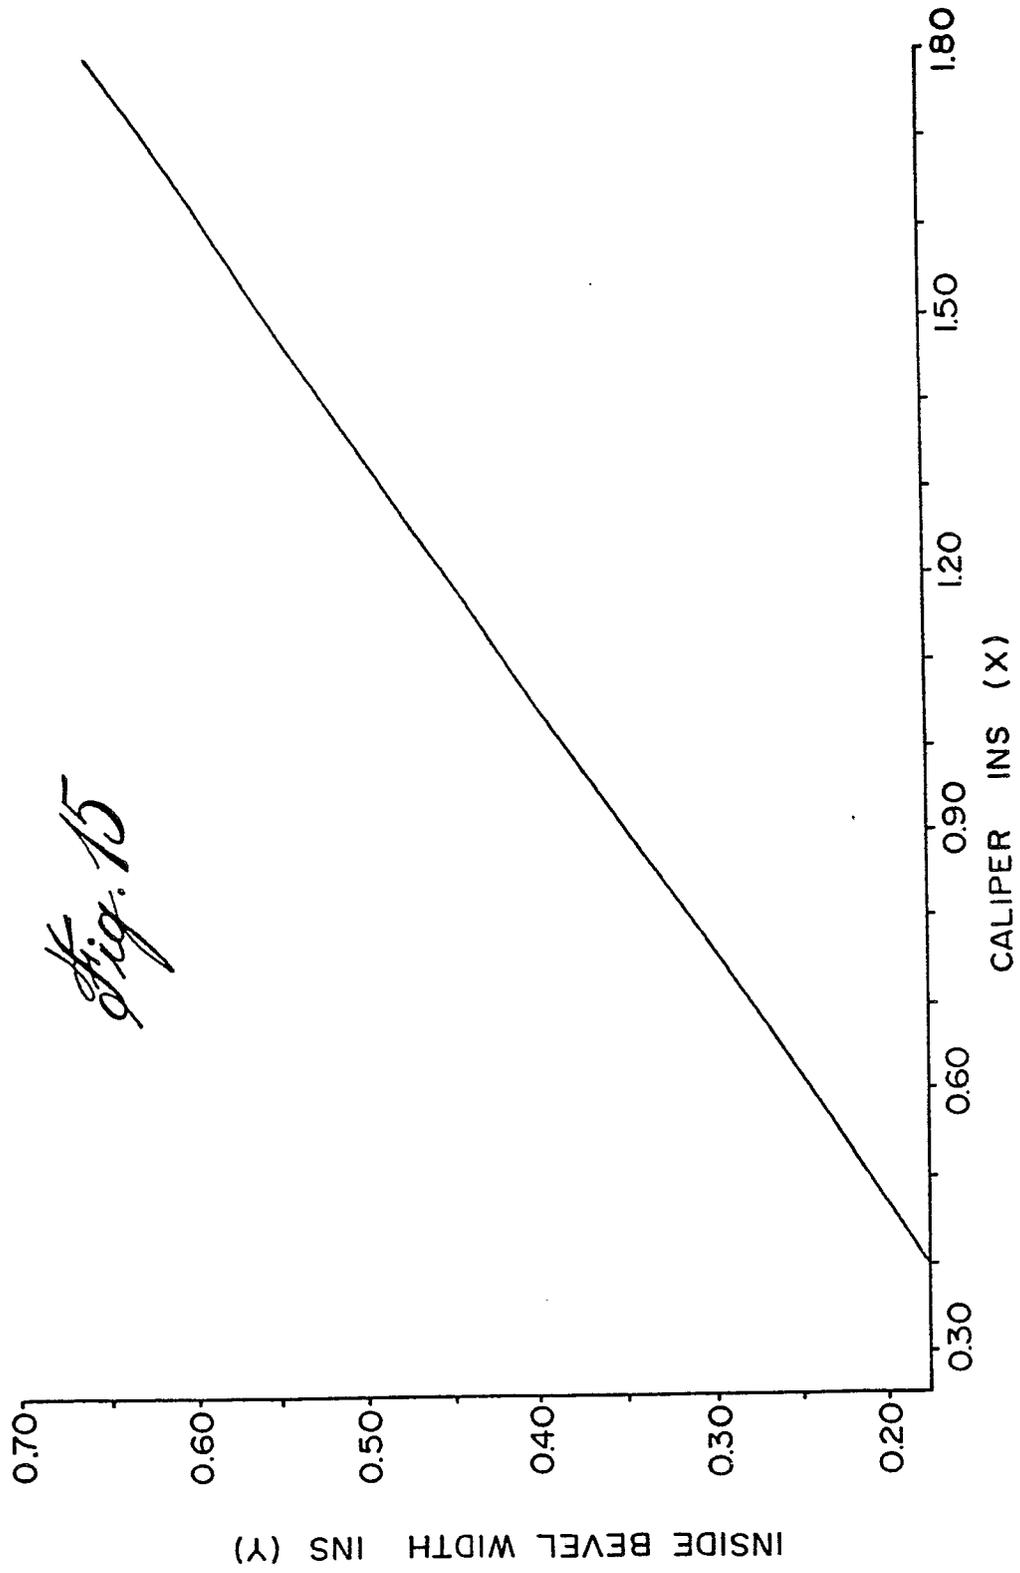

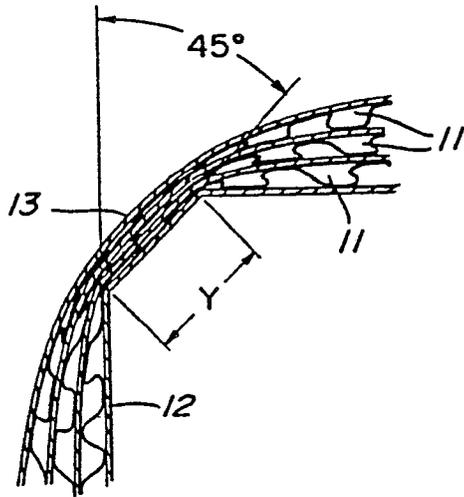


Fig. 16

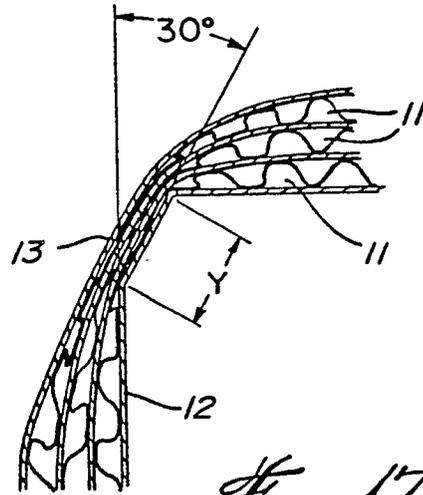


Fig. 17

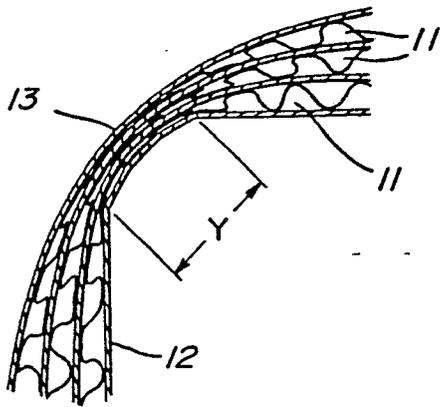


Fig. 18

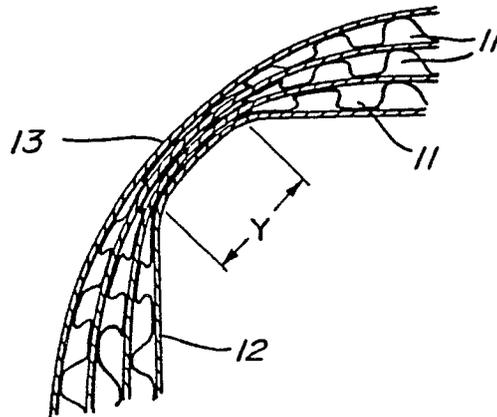


Fig. 19