

⑫ **EUROPEAN PATENT SPECIFICATION**

- ⑬ Date of publication of patent specification: **05.04.89** ⑮ Int. Cl.⁴: **F 27 B 7/20, C 04 B 7/43,**
⑭ Application number: **85300618.7** **F 27 D 13/00**
⑯ Date of filing: **30.01.85**

⑰ **Dust preheating system with preliminary calciner.**

⑱ Priority: **07.09.84 JP 188394/84**
30.05.84 JP 110130/84
15.02.84 JP 27936/84

⑲ Date of publication of application:
28.08.85 Bulletin 85/35

⑳ Publication of the grant of the patent:
05.04.89 Bulletin 89/14

㉑ Designated Contracting States:
CH DE FR GB LI

㉒ References cited:
FR-A-2 384 727
FR-A-2 464 742
GB-A-2 108 013
JP-A-57 034 054

㉓ Proprietor: **KABUSHIKI KAISHA KOBE SEIKO**
SHO
3-18 Wakinohama-cho 1-chome Chuo-ku
Kobe 651 (JP)

㉔ Inventor: **Fujisawa, Tetsuo**
8-4-12 Uenodori
Nada-ku Kobe (JP)

㉕ Representative: **Wright, Hugh Ronald et al**
Brookes & Martin 52/54 High Holborn
London WC1V 6SE (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Description

This invention relates to a preheating system with a preliminary calciner suitable for preheating and preliminary calcination of raw materials such as cement, alumina, limestone and the like, and preferably to a dust preheating system with a preliminary calcination furnace with improved performance in both the combustion of fuel and preliminary calcination of the raw material dust in the preliminary calcination furnace.

Figure 1 shows a flowchart of a typical dust burning system using cement as a raw material, in which the arrows with solid lines indicate the flow direction of gases and the arrows with broken lines indicate the flow direction of raw material dust.

This system comprises a preheater/preliminary calciner 1 consisting of dust separators C1 to C4 in the form of cyclones or the like and a preliminary calcination furnace 2, a main combustion furnace 3 in the form of a rotary kiln or the like, and a clinker cooler 4. The powdery raw material which is fed through a chute 5 successively flows down through the first to third stage cyclones C1 to C3, while hot exhaust gases from the combustion furnace 3 and the preliminary calcination furnace 2 are sucked by an induced draft fan 8, so as to flow up through the preheater 1. Therefore, heat exchange between the powdery raw material and hot gas is repeated in the duct 7 and cyclones C1 to C3. The preheated powdery raw material is fed to the preliminary calcination furnace 2 through a chute 14 from cyclone C3 of the second lowest stage of the preheater 1.

Combustion takes place in the preliminary calcination furnace 2 which receives hot secondary combustion air from the clinker cooler 4 through a combustion air duct 13 in addition to the supply of a fuel and primary combustion air from a burner 6a. By the heat of this combustion and of the exhaust gases from the combustion furnace 3, the powdery raw material which is charged through the chute 14 is preliminarily calcined. The powdery raw material which has undergone the preliminary calcination through the preliminary calcination furnace 2 is fed to the lowermost cyclone C4 along with the combustion exhaust gas, where the dust is separated from the combustion gas and sent to the combustion furnace 3 through the chute 15. The powdery material is subjected to a necessary heat treatment in the combustion furnace 3 and formed into clinker by the heat resulting from the combustion of a fuel which is supplied by a burner 6b located at the end of the furnace 3, discharging the clinker to the cooler 4 for cooling.

The clinker cooling air is supplied by a forced draft fan 10 and part of the hot air resulting from heat exchange with the clinker is circulated to the preliminary calcination furnace 2 and combustion furnace 3, excess air being discharged by the draft fan 9. The clinker which is discharged from the clinker cooler 4 is transferred to the next processing stage by a conveying means 11.

Figure 2 is a schematic illustration showing details of the preheater arrangement to explain the construction and functions of the preliminary calcination furnace.

Thus in the particular example shown, the preliminary calcination furnace 2 is in the form of an upright cylinder, which is provided with a combustion chamber 2a and a mixing chamber 2b below and above respectively a constriction 2c. The lower end of the combustion chamber 2a is formed as an inverted truncated-cone shape with its sectional area gradually reducing in the downward direction, terminating in an opening 2d which is connected to the combustion furnace 3 through an end cover 12. A combustion air duct 13 which passes the combustion air from the clinker cooler 4 is radially or tangentially connected to an inlet port 2e provided in a lower portion of the side wall of the combustion chamber 2a, and a burner 6a which supplies the fuel is embedded in a position just above the inlet port 2e, the burner 6a pointing toward the hot combustion air which is drawn into the combustion chamber 2a through opening 2d. Further a chute 14 for the preheated material from the cyclone C3 in the second lowest stage of the preheater 1 is connected to a position above the burner 6a, and directed toward a combustion zone 16 which is formed in the combustion chamber 2a by the fuel supplied from the burner 6a.

On the other hand, a combustion gas outlet 2f of the mixing chamber 2b is connected to the cyclone C4 in the final stage of the preheater 1.

In operation, the preheated dust from the cyclone C3 (the second one from the lowest) of the preheater 1 is fed into the combustion chamber 2a of the preliminary calcination furnace 2 through the chute 14, and mixed and stirred in the combustion chamber 2a by the ascending exhaust gas from the combustion furnace 3, which gas flow fluidises the dust from the chute 14. The combustion air which is drawn from the clinker cooler 4 is introduced into the gas flows through the combustion air duct 13, while a fuel is supplied from the burner 6a above the air supply port 2e through which the combustion air duct 13 is opened into the combustion chamber 2a, thereby effecting combustion of the fluidised dust.

Accordingly, the powdery raw material which is fed into the combustion chamber 2a through the preheated dust chute 14 undergoes a preliminary calcination reaction by absorption of the heat resulting from combustion of the fuel and the remaining heat of the exhaust gas from the combustion furnace 3, passes through the constriction 2c along with the combustion gas, and is then admitted into the mixing chamber 2b. After completely burning the combustible components of the combustion gas in the mixing chamber 2b, the material is discharged into the cyclone C4 in the lowermost stage of the preheater 1 through the opening 2f.

To burn the fuel in the preliminary calcination

chamber in the above described manner and to effect the combustion as well as possible, the burner 6a is mounted in such a manner as to point toward the hot air flowing into the combustion chamber 2a.

In a case where the preheated raw material is fed toward the combustion zone 16 in the combustion chamber 2a from the second lowest cyclone C3 of the preheating section 1, as shown in Figs. 1 and 2, there is an advantage in that the preliminary calcination reaction can be accelerated since the powdery raw material is promptly heated to a high temperature in the combustion zone. However, it increases the concentration of the powdery raw material in the combustion zone 16, consequently lowering the combustion temperature in the combustion zone 16 and resulting in an unsatisfactory quality of combustion.

On the other hand, in a case where the preheating dust chute 14 which supplies the preliminary calcination furnace 2 with the preheated raw material from the second lowest cyclone C3 is connected to the combustion chamber 2a at a position spaced from the combustion zone 16 in the circumferential direction, namely, to a position 14' indicated by a broken line in Fig. 2, the concentration of the powdery raw material in the combustion zone 16 becomes relatively lean and the quality of combustion of the fuel is improved by a rise in temperature in the combustion zone 16. However, since the heating of the powdery raw material in the combustion chamber 2a becomes slower, the preliminary calcination reactions proceed at a lower velocity, resulting in an inferior preliminary calcination quality and production of an increased amount of NOx (nitrogen oxides) due to the temperature rise in the combustion zone 16.

Under these circumstances, the present inventor previously proposed a dust preheating system with a preliminary calcination furnace in which, as disclosed in Japanese Patent Application no. 55-105643 (see Japanese Laid Open Patent Application no. 57-34054), the preheated material to be fed to the preliminary calcination furnace is divided into two parts, one part being fed to the combustion zone and the other part being diverted away from the combustion zone and toward the exhaust gas which flows into the preliminary calcination furnace from the combustion furnace. Such a system adjusts the temperature of the combustion atmosphere to improve the preliminary calcination quality and suppresses the production of NOx while maintaining satisfactory combustion quality. In this previously proposed system, the part of the powdery raw material which is fed to the combustion zone undergoes a preliminary calcination reaction to a sufficient degree, but the other part which is fed to a region remote from the combustion zone does not. Thus, the system still needs improvements to provide an overall good quality preliminary calcination.

The present invention provides a dust preheat-

ing apparatus with a preliminary calcination furnace, including a preheater having a plurality of dust separators connected one to another to form a corresponding number of preheating stages, a preliminary calcination furnace connected between the preheater and a combustion furnace and connected through a combustion air duct to a clinker cooler located on the downstream side of the combustion furnace, the preliminary calcination furnace being provided with an independent fuel feed and connected through a combustion gas duct to the lowermost dust separator for calcined material, the second lowest one of the dust separators of the preheater having a dust outlet connected to an inlet of the combustion furnace, characterised in that: at least the second lowest one of the dust separators comprises a cyclone separator having an opening in a side wall thereof, and provided with a fine dust outlet in a lower portion thereof, and a coarse dust separating pocket hermetically connected to the opening and having a coarse dust outlet in a lower portion thereof, the fine and coarse dust outlets being connected to fine and coarse dust feed ports formed at spaced positions of the preliminary calcination furnace, said coarse dust feed port is so positioned as to pass the coarse dust through a relatively high temperature zone of said calcination furnace, and said fine dust feed port is so positioned as to pass the fine dust through a relatively low temperature zone of said calcination furnace.

The above and other features and advantages of the invention will become apparent from the following description and appended claims, taken in conjunction with the accompanying drawings, Figures 3 onwards of which show by way of example some preferred embodiments of the invention.

In the accompanying drawings:

Figure 1, already referred to, is a schematic illustration of a typical conventional system for burning powdery raw material such as cement;

Figure 2, already referred to, is a schematic illustration of a preheating section of the burning system in Figure 1, including a preliminary calcination furnace;

Figure 3 is a schematic illustration showing the construction of a preheating system including a preliminary calcination furnace in accordance with a first embodiment of the present invention;

Figure 4 is a schematic plan view of a second lowest dust separator of the preheating system from the direction of arrows A-A in Fig. 3;

Figure 5 is a schematic cross-section of the same dust separator from the direction of arrows B-B in Fig. 3;

Figure 6 is a view similar to Figure 3 but showing another embodiment of the invention;

Figure 7 is a schematic illustration of a modification of the preheating system of the invention;

Figure 8 is a sectional view taken on line A'-A' of Figure 7;

Figure 9 is a schematic illustration of another embodiment of the invention;

Figure 10 is a sectional view taken on line A''-A'' of Figure 9;

Figure 11 is a schematic illustration of a modification of the embodiment shown in Figure 9; and

Figure 12 is a schematic illustration of still another embodiment of the invention.

Hereafter, the invention is described more particularly by way of preferred embodiments shown in Figure 3 and onwards. However, it is to be understood that the invention is not limited to the specific arrangements shown and it is possible to employ other arrangements or to add modifications or alterations thereto without departing from the scope of the invention defined by the claims.

Referring to Figure 3, there is schematically shown the arrangement of a dust preheating system with a preliminary calcination furnace, embodying the present invention, which is almost the same as the known preheating system of Figure 2 with regard to the basic construction of the preliminary calcination furnace 2, the manner in which the exhaust gas from a combustion furnace 3 is introduced into the preliminary calcination furnace, the manner of supplying combustion air through the combustion air duct 13, the flow of the combustion gas in the preliminary calcination furnace 2, and the manner of discharging the combustion gas from the preliminary combustion furnace 2.

Referring to Figures 3 to 5, the description is directed to the novel details of the first embodiment of the invention to explain its features in construction. The second lowest dust separator C3 of the preheating system, which supplies preheated raw material to the preliminary calcination furnace 2, includes a fine dust separating means consisting of, for example, a cyclone 21 having a slot or opening 22 in the side wall thereof, and a coarse dust separating means consisting of a collector in the form of a pocket 20 fixed to the side wall of the cyclone 21 in communication with the opening 22 and having a coarse dust discharge port 24 at the bottom of a lower funnel portion 23 of an inverted truncated-cone shape. The dust discharge port 24 of the pocket portion 20 is connected through a coarse dust chute 14a to the combustion chamber 2d by a coarse duct feed port 114a positioned close to the air feed port 2e and immediately above the burner 6a, in such a manner as to direct the coarse dust toward the combustion zone 16. On the other hand, a fine dust discharge port 26 of the cyclone 21 is connected to a fine dust chute 14b opening into the combustion chamber 2a at a fine dust feed port 14b which is positioned circumferentially spaced from the burner 6a of the combustion chamber 2a.

With the foregoing arrangement, the powder raw material which is collected by the upper dust separator of the preheater is fed to a gas duct 17 through a dust chute 18 and then passed to the intermediate stage cyclone C3, by the hot gas stream discharged from the lowermost cyclone C4. While being whirled around the cylindrical

inner wall by the vortex which is generated in the dust separator C3, relatively large particles of the powder material are thrown into the pocket 20 through the opening 22 thereof under the influence of the centrifugal force, and are discharged through the dust discharge port 24 of the pocket 20 and into the coarse dust chute 14a toward the combustion zone 16 formed in the combustion chamber 2a. On the other hand, fine particles which are not trapped in the pocket 20 are entrained on the vortex gas streams, flow further down along the inner surface of the inverted conical portion 25 of the cyclone 21, and pass through the fine dust chute 14b into the preliminary calcination furnace 2 at a point away from the combustion zone 16. In this instance, the proportions of fine and coarse particles to be separated by the cyclone C3 can be adjusted by a suitable adjusting means, for example, by a distributor plate 27 which is rotatable about a shaft 28 and located in a recess 21' on the upstream side of the opening 22.

Accordingly, only a part of the powdery raw material to be fed to the preliminary calcination furnace 2 is fed into the combustion zone 16, which is formed in the combustion chamber 2a, and its proportion can be adjusted so that it becomes possible to maintain the combustion atmosphere in the zone 16 at a suitable high temperature and to suppress the production of NOx. Although the preheated material which is fed to the combustion zone in the above described manner mostly consists of coarse particles which are less susceptible to the preliminary calcination reactions, it can be calcined at a high reaction velocity in the combustion zone at a relatively high temperature.

On the other hand, the fine dust which is fed to a region remote from the combustion zone 16 undergoes the preliminary calcination by relatively slow heating, being uniformly preliminarily calcined irrespective of its particle size before it is discharged to the lowermost cyclone C4 from the mixing chamber 2b. Thus, the quality of preliminary calcination as a whole can be improved to a considerable degree, giving satisfactory results in both combustion and preliminary calcination qualities.

The cyclone with pocket attached and which is integrally provided with a coarse/fine dust separator has an advantage in that the use of a compact pocket as a coarse dust separator provides a freedom in design with regard to its position in the circumferential direction of the cyclone; in addition there are functional advantages such as a high separation efficiency and suppression of excessive pressure losses. It is therefore suitable for use as the second lowest dust separator in the preheating system of the invention.

Shown schematically in Figure 6 is a modified system comprising another embodiment of the invention, which differs from the foregoing first embodiment on the following points.

As illustrated, the pocket 20 which constitutes

the coarse particle separating means for the second lowest dust separator C3 of the preheating system 1 is provided on the inverted truncated-conical portion 25 and serves as a fine particle separating means. The amount and the particle size distribution of the separated dust fraction may be adjusted by selecting the height of the pocket 20 on the cylindrical or inverted truncated-conical portion of the cyclone 21.

The coarse particles of the preheated raw material trapped in the pocket 20 are fed to the combustion air duct 13 through the coarse dust chute 14a and are introduced into the combustion zone 16 of the combustion chamber 2a along with the combustion air. A dust supply means which is adapted to feed the coarse particles by means of the combustion air in this manner disperses the coarse particles relatively uniformly over the combustion zone 16, and also has the advantage of uniformising the temperature distribution in the combustion zone.

On the other hand, the fine particles which are collected by the cyclone 21 are passed through the fine dust chute 14b and introduced into the preliminary calcination furnace at a position in the vicinity of the inverted truncated-conical portion at the lower end of the preliminary calcination furnace so as to be fed directly into the exhaust gas from the combustion furnace 3. Accordingly, this is effective for an abrupt temperature drop of the combustion furnace exhaust which flows into the preliminary calcination furnace. As indicated in phantom, the fine dust may be fed to the exhaust gas duct 19 through a fine dust chute 14c or directly to the inverted truncated-conical portion at the lower end of the preliminary calcination furnace. In any case, the fine dust is easily fluidised by the exhaust gas from the combustion furnace 3, and is prevented from dropping directly into the end cover 12 without passing through the preliminary calcination furnace. In a case where a fuel feed 6c is additionally provided in the side wall of the inverted truncated-conical portion to form a reducing gas atmosphere in the inverted conical portion for the purpose of decomposing NO_x components of the combustion exhaust gas flowing up from the gas inlet port 2d at the lower end, the catalytic effect of the powdery raw material to reduce the NO_x is increased due to the large contact area of the fine particles.

In practice, the number of the combustion air ducts, the type, the number and the location of the fuel feed(s) may be selected depending upon the kind of the powdery raw material to be processed.

Referring to Figs. 7 and 8, there is shown a modification in which a coarse dust chute 136 extending from the lower end of a pocket housing 134 on the second lowest cyclone C3 is connected to a coarse dust feed port 137 in the side wall of the combustion chamber 102a of the preliminary calcination furnace 102. On the other hand, a fine dust chute 140 extending from the fine dust discharge port 138 at the lower end of the cyclone

C3 is connected to a fine dust feed port 139 provided in the side wall of the mixing chamber 102b of the preliminary calcination furnace 102. If desired, the fine dust chute 140 may be connected to a plurality of fine dust feed ports 139, 139a, 139b and so forth which are provided in the side wall of the preliminary calcination furnace 102 at intervals along the flow direction as indicated by broken lines in Fig. 7. In such a case, at least one of the fine dust inlet ports is preferably located on the downstream side of the coarse dust feed port 137.

The combustion chamber 102a which is supplied with coarse dust is not susceptible to coating of the powdery material on its side wall, so that it is possible to raise the temperature of the atmosphere gas in the combustion chamber 102a thereby to accelerate the preliminary calcination reactions of the coarse particles as an exponential function of the absolute temperature. The temperature in the combustion chamber 102a can also be adjusted by feeding part of the fine dust in the chute 140 to the combustion chamber 102a.

Referring to Figs. 9 and 10, there is shown a further embodiment of the invention, employing a preliminary calcination furnace 217 which is provided with two constricted orifice portions 223a and 223b defining a mixing chamber 217a, an upper calcination chamber 217b and a lower calcination chamber 217c, each having a lower end of an inverted truncated-conical shape. The upper and lower calcination chambers 217b and 217c are respectively provided with fuel feeds 224b and 224c, independently forming a preliminary calcination zone. The calcination furnace 217 is located as a whole over the inlet end cover 209 of the combustion furnace 203, and communicates with the inlet end cover 209 through the exhaust gas induction duct 225. In the same manner as in the foregoing embodiments, the uppermost mixing chamber 217a of the calcination furnace 217 is connected to a lowermost dust separator C4 which serves as a separator for calcined material and which has its dust discharge port connected to the combustion furnace 203 through a chute 227 and the end cover 209.

A pocket-like coarse dust separator 234 which is provided on the second lowest dust separator C3 has the same construction as in the foregoing embodiment and is connected to a coarse particle feed port 237 in the side wall of the lower calcination chamber 217c through a coarse dust chute 236. The fine dust outlet 238 of the dust separator C3 is connected to a fine particle feed port 239 through a fine dust chute 240. If necessary, the fine and coarse dust chutes 240 and 236 may intercommunicate through a branch chute 241 as indicated in phantom.

All of the combustion air which is extracted from the clinker cooler is supplied to the lower calcination chamber 217c through the combustion air duct 210 as in the foregoing embodiments. Accordingly, the exhaust gas from the combustion furnace 203 and hot air from the clinker cooler which are introduced into the lower

calcination chamber 217c through the exhaust gas duct 225 and combustion air duct 210 form a drift of the powdery material flowing through the upper calcination chamber 217b and mixing chamber 217a and through the combustion gas duct 226 into the dust separator C4, forming vortices therein. Then the drifting gas is discharged into the upper dust separator C2 through C3. On the other hand the powdery material which is collected by the upper dust separator C2 is fed to the gas duct 230 through the chute 231 and introduced into the dust separator C3, entrained in the combustion exhaust gas. In the dust separator C3, coarse particles of the powdery material are thrown into the pocket 234 and fed to the lower calcination chamber 217c through the coarse dust chute 236, while fine particles which have not been trapped in the pocket 234 are entrained in the vortex, flow down along the inner surface of the inverted truncated-conical portion of the dust separator C3, and are introduced into the upper calcination chamber 217b through the fine dust outlet 238 and fine dust chute 240.

On the other hand, as described hereinbefore, all of the combustion air from the clinker cooler is supplied to the lower calcination chamber 217c and carbon dioxide which is produced by the fuel and raw material in the upper calcination chamber 217b does not flow into the lower calcination chamber 217c. Therefore it becomes possible to reduce the partial pressure of carbon dioxide of the hot gas in the lower calcination chamber 217c, and thus to calcine at a higher reaction velocity the coarse dust which is fed to the lower calcination chamber 217c. Accordingly, the calcination reaction of the coarse dust which is fed to the lower calcination chamber 217c proceeds to a sufficient degree before the dust is carried into the upper calcination chamber 217b by the hot gas to undergo further calcination there together with fine dust. Calcination of the fine dust is relatively easy, so that it can be calcined in a short time period even in a hot gas with a high carbon dioxide concentration. Thus, the calcination reaction of all of the powdery raw material can be almost completed in the lower and upper calcinations chambers.

The calcined material which has undergone sufficient calcination in the above described manner is then fed through the combustion gas duct 226 into the dust separator C4, where the material is whirled and fed downward, under the influence of the centrifugal force resulting from the whirling action, to the chute 227 connected to the lower end of the dust separator C4 and to the combustion furnace 203 via end cover 209.

With the foregoing arrangement, the temperatures in the lower and upper calcination chambers 217c and 217b can be adjusted according to the amount of the fuel and/or raw material to be fed into the respective chambers. In this instance, the lower calcination chamber 217c which is supplied with coarse dust is not susceptible to coating of the powdery material on its side wall, so that it becomes possible to raise the atmosphere gas

temperature in that chamber to a level higher than in the upper calcination chamber 217b to increase the velocity of the calcination reaction of the coarse powder as an exponential function of the absolute temperature.

As mentioned hereinbefore, part of the fine dust may be supplied to the lower calcination chamber 217c through the chute 241 depending upon the temperature thereby to raise the combustion load in the lower calcination chamber 217c or on the contrary to drop the combustion load in the upper calcination chamber 217b.

Shown in Figure 11 is a modification which differs from the embodiment in Figure 9 in that the dust separator C4 which is connected to the mixing chamber 217a through the combustion gas duct 226 is also provided with a pocket-like coarse dust separator 242 and in that part of the hot air which is extracted from the clinker cooler through the combustion air duct 210 is supplied to the upper calcination chamber 217b through a branch duct 210'.

The coarse dust separator 242 on the cyclone C4 separates coarse particles which are more difficult to calcine, from the powdery material which has undergone calcination reactions to a substantial degree in the calcination furnace 217, and recirculates same to the lower calcination chamber 217c thereby to accelerate the calcination reactions all the more.

When part of the hot air from the cooler is shortcircuited to the upper calcination chamber 217b in this manner, the partial pressure of carbon dioxide in the hot gas in the lower calcination chamber 217c is increased slightly depending upon the air short-circuiting rate. However, due to a drop of the gas flow rate through the lower calcination chamber 217c, it becomes possible to reduce the sectional area of the lower calcination chamber 217c. In this case, although not shown, the branch duct 210' is preferably provided with a damper or the like which controls the flow rates of hot air to the upper and lower calcination chambers 217b and 217c for adjusting the carbon dioxide concentration in the lower calcination chamber 217c.

Although the preliminary calcination furnace 217 is erected on the end cover 209 of the combustion furnace 203 and the exhaust gas from the furnace 203 is introduced into the lower calcination chamber 217c through the bottom end thereof as a fluidising gas in the foregoing embodiments, the hot combustion air from the clinker cooler may be used to form the drifting fluidised bed instead of the exhaust gas from the combustion furnace 203. In such a case, the exhaust gas from the combustion furnace 203 is treated separately or directly introduced into the upper calcination chamber 217b. Any way, the arrangement in which the lower calcination chamber 217c is free of the furnace exhaust gas which contains a relatively high concentration of carbon dioxide permits one to lower the partial pressure of carbon dioxide in the lower calcination chamber 217c and therefore to accelerate the

preliminary calcination of the coarse dust even more.

In the embodiment of Figure 12, the combustion air duct 210'' is connected to the lower end of the preliminary calcination furnace 217' to blow into the lower calcination chamber 217c the hot combustion air from the clinker cooler as a fluidising gas, and an exhaust gas duct 225' is connected to the upper calcination chamber 217b to introduce thereinto the furnace exhaust gas.

Further, the preheating system of Figure 12 includes a fuel classifier 243 which is connected to the fuel feeds 224b and 224c for classifying the grained coal or other solid fuel which is supplied thereto. In the particular embodiment shown in Figure 12, a solid fuel which is pneumatically transferred through a pipe 244 is classified by the fuel classifier 243, and the fine fuel dust is entrained on the carrier air supplied to the fuel feeder 224b of the upper calcination chamber 217b, and the coarse fuel dust is supplied to the fuel feeder 224c of the lower calcination chamber 217c by gravity.

In the present embodiment, the combustion air which is used in the upper calcination chamber 217b is also admitted into the lower calcination chamber 217c, so that the combustion atmosphere in the lower calcination chamber 217c contains a high concentration of oxygen. Besides, as mentioned hereinbefore, the temperature in the lower calcination chamber 217c can be raised by adjusting the feed rate of the fuel and/or raw material to the lower calcination chamber 217c. Accordingly, the coarse fuel can be burned to a substantial degree in the lower calcination chamber 217c, and remaining combustible components flow into the upper calcination chamber 217b together with the combustion gas and completely burned there.

Claims

1. A dust preheating apparatus with a preliminary calcination furnace for powdery material, including a preheater having a plurality of dust separators (C1-C4) connected one to another to form a corresponding number of preheating stages, a preliminary calcination furnace (2) connected between said preheater (1) and a combustion furnace (3) and connected through a combustion air duct to a clinker cooler (4) located on the downstream side of said 1 combustion furnace (3), said preliminary calcination furnace (2) being provided with an independent fuel feed, (6a) and connected through a combustion gas duct (2f) to the lowermost dust separator (C4) for calcined material, the second lowest one of said dust separators (C3) of said preheater (1) having a dust outlet (14) which is connected to said preliminary calcination furnace (2), and said lowermost dust separator (C4) having a calcined dust outlet (15) connected to an inlet of said combustion furnace (3), characterised in that:

at least the second lowest (C3) one of said dust separators comprises a cyclone separator (23)

having an opening (22) in a side wall thereof, a fine dust outlet (26) in a lower portion (25) thereof, and a coarse dust separating pocket (20) hermetically connected to said opening (22) and having a coarse dust outlet (24) in a lower portion thereof (23);

said fine (26) and coarse (24) dust outlets being connected to fine (114b) and coarse (114a) dust feed ports formed at spaced positions of said preliminary calcination furnace (2), said coarse dust feed port (114a) is so positioned as to pass the coarse dust through a relatively high temperature zone of said calcination furnace (2), and said fine dust feed port (114b) is so positioned as to pass the fine dust through a relatively low temperature zone of said calcination furnace (2).

2. A preheating system as claimed in claim 1, characterised in that said coarse dust feed port (114a) is located in a position close to said fuel feed (6a), and said fine dust feed port (114b) is located in a position remote from said fuel feed (6a).

3. A preheating system as claimed in claim 1, characterised in that said coarse dust feed port (114a) is located upstream of said fine dust feed port (114b) as seen in the flow direction of gases in said preliminary calcination furnace (2).

4. A preheating system as claimed in any of claims 1 to 3, characterised in that said coarse dust feed port (114a) is provided in said combustion air duct (13) connected to said preliminary calcination furnace (2).

5. A preheating system as claimed in any of claims 1 to 4, characterised in that said preliminary calcination furnace (2) is constituted by a fluidising vessel (2a) with a lower portion of an inverted conical shape and having an opening (2d) at the lower end thereof in communication with said combustion furnace (3).

6. A preheating system as claimed in claim 5, characterised in that said preliminary calcination furnace (2) is constituted by a series of fluidising vessels (2a, 2b) mounted above one another and each having a lower portion of an inverted conical shape, and said combustion air duct (13) is connected to the lowest one (2a) of said fluidising vessels.

7. A preheating system as claimed in claim 6, characterised in that said coarse (114a) and fine (114b) dust feed ports are provided in the side walls of the lowest (2a) and/or the second lowest (2b) fluidising vessels of said preliminary calcination furnace (2).

8. A preheating system as claimed in claim 7, characterised in that said fuel feed (6a) is provided in the lowest (2a) and/or the second lowest (2b) fluidising vessels of said preliminary calcination furnace (2).

9. A preheating system as claimed in claim 8, characterised in that said combustion air duct (13) is connected to the lowest (2a) and the second lowest (2b) fluidising vessels of said preliminary calcination furnace (2).

Patentansprüche

1. Staubvorwärmvorrichtung mit einem Vorkalzinierofen für pulverförmiges Material, welche einen Vorwärmer mit einer Mehrzahl miteinander verbundener Staubabscheider (C1 bis C4) unter Bildung einer entsprechenden Zahl von Vorwärmstufen enthält, einem zwischen dem Vorwärmer (1) und einem Verbrennungsofen (3) angeordneten und durch einen Verbrennungsluftkanal mit einem dem Verbrennungsofen (3) nachgeschaltetem Klinkerkühler (4) verbundenen Vorkalzinierofen (2), wobei der Vorkalzinierofen (2) mit einer unabhängigen Brennstoffzufuhr (6a) ausgestattet und durch einen Verbrennungskanal (2f) mit dem untersten Staubabscheider (C4) für kalziniertes Material verbunden ist, der zweitunterste der Staubabscheider (C3) des Vorwärmers (2) einen Staubauslaß (14) hat, welcher mit dem Vorkalzinierofen (2) verbunden ist, und der unterste Staubabscheider (C4) einen kalzinierten, mit einem Einlaß des Verbrennungsofens (3) verbundenen Staubauslaß (15) hat, dadurch gekennzeichnet, daß

wenigstens der zweitunterste (C3) der Staubabscheider einen Zyklonseparator (23) enthält, welcher eine Öffnung (22) in seiner Seitenwand, einen Feinstaubauslaß (26) in seinem unteren Abschnitt (25) und eine mit der Öffnung (22) hermetisch verbundene Grobstaubabtrenntasche (20) und einen Grobstaubauslaß (24) in seinem unteren Abschnitt (23) hat, wobei der Feinstaubauslaß (26) und Grobstaubauslaß (24) mit in beabstandeter Position in dem Vorkalzinierofen (2) gebildeten Feinstaub- (114b) und Grobstaub- (114a) Zuführöffnungen verbunden sind, die Grobstaubzuführungsöffnung (114a) so positioniert ist, daß der Grobstaub eine Zone relativ hoher Temperatur des Kalzinierofens (2) durchläuft, und die Feinstaubzuführungsöffnung (114b) so positioniert ist, daß der Feinstaub eine Zone relativ niedriger Temperatur des Kalzinierofens (2) durchläuft.

2. Vorwärmvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Grobstaubzuführungsöffnung (114a) in der Nähe der Brennstoffzufuhr (6a) und die Feinstaubzuführungsöffnung (114b) entfernt von der Brennstoffzufuhr (6a) gelegen sind.

3. Vorwärmvorrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Grobstaubzuführungsöffnung (114a) in Gasflußrichtung oberhalb der Feinstaubzuführungsöffnung (114b) in dem Vorkalzinierofen (2) gelegen ist.

4. Vorwärmvorrichtung nach einem der Ansprüche 1 bis 3, dadurch gekennzeichnet, daß die Grobstaubzuführungsöffnung (114a) in dem mit dem Vorkalzinierofen (2) verbundenen Verbrennungsluftkanal (13) vorgesehen ist.

5. Vorwärmvorrichtung nach einem der Ansprüche 1 bis 4, dadurch gekennzeichnet, daß der Vorkalzinierofen (2) aus einem Wirbelbehälter (2a) mit einem unteren Abschnitt von umgekehrt konischer Form aufgebaut ist, und

eine, in Verbindung mit dem Verbrennungsofen (3) stehende Öffnung (2d) an seinem unteren Ende hat.

6. Vorwärmvorrichtung nach Anspruch 5, dadurch gekennzeichnet, daß der Vorkalzinierofen (2) aus einer Reihe übereinander angeordneter Wirbelbehälter (2a, 2b) aufgebaut ist, wobei jeder einen unteren Abschnitt von umgekehrt konischer Form hat, und der Verbrennungsluftkanal (13) mit dem untersten (2a) der Wirbelbehälter verbunden ist.

7. Vorwärmvorrichtung nach Anspruch 6, dadurch gekennzeichnet, daß die Grobstaubzuführungsöffnung (114a) und die Feinstaubzuführungsöffnung (114b) in den Seitenwänden des untersten (2a) und/oder des zweituntersten (2b) Wirbelbehälters des Vorkalzinierofens (2) vorgesehen sind.

8. Vorwärmvorrichtung nach Anspruch 7, dadurch gekennzeichnet, daß die Brennstoffzufuhr (6a) in dem untersten (2a) und/oder dem zweituntersten (2b) Wirbelbehälter des Vorkalzinierofens (2) vorgesehen ist.

9. Vorwärmvorrichtung nach Anspruch 8, dadurch gekennzeichnet, daß der Verbrennungsluftkanal (13) mit dem untersten (2a) und dem zweituntersten (2b) Wirbelbehälter des Vorkalzinierofens (2) verbunden ist.

Revendications

1. Installation de préchauffage de poussières munie d'un four de calcination préalable de matières en poudre, comportant un réchauffeur équipé de plusieurs séparateurs de poussières (C1 à C4) reliés l'un à l'autre pour former un nombre correspondant d'étages de préchauffage, un four de calcination préalable (2) raccordé entre ledit réchauffeur (1) et un four de combustion (3) en étant relié par un conduit d'air de combustion à un refroidisseur de scories (4) disposé du côté aval dudit four de combustion (3), ledit four de calcination préalable (2) étant muni d'une alimentation en combustible indépendante (6a) et étant relié par un conduit de gaz de combustion (2f) au séparateur de poussières le plus bas (C4) pour la matière calcinée, le séparateur (C3) situé au-dessus du plus bas et appartenant audit réchauffeur (1) ayant une sortie de poussières (14) qui est reliée audit four de calcination préalable (2), et ledit séparateur de poussières le plus bas (C4) ayant une sortie de poussières calcinées (15) reliée à une entrée dudit four de combustion (3), caractérisée en ce qu':

au moins ledit séparateur de poussières (C3) situé au-dessus du plus bas comporte un séparateur cyclone (23) présentant une ouverture (22) dans une paroi latérale, une sortie de poussières fines (26) dans sa partie inférieure (25) et une poche (20) de séparation de grosses poussières en liaison étanche avec ladite ouverture (22) et présentant une sortie de grosses poussières (24) dans sa partie inférieure (23), lesdites sorties de poussières fines (26) et de grosses

poussières (24) étant reliées à des orifices d'alimentation de poussières fines (114b) et de grosses poussières (114a) formés en ces emplacements espacés dudit four de calcination préalable (2), ledit orifice d'alimentation de grosses poussières (114a) étant positionné pour envoyer les grosses poussières dans une zone dudit four de calcination (2), à température relativement élevée et ledit orifice d'alimentation de poussières fines (114b) étant positionné pour envoyer les poussières fines dans une zone dudit four de calcination (2) à température relativement basse.

2. Installation de préchauffage selon la revendication 1, caractérisée en ce que ledit orifice d'alimentation de grosses poussières (114a) est situé en un emplacement rapproché de ladite alimentation en combustible (6a), tandis que ledit orifice d'alimentation en poussières fines (114b) est situé en un emplacement éloigné de ladite alimentation en combustible (6a).

3. Installation de préchauffage selon la revendication 1, caractérisée en ce que ledit orifice d'alimentation de grosses poussières (114a) est situé en amont dudit orifice d'alimentation en poussières fines (114b) en considérant le sens d'écoulement des gaz dans ledit four de calcination préalable (2).

4. Installation de préchauffage selon l'une quelconque des revendications 1 à 3, caractérisée en ce que ledit orifice d'alimentation de grosses poussières (114a) est disposé dans ledit conduit d'air de combustion (13) relié audit four de calcination préalable (2).

5. Installation de préchauffage selon l'une quelconque des revendications 1 à 4, caractérisée en

ce que ledit four de calcination préalable (2) est constitué d'un récipient de fluidisation (2a) dont la partie inférieure est en forme de cône renversé et présentant à sa partie inférieure une ouverture (2d) communiquant avec ledit four de combustion (3).

6. Installation de préchauffage selon la revendication 5, caractérisée en ce que ledit four de calcination préalable (2) est constitué d'une suite de récipients de fluidisation (2a, 2b) montés l'un au-dessus de l'autre et présentant chacun une partie inférieure en forme de cône renversé, ledit conduit d'air de combustion (13) étant relié au plus bas (2a) de ces récipients de fluidisation.

7. Installation de préchauffage selon la revendication 6, caractérisée en ce que lesdits orifices d'alimentation de grosses poussières (114a) et de fines poussières (114b) sont disposés dans les parois latérales du récipient de fluidisation le plus bas (2a) et/ou du récipient de fluidisation situé au-dessus (2b), constituant ledit four de calcination préalable (2).

8. Installation de préchauffage selon la revendication 7, caractérisée en ce que ladite alimentation en combustible (6a) est disposée dans le récipient de fluidisation le plus bas (2a) et/ou dans le récipient de fluidisation situé au-dessus (2b), constituant ledit four de calcination préalable (2).

9. Installation de préchauffage selon la revendication 8, caractérisée en ce que ledit conduit d'air de combustion (13) est relié au récipient de fluidisation le plus bas (2a) et au récipient de fluidisation situé au-dessus, constituant ledit four de calcination préalable (2).

40

45

50

55

60

65

FIG. 1

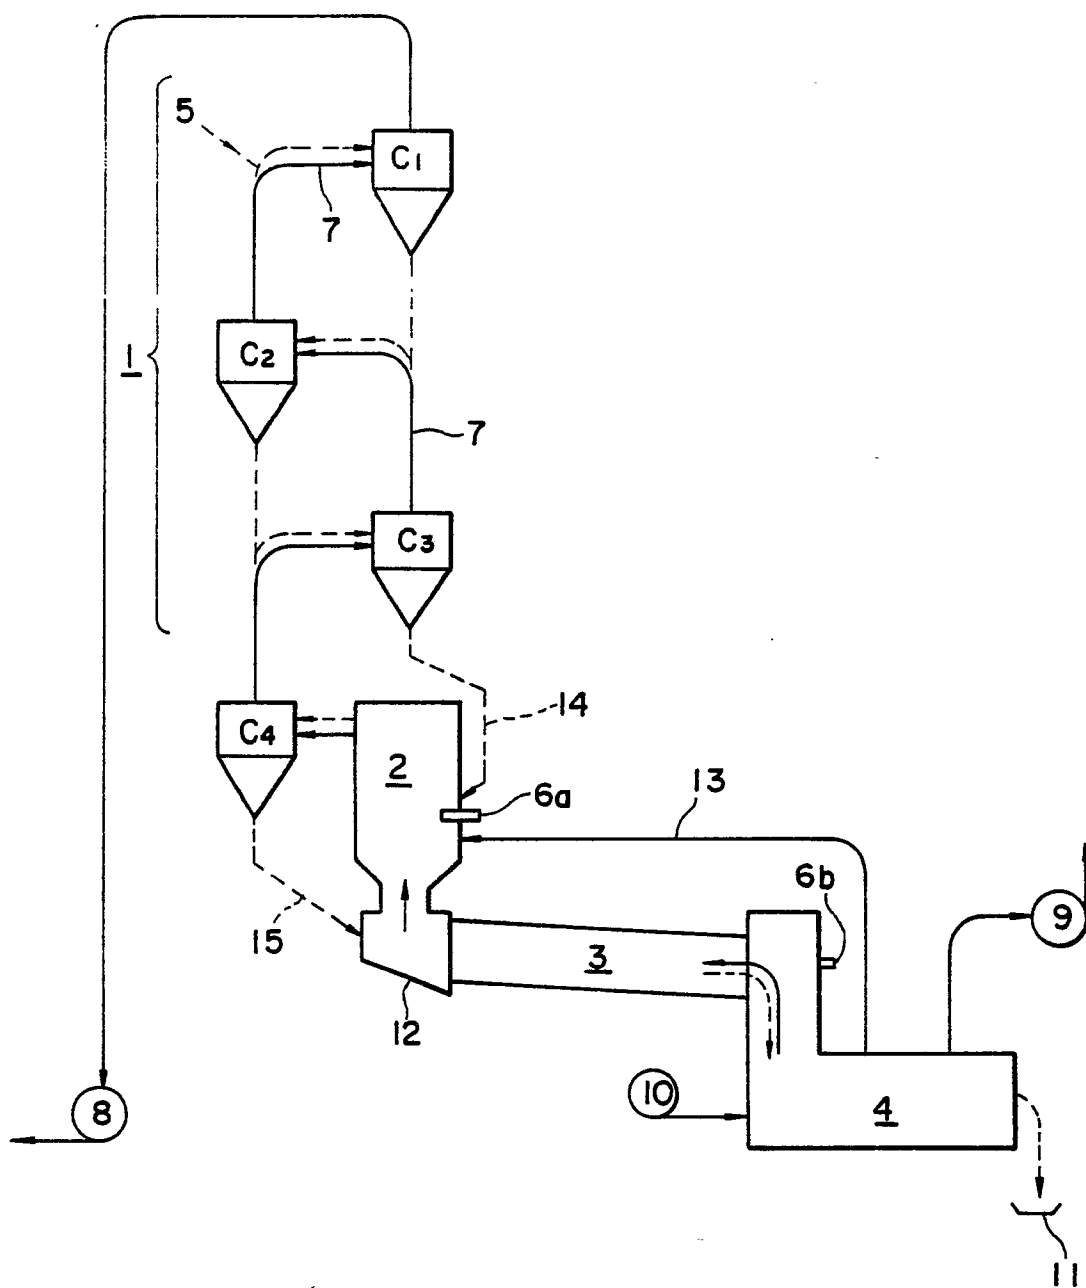


FIG. 3

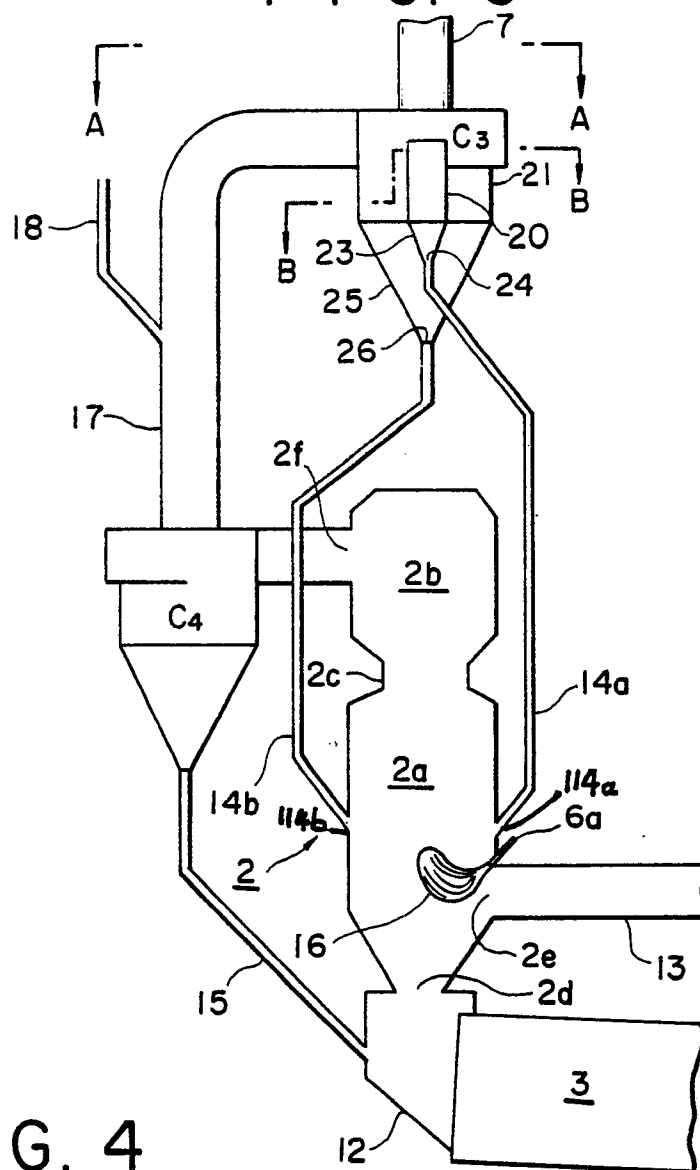


FIG. 4

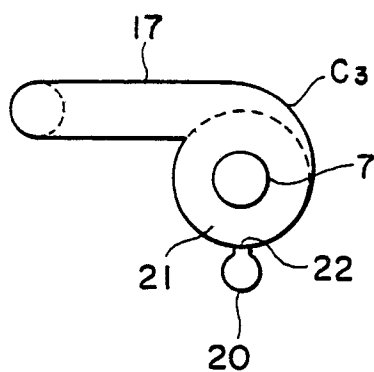


FIG. 5




FIG. 6

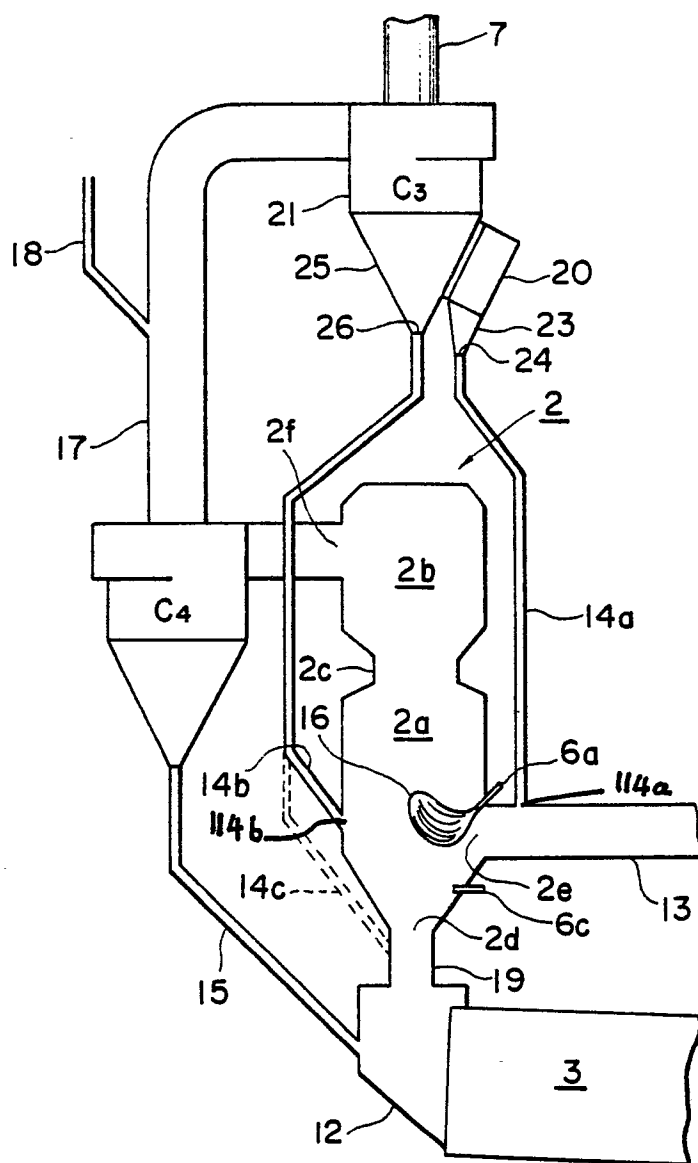


FIG. 7

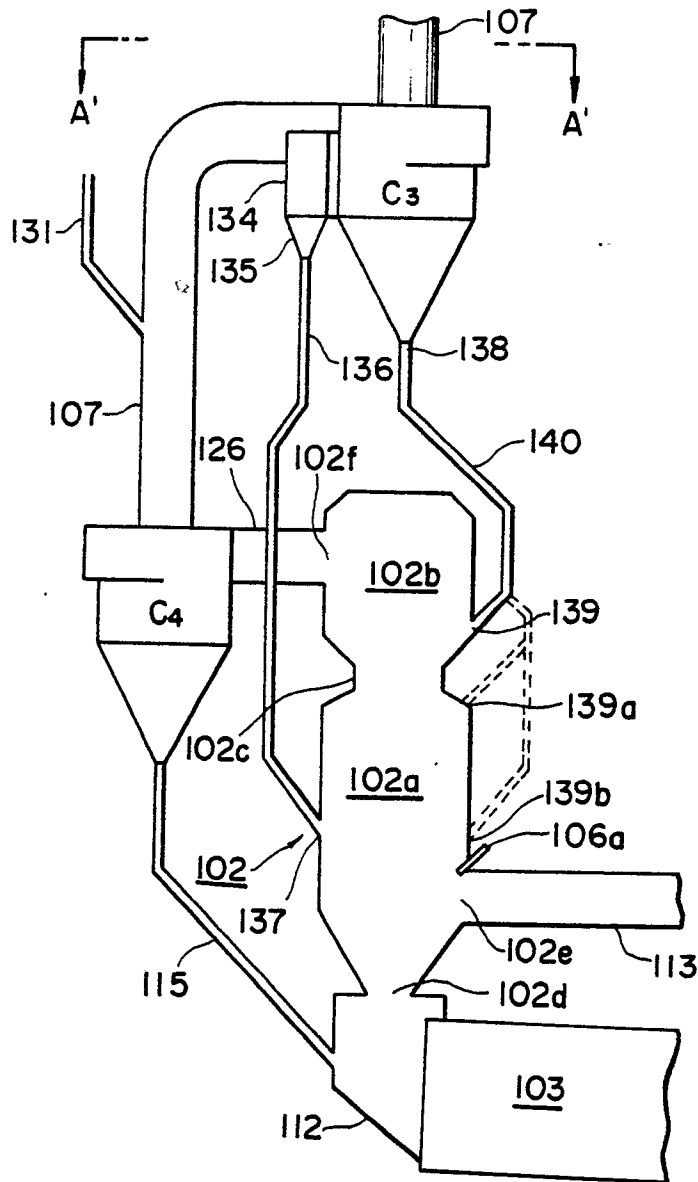


FIG. 8




FIG. 9

FIG. 10

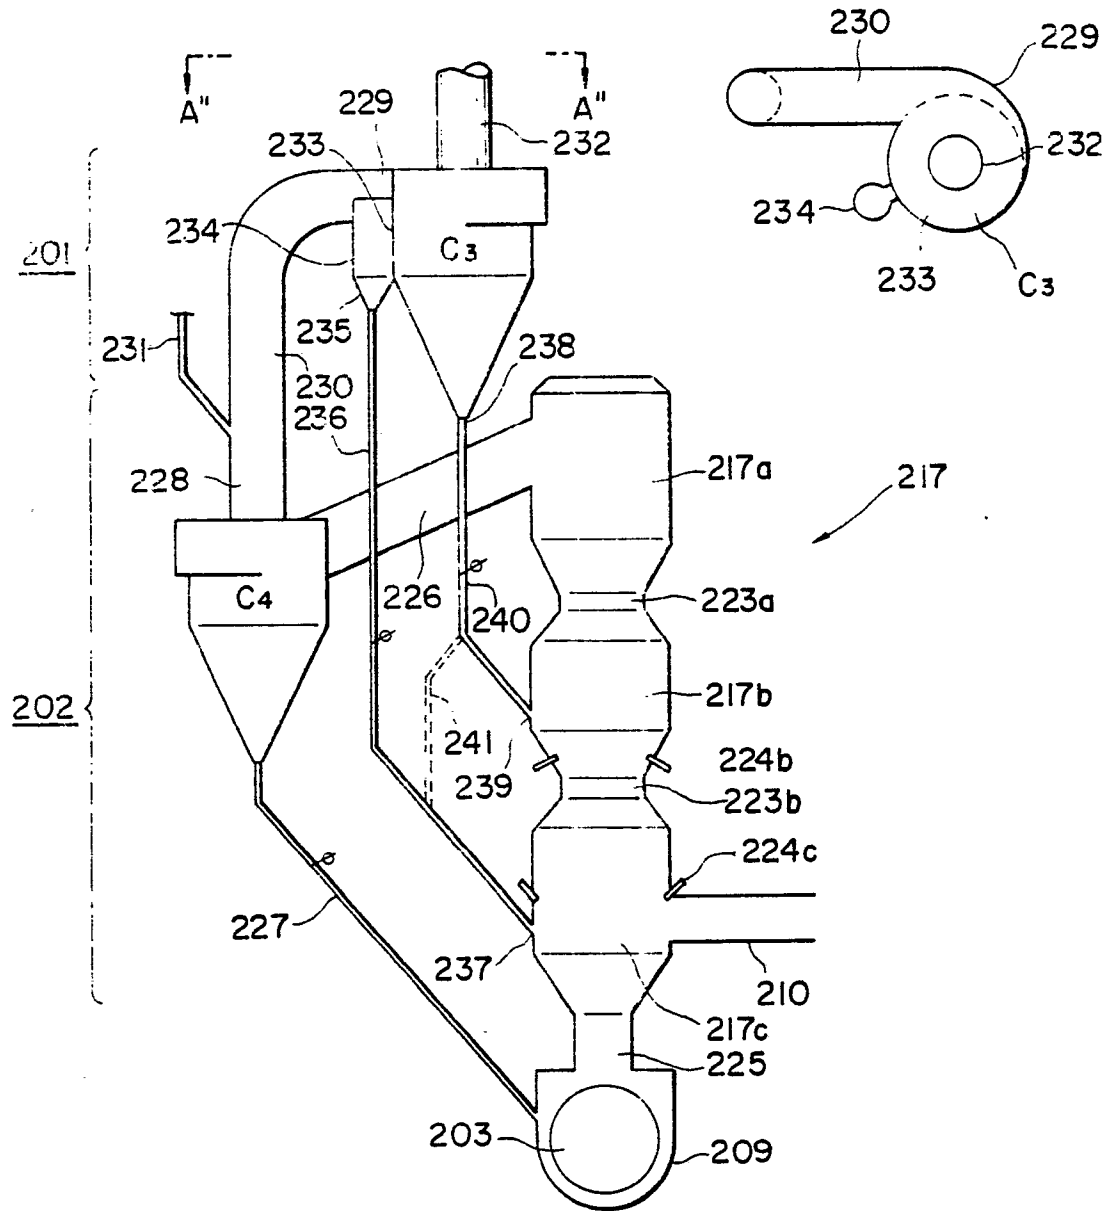


FIG. 11

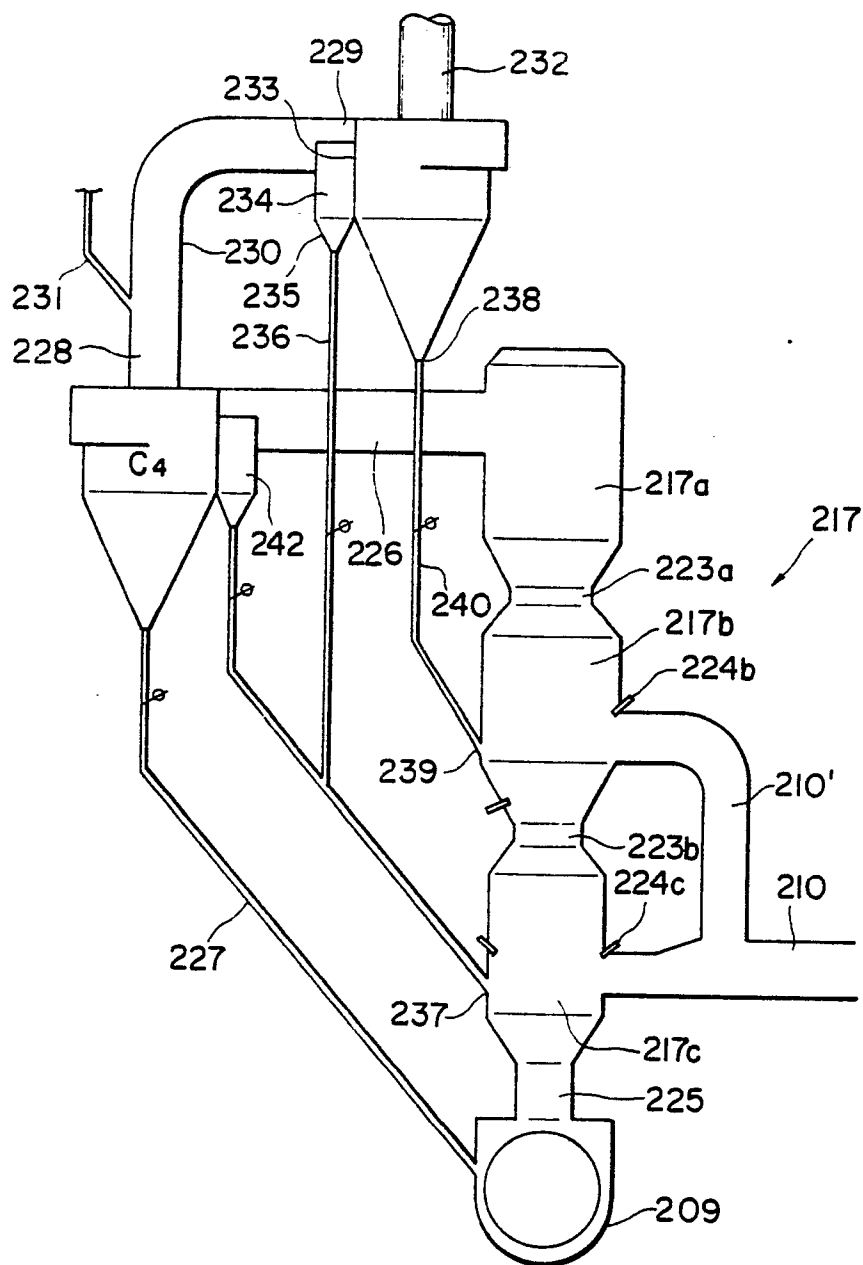


FIG. 12

