



0 157 747
A1

EUROPEAN PATENT APPLICATION

⑤ Int. Cl.⁴: **F 16 H 25/22**

②② Date of filing: 15.03.85


⑦ Applicant: **Granbom, Bo, Lostigen 13, S-731 42 Köping (SE)**

(72) Inventor: **Granbom, Bo, Lostigen 13, S-731 42 Köping (SE)**

(74) Representative: **Onn, Thorsten et al, AB STOCKHOLMS PATENTBYRA** Box 3129, S-103 62 Stockholm (SE)

54 A device for translating a rotary motion to a linear one.

57) A device for translating a rotary motion to a linear one consisting of a first elongate body (1) provided with screw threads extending along the body and a second body (5) rotatable coaxially with the first body. A number of rollers (3) are arranged between the first and the second body with the axes of the rollers parallel to the axes of the bodies and provided with threads meshing with the screw threads of the first body, the first body being provided with teeth extending substantially along the entire body. Moreover, the rollers have teeth cooperating with the teeth of the first body, one body being displaced relative to the other at the turning of the bodies relative to one another. The second body (5) has threads (6) cooperating with the threads (4) of the rollers (3), and teeth (11) cooperating with the teeth (9) of the rollers. The threads (2, 4, 6) of the first body (1), the rollers (3) and the second body (5) are trapezoidal threads, the threads of the rollers (3) and the threads of the second body (5) having the same turning direction and the threads of the first body (1) having a turning direction opposite to the turning direction of the rollers and the second body. The pitch circle (14) of the teeth (8) of the first body (1) is located at some distance from the average diameter (15) of the threads (2) of the first body (1) and the pitch circle (16) of the teeth of each roller (3), respectively, is located at some distance from the average diameter (17) of the threads (4) of the roller.

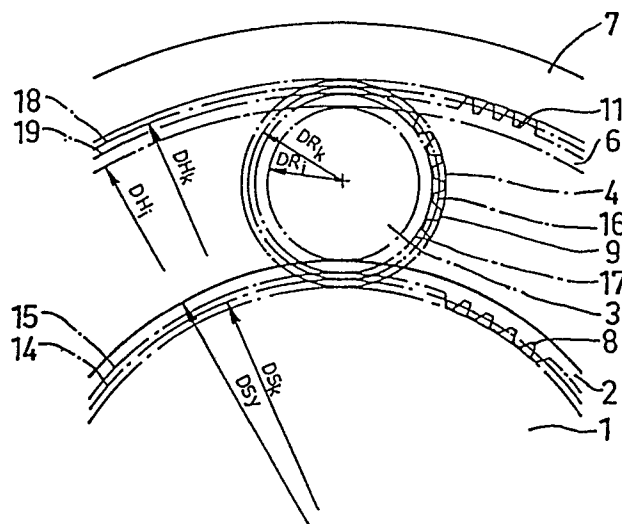

- 1 -

A device for translating a rotary motion to a
linear one

This invention relates to a device for translating a rotary motion to a linear one, as indicated in the preamble of claim 1.

Thus, known devices of this kind use freely rotatable
5 wheels or rollers mounted in one of the parts displaceable relative to each other, which rollers cooperate via ribs or cams with the threads of the other part. By turning one part the rollers will roll with the cams meshing with the threads displacing the second part in this way. The ribs or
10 cams of the rollers may then be parallel lying in planes extending perpendicularly to the roller shaft or form threads corresponding to the threads of the threaded part. At such devices it is required that the rollers must be exactly guided and driven by the second part and abut and
15 engage the threads thereof all the time. As soon as an obliquity between roller and the threaded part appears or a roller is released from this, resulting in different rolling velocity, the device will inevitably seize. Due to the fact that a relative movement between the screw and
20 the roller or rollers cannot be prevented there is a risk that the entire device must be dismounted to be restored to an operable state if it is driven to far, that is to a stop in an outer position. Another very great problem at known devices of this type is that it is very difficult to
25 obtain self-braking, i.e. the device should be stationary without a separate brake even at the greatest load. So far no solution has been found, either, to achieve self-braking of this type of devices.

It is possible by the present invention, as it is
30 apparent from the characterizing portions of the claims, to eliminate the disadvantages mentioned above and associated with the so far known mechanisms of the type intended here so as to translate a rotary motion to a linear one and to achieve a perfect self-braking of the device, even
35 if materials of a very low coefficient of friction are used such as hardened steel against hardened steel.

The invention will be described in greater detail in the form of an example with reference to the drawing, wherein Fig. 1 shows the central part of the invention partially in side elevation, Fig. 2 shows a cross section of the invention and Fig. 3 shows a detail of the invention on an enlarged scale as compared with Figs. 1 and 2. Fig. 4 shows graphically a detail of the device according to the invention.

The figures only show the very inventive thought in detail while the rest of the machine element, in which the invention is included, is omitted. In general it can be said that this consists of a threaded screw mounted in a suitable way and driven e.g. by an electric motor. A housing for supporting the rollers cooperating with the threaded screw can be connected to an axially displaceable sleeve surrounding the screw. Of course the housing or sleeve can instead be driven by an electric motor via e.g. a gear reduction set, whereby the housing or sleeve at a stationary screw will move axially along the screw.

1 denotes a screw or an axle provided with threads 2. A number of rollers 3 provided with threads 4 engaging the threads 2 of the axle 1 cooperate with the threaded axle 1. A housing 5 is arranged about the axle 1 and consists of a cylinder 7 provided with internal threads 6. The threads 6 of the cylinder cooperate with the threads 4 of the rollers 3 evenly spaced between the housing 5 and the screw 1. The threads 2, 4 and 6 consist of trapezoidal threads. In the example shown the screw 1 has left-hand threads, the rollers 3 right-hand threads and the housing 5 or the cylinder 7 right-hand threads as well.

As will be described below more in detail the threads 2 of the screw 1 are provided with teeth 8 within the root area. In the range of the thread tops each roller 3 is provided with a toothing or teeth 9 meshing with the teeth 8 of the screw. Two rings 10 which are provided with cog teeth 11 on their insides are locked to the cylinder 7. The cog teeth 11 and the teeth 9 of the rollers coast with one another. Fixation of the rings 10 to the cylinder 7 can be effected by means of e.g. clamping rings 13 provided with threads 12 so that they can be screwed onto the

cylinder 7. As is apparent from Fig. 1 these will clamp the rings 10 against the cylinder 7 when tightened. It is to be understood that the rings 13 can be locked in a clamping position relative to one another and the cylinder 7.

5 In the example shown the screw 1 has a threaded lead, the rollers 3 also a threaded lead and the housing or cylinder 7 five such leads. The number of rollers 3 is six and the rollers are guided with respect to their movement completely by geometry and the teeth 8, 9 and 11 without any
10 roller holders being necessary.

As is more closely apparent from Fig. 3 the pitch circle 14 of the teeth 8 of the screw 1 is spaced according to the invention inside the average diameter 15 of the threads 2 of the screw. The pitch circle 16 of the teeth 9
15 of each roller 3 is spaced outside the average diameter 17 of the thread 4 of each roller. The pitch diameter 18 of the teeth of the housing or cylinder 7 is radially spaced inside the average diameter 19 of the threads 6 of the cylinder 7.

20 By this configuration, that is with the same thread turning in roller 3 and housing 5 but different from the thread turning of the screw 1 a gear change of the device is obtained according to the formula

$$25 \quad U_t = \frac{DS_k \cdot \pi}{R}$$

where DS_k = the average diameter of the teeth 8 of the screw 1 (designated 14 above for the sake of clearness) and where R is the longitudinal displacement of the housing
30 5 for one turn of the screw 1 and is derived from the formula

$$R = S - S \frac{DS_k}{2(DS_k + DR_k)} - S \left[\left(1 - \frac{DS_k}{2(DS_k + DR_k)} \right) \frac{DS_k}{DR_k} \right]$$

35 where S = the pitch

DR_k = the average diameter of the teeth of the roller 3 (previously designated 16 for the sake of clearness).

In accordance with the invention, with rollers exactly guided between screw and housing and with the gear exchange
40 as above it is possible to accomplish a complete self-braking

action of the device, i.e. also at maximum load (also over-load) in stationary position the device remains immobile.

The frictional moment of the device at rest is obtained from the formula

$$M_{\mu v} = P \cdot F_r \cdot \mu_v \cdot 2$$

where P = the axial load of screw (roller, housing)

F_r = friction radius and

μ_v = the coefficient of friction between the parts (screw-roller, roller-housing) of the device at rest. The friction radius is derived from the formula

$$F_r = \frac{DR_k - DR_i}{2} - S_p - r$$

where DR_i = the inside diameter of the threads of the roller
 S_p = the play between roller-housing and roller-screw, respectively (i.e. total play) and
 r = the edge radius of the thread of the screw (housing).

In Fig. 4 it is shown schematically how F_r can be interpreted graphically. By varying the friction radius it is thus possible to actuate the frictional moment, i.e. the self-braking. It is to be understood that the calculations made above of course also apply to the engagement of the roller with the housing utilizing the current magnitudes. Thus, it is possible by the present invention to "build-in" self-braking with a stationary device by achieving an enforced relative movement between the thread flanks being in engagement with each other. Thus, complete self-braking is possible also when using e.g. hardened steel - hardened steel. As the coefficient of friction at motion (dynamical friction) at this material is about three times lower than at rest the self-braking effect will not influence the device in operation to a large degree. When using hardened steel against hardened steel an efficiency of up to 90% is obtained. As mentioned above, Fig. 4 is a graphical representation showing schematically the engagement between the threads and teeth of the screw 1 and a roller 3. The teeth of the screw are shown with a dashed line in the figure.

Using similar thread turning in housing and rollers and an opposite thread turning in screw together with an exact guiding of the motion of the rollers relative to screw and housing a faultless, smooth operation of the device with
5 a normally opposite direction of motion of the housing relative to the turning direction of the screw is obtained. At clockwise turning of the left-hand screw the housing will thus "be screwed onto the screw". Thus, it is possible according to the invention with the selected thread profile
10 and the reciprocal ratio between the pitch and average diameters of coacting teeth and threads, respectively, to achieve a self-braking screw - nut device which has not been possible before.

The pitch circle of the teeth of the screw can of
15 course, within the scope of the invention, be spaced outside the average diameter of the screw threads. In practice the teeth can then be arranged on the thread tops of the screw with a corresponding placement of the pitch circle of the teeth of the relative roller spaced inside the average dia-
20 meter of the threads of the roller. The demand is still exact guiding, thread geometry and friction radius.

1. A device for translating a rotary motion to a linear one consisting of a first elongate body (1) provided with screw threads extending along the body and a second body (5) rotatable coaxially with the first body, a number or rollers (3) arranged between the first and the second body with the axes of the rollers parallel to the axes of the bodies and provided with threads engaging the screw threads of the first body, the first body being provided with teeth extending substantially along the entire body, and that the rollers have teeth cooperating with the teeth of the first body, one body being displaced relative to the other at turning of the bodies relative to each other, c h a r a c - t e r i z e d in that the second body (5) has threads (6) cooperating with the threads (4) of the rollers (3), that the second body has teeth (11) cooperating with the teeth (9) of the rollers, that the threads (2, 4, 6) of the first body (1), the rollers (3) and the second body (5) are trapezoidal threads, that the threads of the rollers (3) and the threads of the second body (5) have the same turning direction and the threads of the first body (1) have a turning direction opposite to the turning direction of the rollers and the second body and that the pitch circle (14) of the teeth (8) of the first body (1) is located at some distance from the average diameter (15) of the threads (2) of the first body (1) and the pitch circle (16) of the teeth (9) of the roller (3) is located at some distance from the average diameter (17) of the threads (4) of the roller.

2. The device of claim 1, c h a r a c t e r i z e d in that the first body (1) has the shape of a screw and the second body (5) the shape of a sleeve.

3. The device of claim 1 or 2, c h a r a c t e r - i z e d in that the pitch circle (14) of the teeth (8) of the first body (1) is located at some distance inside the average diameter (15) of the threads (2) of the first body (1) and the pitch circle (16) of the teeth (9) of the roller (3) is located at some distance outside the average diameter (17) of the threads (4) of the roller (3).

4. The device of any one of the foregoing claims, characterized in that said distance determines the frictional moment of the device at rest, which moment is defined by the formula $P \cdot Fr \cdot \mu_v \cdot 2$, where P = the axial load of cooperating parts, μ_v = the coefficient of friction between the parts at rest and the radius of friction

$Fr = \frac{DR_k - DR_1}{2} - S_p - r$, where DR_k = the average diameter of the teeth of the relative roller, DR_1 = the inside diameter of the threads of the relative roller, S_p = the play between cooperating parts and R = the edge radius of a thread in the first body (1) and the second body (5).

5. The device of any one of the foregoing claims, characterized in that the gear change U_t is obtained from the formula

$U_t = \frac{DS_k \cdot \pi}{R}$, where R is the longitudinal displacement of the second body (5) of one turn of the first body (1) and is derived from the formula

$$R = S - S \frac{DS_k}{2(DS_k + DR_k)} - S \left[\left(1 - \frac{DS_k}{2(DS_k + DR_k)} \right) \cdot \frac{DS_k}{DR_k} \right]$$

where S = the pitch, DS_k = the average diameter of the teeth (8) of the first body (1) and DR_k = the average diameter of the teeth (9) of the relative roller (3).

FIG.1

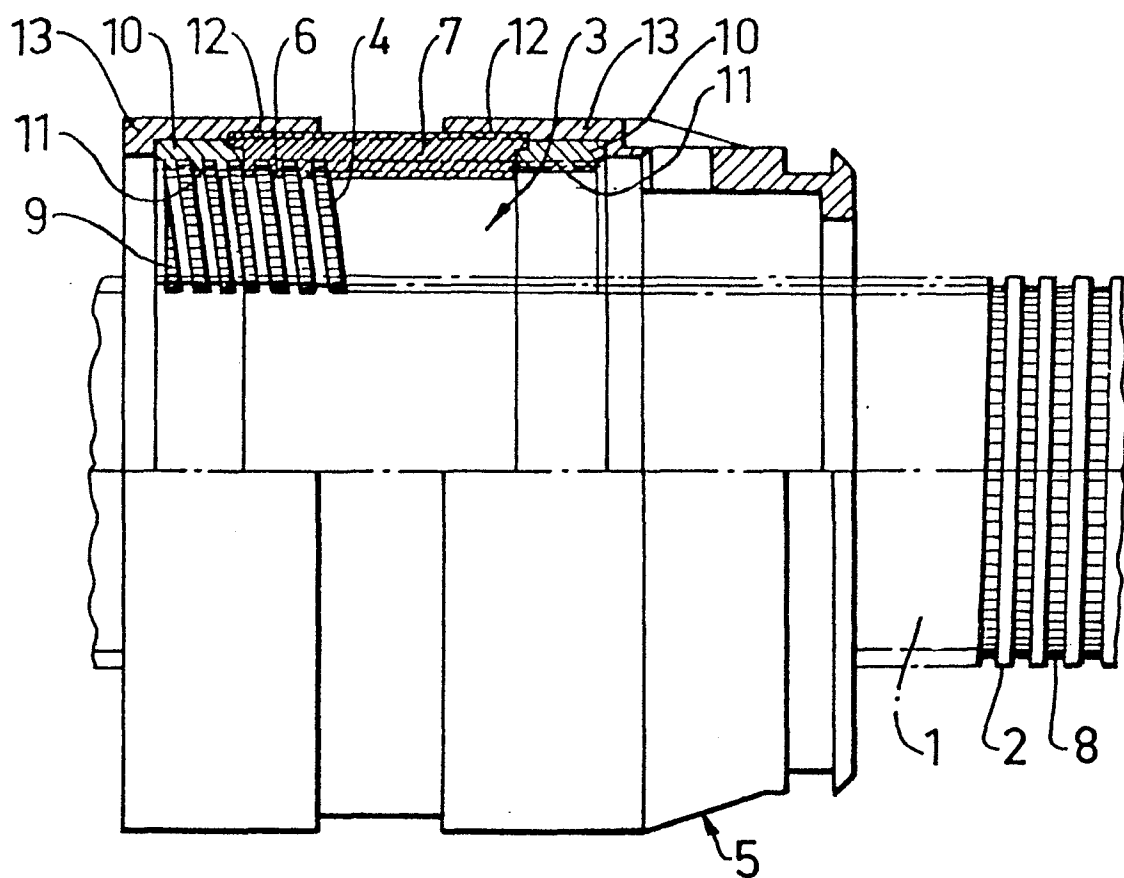


FIG.2

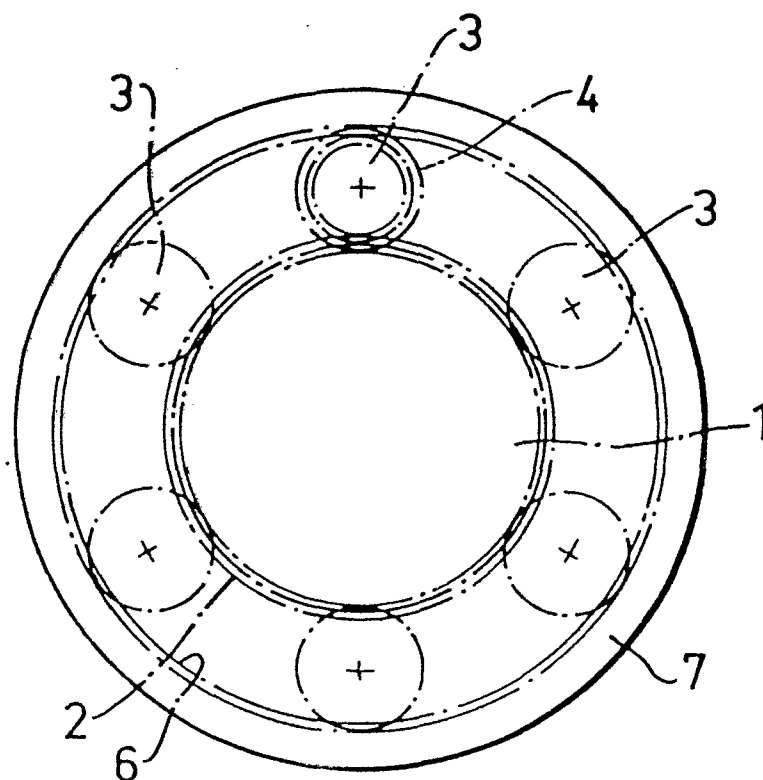


FIG.3


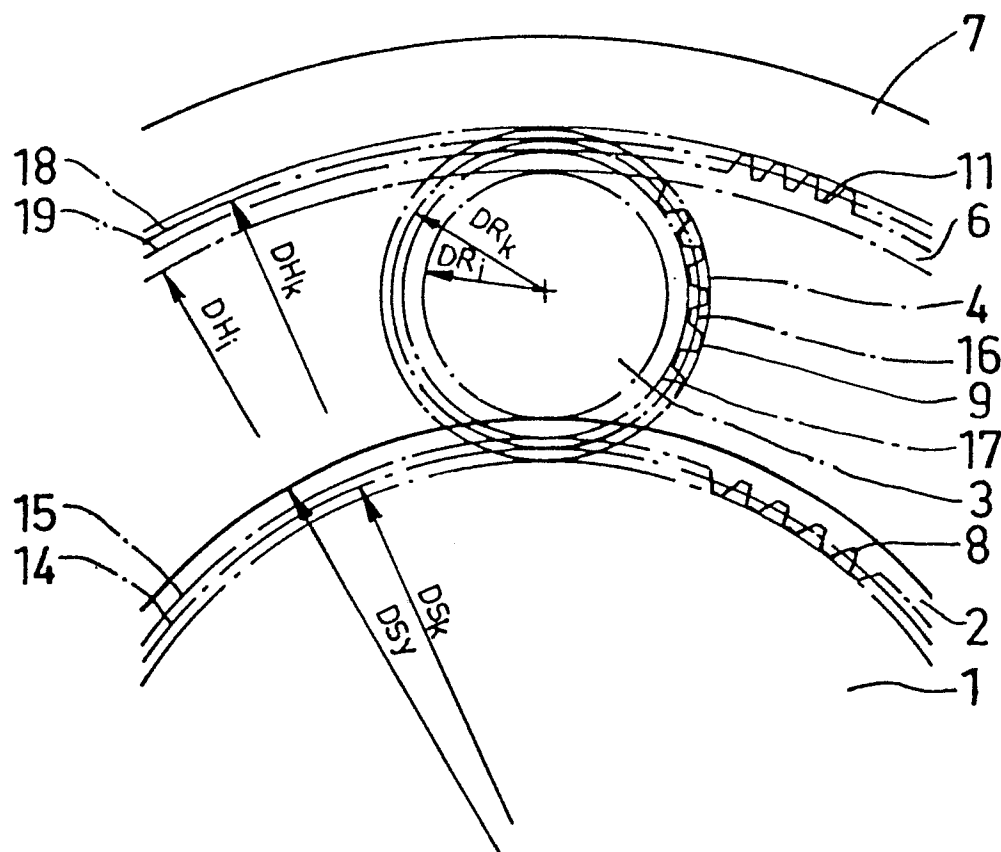


FIG.4



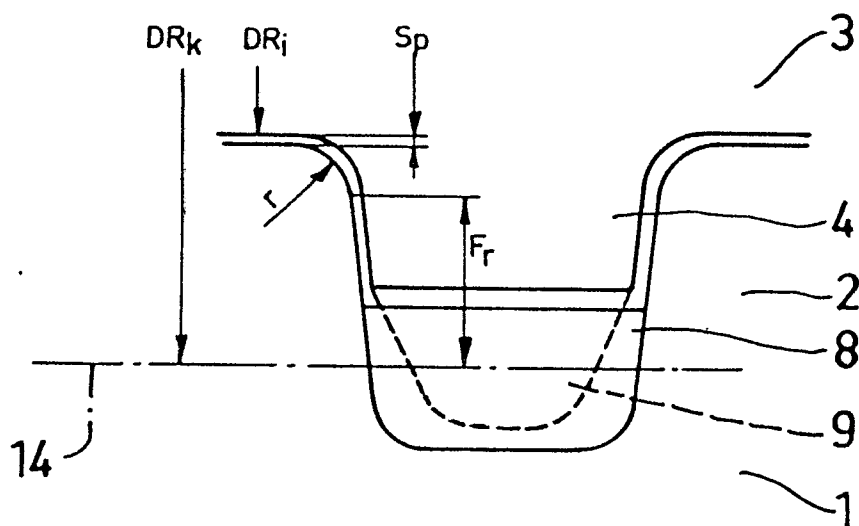

European Patent
Office

EUROPEAN SEARCH REPORT

0157747

Application number

EP 85 85 0094

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
A	FR-A-2 518 208 (GRANBOM BO.)		F 16 H 25/22
A	CH-A- 411 479 (C.B. STRANDGRENN) -----		
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			F 16 H 25/00
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 04-06-1985	Examiner LEMBLE Y.A.F.M.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	