

(12) **EUROPEAN PATENT APPLICATION**

(21) Application number: **85304076.4**

(51) Int. Cl.⁴: **H 05 B 3/74**
H 05 B 3/00

(22) Date of filing: **10.06.85**

(30) Priority: **28.06.84 GB 8416411**
31.07.84 GB 8419492

(43) Date of publication of application:
29.01.86 Bulletin 86/5

(84) Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

(71) Applicant: **THORN EMI Appliances Limited**
THORN EMI House Upper Saint Martin's Lane
London, WC2H 9ED(GB)

(72) Inventor: **Goodchild, Graham Howlett**
3, Camelot Crescent
Portchester Hampshire(GB)

(74) Representative: **Marsh, Robin Geoffrey et al,**
Thorn EMI Patents Limited The Quadrangle Westmount
Centre Uxbridge Road
Hayes Middlesex, UB4 0HB(GB)

(54) **Heating apparatus.**

(57) Heating apparatus includes four infra-red, quartz-halogen, tubular lamps (6), each including a tungsten filament (8), supported above a generally circular shallow tray (1) formed from an infra-red-reflective ceramic material. The apparatus may be mounted beneath a glass ceramic cook-top (19) to form a hotplate area of a cooking hob. The ceramic tray (1) acts as a good reflector, so that radiation emitted from the lamps (6) in a downward direction is reflected upwardly towards, and transmitted through, the glass ceramic cook-top (19).

As an alternative to the tray (1), a substantially flat, infra-red-reflective ceramic sheet, a ceramic sheet profiled around the lamps (6), or respective ceramic troughs below each lamp (6), may be utilised.

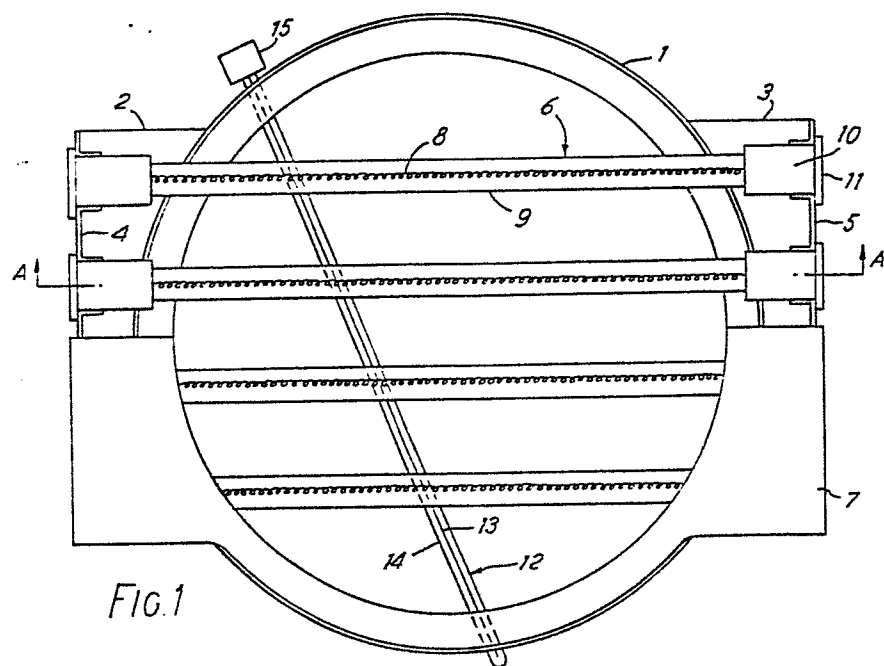


FIG. 1

: 1 :

HEATING APPARATUS

This invention relates to heating apparatus and in particular, though not exclusively to heating apparatus of the kind disclosed in our copending U.K. Patent Application No. 8320717, (Publication No.2132060A), wherein one or more sources
5 of infra-red radiation are mounted beneath a layer of an infra-red transmissive glass ceramic to form a cooking hob.

The heating apparatus disclosed in U.K. Patent Application No.8320717 consists of, in one example, four quartz-halogen, infra-red lamps supported above a generally circular metallic
10 tray member, having a layer of thermally-insulative, microporous material disposed on the base thereof.

The apparatus is mounted beneath a layer of glass ceramic and each lamp is preferably provided with an infra-red reflective coating on the underside of the quartz envelope of
15 the lamp, to reflect infra-red radiation emitted downwardly therefrom back in an upward direction, towards and through the glass ceramic layer.

It is an object of the present invention to provide an alternative arrangement of heating apparatus of this kind.

20 According to the invention there is provided heating apparatus including at least one source of infra-red radiation and characterised in that the apparatus also includes a structure of infra-red-reflective ceramic material disposed in

close proximity to said infra-red source or sources, to reflect infra-red radiation generated by said infra-red source or sources.

5 The structure may form a support for the infra-red source or sources, the support preferably being shaped as a generally circular tray member.

The structure may be profiled to conform to the shape of the source or sources, which preferably consist of one or more tubular infra-red lamps.

10 Alternatively, in conjunction with the infra-red lamps, the structure may consist of one or more respective troughs of the infra-red-reflective ceramic material, each trough extending along the length of a lamp and around substantially one half of the lamp circumference.

15 The invention will now be further described by way of example only with reference to the accompanying drawings, wherein:

Figure 1 shows schematically a plan view of one embodiment of the invention,

20 Figure 2 shows schematically a sectional view through A-A in Figure 1, with the apparatus beneath a glass ceramic cook-top of a cooking hob,

Figure 3 shows schematically a plan view of a second embodiment,

25 Figure 4 shows schematically a sectional view through B-B of the second embodiment in Figure 3, also with the apparatus beneath a glass ceramic cook-top, and

Figures 5 to 7 show schematically sectional views, through a plane orthogonal to those of sections A-A and B-B, of three
30 further embodiments of the present invention.

Referring to Figures 1 and 2, wherein the first embodiment of heating apparatus, in accordance with the present invention, is shown, a generally circular shallow tray 1, formed from an infra-red reflective ceramic material, has two extending flanges
35 2 and 3 arranged on opposite sides of the rim of the ceramic tray 1. Each flange 2 and 3, has upturned end portions 4 and

5, respectively.

A number of sources of infra-red radiation, preferably four, are disposed above the ceramic tray 1 and are supported at each end by the flanges, 2 and 3.

5 A moulding 7 of ceramic fibre material is disposed above the ceramic tray 1 and press-fitted around the ends of each source 6 to provide a suitable packing therefor.

Each source 6 of infra-red radiation comprises a quartz-halogen infra-red lamp including a tungsten filament 8 supported within a tubular quartz envelope 9. One suitable example of such a lamp is disclosed in copending European Application No. 84 301636.1, in the name of THORN EMI plc.

Each lamp has moulded ceramic end caps, one shown at 10, enclosing a pinch seal (not shown) with an electrical connection connected to an end of the filament 8 sealed therein. Each end cap 10 is provided with a location tab 11 for easy insertion of the lamps into the correct position on flanges 2 and 3.

A number, preferably four, of the heating apparatus are preferably mounted beneath a layer 19 of infra-red transmissive material, such as glass ceramic, so as to form respective hotplate areas of a cook-top of a cooking hob.

A thermal limiter 12, which is intended to monitor the temperature of the glass ceramic, includes a metallic wire 13 contained within a quartz tube 14. The wire 13 is arranged to activate a microswitch 15, so as to disconnect the lamps 6 from a power supply, when the temperature of the glass ceramic reaches a maximum predetermined value, thereby preventing overheating and damage to the glass ceramic.

It has been found that the diameter of the wire 13 may be crucial to the temperature of the glass ceramic to which the limiter 12 is sensitive. To ensure that the limiter 12 monitors the a particular temperature of the glass ceramic, it may therefore be necessary to utilise a wire 13 of a particular diameter. Alternatively, other techniques may be used to achieve the desired selectivity in the response characteristics of the limiter.

Figures 3 and 4, wherein like parts are labelled with like reference numerals with respect to Figures 1 and 2, show a second embodiment of the heating apparatus, in accordance with the present invention. In the second embodiment, the flanges 2 and 3, as provided in the first embodiment, have been replaced by suitably-shaped pieces of insulative material, 16 and 17, through which the ends of each lamp 6 extend and being shaped so that substantially equal portions 18 of each lamp is exposed thereby ensuring that substantially equal amounts of heat are dissipated at the ends of all of the lamps.

The second embodiment also enables cool air to circulate around the end cap 10, so as to aid in cooling the pinch seal enclosed therewithin, this being necessary to ensure longevity of the lamps.

The ceramic tray 1 acts as a good infra-red reflector, so that radiation emitted from the lamps in a downward direction is reflected upwardly towards the layer of glass ceramic, and is thus transmitted therethrough.

Figures 5 to 7 show schematic illustrations of embodiments which may be used as alternatives to, or in conjunction with, those shown in Figures 1 to 4.

Figure 5 illustrates a flat sheet 20 of the ceramic material, disposed beneath four infra-red lamps 21 to 24, mounted beneath a glass ceramic cook-top 25, the sheet 20 either being spaced from, or in close proximity to, the lamps.

In Figure 6, the apparatus is provided with a profiled sheet 26 of ceramic material, which is shaped to conform to the shape of the tubular lamps 21 to 24. Each profiled portion 27 of the sheet 26 may be directly connected to an adjacent portion, as shown, or alternatively the profiled portions may be joined by connecting flat portions of the sheet 26.

Figure 7 shows another embodiment, wherein each lamp 21 to 24 is provided with a respective trough 28 of the infra-red-reflective ceramic material. The troughs 28 may be shaped to give the required reflectivity, i.e. they may be semi-circular, parabolic or semi-elliptical, for example.

Each trough 28 preferably extends at least along the whole length of the respective lamp filament and around substantially the lower half of its cross-sectional circumference.

The pinch seals of each lamp are required to be kept
5 relatively cool to ensure longevity of the lamps, so that it may be preferable that the troughs 28 do not extend to beneath, or around, the pinch seals.

It may be preferable to shape the troughs 28 so that the filament, such as at 29, of each lamp is situated at the focal
10 point of the trough.

Alternatively, the shaped sheet 26 may be incorporated into the base of the tray 1, as shown in Figures 2 and 4.

As an additional infra-red reflector, the lower half of the quartz envelope 9 of each lamp 6 may be provided with a suitable
15 infra-red-reflective coating, to aid in reflecting downwardly-emitted radiation in an upward direction towards the glass ceramic layer.


The heating apparatus may be provided with thermal insulation, such as a microporous material as used in our
20 above-mentioned copending U.K. Patent Application No. 8320717, disposed within the cooking hob below and/or around the apparatus, in contact therewith or spaced therefrom, so as to aid in preventing heat dissipation from the apparatus. In the embodiments shown in Figures 5 to 7, the insulative material
25 may, alternatively or additionally be used as a support for the lamps.



Additionally or alternatively, the cooking hob may include a forced air cooling system, to aid in preventing overheating of certain parts of the apparatus, particularly the pinch seals of
30 the lamps which are required to be kept relatively cool.


Additional or alternative cooling of the pinch seals may be provided by heat sinking and/or natural air convection techniques, such as those disclosed in any of copending European Patent Application Nos. 84303424.0, 84303729.2 and 84303846.4.

CLAIMS

1. Heating apparatus including at least one source (6) of infra-red radiation and characterised in that the apparatus also includes a structure (1) of infra-red-reflective ceramic material disposed in close proximity to said infra-red source or
5 sources (6), to reflect infra-red radiation generated by said infra-red source or sources (6).
2. Heating apparatus as claimed in claim 1 wherein said infra-red source or sources (6) each consists of a generally tubular infra-red lamp.
- 10 3. Heating apparatus as claimed in claim 1 or 2 wherein said structure (1) forms a support for said infra-red source or sources (6).
4. Heating apparatus as claimed in claim 1, 2 or 3 wherein said structure (1) is shaped to form a generally circular tray
15 member (1).
5. Heating apparatus as claimed in any preceding claim wherein said structure (1) is profiled to conform to the shape of said infra-red source or sources (6).
- 20 6. Heating apparatus as claimed in claim 2 wherein said structure (1) consists of one or more respective troughs (28) of infra-red-reflective ceramic material, each trough (28) extending along the length of one of said lamp or lamps and around substantially one half of the circumference of said lamp.
7. Heating apparatus as claimed in claim 1 or 2 wherein said
25 structure (1) consists of a substantially flat sheet (20) of infra-red-reflective ceramic material.
8. Heating apparatus as claimed in any preceding claim and including thermal insulation to aid in preventing heat dissipation from said apparatus and/or to support said infra-red
30 source or sources (6).
9. A cooking hob comprising a cook-top (19) of glass ceramic material and at least one heating apparatus, as claimed in any preceding claim, mounted therebelow, so that infra-red radiation generated by said infra-red source or sources (6) is reflected
35 towards said cook-top (19) for transmission therethrough.

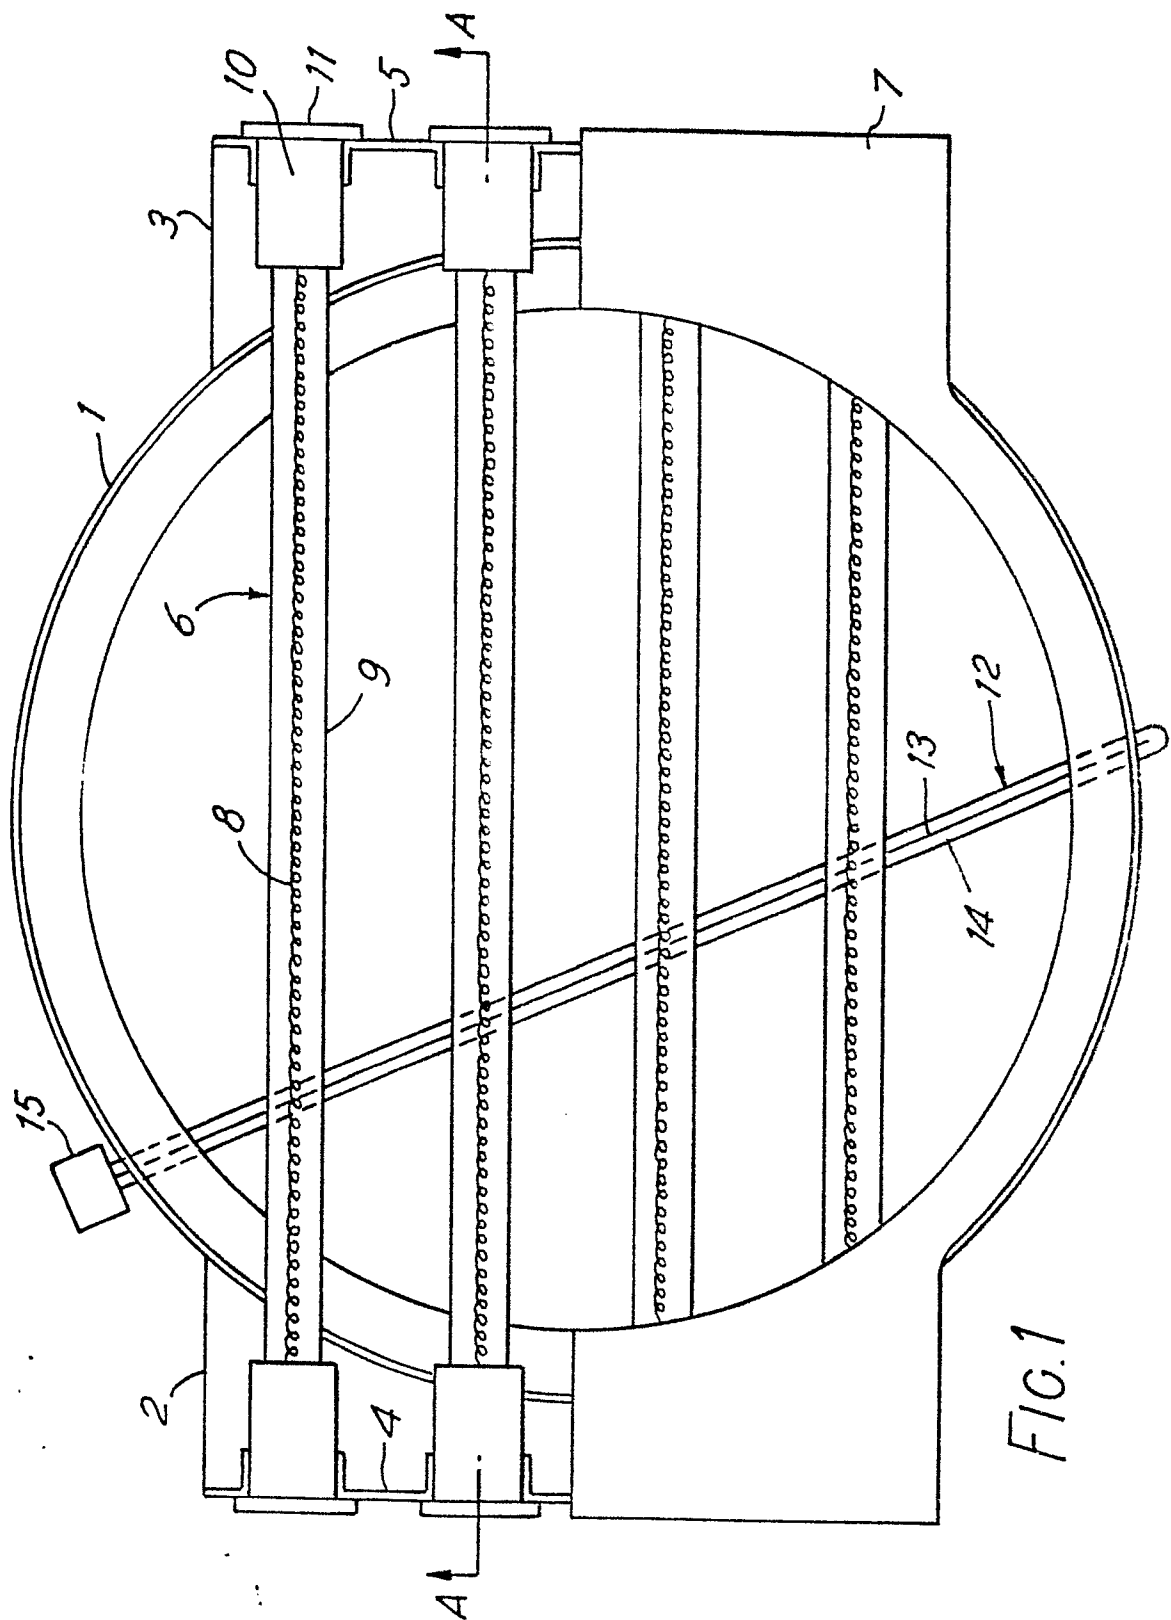

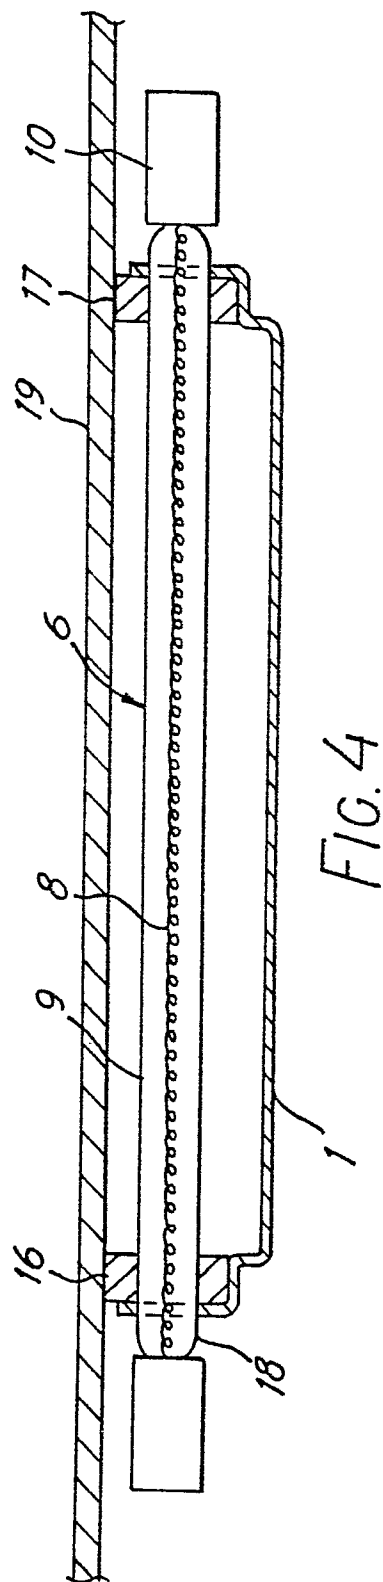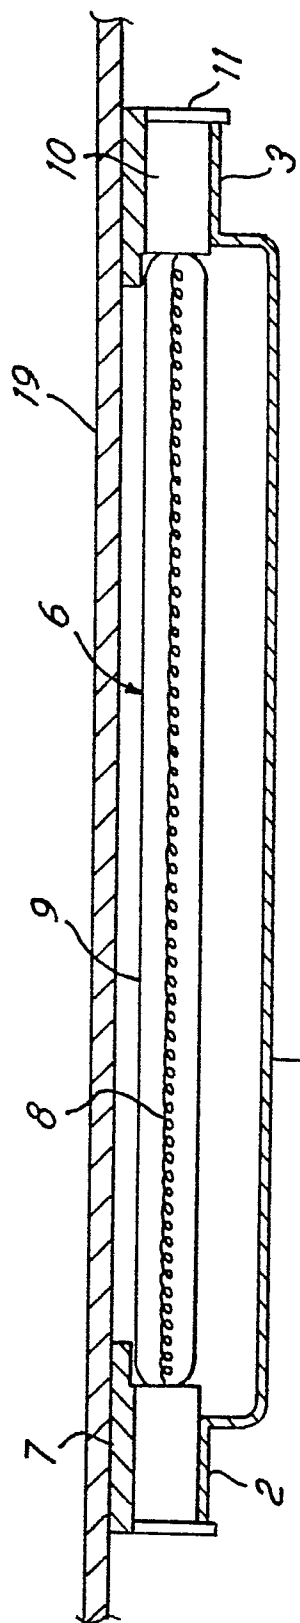



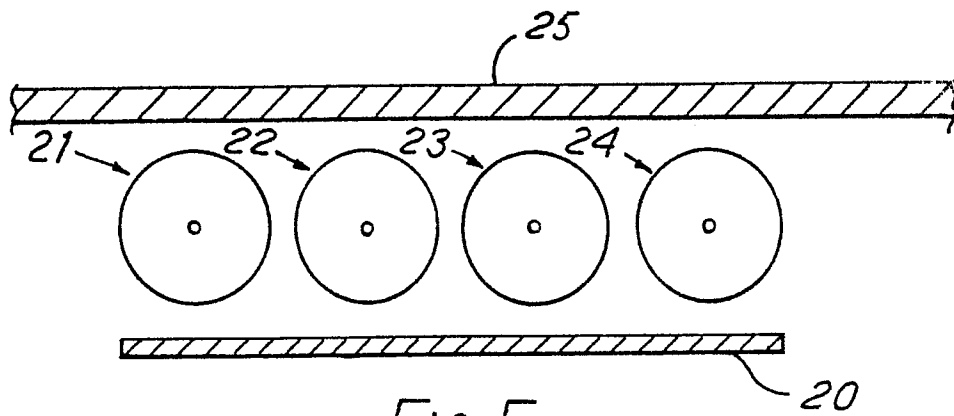


FIG. 5

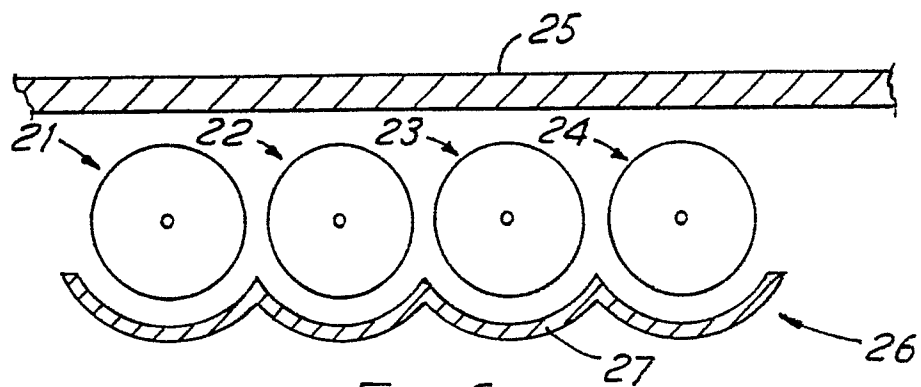


FIG. 6

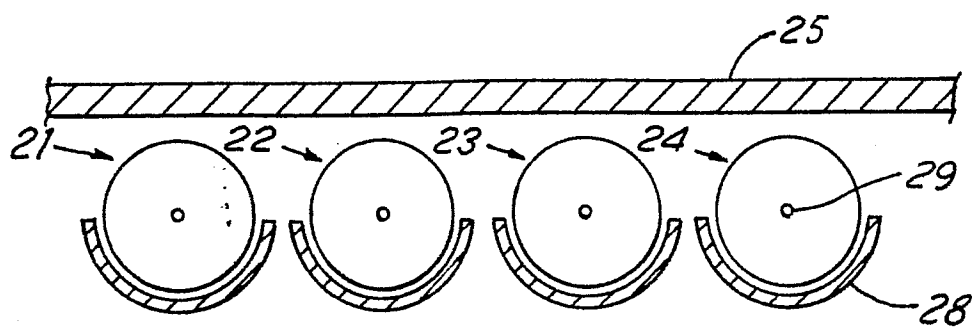


FIG. 7



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
D, Y	GB-A-2 132 060 (THORN EMI) * Page 1, lines 76-84; page 3, lines 24-33; figures 1, 3 *	1-4, 7-9	H 05 B 3/74 H 05 B 3/00
Y	DE-A-1 925 033 (FUJI) * Page 3, last paragraph; page 4, lines 1-14; figure 5 *	1, 2, 7	
A	US-A-3 355 574 (G.M.C.) * Column 4, lines 8-34; figure 4 *	1-3, 5, 6, 9	
P, X	EP-A-0 134 090 (THORN EMI) * Page 4, lines 3-24; figures 1, 2 *	1-9	
A	FR-A-2 138 464 (SCHOLTES)		
A	DE-A-2 809 131 (AKO-WERKE)		
A	US-A-3 718 497 (RICE)		
A	US-A-3 836 751 (ANDERSON)		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. Cl. 4) H 05 B 3/00 F 24 C 15/00
Place of search THE HAGUE		Date of completion of the search 26-09-1985	Examiner RAUSCH R.G.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			