

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 171 279 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **07.07.93** (51) Int. Cl.⁵: **H01P 1/213, H01P 1/205**

(21) Application number: **85305544.0**

(22) Date of filing: **05.08.85**

(54) **High frequency electrical network.**

(30) Priority: **10.08.84 GB 8420361**

(43) Date of publication of application:
12.02.86 Bulletin 86/07

(45) Publication of the grant of the patent:
07.07.93 Bulletin 93/27

(84) Designated Contracting States:
AT BE CH DE FR IT LI LU NL SE

(56) References cited:
GB-A- 1 163 896
GB-A- 1 390 809
US-A- 3 562 677
US-A- 3 597 709
US-A- 3 818 389

(73) Proprietor: **GEC-MARCONI LIMITED (No. 53403**
- formerly THE MARCONI COMPANY LIMIT-
ED)
The Grove Warren Lane
Stanmore Middlesex HA7 4LY(GB)

(72) Inventor: **Hutchinson, Ronald**
6, Wilkinson's Mead
Chelmsford Essex, CM2 6OF(GB)

(74) Representative: **Lawrence, Brian Richard et al**
GEC Patent Department GEC-Marconi Re-
search Centre West Hanningfield Road Great
Baddow
Chelmsford, Essex CM2 8HN (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

This invention relates to high frequency electrical networks having frequency dependent coupling properties so that signals at one frequency can be combined with, or separated from, signals at another frequency whilst maintaining electrical isolation between respective signal sources or loads as the case may be. One requirement of this kind arises in the combination of broadcast signals having different carrier frequencies generated by different transmitters so that they can be radiated at a common antenna, but without the output of one transmitter coupling into or adversely affecting another transmitter.

A band pass filter has been proposed in US 3 562 677 in which a plurality of resonators are mounted on opposing walls of the resonators, being provided for electrical access to the filter. However, such a device acts purely as a filter and cannot be used as a network arrangement as discussed here.

According to this invention a high frequency network includes a transmission line device in the form of a closed cavity having two opposite conductive end plates and a connecting side wall structure; four quarter wave resonators mounted within the cavity and being disposed symmetrically about an axis passing through both end plates, one pair of mutually opposite resonators being mounted on one end plate, and the other pair being mounted on the other end plate, and two coupling means are associated with the side wall structure so that each couples equally with the two closest resonators, each coupling means comprising a coupling loop.

Preferably each resonator is in the form of a hollow tube which is closed at the end which is mounted on the end plate, and is open at its other end which is spaced apart from the opposite end plate.

Preferably again the open end of each tubular resonator is capacitively coupled to its said opposite end plate by conductive means which project into the interior of the open end.

The network is very compact and simple to construct as compared with previously known networks using discrete cavities linked by external hybrid circuits and transmission lines. It can be implemented very satisfactorily for frequencies of the order of 100 MHz and for frequencies of this order it occupies significantly less space than the network disclosed in our previous patent GB-A-1390809.

The invention is further described by way of example with reference to the accompanying drawings in which:

Figures 1 and 2 show plan and elevation views respectively of a high frequency network in ac-

cordance with the invention; and

Figures 3 and 4 show plan and elevation views respectively of a modified form.

Referring to Figures 1 and 2, a hollow rectangular box-shaped cavity 1 contains four elongate hollow identical tubular resonators 3, 4, 5 and 6 disposed symmetrically about an axis 7, which is located centrally within the cavity 1. In consequence of the symmetrical disposition, the centre-lines of the four resonators 3, 4, 5 and 6 lie at the corners of a square 8. Resonators 4 and 6 are of circular section and are mounted on the underside of the upper end plate 9, whereas the remaining two resonators 3 and 5 which also have circular sections, are mounted on the upper surface of the opposite end plate 10. The way in which the resonators are mounted on the end plate constitutes a short-circuit whereas the opposite end of the resonator is open and constitutes an electrical open-circuit.

Each of the four resonators is the same length and possesses identical characteristics. Its length is a quarter wavelength of a selected frequency taking into account its propagation properties within the transmission line constituted by the cavity 1, i.e. its wavelength will differ from the free space value. The open ends 11, 12 of the cavities are capacitively coupled to the respective end plates 9, 10 by means of conductive studs 13, 14 which project through the respective end plates in an adjustable manner so that the depth of penetration into the open end of a resonator can be adjusted.

A pair of transmission line coupling loops 15, 16 are mounted on the sidewall structure of the cavity 1 which connects the end plates 9 and 10 together. Each coupling loop is mounted exactly symmetrically with respect to the two resonators which are adjacent to it. Thus coupling loop 15 is positioned equidistant from the axes of the two resonators 3 and 6, and similarly coupling loop 16 is positioned equidistant from the axes of the two resonators 4 and 5. Although in this particular example the two coupling loops 15 and 16 are mounted on opposite walls of the sidewall structure this is not necessarily always the case, and coupling loop 16 could be mounted on the wall which is adjacent to that on which the coupling loop 15 is mounted. Alternatively, again, the coupling loops 15 and 16 could be mounted on the same sidewall, but in this case they would be longitudinally displaced along a common longitudinal line so that, for example, both couple equally into resonators 3 and 6. The coupling loops 15 and 16 constitute identical transmission lines and each has a characteristic impedance which is identical to the characteristic impedance of a coaxial line 17 connected to each end of the loops.

The operation of Figures 1 and 2 is as follows. The device can be regarded as a four port network having four ports 20, 21, 22 and 23. The network resonates at a frequency determined by the dimensions of the resonators 3, 4, 5 and 6 and the magnitude of the capacitance provided by the studs 13, 14. It is not primarily dependent on the dimensions of the cavity which are sufficiently small that only a TEM wave can be supported, and thus the cavity does not behave as a conventional waveguide structure. Instead, the operation of the resonators is analogous to a transmission line. When a frequency is applied to port 20, which is exactly equal to the resonant frequency, all of the energy is passed through the network and emerges at port 23 with no energy emerging from ports 21 or 22. However, when a signal having a frequency which is spaced apart sufficiently from that of the resonant frequency is applied to port 22, all of the energy emerges at port 23 and no energy emerges at ports 20 and 21, i.e. the energy does not couple into the cavity 1. Thus, in a typical example, port 23 would be coupled to the antenna of a transmitting arrangement and two individual transmitters would be coupled to input ports 20 and 22 respectively whilst the final port 21 is terminated with the characteristic resistance of the coaxial lines 17. In this way electrical signals having mutually different carrier frequencies can be combined on to a single output port 23 for transmission to a radiating antenna, whilst enabling the two individual transmitters coupled to the ports 20 and 22 to remain completely electrically isolated.

The arrangement is particularly suitable for use at relatively low transmission frequencies in the range 50 MHz to 250 MHz, as at these frequencies conventional filter networks are of extremely large and inconvenient dimensions and complex construction.

The frequency separation required for the two signals applied to ports 20 and 22 is clearly dependent on the sharpness of the resonance characteristic of the transmission line network. The sharpness of the resonance characteristic can be increased by coupling two or more similar transmission line devices in cascade, and such an arrangement is illustrated in Figures 3 and 4. Referring to Figures 3 and 4, similarly reference numerals are used to indicate the four ports 20 to 23. It will be seen that the device consists of two cavities 30 and 31 both of which are essentially similar to the cavity 1 of Figures 1 and 2. As before, each cavity contains four resonators 32 which are spaced symmetrically around a central axis 33 or 34 as the case may be. Alternate resonators in each group of four are connected respectively to a top plate 35 or a bottom end plate 36, and the resonance frequency of each resonator is adjusted by the lon-

gitudinal penetration of a conductive stud 37 into the open end of a resonator tube as previously. Coupling between the two cavities 30 and 31 is not by means of a respective transmission line coupling loop, but simply via an aperture formed in a common conductive wall 38. Depending on the transmission characteristic required, the wall 38 may not be present, so that in effect the coupling aperture extends over the full extent and width of the structure.

Operation of the structure shown in Figures 3 and 4 is exactly analogous to that shown in Figures 1 and 2 except that the sharpness of the resonance characteristic of the frequency applied to port 20 is very much greater, enabling the frequency of the signal applied to port 20 to be much closer to that of the signal applied to port 22 without signal interference occurring between these ports. Additional cavities can be added as necessary if an even sharper resonance characteristic is required.

Although rectangular cavities are illustrated in the drawings, this is not essential, as in practice the structure shown in Figure 1 may be of a cylindrical shape, and that in Figure 2 may be of a series of cylinders linked by apertures formed where the cylinders abut.

Claims

1. A high frequency network including a transmission line device in the form of a closed cavity (1) having two opposite conductive end plates (2,10) and a connecting side wall structure; characterised in that four quarter wave resonators (3,4,5,6) are mounted within the cavity (1) and are disposed symmetrically about an axis (7) passing through both end plates, one pair of mutually opposite resonators being mounted on one end plate, and the other pair being mounted on the other end plate; and two coupling means are associated with the side wall structure so that each couples equally with the two closest resonators, each coupling means comprising a coupling loop (15, 16).
2. A network as claimed in claim 1 and wherein each resonator is in the form of a hollow tube which is closed at the end which is mounted on the end plate, and is open at its other end which is spaced apart from the opposite end plate.
3. A network as claimed in claim 1 and wherein the tubes are of circular section, and are parallel to said axis.
4. A network as claimed in claim 2 or 3 and wherein the open end of each tubular resona-

tor is capacitively coupled to its opposite end plate by conductive means which project into the interior of the open end.

5. A network as claimed in any of the preceding claims and wherein said coupling loop is in the form of a transmission line section, both ends of which are terminated by its characteristic impedance. 5
6. A network as claimed in any of the preceding claims and wherein a plurality of transmission line devices each in the form of a cavity are provided, the devices being coupled together via a common sidewall structure. 10
7. A network as claimed in claim 6 and wherein the devices are coupled together by means of an aperture in a common conductive portion of sidewall structure. 15

Patentansprüche

1. Hochfrequenznetz, das ein Übertragungsleitungsgerät enthält in Form eines geschlossenen Hohlraums (1) mit zwei einander gegenüberliegenden leitfähigen Endplatten (2, 10) und einer verbindenden Seitenwandstruktur; dadurch gekennzeichnet, daß vier Viertelwellen-Resonatoren (3,4,5, 6) innerhalb des Hohlraums (1) angebracht und symmetrisch um eine durch die beiden Endplatten hindurchtretende Achse (7) angeordnet sind, wobei ein Paar einander gegenüberliegende Resonatoren an einer Endplatte und das andere Paar an der anderen Endplatte angebracht ist; und daß zwei Kopplungsmittel mit der Seitenwand der Struktur so zugeordnet sind, daß jedes mit den zwei nächstliegenden Resonatoren gleich koppelt, wobei jedes Kopplungsmittel eine Kopplungsschleife (15, 16) umfaßt. 20
2. Netz nach Anspruch 1 und bei dem jeder Resonator die Form eines Hohlrohrs besitzt, das an dem an der Endplatte angebrachten Ende geschlossen und an seinem anderen Ende, das von der gegenüberliegenden Endplatte Abstand aufweist, offen ist. 25
3. Netz nach Anspruch 1 und bei dem die Rohre kreisförmigen Querschnitt besitzen und parallel zu der Achse sind. 30
4. Netz nach Anspruch 2 oder 3 und bei dem das offene Ende jedes rohrförmigen Resonators kapazitiv mit der anliegenden Endplatte durch leitfähige Mittel gekoppelt ist, die in das Innere des offenen Endes vorstehen. 35

5. Netz nach einem der vorangehenden Ansprüche und bei dem die Kopplungsschleife die Form eines Übertragungsleitungsabschnitts besitzt, dessen beiden Enden durch seine charakteristische Impedanz abgeschlossen sind. 40
6. Netz nach einem der vorangehenden Ansprüche und bei dem eine Vielzahl von Übertragungsleitungsgeräten jeweils in Form eines Hohlraums vorgesehen sind, und die Geräte über eine gemeinsame Seitenwandstruktur miteinander gekoppelt sind. 45
7. Netz nach Anspruch 6 und bei dem die Geräte mittels eines Durchbruchs in einem gemeinsamen leitfähigen Abschnitt der Seitenwandstruktur gekoppelt sind. 50

Revendications

1. Réseau haute fréquence comportant un dispositif de ligne de transmission se présentant sous la forme d'une cavité fermée (1) qui possède deux plaques terminales conductrices opposées (8, 10) et une structure de paroi latérale de connexion ; caractérisé en ce que quatre résonateurs quart d'onde (3, 4, 5, 6) sont montés à l'intérieur de la cavité (1) et sont disposés symétriquement par rapport à un axe (7) passant par les deux plaques terminales, une paire de résonateurs mutuellement opposés étant montée sur une plaque terminale, et l'autre paire étant montée sur l'autre plaque terminale ; et deux moyens de couplage sont associés à la paroi latérale de la structure de manière que chacun se couple de façon égale avec les deux résonateurs les plus proches, chaque moyen de couplage comprenant une boucle de couplage (15, 16). 55
2. Réseau selon la revendication 1, où chaque résonateur se présente sous la forme d'un tube creux qui est fermé au niveau de l'extrémité qui est montée sur la plaque terminale et est ouvert à son autre extrémité, laquelle est écartée de la plaque terminale opposée. 60
3. Réseau selon la revendication 1, où les tubes ont une section circulaire et sont parallèles audit axe. 65
4. Réseau selon la revendication 2 ou 3, où l'extrémité ouverte de chaque résonateur tubulaire est couplée par effet capacitif à sa plaque terminale opposée par un moyen conducteur qui fait saillie dans l'intérieur de l'extrémité ouverte. 70

5. Réseau selon l'une quelconque des revendications précédentes, où ladite boucle de couplage se présente sous la forme d'une section d'une ligne de transmission, dont les deux extrémités sont terminées par son impédance caractéristique. 5
6. Réseau selon l'une quelconque des revendications précédentes, où sont prévus plusieurs dispositifs de ligne de transmission ayant chacun la forme d'une cavité, les dispositifs étant couplés ensemble par l'intermédiaire d'une structure de paroi latérale commune. 10
7. Réseau selon la revendication 6, où les dispositifs sont couplés ensemble par l'intermédiaire d'une ouverture ménagée dans une partie conductrice commune de la structure de paroi latérale. 15

20

25

30

35

40

45

50

55

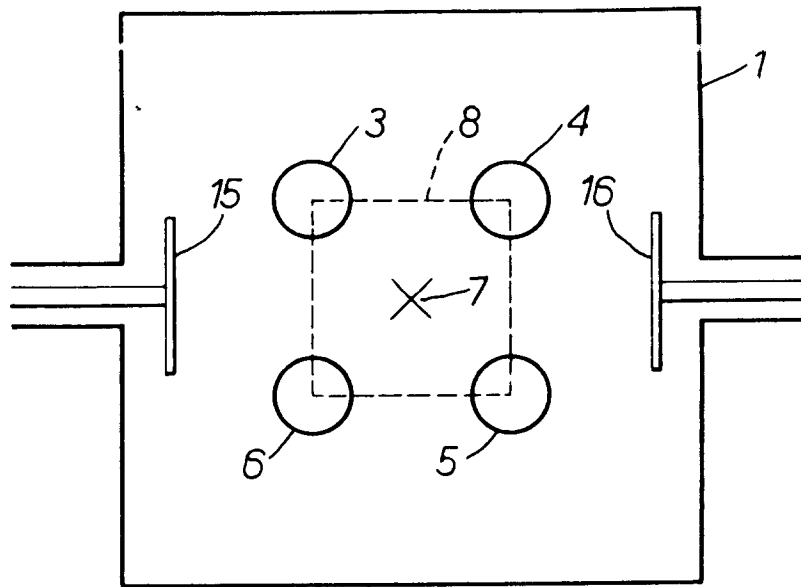


FIG. 1.

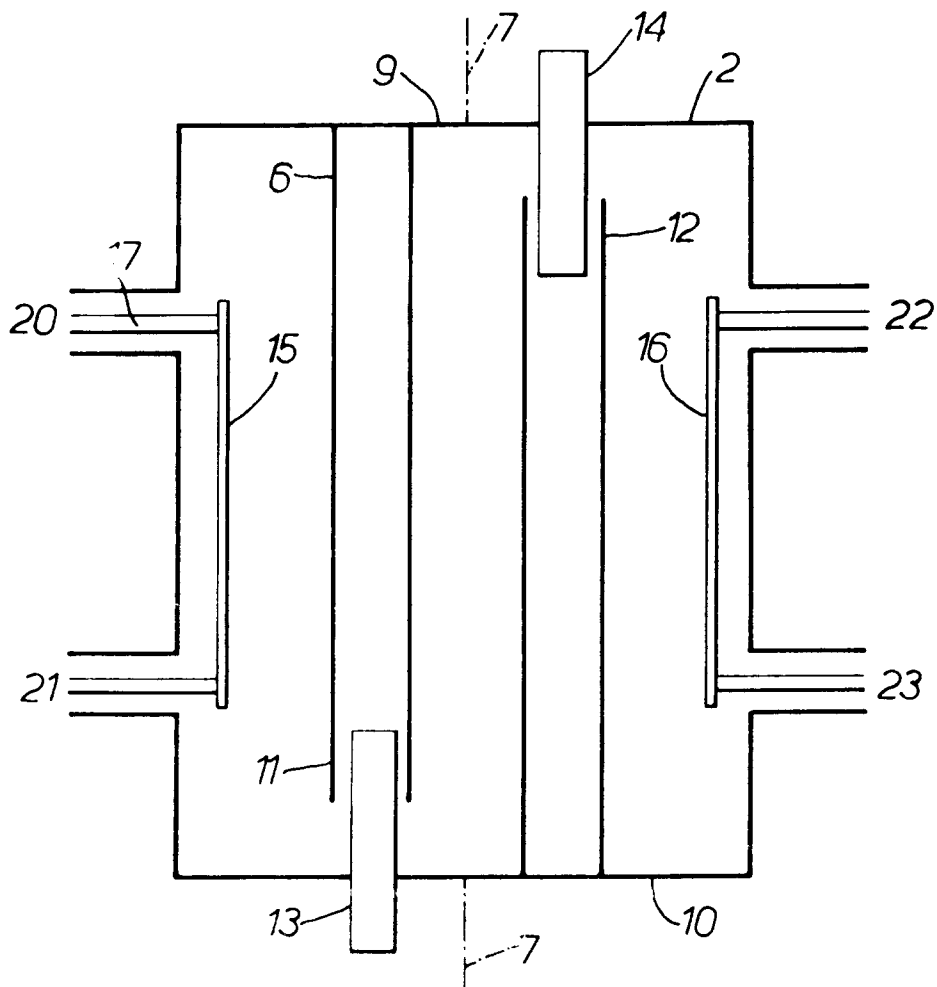


FIG. 2.

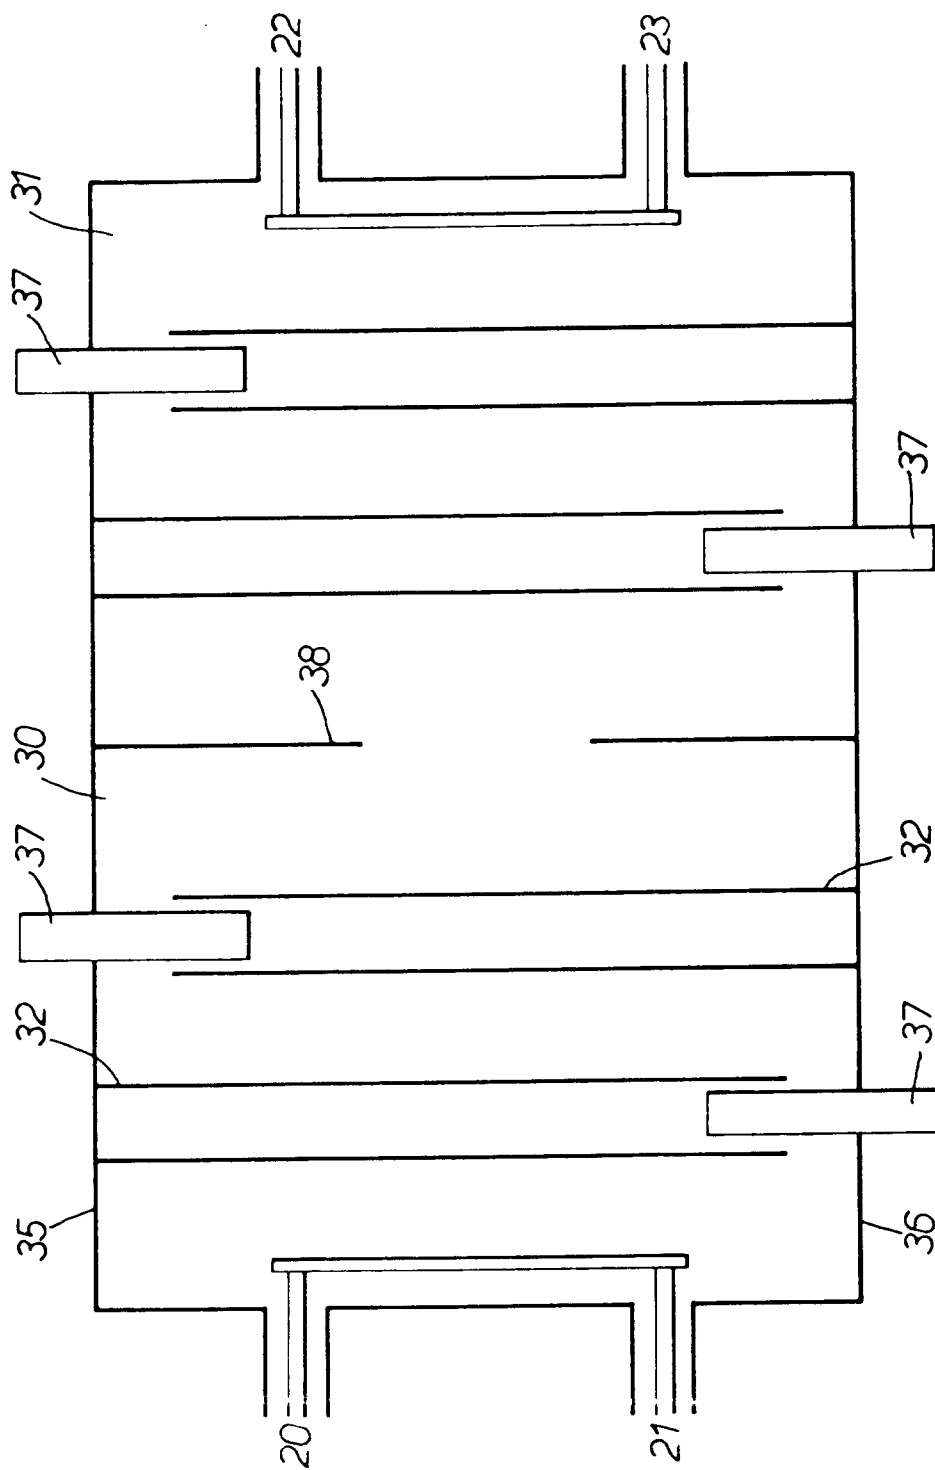


FIG. 3.

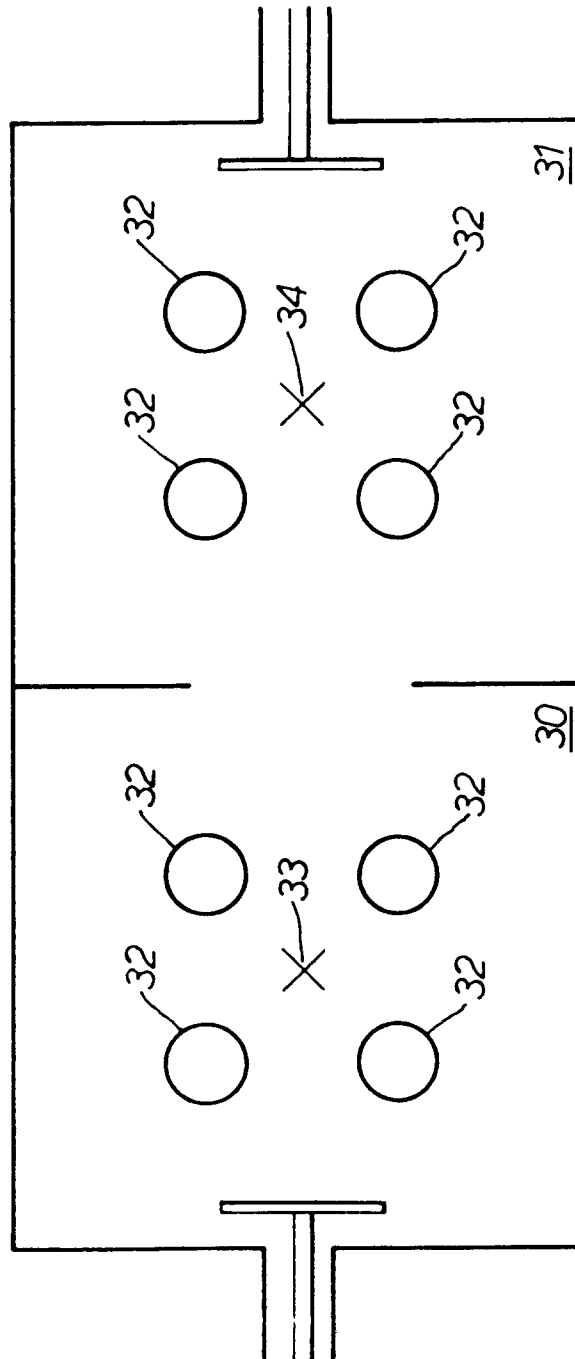


FIG.4.