

12 **EUROPEAN PATENT APPLICATION**

21 Application number: 85308099.4

61 Int. Cl.⁴: **C 11 D 1/94**
C 11 D 1/12, C 11 D 1/29
C 11 D 1/37

22 Date of filing: 07.11.85

30 Priority: 24.10.85 GB 8526302
07.11.84 GB 8428149

43 Date of publication of application:
14.05.86 Bulletin 86/20

64 Designated Contracting States:
BE DE FR GB IT NL SE

71 Applicant: **THE PROCTER & GAMBLE COMPANY**
One Procter & Gamble Plaza
Cincinnati Ohio 45202(US)

64 Designated Contracting States:
BE DE FR IT NL SE

71 Applicant: **Procter & Gamble Limited**
Hedley House
Gosforth Newcastle upon Tyne NE99 1EE(GB)

64 Designated Contracting States:
GB

72 Inventor: **Lamb, Christopher**
11 Stuart Court
Kingston Park Newcastle NE3 2SG(GB)

72 Inventor: **Lawson, John Russell**
15 The Foxhills Fallside Park
Whickham Newcastle NE16 5NN(GB)

72 Inventor: **Pearson, Carol**
20 Cobbett's Way
Wilmalow Cheshire SK9 6HN(GB)

74 Representative: **Gibson, Tony Nicholas et al,**
Procter & Gamble (NTC) Limited Whitley Road
Longbenton Newcastle upon Tyne NE12 9TS(GB)

64 **Liquid detergent compositions.**

67 Stable liquid dishwashing detergent compositions are provided incorporating an alkyl benzene sulphonate and/or alkyl sulphate, an alkyl ethoxy sulphate, an ethoxylated C₈-C₁₃ alcohol containing an average of from 3 to 12 moles of ethylene oxide and wherein the ethoxylated alcohol contains no more than 1% by weight of unethoxylated alcohol and a zwitterionic surfactant containing a C₁₀-C₁₆ alkyl group.

LIQUID DETERGENT COMPOSITIONS

Christopher Lamb

John Russell Lawson

Carol Pearson

5 Field of the Invention

This invention relates to aqueous liquid detergent compositions and particularly to dishwashing compositions incorporating a mixture of anionic, ethoxylated nonionic and zwitterionic surfactants.

10 Background of the Invention

Liquid detergent compositions intended for use as dishwashing products conventionally take the form of clear aqueous solutions containing a mixture of one or more sulphate and sulphonate anionic surfactants together with a suds
15 stabilising agent. Recently there has been a trend towards the use of magnesium cations for at least part of the anionic surfactants present, typified by the disclosures of British Patent Specifications Nos. 1,524,441 and 1,551,074, British
published Patent Application No. 2,010,893 A and European Patent
20 Application Publication No. 0039110. The art teaches that these formulations have enhanced performance, particularly when

used in water of low mineral hardness. Nevertheless, the pressure to improve the cost-effectiveness of liquid detergent compositions has meant that the search has continued for compositions having improved economy, performance and in-use characteristics. In particular, intensive effort has been expended in increasing the concentration of dishwashing liquid detergent compositions and in reducing the level of non-performing ingredients such as solvents and solubilising hydrotropes without sacrificing the storage stability of the compositions.

Ethoxylated nonionic surfactants constitute a class of materials capable of solubilising other components in aqueous media but this capability is strongly dependent on their average degree of ethoxylation (E_{av}). Highly ethoxylated nonionic surfactants, (i.e. $E_{av} > 20$), are very hydrophilic in nature and thus tend to reduce the oily soil removal capability of liquid dishwashing detergent formulations, which is undesirable where oil and grease removal is an important criterion of consumer acceptance. On the other hand, nonionic surfactants having low levels of ethoxylation (i.e. $E_{av} \leq 2$) are relatively hydrophobic and have a limited ability to form homogeneous solutions with other components in the absence of other surfactant species.

A feature shared by all ethoxylated nonionic surfactants is the presence of a level of unethoxylated material, the magnitude of which depends on the degree of ethoxylation, but which can constitute up to 20% by weight of the nonionic surfactant. Unethoxylated C_6 - C_{13} aliphatic primary alcohols are odorous materials having a low water solubility, and these characteristics are discernible in the ethoxylated alcohols to an extent which depends on the level of ethoxylation, the effect diminishing as E_{av} increases.

Liquid dishwashing detergent compositions containing alkyl sulphates and/or alkyl benzene sulphonates have been found to be particularly subject to odour and storage stability problems when formulated with ethoxylated nonionic surfactants containing

the normal spread of ethoxylated species, and this effect is more pronounced when the composition also contains magnesium ions. However, the Applicants have established that certain alcohol ethoxylates, containing less than a defined amount of unethoxylated species, and from which preferably at least part of the mono-ethoxylated species has been removed, can be incorporated in alkyl benzene sulphonate- or alkyl sulphate-containing liquid dishwashing detergent compositions without adverse effect on the storage stability of the latter.

5

10 The Applicants' copending European Application No. 84303044.6 publication No. 0125854 relates to liquid dishwashing detergent compositions of this type.

Zwitterionic surfactants are also known components of detergent compositions particularly in combination with other surfactant species. Disclosures of compositions of this type are provided by European Patent Application Publication No. 0036625 and UK Patent Application No. 2103236A, both of which relate to liquid detergent compositions containing mixtures of alkyl ethoxy sulphates in combination with other anionic

15

20 surfactants and a surface active betaine. Another disclosure is provided by Thiele et al USP 3,634,266 which describes an amylase-containing liquid detergent composition in which the surfactant system comprises a mixture of alkyl ethoxy sulphate, ethoxylated nonionic and sulphobetaine species.

25 Nevertheless, it appears that the efficacy of a zwitterionic detergent in providing enhanced grease and particulate soil removal performance is a function not only of the structure of the zwitterionic surfactant itself, but also of the detergent composition into which it is blended. In particular, it has

30 been found that zwitterionic surfactants that give a suds mileage benefit and/or acceptable greasy soil redeposition performance in one detergent matrix do not give a similar benefit over the same range of usage conditions in other matrices.

The Applicants have now made the discovery that certain narrowly defined classes of betaines provide an unexpected improvement in the soil handling capability of the compositions of the general type disclosed in the previously mentioned European Application No. 0125854.


Accordingly in the present invention there is provided a physically stable enzyme-free liquid detergent composition comprising from 22% to 65% by weight of a surfactant system composed of a mixture of anionic, nonionic & zwitterionic surfactants in an organic solubiliser/hydrotrope-water medium wherein

- i) the anionic surfactant comprises in combination
 - a) from 4% to 20% by weight of the composition of a primary C₁₀-C₁₆ alkyl sulphate;
 - b) from 5% to 20% by weight of the composition of a C₁₀-C₁₆ linear alkyl benzene sulphonate;
 - c) from 5% to 24% by weight of the composition of a C₁₀-C₁₆ alkyl ethoxysulphate containing an average of up to 6 moles of ethylene oxide per mole of ethoxysulphate;

wherein, in said anionic surfactant combination, the cations include magnesium ion in a molar amount corresponding to from 35% to 65% of the molar amount of alkyl sulphate present in the combination;

- ii) the nonionic surfactant comprises from 1% to 10% by weight of the composition of an ethoxylated C₆-C₁₃ aliphatic alcohol containing an average of from 1.5 to 25 moles of ethylene oxide per mole of alcohol, said ethoxylated alcohol containing not more than 1% by weight of unethoxylated alcohol where the alcohol contains an average of less than 9 moles of ethylene oxide and not more than 2% by weight of unethoxylated alcohol where the ethoxylated alcohol containing an average of from 9 to 25 moles of ethylene oxide per mole of alcohol;


iii) the zwitterionic surfactant comprises from 0.25% to 10% by weight of the composition of a compound of the general formula

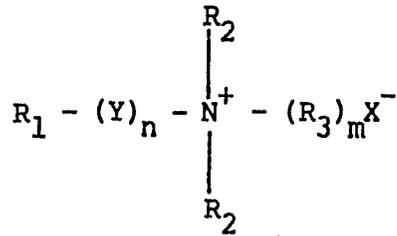

wherein R₁ is C₁₀-C₁₆ alkyl

R₂ is C₁-C₃ alkyl

R₃ is a -(CH₂)₃ group or a -(CH₂- $\overset{\overset{OH}{|}}{CH}$ -CH₂) group

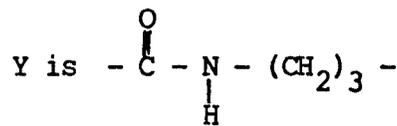

n & m are 0 or 1

X⁻ is CH₂COO⁻ or SO₃⁻;

provided that where X⁻ is CH₂COO⁻ m is 0 and where X⁻ is SO₃⁻ m is 1.

5 Preferably, in the zwitterionic surfactant, R₁ is C₁₀-C₁₆ alkyl, R₂ is methyl and n is 0 and more preferably the zwitterionic surfactant is a C₁₂-C₁₄ alkyl betaine, present in an amount of from 0.5% to 5%, most preferably in an amount of from 1.0% to 2.5% by weight of the composition

10 Preferably the ethoxylated aliphatic alcohol has an HLB in the range from 8.0 to 17.0 more preferably from 11.0 to 17.0, and most preferably from 11.0 to 15.0. Preferred compositions in accordance with the invention contain from 3 to 5% of a C₉-C₁₁ primary alcohol condensed with an average of from 6 to 10 moles of ethylene oxide per mole of

alcohol. Preferably, the ethoxylated aliphatic alcohol contains less than 0.7%, most preferably less than 0.5% of unethoxylated material, and in highly preferred compositions the level of mono-ethoxylated C₉-C₁₁ alcohol is no more than 5% by weight of the nonionic surfactant.

One useful group of compositions incorporates a three component anionic surfactant system, comprising 6-12% by weight of the composition of C₁₀-C₁₆ primary alkyl sulphate, 6-14% of a C₁₀-C₁₆ primary alkyl ethoxysulphate containing an average of from 1.5 to 3 ethoxy groups per alkyl group, and 5-15% of a C₁₀-C₁₆ alkyl benzene sulphonate. The cations in this system are a mixture of ammonium and magnesium ions, the level of magnesium corresponding to approximately one half of the molar amount of alkyl sulphate present.

Highly preferred compositions in accordance with the invention incorporate an anionic surfactant system containing from 15 to 20% by weight of the composition of a primary C₁₂-C₁₄ alkyl ethoxy sulphate stock containing an average of from 0.8 to 2.0 ethylene oxide groups per mole of C₁₂-C₁₄ alkyl ethoxy sulphate, this alkyl ethoxy sulphate stock also including from 6 to 10%, by weight of the composition, of C₁₂-C₁₄ alkyl sulphate, together with from 5 to 10% by weight of the composition of a C_{11.8} linear alkyl benzene sulphonate component.

Preferably compositions in accordance with the invention also contain 2%-8%, most preferably 3%-4% by weight of a suds booster selected from C₁₀-C₁₆ alkyl mono or di-C₂-C₃ alkanolamide.

Description of the Invention

Detergent compositions in accordance with the present invention comprise a mixture of anionic surfactants of defined constitution, in an amount of from 22% to 65% by weight of the composition, together with from 1% to 10% by weight of an ethoxylated nonionic surfactant having a low content of unethoxylated material and from 0.25% to 10% by weight of a zwitterionic surfactant of defined structure.

All compositions in accordance with the invention incorporate an alkyl sulphate and an alkyl benzene sulphonate component in combination with an alkyl ethoxy sulphate.

The alkyl sulphate component is a primary alkyl sulphate in which the alkyl group contains 10-16 carbon atoms, more preferably an average of 12-14 carbon atoms preferably in a linear chain.

5 C₁₀-C₁₆ alcohols, derived from natural fats or Ziegler olefin build-up or OXO synthesis, form suitable sources for the alkyl group. Examples of synthetically derived materials include Dobanol 23 (RTM) sold by Shell Chemicals (UK) Ltd, Ethyl 24 sold by the Ethyl Corporation, a blend of C₁₃-C₁₅ alcohols in the ratio 67% C₁₃, 33% C₁₅ sold under the trade name Lutensol by BASF GmbH and 10 Symperonic (RTM) by ICI Ltd, and Lial 125 sold by Liquichimica Italiana. Examples of naturally occurring materials from which the alcohols can be derived are coconut oil and palm kernel oil and the corresponding fatty acids.

When present in compositions in accordance with the invention, 15 the level of the alkyl sulphate component lies in the range of from 4% to 20% by weight of the composition, more generally from 4% to 16% by weight. Preferably the usage level lies in the range from 6% to 12% by weight, most preferably in the range from 6% to 10% by weight.

20 For the purposes of the present invention, the alkyl sulphate is associated with a source of magnesium ions which, as will be described hereinafter, can either be introduced as the oxide or hydroxide to neutralise the acid or can be added to the composition as a water soluble salt. However the addition of appreciable levels 25 of magnesium salts to the dishwashing compositions of the invention raises the temperature at which inorganic salt crystals form in the compositions on cooling and is therefore less preferable.

The molar amount of magnesium ion in the compositions is controlled to correspond to 0.35-0.65X, preferably 0.45-0.55X where X 30 is the number of moles of C₁₀-C₁₆ alkyl sulphate present. Most preferably the magnesium ion content is adjusted to provide the stoichiometric equivalent i.e. half the molar amount of the alkyl sulphate present. In practice the magnesium ion will be present at a level of from about 0.15% to about 0.70% by weight, preferably from 35 0.25% to 0.45% by weight of the composition.

Alkyl benzene sulphonates useful in compositions of the present invention are those in which the alkyl group, which is substantially linear, contains 10-16 carbon atoms, preferably 11-13 carbon atoms, a material with an average carbon chain length of 11.8 being most preferred. The phenyl isomer distribution, i.e. the point of attachment of the alkyl chain to the benzene nucleus, is not critical, but alkyl benzenes having a high 2-phenyl isomer content are preferred. When employed in compositions in accordance with the present invention, an alkylbenzene sulphonate content of from 5% to 20% by weight of the composition is required generally from 5% to 15% by weight. In a preferred aspect of the invention an alkylbenzene sulphonate content of from 5% to 10% by weight is used and highly preferred compositions in accordance with this aspect of the invention have from 6% to 8% of $C_{11.8}$ alkyl benzene sulphonate.

The alkyl ethoxy sulphate surfactant component comprises a primary alkyl ethoxy sulphate derived from the condensation product of a C_{10} - C_{16} alcohol with an average of up to 6 ethylene oxide groups. The C_{10} - C_{16} alcohol itself can be obtained from any of the sources previously described for the alkyl sulphate component. It has, however, been found preferable to use alkyl sulphates and alkyl ether sulphates in which the carbon chain length distributions are the same. C_{12} - C_{13} alkyl ether sulphates are preferred and the level of alkyl ethoxy sulphate in the composition lies between 5% and 24% by weight of the compositions, generally in the range from 6% to 14% by weight. In the preferred compositions, the level lies in the range from 6% to 12% by weight, most preferably in the range from 8% to 12% by weight.

Conventional base-catalysed ethoxylation processes to produce an average degree of ethoxylation of 6 result in a distribution of individual ethoxylates ranging from 1 to 15 ethoxy groups per mole of alcohol, so that the desired average can be obtained in a variety of ways. Blends can be made of material having different degrees of ethoxylation.

and/or different ethoxylate distributions arising from the specific ethoxylation techniques employed and subsequent processing steps such as distillation. For example, it has been found that equivalent sudsing and grease removal performance to that given by a blend of alkyl sulphate and alkyl triethoxy ether sulphate can be obtained by reducing the level of alkyl sulphate and using an alkyl ether sulphate with an average of approximately two ethoxy groups per mole of alcohol. In preferred compositions in accordance with the present invention the average degree of ethoxylation is from 0.5 to 4, more preferably from 0.8 to 2.0. When an alkyl ether sulphate stock of low ethoxylation level is employed as a means of incorporating both the alkyl sulphate and alkyl ether sulphate components, the level of its usage in the composition is from 10% to 25% by weight, more preferably from 15% to 20% by weight.

The counter ion for the alkyl ethoxy sulphate component can be any one of sodium, potassium, ammonium or alkanol-ammonium or a mixture thereof. However, where it is desirable to achieve a low chill point temperature, (the temperature at which inorganic salt crystals separate), a significant proportion (e.g. 30%) of the counter ions for the alkyl ethoxy sulphate component should be ammonium and in order to achieve the lowest possible chill point temperatures the alkyl ethoxy sulphate should be completely neutralized by ammonium ions.

The counter ions in association with the alkyl benzene sulphonate are independently selected in the same manner as those for the alkyl ethoxy sulphate. In order for compositions in accordance with the invention to have a chill point of $\leq 0^{\circ}\text{C}$, at least 70% of the neutralising cations for the anionic surfactants should be ammonium ions.

The ethoxylated nonionic surfactant component of the invention is a $\text{C}_6\text{-C}_{13}$ aliphatic alcohol ethoxylate containing an average of from 1.5 to 25, more preferably from 2 to 15 and most preferably from 6 to 10 moles of ethylene oxide per mole of alcohol. The aliphatic alcohol ethoxylate contains not more than 1% by weight of unethoxylated alcohol

where the ethoxylated alcohol contains an average of less than 9 moles of ethylene oxide and not more than 2% by weight of unethoxylated alcohol where the ethoxylated alcohol contains an average of from 9 to 25 moles of ethylene oxide per mole of alcohol.

The starting alcohol may be a primary alcohol or secondary but is preferably a primary alcohol which may be derived from natural or synthetic sources. Thus natural fats or oils, or products of Ziegler olefin build up reactions or OXO synthesis may all be used as the source of the hydrocarbon chain, the structure of which may be linear or branched in type.

The preferred alcohol chain length range is from C₉ to C₁₁ as it has been found that the sudsing volume and mileage performance of compositions in accordance with the invention is optimum when incorporating ethoxylates made from such alcohols. It is also desirable for performance reasons that the hydrophilic-lipophilic balance (HLB) of the ethoxylated alcohol is in the range from 8.0 to 17.0, more preferably from 11.0 to 17.0 and most preferably from 11.0 to 15.0.

As discussed with respect to the alkyl ethoxy sulfate component, the normal (base catalysed) ethoxylation process to produce an average degree of ethoxylation of 6 results in a distribution of ethoxylate species which ranges from 1 to 15 moles of ethylene oxide per mole of alcohol. An increase in E_{av} causes some change in this distribution, principally a reduction in the level of unethoxylated material, but an increase in E_{av} from 3 to 5 will still leave approximately 5-10% of such material in the ethoxylated product.


In the liquid dishwashing detergent compositions of the invention, this level of unethoxylated material will give rise to phase stability/chill point problems and/or will

result in a product having a fatty alcohol odour which is unacceptable to consumers and cannot be masked by conventional detergent perfumes. It has been found that the maximum level of unethoxylated alcohol that can be tolerated in the ethoxylated alcohol component is 1% by weight. More preferably the unethoxylated alcohol level is not more than 0.7% and most preferably is less than 0.5% by weight of the ethoxylated alcohol component. Distillation under vacuum is employed to remove the undesired material and this also removes a portion of the monoethoxylate fraction, thereby increasing the E_{av} of the remaining material. In preferred embodiments of the invention the level of monoethoxylate is not more than 5% by weight of the ethoxylated alcohol.

The level of usage of the ethoxylated alcohol component in compositions of the invention is from 1% to 10% by weight more preferably from 2 to 6% by weight and most preferably from 3% to 5% by weight. Liquid dishwashing detergent compositions in accordance with the invention and incorporating from 3% to 5% by weight of a primary alcohol containing from 9 to 11 carbon atoms condensed with an average of from 5 to 10 moles ethylene oxide per mole of alcohol to give an HLB value in the range of from 12 to 15, the alcohol ethoxylate containing <0.5% by weight of unethoxylated alcohol, display chill points <0°C together with enhanced sudsing and mileage performance relative to compositions not in accordance with the invention.

The third component of the compositions of the invention is a zwitterionic surfactant, present in an amount of from 0.25% to 10%, more preferably from 0.5% to 5% and most preferably from 1% to 2.5% by weight of the compositions.

The zwitterionic surfactant has the general formula:

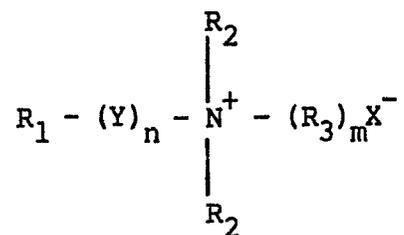

wherein R_1 is C_{10} - C_{16} alkyl

R_2 is C_1 - C_3 alkyl

R_3 is a $-(CH_2)_3$ group or a $-(CH_2-\overset{\overset{OH}{|}}{CH}-CH_2)$ group

Y is $-\overset{\overset{O}{||}}{C}-\underset{\underset{H}{|}}{N}-(CH_2)_3-$

n & m are 0 or 1

X^- is CH_2COO^- or SO_3^- ;

provided that where X^- is CH_2COO^- m is 0 and where X^- is SO_3^- m is 1.

More preferably R_1 has an average carbon chain length of from 12 to 14 carbon atoms and may be derived from synthetic sources, in which case the chain may incorporate some branching, or from natural
 5 fats and oils, in which case the chains are linear and may include minor amounts of C_8 - C_{10} and C_{14} - C_{18} moieties. Synthetic sources for the R_1 group may be the same as those mentioned previously for the alkyl group in the alkyl sulphate component.

Whilst compositions incorporating the C_{12} - C_{14} amido betaine
 10 and C_{12} - C_{14} sulpho betaine display the benefits of the invention, the most preferred compositions utilise a C_{12} - C_{14} alkyl betaine as the zwitterionic surfactant component, the C_{12} - C_{14} alkyl group being derived from a coconut or palm kernel oil feedstock.

A highly preferred optional ingredient of the composition according to the invention is a suds-promoting agent present at a level of from 2% to 8% by weight of the composition, preferably from 3% to 6% and most preferably 3%-4%.

5 The suds-promoting agent is normally a C₁₀-C₁₆ alkyl mono- or di-C₂-C₃ alkanolamide, examples including coconut alkyl monoethanolamide, coconut alkyl diethanolamide and palm kernel and coconut alkyl mono- and di-isopropanol amides. The palm kernel or coconut alkyl residue may either be 'whole cut', including the C₁₀
10 and C₁₆ fractions or may be the so-called 'narrow-cut' C₁₂-C₁₄ fraction. Synthetic sources of the C₁₀-C₁₆ alkyl group can also be used.

The balance of the formula comprises a hydrotrope-water system in which the hydrotrope may be urea, a C₁-C₃ aliphatic alcohol, a
15 lower alkyl or dialkyl benzene sulphonate salt such as toluene sulphonate, xylene sulphonate, or cumene sulphonate, or mixtures of any of these. Normally a single hydrotrope will be adequate to provide the required phase stability, but compositions in accordance with the present invention preferably employ a mixture such as
20 urea-alcohol-water, alcohol-lower alkyl benzene sulphonate-water or urea-lower alkyl benzene sulphonate-water in order to achieve the desired viscosity, and to remain stable and easily pourable. For compositions having an organic active concentration less than about 40% by weight, the preferred alcoholic hydrotrope is ethanol which is
25 employed at from 3% to 10% by weight of the composition, preferably at from 4% to 8%, usually in admixture with urea. For compositions having an organic active concentration greater than about 40% by weight, mixtures of ethanol with urea and/or lower alkyl benzene sulphonate are preferred. Mixtures of hydrotropes can, of course,
30 be employed for cost effectiveness reasons irrespective of any stability/viscosity considerations.

Optional ingredients of the liquid detergent compositions of the invention include opacifiers such as ethylene glycol distearate, thickeners such as guar gum, antibacterial agents such as glutaraldehyde and Bronopol (RTM), antitarnish agents such as
5 benzoxytriazole, heavy metal chelating agents such as ETDA or ETDMP, perfumes and dyes. The pH of the compositions may be anywhere within the range 6-7.5 but as manufactured the compositions normally have a pH in the range 6.6-7.3 and are subjected to a final pH trimming operation to obtain the desired finished product pH. For coloured
10 products the pH preferably lies in the range 6.5-6.9 in order to maintain colour stability.

The compositions of the invention can be made in a number of ways but it is preferred that the zwitterionic surfactant is incorporated towards the end of the making process if not actually forming the
15 last ingredient to be added. This minimises the risk of any degradation of the zwitterionic surfactant under the acid conditions existing at the beginning of the making process and also facilitates the control of the viscosity of the finished product.

Thus, individual anionic surfactants can be made as aqueous
20 solutions of alkali metal or ammonium salts which are then mixed together with the ethoxylated nonionic surfactant, followed by the suds booster and the hydrotrope, after which any magnesium ion can be introduced as a water soluble salt such as the chloride or sulphate. The zwitterionic surfactant and any optional minor ingredients are
25 then added at the same time as the pH and viscosity are adjusted. This method has the advantage of utilising conventional techniques and equipment but does result in the introduction of additional chloride or sulphate ions which can increase the chill point temperature (the temperature at which inorganic salts precipitate as
30 crystals in the liquid).

In order to simplify the making process the alcohol and alcohol ethoxylate can be mixed together and a single sulphonation and neutralisation can then be carried out on these two materials. For this, the alcohol and alcohol ethoxylate should be mixed in a weight
35 ratio lying in the range 4:3 to 1:6. In the most preferred technique however, a single alcohol ethoxylate stock is produced in which the levels of alcohol and ethoxylated alcohol species are controlled to provide the desired ratio of these starting materials.

Sulf(on)ation of the alcohol, alcohol ethoxylate and alkyl benzene can employ any of the conventional sulph(on)ating agents such as sulphur trioxide or chlorosulphonic acid. Neutralisation of the alkyl ether sulphuric acid and the alkyl sulphuric acid is then
5 carried out with the appropriate alkali or with a magnesium oxide or hydroxide slurry which avoids the addition of chloride or sulphate ions.

In one variant of this technique the alkyl benzene sulphonic acid is added to a neutralising medium, comprising ammonium hydroxide in
10 an ethanol-water solution, to which the ethoxylated nonionic surfactant has also been added. This paste then forms a 'heel' to which the suds booster and a magnesium hydroxide slurry are added followed by the mixed alkyl sulphuric and alkyl ether sulphuric acids. The neutralisation of the alkyl sulphate and alkyl ether
15 sulphate actives is carried out to a pH < 4 in order to ensure dissolution of the magnesium hydroxide, after which the pH is adjusted to the finished product pH of 6.6-7.3 and the minor ingredients (colour, perfume, bactericides etc.) are added before the zwitterionic component is blended and final adjustment of the
20 viscosity is carried out.

A further and preferred variation involves the neutralisation of the mixed alkyl sulphuric and alkyl ether sulphuric acids in the alcoholic ammonia solution and the use of this paste, at a surfactant concentration of from 40 to 60% by weight and a pH of from 7 to 8, as
25 the 'heel' to which the monoethanolamide suds booster, magnesium hydroxide slurry and alkyl benzene sulphonic acid are added. The pH of the system after the sulphonic acid is added must be in the range of from 2 to 4 to ensure complete dissolution of the magnesium hydroxide. The minor ingredient addition, pH trimming, zwitterionic
30 surfactant incorporation and viscosity adjustment are as before.

Preferred compositions in accordance with the invention are clear single phase liquids, but the invention also embraces opaque products containing dispersed phases provided that such products are physically stable (i.e., do not separate) on storage.

35 The invention is illustrated in the following non-limitative examples in which all parts and percentages are by weight unless otherwise specified.

0181212

EXAMPLE 1

The following compositions were prepared:

	A	B	C	D	E	F	G	H
Ammonium C _{11.8} linear								
5 alkyl benzene sulphonate	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5
Ammonium C ₁₂₋₁₃ alkyl								
(EO) ₂ sulphate	9.9	9.9	9.9	9.9	9.9	9.9	9.9	9.9
Magnesium C ₁₂ -C ₁₃								
alkyl sulphate	8.2	8.2	8.2	8.2	8.2	8.2	8.2	8.2
10 Primary alcohol								
ethoxylate ¹	-	-	-	-	4.7	4.7	4.7	4.7
Zwitterionic surfactant	-	0.75	1.5 ²	2.25 ²	-	1.5 ²	1.5 ³	1.5 ⁴
Coconut Monoethanolamide	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
Ethanol	9.0	9.0	9.0	9.0	4.0	4.0	4.0	4.0
15 Water	_____ to 100 _____							

¹ A predominantly linear C₉-C₁₁ alcohol blend containing an average of 10 ethylene oxide units per mole of alcohol, and containing less than 2% by weight of unethoxylated alcohol.

20 ² A Coconut amido propyl betaine in which >70% by weight of the alkyl groups comprise C₁₂ or C₁₄ radicals.

³ A Coconut alkyl sulphobetaine in which >95% by weight of the alkyl group comprise C₁₂ or C₁₄ radicals.

25 ⁴ A Coconut alkyl betaine in which >95% by weight of the alkyl groups comprise C₁₂ or C₁₄ radicals.

In the preparation of Compositions A-D, a mixture of alcohol and alcohol ethoxylate was sulphated using SO₃-air sulphation, and was then neutralised to a solution pH of 4 in an alcoholic ammonium hydroxide solution to which magnesium hydroxide had been added in an amount corresponding to half the molar quantity of alkyl sulphate present. After dissolution of the magnesium hydroxide, ammonia was added to form a neutralising solution for the alkyl benzene sulphonic acid. A separate sulphonation of the alkyl benzene was employed to produce the alkyl benzene sulphonic acid which was added to the alkaline solution of the other actives and neutralised with the excess ammonia to pH 7. The monoethanolamide and, where present, the betaine were then added before final pH trimming to pH 6.8. The chill point of Composition A was -5°C. Compositions incorporating ethoxylated nonionic surfactant (i.e. E-H) were prepared in a similar manner except that the ethoxylated nonionic surfactant was added during the final pH trimming operation.

A comparison of the suds mileage of the compositions under identical test conditions was made using a prepared particulate soil and a prepared grease soil in the mechanical sudsing test method described.

Test Conditions

Product Concentration 0.12%
Water Temperature 47°C
Water Hardness 2°H and 18°H

25 Particulate soil

Soil : Cake Mix / Mixed free fatty acids (MFFA)

The Cake Mix is McDougall's Sponge Mix

The free fatty acids comprise 2 parts oleic acid

2 parts linoleic acid

30

1 part stearic acid

2.5 parts palmitic acid

367 parts corn oil

to give 2% MFFA mixture.

Grease soil

35

6 parts palmitic acid

94 parts corn oil

to give 6% FA soil

Test Method

The method uses 4 cylinders of length 30 cm and diameter 10 cm fixed side by side, and rotatable at a speed of 24 rpm about a central axis. Each cylinder is charged with 500 mls
 5 of product solution at a concentration of 0.12% and a temperature of 47°C. The outer two cylinders are used for one of the products being compared and the inner two for the other product.

The cylinders are rotated for 2 minutes, stopped, the
 10 initial suds are measured and a soil load is then added. In the particulate soil test all of the Cake Mix soil (5g) is added together at this stage with 1 ml of the 2% MFFA. In the grease soil test 1 ml of the 6% FA soil alone is added. After 1 minute the cylinders are restarted and allowed to
 15 rotate for 1 minute. The suds height is noted and 1 ml of the 2% MFFA or 6% FA (depending on the test) is added to each cylinder. After 1 minute the cylinders are restarted. This process continues until the suds height in the cylinder is lower than 0.3 cms.

20 One product is designated as the control and suds mileage figures are calculated for the other product versus the 'control' product on the following basis.

Mileage of test product

$$25 \quad = \frac{\text{number of soil additions to test product solution to reduce suds height to 0.3 cm}}{\text{number of soil additions to control product to reduce suds height to 0.3 cm}} \times 100$$

The results of various mileage comparisons were as follows;

1) Comparison of compositions A-D using composition A as control (i.e. 100%):

	Particulate soil		Grease soil		
	Mileage		Mileage		
	2°H	18°H	2°H	18°H	
5	A	100	100	100	100
	B	110	113	-	-
10	C	128	104	114	113
	D	125	105	-	-

2) Comparison of compositions A, C and E-H using composition E as control (i.e. 100%):

	Particulate soil		Grease soil		
	Mileage		Mileage		
	2°H	18°H	2°H	18°H	
15	A	80	80	80	80
	C	108	84	94	100
	E	100	100	100	100
20	F	125	125	123	107
	G	125	137	122	109
	H	150	136	135	128

A comparison of the performance of compositions A-D shows that little, if any, benefit is obtained from increasing zwitterionic level above 1.5% by weight of the composition.

It can be seen that in a comparison of the mileage performance of compositions A, C, E and F, the addition of 1.5% betaine to composition A to form composition C does not produce as great an overall mileage benefit as does the addition of 4.7% alcohol to composition A to form composition E. Addition of betaine to composition E to form composition F provides, overall, a greater benefit than that arising from adding betaine to composition A to form composition C. Comparison of the mileage performance of compositions E-H show that

whilst both the amido betaine-containing composition F and the sulphobetaine containing composition G both show significant advantages over the base composition E, the alkyl betaine-containing composition H is much superior to the other two.

5 EXAMPLE 2

Products were made using the process of Example 1 having the following compositions:-

	I	J	K	L	M
10 Ammonium C _{11.8} Linear alkyl benzene sulphonate	14.3	14.3	14.8	6.0	-
C ₁₂ -C ₁₃ alkyl (EO) _{0.8} sulphate ¹ comprising approximately 57% by weight of C ₁₂ -C ₁₃ alkyl sulphate	16.8	16.8	17.3	20.0	25.0
15 Primary alcohol ethoxylate ²	4.7	4.7	4.7	4.7	4.7
Coconut monoethanol-amide	3.8	3.8	3.8	3.8	3.8
Zwitterionic surfactant ³	-	1.5	1.5	1.5	1.5
Solubiliser system ⁴	9.0	9.0	9.0	9.0	9.0
Water					to 100

20 ¹ Associated with a mixture of Magnesium and Ammonium ions, the amount of magnesium corresponding to half the molar level of alkyl sulphate present

25 ² A predominantly linear C₉-C₁₁ alcohol blend containing an average of 10 ethylene oxide units per mole of alcohol, and containing less than 2% by weight of unethoxylated alcohol.

³ A Coconut alkyl betaine in which 95% by weight of alkyl groups comprise C₁₂ or C₁₄ radicals.

⁴ 5% Ethanol 4% urea.

30 The performance of the above products was then assessed using the test methods identified below:-

1. Grease Cutting

8.5 cm dia metal dishes each containing 5 ml of solidified household fat (Mpt 45°C), as a uniform thickness layer, were suspended in a 0.12% solution of each product at 45°C for 30 minutes. The fat released by each product solution was collected via an inverted funnel immersed in the solution and overlying the dish. The weight of the fat released and collected was measured. Tests were carried out in both 2°H and 18°H water and the average of the measured fat weight in the two water hardnesses calculated for each product. This was then compared to that released by the standard product I and expressed as an Index Value relative to product I at 100.

2. Grease redeposition

Clean ceramic slides were dipped into product solutions comprising 500 mls of 0.12% wt concentration in 2°H and 18°H water containing 5 mls household fat soil which had been mixed at 45°C for 2 minutes. The slides were withdrawn and compared and graded visually by an expert panel. The results were recorded in terms of panel score units of a Scheffè scale and the average of the results for each product in the two water hardnesses were expressed as better than, or poorer than, the standard product I.

3. Initial Suds

A model test was employed in which product solutions of 0.12% concentration at 45°C with no soil present were subjected to impact by pouring 4.5 litres of water at 45°C on to the solution from a height of 20 cm in a 9 litre graduated bowl. The height of the suds generated by this technique was found to be correlatable to the initial suds experienced by consumers in use. The performance of each product was expressed as better than, or poorer than, that of the standard product I.

4. Suds Mileage

This was carried out as described in Example 1 except that the grease soil comprised 5% of a mixture of fatty acids and 95% corn oil by weight, the mixture of fatty acids comprising 2 parts oleic acid, 2 parts linoleic acid, 1 part stearic acid and 2.5 parts palmitic acid. Product I was used as the standard.

The results were as follows:

	I	J	K	L	M
Grease Cutting	100	150	150	150	150
Grease Redeposition	STD	POORER	POORER	BETTER	BETTER
5 Initial Suds	STD	-VE	STD	STD	
Mileage (2°H/18°H):					
Grease	100/100	122/114	160/130	154/135	70/87
Particulate	100/100	150/136	133/120	128/132	108/108

It can be seen that Products J, K and L in accordance with the
10 invention, although providing the suds mileage benefits of the
invention do not all perform equally well in other areas. Product
J, which comprises the addition of 1.5% alkyl betaine to Product I,
improves suds mileage and grease cutting but shows technical
deficiencies in initial suds level and grease redeposition. A more
15 preferred embodiment Product K, in which the anionic surfactant level
has been slightly increased, eliminates the initial suds performance
deficiency of Product J. A highly preferred embodiment of the
invention is constituted by Product L in which the ratio of alkyl
benzene sulphonate to alkyl sulphate/alkyl ether sulphate has been
20 significantly reduced. This formulation demonstrates improved
grease redeposition performance relative to the other products,
whilst employing a lower total level of anionic surfactant.
However, elimination of the alkyl benzene sulphonate component and an
increase in the level of the alkyl sulphate/alkyl ether sulphate
25 component to give a formulation of equal cost (Product M) shows a
marked decline in suds mileage performance, particularly on greasy
soils, where the performance is worse than that of the reference
product I.

CLAIMS

0181212


1. A physically stable enzyme-free liquid detergent composition comprising from 22% to 65% by weight of a surfactant system composed of a mixture of anionic, nonionic
5 & zwitterionic surfactants in an organic solubiliser/hydrotrope-water medium characterised in that

- i) the anionic surfactant comprises in combination
- a) from 4% to 20% by weight of the composition of a primary C₁₀-C₁₆ alkyl sulphate;
 - 10 b) from 5% to 20% by weight of the composition of a C₁₀-C₁₆ linear alkyl benzene sulphonate;
 - c) from 5% to 24% by weight of the composition of a C₁₀-C₁₆ alkyl ethoxysulphate containing an average of up to 6 moles of ethylene oxide per
15 mole of ethoxysulphate;

wherein, in said anionic surfactant combination, the cations include magnesium ion in a molar amount corresponding to from 35% to 65% of the molar amount of alkyl sulphate present in the combination;

- 20 ii) the nonionic surfactant comprises from 1% to 10% by weight of the composition of an ethoxylated C₆-C₁₃ aliphatic alcohol containing an average of from 1.5 to 25 moles of ethylene oxide per mole of alcohol, said ethoxylated alcohol containing not more than 1% by weight
25 of unethoxylated alcohol where the alcohol contains an average of less than 9 moles of ethylene oxide and not more than 2% by weight of unethoxylated alcohol where the ethoxylated alcohol containing an average of from 9 to 25 moles of ethylene oxide per mole of alcohol;


iii) the zwitterionic surfactant comprises from 0.25% to 10% by weight of the composition of a compound of the general formula

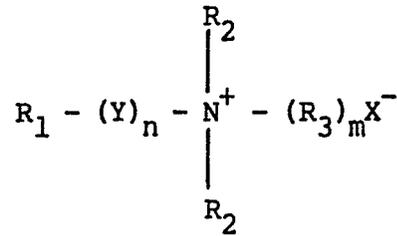

wherein R₁ is C₁₀-C₁₆ alkyl

R₂ is C₁-C₃ alkyl

R₃ is a -(CH₂)₃ group or a -(CH₂-CH(OH)-CH₂) group

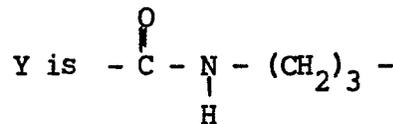

n & m are 0 or 1

X⁻ is CH₂COO⁻ or SO₃⁻;

provided that where X⁻ is CH₂COO⁻ m is 0 and where X⁻ is SO₃⁻ m is 1.

2. A detergent composition according to claim 1 wherein the
 5 anionic surfactant combination comprises from 6% to 12% of a
 C₁₂-C₁₄ alkyl sulphate, from 5% to 15% of a C₁₁-C₁₃
 alkyl benzene sulphonate and from 6% to 14% of a C₁₂-C₁₄
 alkyl ethoxysulphate containing an average of not more than 2
 ethoxy groups per mole of ethoxy sulphate, the cations in said
 10 combination including magnesium ion in a molar amount
 corresponding to approximately 50% of the molar amount of alkyl
 sulphate present in the combination.

3. A detergent composition according to either one of claims 1 and 2 wherein the alkyl sulphate and alkyl ethoxysulphate components are provided by a single alkyl ethoxysulphate stock containing an average of from 0.8 to 2.0 ethoxy groups per mole of alkyl ethoxy sulphate, said single stock being present in an amount of from 10% to 25% by weight of the composition.
- 5
4. A detergent composition according to any one of claims 1-3 wherein the anionic surfactant combination comprises from 5% to 10% by weight of a C₁₁-C₁₃ linear alkyl benzene sulphonate and from 15% to 20% by weight of C₁₂-C₁₄ linear alkyl ethoxy sulphate containing approximately 0.8 ethoxy groups per mole of alkyl ethoxy sulphate.
- 10
5. A detergent composition according to any one of claims 1-4 wherein the nonionic surfactant has an HLB in the range from 8.0 to 17.0.
- 15
6. A detergent composition according to any one of claims 1-5 wherein the nonionic surfactant comprises from 2% to 6% of a linear C₉-C₁₁ alcohol containing an average of from 6 to 10 moles of ethylene oxide per mole of alcohol.
- 20
7. A detergent composition according to any one of claims 1-6 wherein the zwitterionic surfactant is 1(N, N dimethyl N-C₁₂-C₁₄ alkyl ammonio) methane - 1 - carboxy and comprises from 1% to 5% by weight of the composition.



DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
A	EP-A-0 062 371 (PROCTER & GAMBLE CO.) * abstract, claims 1, 2 *		C 11 D 1/94 C 11 D 1/12 C 11 D 1/29 C 11 D 1/37
D,A P	EP-A-0 125 854 (PROCTER & GAMBLE LTD.) * example 2, claims 1-4 *		
D,A	GB-A-2 010 893 (UNILEVER LTD.) * claims 1-8 *		
D,A	EP-A-0 039 110 (PROCTER & GAMBLE CO.) * claim 1 *		
D,A	EP-A-0 036 625 (HENKEL KG aA) * claims 1-4 *		TECHNICAL FIELDS SEARCHED (Int. Cl. 4) C 11 D 1/00
The present search report has been drawn up for all claims			
Place of search BERLIN	Date of completion of the search 29-01-1986	Examiner SCHULTZE D	

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
 Y : particularly relevant if combined with another document of the same category
 A : technological background
 O : non-written disclosure
 P : intermediate document

T : theory or principle underlying the invention
 E : earlier patent document, but published on, or after the filing date
 D : document cited in the application
 L : document cited for other reasons
 & : member of the same patent family, corresponding document