

12

EUROPEAN PATENT APPLICATION

21 Application number: 85850056.4

51 Int. Cl.⁴: **E 21 B 10/04**
E 21 B 10/46, E 21 B 10/60

22 Date of filing: 19.02.85

43 Date of publication of application:
27.08.86 Bulletin 86/35

84 Designated Contracting States:
BE DE FR GB


71 Applicant: **Strata Bit Corporation**
600 Kenrick Suite A1
Houston Texas 77060(US)

72 Inventor: **Dennis, Mahlon D.**
2126 Riverlawn Drive
Kingwood Texas 66338(US)

74 Representative: **Forsberg, Lars-Ake et al,**
Sandvik AB Central Services Patents and Licences
S-811 81 Sandviken(SE)

54 **Rotary drill bit.**

57 A rotary drill bit includes a cutting face (24) having a peripheral edge (26) and a central recess (28). A plurality of fluid discharge nozzles (18) are mounted in the cutting face (24). A plurality of cutter elements (14) are mounted in the peripheral edge (26) and in the recess (28) to fracture an earthen core formed as the drill cuts through a formation. A plurality of lateral discharge passages (36) extend radially through the bit body (10) from said recess (28) and extend longitudinally to the peripheral edge (26) to form circumferential interruptions in the peripheral edge (26). A convex protrusion (34) is disposed centrally at a longitudinally inner end of the recess (28) and includes a convex deflecting surface (40) arranged to contact and fracture the earthen core and deflect the cuttings to the lateral discharge passages (36). A ridge (50) is disposed along a trailing edge of each of the discharge passages (36) to retard the flow of drilling fluid into the associated discharge passage (36) from an adjacent one of the nozzles (18), whereby such fluid is caused to flow across cutter elements (14) located behind the ridges (50).

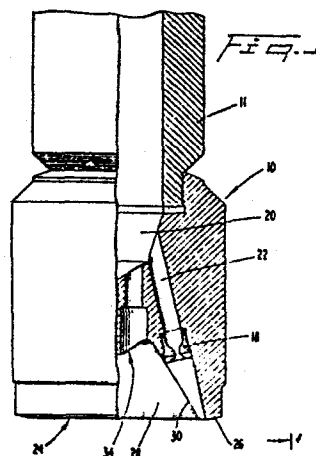

The present invention relates to drill bits for use in rotary drilling through earth formations.

In a typical rotary drilling operation, a rotary drill bit is rotated while being advanced into a soil or rock formation. The soil or rock is cut by cutting elements on the drill bit, and these cuttings are flushed from the borehole by the circulation of drilling fluid toward the top of the borehole. The drilling fluid is delivered to the drill bit downwardly through a passage in the drill stem and is ejected outwardly through nozzles disposed in the cutting face of the drill bit. The ejected drilling fluid is directed outwardly through the nozzles at high speed to aid in cutting, and to flush the cuttings and cool the cutter elements.

A traditional area of concern in the design of rotary drill bits of this type involves the configuration at the center of rotation of the bit cutting face where the linear speed of the cutter elements is relatively slow.

It has been heretofore proposed to provide a drill bit with a concave recess at the center of the cutting face. When cutting through a hard substance, a core of the substance is formed within the recess. The core is gradually broken up by cutter elements disposed within the recess and/or by an inclined surface disposed at an inner end of the recess. The inclined surface also deflects the cuttings laterally through a discharge passage in the bit body. A drill bit of that type has utility in the cutting of both hard and soft substances. In the latter, the lateral discharge passage promotes the discharge of a high volume of cuttings which might otherwise clog-up the recess; thus, cutting may proceed at a faster rate. Exemplary of drill bits of that type are the bits disclosed in US-A-2 931 630, US-A-3 727 704 and US-A-4 234 048.

Drill bits of the above-described type are subject to certain shortcomings, however, as determined by the present inventor. For example, as the core is engaged and broken up by the inclined surface at the inner end of the recess, an unbalanced
5 force pattern is established on the drill bit. That is, the force generated by the contact between core and the inclined surface includes a radial component which tends to displace the drill bit from its intended travel path. As a result, it becomes difficult to cut in a predetermined straight path.

10

Furthermore, in cases where the discharge passage in the bit body extends longitudinally all the way to the forward end of the bit, there may be a tendency for drilling fluid to bypass some of the cutting elements mounted on the bit. That is,
15 such a discharge passage forms a convenient travel path for drilling fluid to travel directly from the nozzle to the annulus without contacting the cutter bits to flush and cool same.

It is, therefore, an object of the present invention to minimize or obviate problems of the above-described sort.
20

Another object is to provide a drill bit which has utility in hard and soft substances and which promotes drilling in a straight direction.

25

A further object is to provide such a drill bit which minimizes tendencies for drilling fluid to bypass the cutter elements.

30 An additional object is to provide a centrally recessed drill bit which fractures a core without generating appreciable unbalanced forces on the bit.

A further object is to provide such a drill with a dam that
35 deflects drilling fluid toward cutter elements which otherwise would be bypassed.

The above and other objects are attained by giving the invention the characterizing features stated in the appending claims.

The invention is described in detail in the following description with reference to the accompanying drawings in which one embodiment is shown by way of example. It is to be understood that this embodiment is only illustrative of the invention and that various modifications thereof may be made within the scope of the claims.

10

In the drawings, Fig. 1 is a side elevational view, partially in longitudinal section, of a drill bit and drill string according to the present invention.

15 Fig. 2 is an end view of the drill bit, depicting the series of holes for receiving cutter elements and nozzles; some of the holes remaining empty in Fig. 2 and the remaining holes being depicted as containing nozzles and cutter elements.

20 Fig. 3 is a side elevational view of a cutter element employed in the drill bit.

Fig. 4 is a longitudinal sectional view through the drill bit taken along line 4-4 of Fig. 2, with the nozzles and cutter
25 elements being omitted for clarity.

Fig. 5 is a side elevational view of the drill bit taken along line 5-5 of Fig. 2, with the nozzles and cutting elements being omitted for clarity.

30

Fig. 6 is a cross-sectional view taken along the line 6-6 in Fig. 2 to depict a lateral discharge passage and a dam-forming ridge mounted along a trailing edge of the discharge passage.

35 Depicted in Figs. 1 and 2 is a rotary drill bit 10 mounted

at the end of a drill stem 11. A plurality of small bores 12 (Fig. 2) are formed in the drill bit body 10 which are adapted to receive cutter elements 14 (Fig. 3). The cutter elements 14 may comprise polycrystalline diamond studs in a conventional
5 manner.

A plurality of larger bores 16 are provided in the drill bit for the reception of nozzles 18 for discharging jets of drilling fluid. The drilling fluid is conducted to the nozzles 18
10 through a passage 20 in the drill stem 11 and drill bit 10 which communicates with passages 22 in the drill bit. The jet streams aid in the cutting of the formation, cooling of the drill bit cutters, and carrying of the cuttings to the top of the borehole.

15 The cutting face 24 of the drill bit comprises an outer peripheral edge 26 and a central recess 28. The outer edge 26 slopes longitudinally inwardly (upwardly) and radially outwardly. The recess 28 is defined by side walls 30 which are
20 inclined longitudinally and radially inwardly. The cutting elements 14 are positioned in the peripheral edge 26, in the side walls 30, and in a floor 32 of the recess 28. Most of the nozzles 18 are positioned in the floor 32.

25 The floor 32 of the recess 28 is of concave configuration, the floor preferably comprising a centrally located, generally frusto-conical protuberance 34. If desired, the protuberance 34 could be of other convex shape such as semi-spherical for example. Holes 12A, 12B for cutting elements
30 14 (Fig. 2) are formed in the protuberance 34, and the aforementioned nozzle 18A is mounted in the protuberance 34.

The drill bit also includes a plurality of lateral discharge passages 36 which communicate with the central recess 28.
35 Those passages 36 include base surfaces 38 (Fig. 4) which

constitute continuations of an inclined wedge face 40 of the protuberance 34. The passages 36, preferably three in number, are equidistantly spaced around the longitudinal axis of the drill bit, i e at 120 degree intervals.

5

Each passage extends radially completely through the bit body and extends longitudinally outwardly to the peripheral edge 26 so as to form gaps in the latter.

- 10 It will be appreciated that during a cutting operation, the earth formation is cut so as to form a conical earthen core which projects into the central recess 28. The core is fractured by the combined action of the cutting elements 14 and the convex protuberance 34, the former engaging the sides of the
- 15 core and the apex 41 of the latter engaging the tip of the core. The convex shape of the surface 40 of the protuberance 34 assures that the reaction forces applied against the protuberance will be distributed around the protuberance and thus will tend to be self-balancing in the radial direction.
- 20 That is, a concentration of forces at one point on the floor of the recess is avoided. As a result, the drill bit will not be caused to deviate from its intended path of travel by unbalanced forces acting on the floor of the recess.
- 25 The cuttings are discharged from the recess through the passages 36 by the action of the surface 40 which serves as a wedge, and by flushing fluid from the nozzles 18, 18A.

- Disposed on the cutting face of the drill bit along the trailing edge 48 of each lateral discharge passage 36 is a ridge 50 (Fig. 6). The ridge 50 can be formed of a hard or a soft substance, as desired. For example, the ridge 50 can be formed of a hard material such as tungsten carbide or 4140 steel, or formed of a softer substance such as a soft steel
- 35 (e g 1020 steel). The ridge 50 projects outwardly from the

cutting face by a distance slightly less than that of the cutter elements 14 and extends longitudinally along the side wall of the recess and radially along the peripheral edge 26.

5

The ridge 50 performs two important functions. Firstly, the ridge acts to dam-up drilling fluid ejected from the adjacent trailing nozzle 18B (i e, the nearest nozzle 18B spaced clockwise from the ridge 50 in Fig. 2). That is, in the absence
10 of the ridge, much of the drilling fluid emanating from that nozzle would flow into the adjacent gap in the peripheral edge (i e, the gap formed by the discharge passage) and then upwardly through the annulus. However, upon encountering the ridge 50, the fluid travel is blocked, causing the fluid to
15 rebound and flow to the adjacent cutting elements located behind the ridge, i e, the cutting elements spaced clockwise from the ridge 50 in Fig. 2.

As noted earlier, the ridges 50 project from the cutting
20 face 24 by a distance less than, e g, one-half, that of the cutter elements 14. The difference in such projecting distance is about equal to the expected penetration depth of the cutter elements. In this fashion, the ridge will essentially contact the formation, thereby minimizing the travel
25 of fluid between the ridge and the formation.

A second important function of the ridge 50 is to act as a plow to push larger cuttings from the associated discharge passage so that such cuttings do not contact and damage the
30 cutting elements located behind the ridge. In softer substances the ridges 50 may serve as cutter blades as well as plows.

In operation, the drill bit is rotated while simultaneously
35 advanced into an earth formation. As the cutting operation

progresses an earthen core is formed which is disposed within the recess 28. The sides of the core are gradually fractured by the cutter elements 14 disposed within the recess, and the tip of the earthen core is fractured by the cutter elements
5 disposed in the floor of the recess, as well as by the convex protuberance 34. Engagement between the core and the protuberance is such as to establish generally radially balanced forces on the drill bit whereby the drill bit is not diverted from its intended path of travel.

10

The convex protuberance 34 deflects the cuttings laterally outwardly through the discharge passages 36. Ejection of larger chunks through the discharge passages is aided by the ridges 50 which act as plows to push the chunks along.

15

The ridges 50 also serve to block the escape of drilling fluid from the nozzles 18. Instead, that fluid rebounds rearwardly and flows across the cutter elements disposed behind the respective ridges in order to flush and cool those
20 cutter elements.

25

It will be appreciated that the present invention minimizes the likelihood that unbalanced radial forces will be exerted against the drill bit in response to contact between the earthen core and the floor of the recess. Consequently, it is easier to maintain the drill bit in a straight path of travel.

30

The presence of the ridges 50 aids in pushing larger chunks through the lateral discharge openings and thereby minimizes the likelihood that such chunks could contact and damage the cutter elements.

35

It is also assured that the cutter elements will be supplied with a substantial amount of cooling and flushing fluid,

since it will be difficult for such fluid to bypass the cutter elements by flowing directly into the lateral discharge openings and upwardly through the annulus, due to the presence of the ridges.

5

10

15

20

25

30

35

Claims

1. A rotary drill bit for cutting in earth formations, comprising a bit body (10) including a cutting face (24) having a peripheral edge (26) and a central recess (28) extending longitudinally inwardly from said peripheral edge (26), a plurality of fluid discharge nozzles (18) mounted in said cutting face (24) for emitting drilling fluid under pressure, and a plurality of cutter elements (14), some of which being mounted in said peripheral edge (26), and others of which being mounted in said recess (28) to fracture an earthen core formed as the drill cuts through the formation, characterized in that the drill bit further comprises a plurality of lateral discharge passages (36) formed in said body (10), said passages (36) extending radially through said body (10) from said recess (28) and extending longitudinally to said peripheral edge (26) to form circumferential interruptions in said peripheral edge (26), and a convex protrusion (34) disposed centrally at a longitudinally inner end of said recess (28) and including a convex deflecting surface (40), said protrusion (34) arranged to contact and fracture the earthen core and deflect the cuttings to said lateral discharge passages (36).
2. A drill bit according to claim 1, including a ridge (50) disposed along a trailing edge of each of said discharge passages (36), each ridge (50) projecting from said cutting face (24) by a distance less than that of said cutter elements (14) and being arranged to retard the flow of drilling fluid into the associated discharge passage (36) from an adjacent one of said nozzles (18), whereby such fluid is caused to flow across cutter elements (14) located behind said ridge (50).
3. A drill bit according to claim 1, wherein said protrusion (34) is of frusto-conical shape.

4. A drill bit according to any of the preceding claims, wherein some of said nozzles (18) are mounted in a side wall (30) of said recess (28) and one (18A) of said nozzles is mounted in said protrusion (34).

5

5. A drill bit according to any of the preceding claims, wherein at least one of said cutter elements (14) is mounted in said protrusion (34).

10 6. A drill bit according to any of the preceding claims, wherein there are three of said discharge passages (36), said passages disposed equidistantly around the circumference of said bit.

15 7. A drill bit according to any of claims 2 - 6, wherein said ridges (50) are formed of a hard material.

8. A drill bit according to any of claims 2 - 6, wherein said ridges (50) are formed of a soft material.

20

9. A drill bit according to any of claims 2 - 8, wherein said cutter elements (14) project farther from said cutting face (24) than said ridges (50) by a distance equal to the expected penetration depth of said cutter elements (14).



25

10. A drill bit according to any of claims 2 - 8, wherein said ridges (50) project from said cutting face by a distance equal to about one-half the distance which said cutter elements (14) project from said cutting face (24).

30

35

1/2

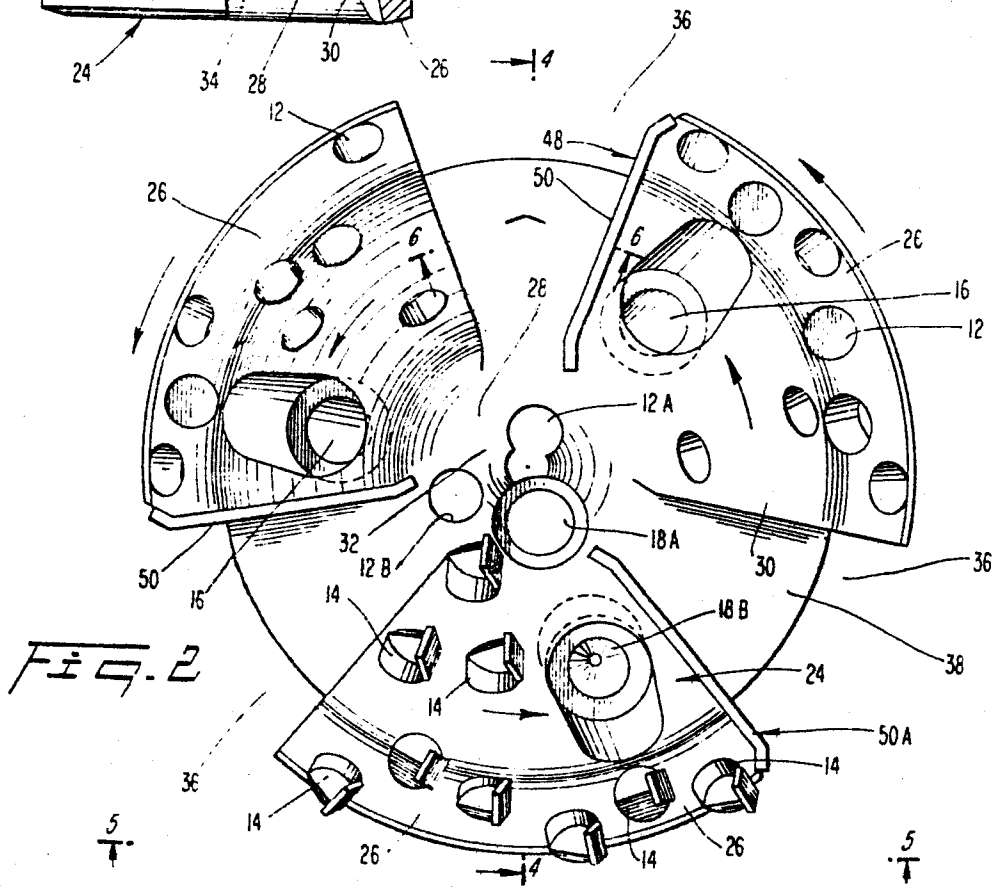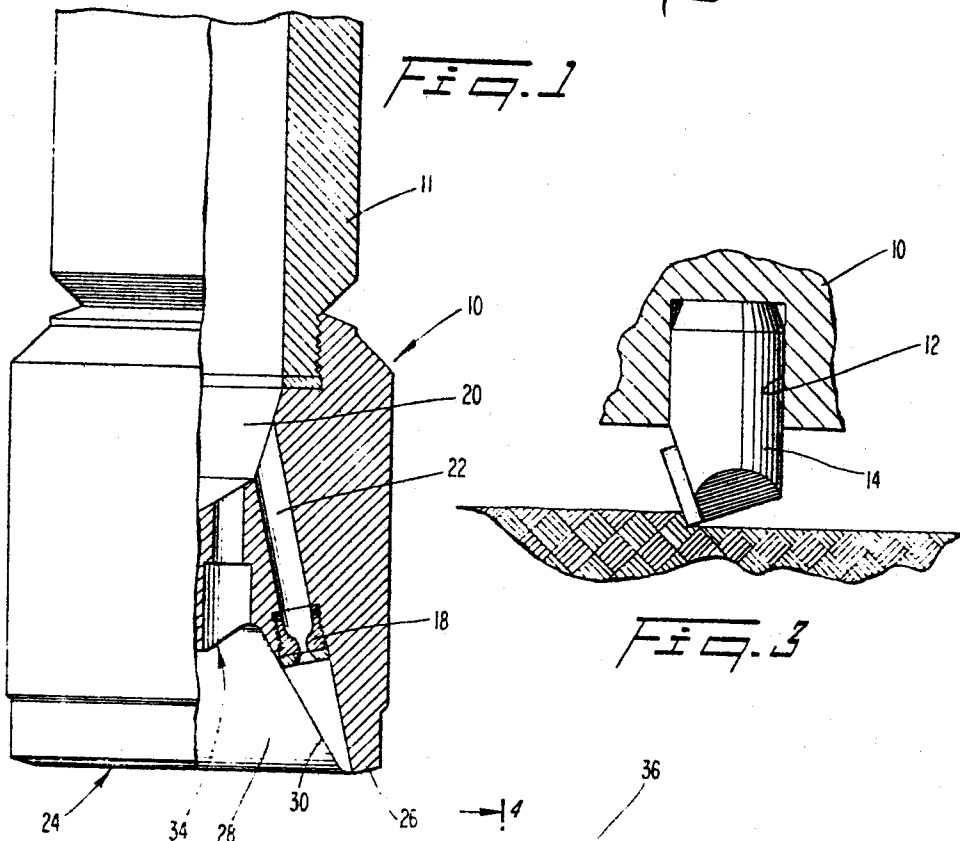

2/2

0192016

FIG. 4

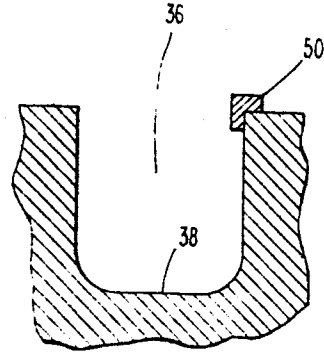
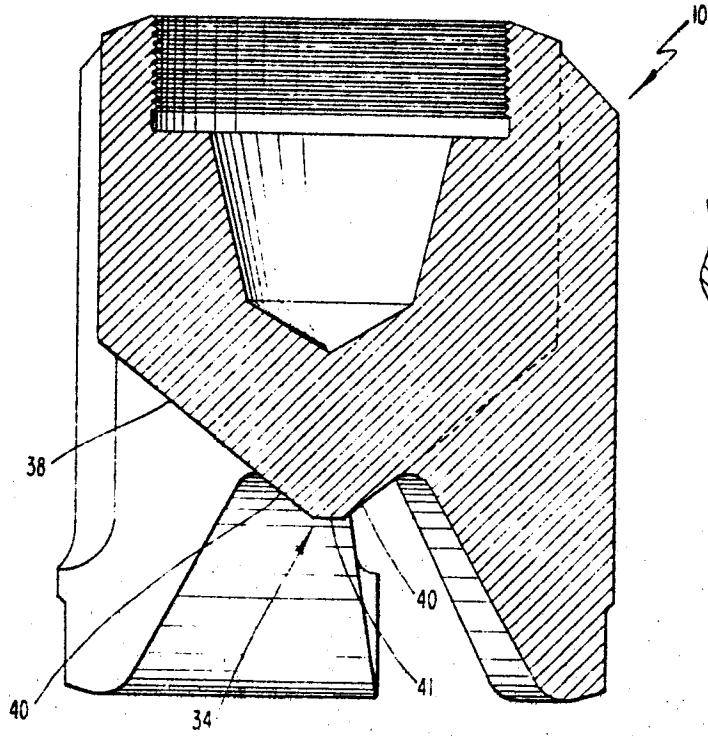


FIG. 6

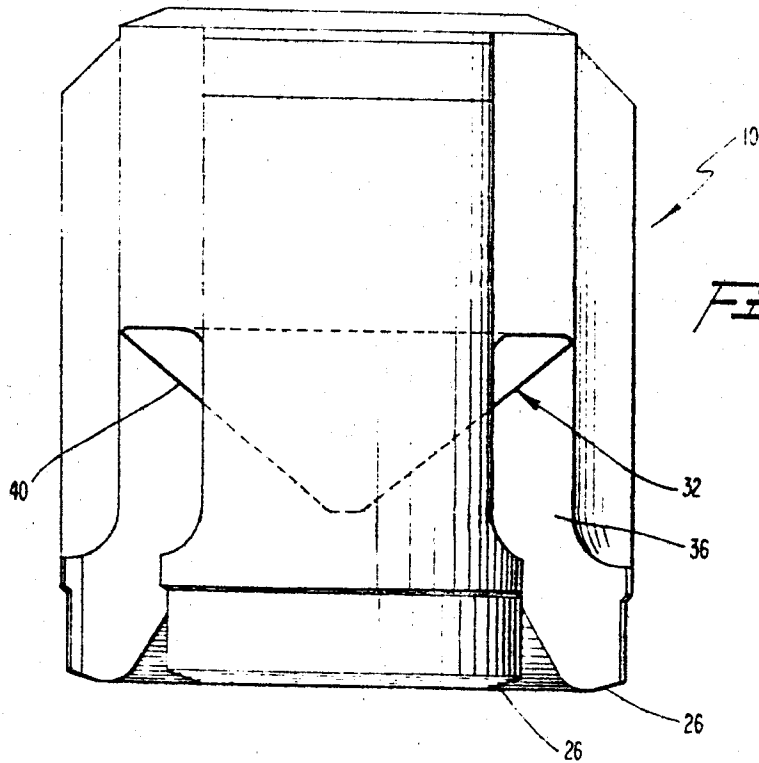


FIG. 5



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
Y	US-A-4 207 954 (JEROME) * Column 2, lines 11-45; figures 1,2 *	1,3-5	E 21 B 10/04 E 21 B 10/46 E 21 B 10/60
Y	US-A-4 494 618 (RADTKE) * Column 4, line 63 - column 6, line 29; figures 1,2 *	1,3-5	
A	EP-A-0 114 016 (CHARBONNAGES DE FRANCE) * Page 5, lines 1-12; page 6, lines 24-30; figures 1,2 *	1,3	
A	US-A-2 740 612 (PHIPPS) * Figures *	1,3	
A	FR-A-1 197 183 (SMIT) * Page 1, column 2, last paragraph - page 2, column 1, first paragraph; figure 1 *	1	TECHNICAL FIELDS SEARCHED (Int. Cl. 4) E 21 B
A	FR-A-1 366 092 (GSTALDER et al.) * Figures *	1,6	
A	US-A-3 938 599 (HORN) * Column 3, lines 27-53; figures 1-4 *	2,7,9,10	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 09-10-1985	Examiner RAMPELMANN J.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			



DOCUMENTS CONSIDERED TO BE RELEVANT				Page 2												
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)													
A	EP-A-0 032 791 (DRILLING & SERVICE) * Page 5, paragraph 3; figures 1-3 *	2,7,9														
A	FR-A-1 363 375 (TIRASPOLSKY) * Page 4, column 2, paragraph 3; page 5, column 1, paragraph 1; figures 8,9 *	2,7,9														
A	GB-A-2 088 443 (CHRISTENSEN)															
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)													
Place of search THE HAGUE		Date of completion of the search 09-10-1985	Examiner RAMPELMANN J.													
<table border="0"><tr><td>CATEGORY OF CITED DOCUMENTS</td><td></td></tr><tr><td>X : particularly relevant if taken alone</td><td>T : theory or principle underlying the invention</td></tr><tr><td>Y : particularly relevant if combined with another document of the same category</td><td>E : earlier patent document, but published on, or after the filing date</td></tr><tr><td>A : technological background</td><td>D : document cited in the application</td></tr><tr><td>O : non-written disclosure</td><td>L : document cited for other reasons</td></tr><tr><td>P : intermediate document</td><td>& : member of the same patent family, corresponding document</td></tr></table>					CATEGORY OF CITED DOCUMENTS		X : particularly relevant if taken alone	T : theory or principle underlying the invention	Y : particularly relevant if combined with another document of the same category	E : earlier patent document, but published on, or after the filing date	A : technological background	D : document cited in the application	O : non-written disclosure	L : document cited for other reasons	P : intermediate document	& : member of the same patent family, corresponding document
CATEGORY OF CITED DOCUMENTS																
X : particularly relevant if taken alone	T : theory or principle underlying the invention															
Y : particularly relevant if combined with another document of the same category	E : earlier patent document, but published on, or after the filing date															
A : technological background	D : document cited in the application															
O : non-written disclosure	L : document cited for other reasons															
P : intermediate document	& : member of the same patent family, corresponding document															