



Europäisches Patentamt
European Patent Office
Office européen des brevets

Publication number:

**0 196 074
B1**

12

EUROPEAN PATENT SPECIFICATION

- 45 Date of publication of patent specification: **03.10.90** 51 Int. Cl.⁵: **B 41 J 2/14, B 41 J 2/06**
71 Application number: **86104112.7**
22 Date of filing: **04.02.82**
90 Publication number of the earlier application in accordance with Art. 76 EPC: **0 057 472**

54 **Random droplet liquid jet apparatus and process.**

39 Priority: **04.02.81 US 231326**

43 Date of publication of application:
01.10.86 Bulletin 86/40

45 Publication of the grant of the patent:
03.10.90 Bulletin 90/40

64 Designated Contracting States:
AT BE CH DE FR IT LI LU NL SE

56 References cited:
DE-B-2 154 472
GB-A-1 095 689
US-A-3 656 171
US-A-3 798 656

73 Proprietor: **Burlington Industries, Inc.**
3330 West Friendly Avenue
Greensboro North Carolina 27420 (US)

72 Inventor: **Gamblin, Roger Lotis**
1506 Shroyer Road
Dayton Ohio 45419 (US)

74 Representative: **UEXKÜLL & STOLBERG**
Patentanwälte
Beselerstrasse 4
D-2000 Hamburg 52 (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Leamington Spa, England.

EP 0 196 074 B1

Description

Field of the invention

This invention relates to the field of non-contact fluid marking devices which are commonly known as "ink jet" devices.

The prior art

Ink jet devices are shown generally in U.S. Patent No. 3,373,437, issued March 12, 1968, to Sweet & Cumming; No. 3,560,988, issued February 2, 1971 to Krick; No. 3,579,721, issued May 25, 1971 to Kaltenbach; and No. 3,596,275, to Sweet, issued July 27, 1971. In all of those devices, jets (very narrow streams) are created by forcing a supply of recording fluid or ink from a manifold through a series of fine orifices or nozzles. The chamber which contains the ink or orifices by which the jets are formed are vibrated or "stimulated" so that the jets break up into droplets of uniform size and regular spacing. Each stream of drops is formed in proximity to an associated selective charging electrode which establishes electrical charges on the drops as they are formed. The flight of the drops to a receiving substrate is controlled by interaction with an electrostatic deflection field through which the drops pass, which selectively deflects them in a trajectory toward the substrate, or to an ink collection and recirculation apparatus (commonly called a "gutter") which prevents them from contacting the substrate.

While it has been known that a fine liquid jet will break into discrete droplets under its inherent thermal and acoustic motion even in the absence of any external perturbations, it has heretofore generally been believed that specifically calibrated separate perturbation at or near the natural frequency of drop formation was a practical necessity to produce droplets that are regularly spaced, sized, and timed across the orifice array to permit proper use of the apparatus. Printing with charged drops requires relatively precise control of the droplet paths to the ultimate positions on the receiving substrate, and drop size, spacing, and charge level have generally been regarded as critical factors. Thus, Sweet requires perturbation means for assuring that droplets in the stream are spaced at regular intervals and are uniform in size.

As noted in Sweet, the stream has a natural tendency, due at least in part to the surface tension of the fluid, to break up into a succession of droplets. However, as is easily observed in a jet of water squirted through a garden hose nozzle, the droplets are ordinarily not uniform as to dimension or frequency. In order to assure that the droplets will be substantially uniform in dimension and frequency, Sweet provides means for introducing what he refers to as "regularly spaced varicosities" in the stream. These varicosities create undulations in the cross-sectional dimension of the jet stream issuing from the nozzle. They are made to occur at or near the natural frequency of formation of the droplets. As

in Sweet, this frequency may be typically on the order of 120,000 cycles per second.

A wide variety of varicosity inducing means are now known in the art. For example, Krick utilizes a supersonic vibrator in the piping through which ink is fed from the source to the apparatus; and in Kaltenbach, the ink is ejected through orifices formed in a perforated plate which is vibrated continuously at a resonant frequency.

Since the advent of the Sweet approach, non-contact marking devices utilizing fluid droplet streams have become commercially developed. However, so far is known to me, it has been a characteristic of ink jet devices that all of them utilize some type of varicosity inducing means or "stimulator" to induce regular vibrations into the stream to provide regularity and uniformity of the droplets.

As noted in Stoneburner U.S. Patent No. 3,882,508, issued May 6, 1975, proper stimulation has been one of the most difficult problems in the operation of jet drop recorders. For high quality recording it has been necessary that all jets be stimulated at the same frequency and with very nearly the same power to cause break-up of all the streams into uniformly sized and regularly spaced drops.

Furthermore, it is necessary that drop generation not be accompanied by generation of "satellite drops", and that the break-up of the streams into drops occur at a predetermined location in proximity to the charging electrode, both of which are dependent on the power of delivery at each jet. Stoneburner shows means for generating a travelling wave along the length of an ink supply manifold of which an orifice plate forms one side. The wave guide so formed is tapered or progressively decreased in width along its length, to counteract and reduce the natural tendency toward attenuation of the drop stimulating bending waves as they travel down the length of the orifice plate.

US—A—3 798 656 discloses an ink return system for a multi-jet ink jet printer for printing characters on sheets of paper.

Brief description of the present invention

In practice, there is often an undesirable interaction between the stimulator and the structure of the ink delivery system. This adverse effect may show up as a tendency for the overall system to achieve non-uniform stimulation across the orifice array due to reflected and interfering waves (as referred to in Stoneburner, just discussed), such that certain orifices do not receive appropriate stimulation while others have too much. The system thus has "cusps" or null points that are reflected as degradations in the quality of droplet deposition. Furthermore, with these variations in power, satellite or very small droplets tend to form in between each of the larger droplets and cause difficulties within the system in that these fine droplets tend to escape and be dispersed into the surrounding area or beyond the acceptable target area limits. Satellite

droplet formation is a sensitive function of the properties of the ink or treating liquid being used so that the problem of stimulation is further complicated.

Another and major limiting factor of the known perturbed ink jet systems resulting from the stimulator is that the travelling waves generated by the external or artificial perturbation means substantially limit the length of those devices. From a practical standpoint, such known devices are limited to cross-machine orifice plate lengths no greater than 10.5 inches (26.67 cm) where there are 120 jets to the inch and the artificial perturbation means is operating at 48 kilocycles. At higher frequencies the possible length of the orifice plates is reduced, while at lower frequencies the length might be lengthened.

There are numerous disadvantages associated with such orifice plate limitations. The primary disadvantage is encountered in trying to build a perturbed orifice system suitable for treatment of continuous length broad width goods, for example including those in the textile field, wall-paper, paper or other continuous length broad width goods or in continuously or intermittently fed forms of other wide substrates or materials, where any such goods, substrates or materials range in width from about one foot to about several yards. Experience shows that it is extremely difficult and, practically speaking, almost impossible to combine two or more of the limited length perturbed orifice plates across the needed distance in a manner that will permit the uniform continuous treating of such goods or materials sufficiently to mask the separation between the perturbed orifice plate sections, and/or to mask the effect of their mutually different operational patterns. It becomes increasingly difficult to obtain a satisfactory result as the number of such short length perturbed orifice plates is increased to span increasing widths of goods to be treated.

With the present invention, however, where no artificial or external perturbation is being used, there is virtually no limitation on the length of the orifice plate or the extent over which such orifices can be made available for use across the width of a wide or narrow substrate or receiving medium. Thus, textile paper or other substrates having widths varying from a few feet to many yards can be treated as they are moved or otherwise indexed beneath a single, machine-wide orifice structure. A plurality of such machine-wide orifices can of course be operated in tandem or in some predetermined manner or sequence to accomplish any desired result.

I have found that although droplet break-up in an unperturbed, continuous jet system is a random process, the distribution of random droplet sizes and spacings is nevertheless quite narrow. I have also found that at smaller orifice sizes and higher fluid pressures, the variations among randomly generated droplets can be made sufficiently narrow so that the resulting random droplet streams become useful, for example, in

applying color patterns or any type of treating agent or agents to textiles or for applying indicia or treatments to a variety of other surfaces employing a variety of liquids.

This "narrow random distribution" effect is utilized according to a preferred form of the invention in apparatus having: a source of treating liquid which is to be applied under higher pressure than is normally used for equivalent accuracy of droplet placement; a series of jet orifices of smaller diameter than usual, for equivalent droplet placement accuracy, through which orifices the treating liquid or coloring medium is forced as fine streams that break randomly into discrete droplets; electrode means for imparting electrostatic charges to the drops as they form; and deflection means for directing the paths of selected droplets in the streams toward a receiving substrate or toward a gutter or other collecting means. Further, the charging electrode is more extensive than with a stimulated system since the break-off point may vary more in both space and time.

Neither the apparatus nor the process has perturbation means that would impart regular cyclical vibrations or cause the liquid being applied to break into droplets more uniform than their unperturbed, random size distribution.

To achieve a given accuracy of droplet placement, or "droplet misregistration value", an unperturbed system with the same flow rate requires a different orifice size and pressure than a perturbed system. The orifice size must be smaller than would be used to achieve the same accuracy in a conventional perturbed system, typically no more than about 70% the orifice diameter of a perturbed system having the same accuracy of droplet placement or droplet misregistration value. The liquid head pressure is also or alternatively, substantially higher, preferably at least about four times that of a perturbed system with corresponding accuracy. Further, it is desirable that the charging voltage be higher, by a factor of at least about 1.5 times.

For purposes of this specification and claims, the term "droplet misregistration value" is defined as the offset distance or variation from a straight line, measured in a direction perpendicular to the direction of travel of the substrate, of a mark on the substrate when all jets in an array perpendicular to the direction of motion of the substrate are switched at the same time from being caught by the gutter to being delivered to the substrate.

The perturbations that cause drop break-off in unstimulated jets generally arise from the environment in which the system is found. Generally these fluctuations are produced by the normal sound and acoustic motion that are inherently present in the fluid. However, in some "noisy" environments, unwanted external perturbations, for example, factory whistles, vibrations from gears and other machine movements, and even sound vibrations from human voices, can have an overpowering influence and cause a

change in the mean break-off point of the jets in an unstimulated system. In a modified embodiment of this invention, the system can be irregularly stimulated, as by a noise source which generates random vibrations. I believe this embodiment can be found useful where the apparatus is to be used in a noisy area. In such an environment, the application of the irregular noise vibration will surprisingly produce more regular results from jet to jet than application of regular cyclical vibrations.

The invention relates to a liquid jet treatment apparatus for selectively applying liquid at predetermined locations along a cross-machine dimension to a receiving substrate while it passes therethrough along a longitudinal direction transverse to said cross-machine dimension said apparatus being of the type which includes (a) a source of pressurized treatment liquid (10) having a predetermined pressure P, (b) an array of spaced-apart liquid jet orifices (14) along said cross-machine direction, each orifice having a predetermined diameter D and being in fluid communication with said source, (c) a charging electrode (18) of predetermined length L disposed downstream of the orifices for selectively electrically charging droplets as they break off from continuous jet streams issuing from said orifices by selective application of a charging voltage V thereto, (d) at least one deflecting electrode (20) disposed downstream of the charging electrode for deflecting electrically charged droplets away from the receiving substrate, and (e) collecting means (22) for collecting the charged deflected droplets, said liquid jet treatment apparatus being characterized by:

a cross-machine treatment dimension substantially greater than 26.7 cm (10.5 inches);

each orifice having a diameter D less than 0.05 cm and the pressure P greater than 0.14 kg/cm² such that droplets are randomly formed having differing sizes and spacings therebetween; and said predetermined parameter values P and D providing a droplet misregistration value of 2.3 cm or less of the substrate surface even though droplet generation occurs randomly.

The invention relates further to a liquid jet treatment method for selectively applying liquid at predetermined locations along a cross-machine dimension to a receiving substrate while it passes therethrough along a longitudinal direction transverse to said cross-machine dimension, said method utilizing (a) a source of pressurized treatment liquid (10) having a predetermined pressure P, (b) an array of spaced-apart liquid jet orifices (14) along said cross-machine direction, each orifice having a predetermined diameter D and being in fluid communication with said source, (c) a charging electrode (18) of predetermined length L disposed downstream of the orifices for selectively electrically charging droplets as they break off from continuous jet streams issuing from said orifices by selective application of a charging voltage V thereto, (d) at least one deflecting electrode (20) disposed

downstream of the charging electrode for deflecting electrically charged droplets away from the receiving textile substrate, and (e) a collecting means (22) for collecting the charged deflected droplets, said treatment method being characterized by:

passing the substrate having a cross-machine treatment dimension substantially greater than 26.7 cm (10.5 inches) along said longitudinal direction; and randomly forming droplets without artificial perturbation by providing each orifice a diameter D of less than 0.05 cm and the pressurized treatment liquid to the orifice at a pressure P greater than 0.14 kg/cm² and selectively treating said substrate over said cross-machine dimension with said liquid as it passes along said longitudinal direction by only selectively charging some of said randomly formed droplets as they are randomly formed and by permitting the remainder of said randomly formed droplets to fall onto said substrate with a predetermined maximum droplet misregistration value.

Other objects, features, and characteristics of the present invention as well as the process, and operation and functions of the related elements and the combination of parts, and the economies of manufacture, will become more apparent from the following description and the appended claims with reference to the accompanying drawings, all of which form a part of this specification, wherein like reference numerals designate corresponding parts in the various figures.

Brief description of the drawings

In the accompanying drawings:

Figure 1 is a diagrammatic cross-sectional illustration of a binary continuous fluid or liquid jet apparatus in accordance with the invention;

Figure 2 is a diagrammatic perspective illustration showing the droplet charging means and the droplet deflecting means;

Figure 3 is a schematic illustration of a modified embodiment of the invention wherein the apparatus is stimulated by a random noise generator that drives an acoustic horn; and

Figure 4 is a diagrammatic illustration of another embodiment of a random noise perturbed system in accordance with the invention, wherein a series of piezoelectric crystals apply random noise perturbations to a wall of the fluid or liquid supply manifold or chamber.

Detailed description of the preferred embodiment of the present invention

While this invention may be similar to previously known ink jet recording apparatus in that similar results can be achieved, the basic operating principle of the present invention offers radically from such known ink jet recording systems.

As shown diagrammatically in Figure 1 and 2, the apparatus includes a supply or source of treating liquid 10 under pressure in a manifold or chamber that supplies an orifice plate 12 having a

plurality of jet orifices 14. Streams or jets of liquid 16 forced through the orifices 14 pass through electrostatic droplet charging means 18, 18, which selectively imparts to the liquid charges that are retained on the droplets as the streams break into discrete droplets.

The charging plates 18, 18 must be sufficiently extensive in length and have a dimension wide enough in the direction of jet flow to charge droplets regardless of the random points at which their break-off occurs. In prior art apparatus, the perturbations caused break-off to occur in a narrow zone, downstream of the orifices. Here, without regular or separate artificial or external perturbation, the point of break-off varies more widely. In order to assure that all late-to-break-off droplets are charged, the ribbon like charging plates 18, 18 must provide a field that extends to the region of break-off of such droplets. In practice, the ribbon like charging plates should preferably have a dimension of about 100 d inches (100 d cm) in the direction of jet flow, where d is the orifice diameter in inches or centimeters. Their width or dimension in the direction of droplet flow could range from a size greater than about 30 d to less than about 300 d. Charging voltages to charge plates 18, 18 preferably range from about 50 to about 200 volts.

After charging, the droplets in flight then pass a deflecting ribbon or means 20 which directs the paths of the charged droplets toward a suitable gutter or collector 22. Uncharged drops proceed toward a receiving substrate 24, which is supported by and may be conveyed in some predetermined manner by means not shown, relative to the apparatus, in the direction of arrow 26. The deflector ribbon or means 20 is preferably operated at voltages ranging from about 1000 to about 3000 volts.

Reference may be had to known ink jet devices for further details of structural elements suitable for use in such apparatus.

In part, the structure of the present invention differs from the prior art in that the streams break up into droplets in response to a variety of factors including internal factors such as surface tension, internal acoustic motion, and thermal motion, rather than regular external perturbation. No regular varicosity inducing means are utilized, in contrast to what has heretofore been believed essential. Droplet formation takes place randomly.

Lord Rayleigh explored the dynamics of fluid jets around the beginning of the 20th century. He found that a fluid stream issuing under pressure from a jet orifice breaks into individual droplets at droplet-to-droplet intervals that statistically average $2\pi r$, where r is the radius of the orifice producing the jet. The droplet diameters average about 2.11 d. However, these spacings and sizes are only averages. Actual break-up is a random process; the actual droplet size and spacings vary. The actual sizes and spacings follow normal distribution curves around the means defined by the Rayleigh formulae and in experiments since

Lord Rayleigh's work I have found that the average spacing is now better represented by the expression $4.51 d$ with 4.51 being an observed or measured number. For example, in apparatus having an ink pressure P of 12 psig (0.8 kg/cm²) and an orifice diameter of .002" (0.051 cm), the mean droplet size is about .004" (0.0102 cm). The normalized standard deviation of the droplet sizes (that is, the standard deviation of droplet size, divided by the mean droplet size) is about .1; that is, 68% of the droplets are within .0004" (0.001 cm) of the mean droplet size of .004" (0.0102 cm). Further, the break-off point varies from jet to jet by up to six drop spacings. These variances are too wide for utility in many applications. When intending to print a horizontal line across a substrate, all jets are commanded to print at the same time by removing voltage from the charge plate at all jet positions. It can be seen that if all jets break up into droplets at the same time and at the same distance from the orifice plate, the system will simultaneously cause all jets to start issuing uncharged drops and these drops will proceed to the paper in step.

For the normalized standard deviation of droplet size of approximately 0.1, as is encountered in practice, this corresponds to about a 32% chance the droplet will be larger or smaller by that amount and the spot size on the substrate will correspondingly vary by that size. This produces variation in the apparent uniformity of a horizontal line. This effect will be minor, however, in that for a deviation of .1 with a droplet of .004" (0.0102 cm) in diameter, the variation will only be .001" (0.0025 cm).

In flight from the point of break-off, larger drops have more mass than smaller drops, in proportion to the third power of the ratio of their diameters. The fluid dynamic force from passage through air that tends to slow them down is proportional to the square of the ratio of their diameters so that larger drops tend to maintain faster speeds in travelling to the substrate. Assuming, however, that all jets break off at the same time, for an orifice diameter of .003" (0.0076 cm), a distance to the substrate of one inch (2.54 cm), a jet velocity of 400 inches per second (1000 cm/sec), and a deviation of .1 inch (0.254 cm) drop diameter, the misregistration on the substrate is less than two thousandths of an inch (0.0051 cm).

In the event one jet breaks off closer to the orifice plate than the mean break-off point of all jets by some number n of mean drop spacings (half the total spread) the resulting droplet (which I shall call the "late droplet") will have a farther distance to travel to the substrate than a droplet from the mean breakoff point (which I shall call the "mean droplet"). To date, the total spread of drop spacings I have noticed is about 6 or +3 and -3 about the mean. However, drop spacings can vary from this, for example, from about 2 to about 8 but will generally be greater than about 1. If V is the jet velocity in inches per second (or cm/sec), d the orifice diameter in inches (or cm), and V' the rate of movement of the substrate in inches per

second (or cm/sec), the arrival of the late droplet at the substrate will occur about n ($4.51 d/V$) seconds after the arrival of the mean droplet. During this time interval the moving substrate will have travelled a distance of n ($4.51 d$) V'/V inches (or cm). By way of example, at a substrate speed of 60 inches per second (152.4 cm/sec) (corresponding to a substrate moving at 100 yards per minute), a jet velocity of 800 inches per second (2032 cm/sec), an orifice diameter of .003 inches (0.0076 cm), and with $n=6$, the misregistration error is .0061 inches (0.0155 cm). It is to be noted that if d were $\sqrt{2}$ times larger and V twice smaller, the error would be $2\sqrt{2}$ larger, or about .017 inches (0.0432 cm). Thus, the use of the smaller diameter orifice and the higher pressure fluid in an unstimulated system can achieve smaller misregistration errors than a perturbed system of conventional orifice diameter and pressure.

In devices heretofore available, perturbation means have been required to narrow the distribution in drop size to essentially zero, to achieve acceptable misregistration error. However, I have found that errors due to the distribution of drop sizes can be substantially reduced by certain conditions. This can be seen from the following analysis. The normalized standard deviation of droplet size remains constant as the diameter of the orifice is made smaller and also as the pressure P is increased, in the absence of perturbing means. If the orifice diameter is reduced by, say, a factor of the square root of two ($\sqrt{2}$), the area of the orifice is accordingly decreased by a factor of two. If at the same time stream velocity is increased by a factor of two, the net flow from the orifice remains constant.

For similar charge and deflection fields the drop trajectories remain constant, but the natural frequency now is $2\sqrt{2}$ higher and there are now $2\sqrt{2}$ as many drops formed per unit time, and the time of flight to the substrate is halved. If the breakup point with a full sized jet varied six drop spaces due to the random nature of break-up, as is often the case, a print error would occur of six times the break-off time interval times the speed of the substrate. With the smaller, higher pressure jet, the same error in break-off distance would result in an error only $1/2\sqrt{2}$ as great, that is, 2.12 instead of six or only 35% of the error above. Furthermore, fluctuations in density would now be averaged over $2\sqrt{2}$ drops; if there is a 32% chance that the drop radius for the larger orifice case varied 10%, with a corresponding volume variation of 33%, there would only be a 9% chance the smaller orifice system would so vary.

Though a stimulated system can in principle be designed to deliver with high accuracy, in practice errors occur of up to two drop spacings. With an unstimulated system, the break-off point can vary over six to seven drop spacings, but by reducing orifice size and increasing pressure, this error can be reduced to that of a stimulated system with the larger orifice size, while still offering the advantage of substantially unlimited orifice plate length.

In general for this purpose, the orifice size may be in the range of .00035 to .020 inches (0.008 to 0.05 cm); and the fluid or liquid pressure may be in the range of 2 to 500 psig (0.14 to 35 kg/cm²). The value of droplet misregistration error can be less than about 0.1 inch (0.25 cm) for applications on substrates having a relatively smooth surface while for application to substrates having relatively unsmooth, rough or fibrous surfaces the droplet misregistration error can be less than about 0.4 inches (1.016 cm), or even 0.9 inches (2.3 cm) where such misregistration could be acceptable, such as where the printing or image will only be viewed from a distance.

More specifically I have found that general applications of a liquid to treat a substrate require an orifice diameter of about 0.004 inches (0.0102 cm), with the center to center spacing of orifices being about 0.016 inches (0.0406 cm). The liquid head pressures behind the orifices can vary from about 2 to about 30 psig (0.14 to 2.1 kg/cm²). However, the preferred pressure range varies from about 3 to about 7 psig (0.2 to 0.5 kg/cm²). The substrate can move at a velocity (V') of about 0 to about 480 inches (1300 m) per second with a preferred narrower range varying from about 5 to about 150 inches (12 to 380 cm) per second and the most preferred rate being about 60 inches per second (52.4 cm or 100 yards per minute).

More general ranges for the parameters involved, including the orifice and pressure ranges, are a jet velocity (V) ranging from about 200 to about 3200 inches per second (500 to 8200 cm) with the more preferred velocity range varying from about 200 to about 500 inches per second (500 to 1300 cm) for a general purpose liquid applicator and the most preferred jet velocity being about 400 inches per second (1000 cm). Also, in certain instances substrates could be moved at rates faster than 480 inches per second (1300 cm), such as speeds of 800—1000 inches (2000 to 2600 cm) per second, and this apparatus could have applicability to printing at such substrate feed rates.

Fine printing, coloring, and/or imaging of substrates similar to the results obtainable from a perturbed system can be obtained with the present invention by using an orifice having a diameter of about 0.0013 inches (0.0033 cm) with appropriate center to center spacing. The pressures will be greater than in the general application circumstances above and will range from about 15 to about 70 psig (1 to 5 kg/cm²), with the preferred pressure being about 30 psig (2 kg/cm²). Here, jet velocities will preferably vary from about 600 to about 1000 inches per second (1500 to 2500 cm) with the preferred velocity being about 800 inches per second (2000 cm).

The viscosities of the ink, colorant or treating liquid are limited only by the characteristics of the particular treating liquid or coloring medium relative to the orifice dimension. From a practical standpoint, the liquid or medium will generally have a viscosity less than about 100 cps and preferably about 1 to about 25 cps.

Since the present invention can produce applicators of virtually almost any orifice plate length, as discussed previously, the range of application, unlike the previously discussed perturbed systems, is extremely broad. This is because the jet orifices can not only be constructed in very short lengths, such as a few centimeters or inches, they can also extend for any desired distance for example, 0.1" to 15 feet (0.254 to 460 cm) or longer. Accordingly, the present invention is uniquely suitable for use with wide webs or where relatively large surfaces are to be colored or printed with indicia of some type. One example is printing, coloring or otherwise placing images on textiles but it should be clearly understood this is not the only application of this invention. In a similar manner the characteristics of the receiving substrate can vary markedly.

In textile applications all textile dyes and dyestuffs and colorants can be used, being either natural or synthetic, so long as they are compatible with the material from which the orifice plate is constructed, such as stainless steel or other chemically resistant materials or combinations thereof, and are compatible as well with the orifice dimensions which are desired to be used. (Large particle materials can cause unwanted clogging.) Suitable textile dyes include reactive, vat, disperse, direct, acid, basic, alizarine, azoic, naphthol, pigment and sulphur dyes. Included among suitable colorants are inks, tints, vegetable dyes, lakes, mordants and mineral colors.

Included among the types of treating liquids are any desired printing, coloring or image forming agents or mediums, including fixatives, dispersants, salts, reductants, oxidants, bleaches, resists, fluorescent brighteners and gums as well as any other known chemical finishing agents such as various resins and reactants and components thereof, in addition to numerous additives and modifying agents. It is believed that all such materials could be effectively employed according to the present invention to produce desired effects on a variety of substrates, as for example, all types of paper and paper like products, cloth and textile webs of various woven, knitted, needled, tufted, felted, batt, spun, bonded and other non-woven types, metal sheet, plastics, glass, gypsum and similar composition board, various laminates including plywood, veneers, chipboard, various fiber and resin composites like Masonite, or any other material as well as on a variety of surfaces including flat, curved, smooth, roughened, or various other forms.

The apparatus shown in Figures 1 and 2 is unperturbed. As previously mentioned, background or other vibrations in the area of use can themselves sometimes act as perturbation means and produce undesirable variable results. Figures 3 and 4 show a modified embodiment of the apparatus, wherein the system is not regularly perturbed, but is subject to irregular or noise perturbation, which overrides or masks such background vibration.

In Figure 3 the noise source includes an amplifier 30 which applies noise from a resistive or other electrical source 32, to a transducer such as an acoustic horn 34. The horn imparts the noise vibrations to the fluid or the manifold. These random perturbations may be applied to the fluid using prior art transducers; but the perturbation they apply herein is irregular, not regular.

In Figure 4, the noise transducer is a set of piezoelectric crystals 40 which are mounted to wall 42 of the fluid manifold 12. Other types of transducers may be used, as known in the art. The difference is that they are operated in a narrow band of random frequencies, not at regular frequencies.

It is desirable that the central frequency of the noise approximate the natural frequency of droplet breakup. This is about $V/4.51 d$ cycles per second where d is the jet diameter in inches or cm and V the velocity of the jet in inches per second. The band width is desirably less than about 12,000 cycles/second, so that the random vibrations are most effective in achieving breakoff.

While the invention has been described in connection with what is presently considered to be the most practical and preferred embodiments, it is to be understood that the invention is not to be limited to the disclosed embodiments but on the contrary, is intended to cover various modifications and equivalent arrangements included within the scope of the appended claims, which scope is to be accorded the broadest interpretation so as to encompass all such modifications and equivalent structures.

Claims

1. Liquid jet treatment apparatus for selectively applying liquid at predetermined locations along a cross-machine dimension to a receiving substrate while it passes therethrough along a longitudinal direction transverse to said cross-machine dimension said apparatus being of the type which includes (a) a source of pressurized treatment liquid (10) having a predetermined pressure P , (b) an array of spaced-apart liquid jet orifices (14) along said cross-machine direction, each orifice having a predetermined diameter D and being in fluid communication with said source, (c) a charging electrode (18) of predetermined length L disposed downstream of the orifices for selectively electrically charging droplets as they break off from continuous jet streams issuing from said orifices by selective application of a charging voltage V thereto, (d) at least one deflecting electrode (20) disposed downstream of the charging electrode for deflecting electrically charged droplets away from the receiving substrate and (e) collecting means (22) for collecting the charged deflected droplets, said liquid jet treatment apparatus being characterized by:

a cross-machine treatment dimension substantially greater than 26.7 cm (10.5 inches);

each orifice having a diameter D less than 0.05 cm and the pressure P greater than 0.14 kg/cm²

such that droplets are randomly formed having differing sizes and spacings therebetween; and said predetermined parameter values P and D providing a droplet misregistration value of 2.3 cm or less of the substrate surface even though droplet generation occurs randomly.

2. Liquid jet treatment apparatus as in Claim 1 wherein the substrate is a textile.

3. Liquid jet treatment apparatus as in Claims 1 or 2 wherein said droplet misregistration value is defined by the expression $n(4.51 D) S'/S$ where n equals the number of mean drop spacings a droplet is formed away from the mean breakoff point, D equals the orifice diameter, S equals jet velocity and S' equals the rate of substrate movement.

4. Liquid jet treatment apparatus as in Claims 1, 2 or 3 wherein each orifice has a diameter D in the range of 0.0008 to 0.05 cm and the pressure P lies in a range of 0.14 to 35 kg/cm².

5. Liquid jet treatment apparatus as in Claims 1, 2 or 3 wherein each orifice has a diameter of about 0.0102 cm and the pressure P lies in a range of 0.2 to 0.5 kg/cm².

6. A liquid jet treatment method for selectively applying liquid at predetermined locations along a cross-machine dimension to a receiving substrate while it passes therethrough along a longitudinal direction transverse to said cross-machine dimension, said method utilizing (a) a source of pressurized treatment liquid (10) having a predetermined pressure P, (b) an array of spaced-apart liquid jet orifices (14) along said cross-machine direction, each orifice having a predetermined diameter D and being in fluid communication with said source, (c) a charging electrode (18) of predetermined length L disposed downstream of the orifices for selectively electrically charging droplets as they break off from continuous jet streams issuing from said orifices by selective application of a charging voltage V thereto, (d) at least one deflecting electrode (20) disposed downstream of the charging electrode for deflecting electrically charged droplets away from the receiving textile substrate, and (e) a collecting means (22) for collecting the charged deflected droplets, said treatment method being characterized by:

passing the substrate having a cross-machine treatment dimension substantially greater than 26.7 cm (10.5 inches) along said longitudinal direction; and

randomly forming droplets without artificial perturbation by providing each orifice a diameter D of less than 0.05 cm and the pressurized treatment liquid to the orifice at a pressure P greater than 0.14 kg/cm² and selectively treating said substrate over said cross-machine dimension with said liquid as it passes along said longitudinal direction by only selectively charging some of said randomly formed droplets as they are randomly formed and by permitting the remainder of said randomly formed droplets to fall onto said substrate with a predetermined maximum droplet misregistration value.

7. A liquid jet treatment method as in Claim 6 wherein said predetermined pressure P is at least two times that of a coherently perturbed printing apparatus having the same said predetermined droplet misregistration value.

8. A liquid jet treatment method as in Claim 7 wherein said predetermined charging voltage V is at least 1.5 times that of a coherently perturbed printing apparatus having the same predetermined misregistration value.

9. A liquid jet treatment method as in Claim 6 wherein the orifice size and liquid pressure are established according to a predetermined droplet misregistration value $E = n(4.5/D) S'/S$ where n equals the number of mean drop spacings a droplet is formed away from the mean breakoff point, D equals the orifice diameter, S equals jet speed or velocity and S' equals the speed or rate of substrate movement.

10. A process as in Claim 6 wherein the substrate is a textile and the liquid is natural or synthetic textile dyes or colorants or mixtures thereof.

Patentansprüche

1. Vorrichtung zur Flüssigkeitsstrahlbehandlung für die selektive Aufbringung einer Flüssigkeit an vorgegebenen Stellen quer zu einer Maschinenvorschubrichtung auf ein Aufnahme-substrat, während dieses in Längsrichtung quer zu der Querrichtung läuft, wobei die Vorrichtung von dem Typ ist, der aufweist (a) eine Quelle von unter Druck stehender Behandlungsflüssigkeit (10), die einen vorgegebenen Druck P hat, (b) eine Anordnung von beabstandeten Flüssigkeitsstrahlöffnungen (14) entlang der Querrichtung, wobei jede Öffnung einen vorgegebenen Durchmesser (D) hat und in Strömungsverbindung mit der Quelle steht, (c) eine Aufladeelektrode (18) von vorgegebener Länge (L), die stromabwärts von den Öffnungen liegt, um wahlweise Tröpfchen elektrisch aufzuladen, während diese aus zusammenhängenden Strahlen vereinzelt werden, die aus den Öffnungen austreten, indem selektiv eine Aufladespannung V daran angelegt wird, (d) mindestens eine Ablenkelektrode (20), die stromabwärts von der Aufladeelektrode angeordnet ist, um die elektrisch aufgeladenen Tröpfchen von dem Aufnahmesubstrat abzulenken, und (e) Sammeleinrichtungen (22) zum Sammeln der aufgeladenen und abgelenkten Tröpfchen, wobei die Flüssigkeitsstrahl-Behandlungsvorrichtung dadurch gekennzeichnet ist, daß:

eine Querbehandlungsabmessung wesentlich größer als 26,7 cm (10,5 inch) ist;

daß jede Öffnung einen Durchmesser von weniger als 0,05 cm hat und der Druck P größer als 0,14 kg/cm² ist, so daß zufällig geformte Tröpfchen dazwischen unterschiedliche Größen und Abstände haben; und

daß die vorgegebenen Parameterwerte P und D einen Tröpfchen-Fehlausrichtungswert von 2,3 cm oder weniger von der Substratoberfläche selbst dann haben, wenn die Tröpfchenerzeu-

gung zufällig erfolgt.

2. Flüssigkeitsstrahl-Behandlungsvorrichtung nach Anspruch 1, wobei das Substrat ein Gewebe ist.

3. Flüssigkeitsstrahl-Behandlungsvorrichtung nach Anspruch 1 oder 2, wobei der Tröpfchen-Fehlausrichtungswert durch den Ausdruck $n(4,51 D) S'/S$ definiert ist, wobei n der Anzahl der mittleren Tropfenabstände entspricht, in denen ein Tröpfchen vom mittleren Ablösepunkt gebildet wird, D dem Öffnungsdurchmesser, S der Strahlgeschwindigkeit und S' der Substratbewegungsgeschwindigkeit entspricht.

4. Flüssigkeitsstrahl-Behandlungsvorrichtung nach Anspruch 1, 2 oder 3, wobei jede Öffnung einen Durchmesser D im Bereich von 0,0008 bis 0,05 cm hat und der Druck P im Bereich von 0,14 bis 35 kg/cm² liegt.

5. Flüssigkeitsstrahl-Behandlungsvorrichtung nach Anspruch 1, 2 oder 3, wobei jede Öffnung einen Durchmesser von etwa 0,0102 cm hat und der Druck P im Bereich von 0,2 bis 0,5 kg/cm² liegt.

6. Flüssigkeitsstrahl-Behandlungsverfahren zum selektiven Aufbringen einer Flüssigkeit an vorgegebenen Stellen entlang einer Maschinen-vorschub-Querrichtung auf ein Aufnahmesubstrat, während dieses sich in einer Längsrichtung quer zu der Maschinenquerrichtung bewegt, wobei das Verfahren verwendet (a) eine Quelle von unter Druck stehender Behandlungsflüssigkeit (10), die einen vorgegebenen Druck P hat, (b) eine Anordnung von beabstandeten Flüssigkeitsstrahlöffnungen (14) entlang der Maschinenquerrichtung, wobei jede Öffnung einen vorgegebenen Durchmesser D hat und in Flüssigkeitsverbindung mit der Quelle steht, (c) eine Aufladeelektrode (18) von vorgegebener Länge L , die stromabwärts von den Öffnungen angeordnet ist, um die Tröpfchen bei ihrer Ablösung aus den zusammenhängenden Strahlen, die aus den Öffnungen austreten, durch selektive Anwendung einer Aufladespannung V abzulösen, (d) mindestens eine Ablenkelektrode (20), die stromabwärts von der Aufladeelektrode angeordnet ist, um die elektrisch aufgeladenen Tröpfchen von dem Aufnahmetextilsubstrat abzulenken, und (e) eine Sammeleinrichtung (22) zum Sammeln der aufgeladenen und abgelenkten Tröpfchen, wobei das Behandlungsverfahren dadurch gekennzeichnet ist, daß:

das Substrat mit einer quer zur Vorschubrichtung verlaufenden Behandlungsabmessung von wesentlich mehr als 26,7 cm (10,5 inch) in der Längsrichtung bewegt wird; und

und daß Tröpfchen zufällig und ohne künstliche Störungen erzeugt werden, indem jede Öffnung einen Durchmesser D von weniger als 0,05 cm hat und der Öffnung die unter Druck stehende Behandlungsflüssigkeit mit einem Druck von mehr als 0,14 kg/cm² zugeleitet wird und das Substrat in Querrichtung selektiv mit der Flüssigkeit behandelt wird, während es sich in Längsrichtung bewegt, indem lediglich einige der zufällig geformt werden, und daß man den Rest der

zufällig geformten Tröpfchen selektiv aufgeladen werden, während sie zufällig geformt werden, und daß man den Rest der zufällig geformten Tröpfchen mit einem vorgegebenen maximalen Tröpfchen-Fehlausrichtungswert auf das Substrat fallen läßt.

7. Flüssigkeitsstrahl-Behandlungsverfahren nach Anspruch 6, wobei der vorgegebene Druck P mindestens zweimal so groß wie für eine kohärent gestörte Druckvorrichtung ist, die den gleichen vorgegebenen Tröpfchen-Fehlausrichtungswert hat.

8. Flüssigkeitsstrahl-Behandlungsverfahren nach Anspruch 7, wobei die vorgegebene Aufladespannung V mindestens 1,5 mal so groß wie die für eine kohärent gestörte Druckvorrichtung ist, die den gleichen vorgegebenen Fehlausrichtungswert hat.

9. Flüssigkeitsstrahl-Behandlungsverfahren nach Anspruch 6, wobei die Öffnungsgröße und der Flüssigkeitsdruck nach einem vorgegebenen Tröpfchen-Fehlausrichtungswert eingestellt werden, der $E=n(4,5/D) S'/S$ ist, worin n der Anzahl der mittleren Tröpfchenabstände entspricht, die ein Tröpfchen von dem mittleren Ablösepunkt entfernt bildet, d dem Öffnungsdurchmesser, S der Strahlgeschwindigkeit und S' der Substratbewegungsgeschwindigkeit entspricht.

10. Verfahren nach Anspruch 6, wobei das Substrat ein Gewebe ist und die Flüssigkeit ein natürlich oder synthetischer Textilfarbstoff oder Farbe oder Mischungen davon ist.

Revendications

1. Appareil de traitement à jet de liquide pour appliquer sélectivement un liquide en des emplacements prédéterminés le long d'une dimension transversale d'une machine sur un substrat récepteur lorsqu'il passe à travers celle-ci le long d'une direction longitudinale transversale à ladite dimension transversale de machine, ledit appareil étant du type qui comporte (a) une source de liquide de traitement sous pression (10) ayant une pression prédéterminée P , (b) un groupement d'orifices (14) de jet de liquide espacés les uns des autres le long de ladite direction transversale de machine, chaque orifice ayant un diamètre prédéterminé D et étant en communication de fluide avec ladite source, (c) une électrode de charge (18) de longueur prédéterminée L disposée en aval des orifices pour charger électriquement de façon sélective des gouttelettes lorsqu'elles sont fragmentées à partir de jets continus sortant desdits orifices grâce à l'application sélective d'une tension de charge V à celle-ci, (d) au moins une électrode de déviation (20) disposée en aval de l'électrode de charge pour dévier électriquement des gouttelettes chargées de façon à les éloigner du substrat récepteur, et (e) des moyens de collecte (22) pour collecter les gouttelettes déviées chargées, ledit appareil de traitement à jet de liquide étant caractérisé par:

une dimension de traitement transversale à la

machine substantiellement supérieure à 26,7 cm (10,5 pouces);

le fait que chaque orifice a un diamètre D inférieur à 0,05 cm et que la pression P est supérieure à 0,14 kg/cm² de telle sorte que les gouttelettes soient formées de façon aléatoire et aient des tailles et des espacements différents les uns par rapport aux autres; et

le fait que lesdites valeurs de paramètres prédéterminées P et D assurent une valeur d'écart des gouttelettes de 2,3 cm ou moins par rapport à la surface du substrat même si la génération de gouttelettes se produit de façon aléatoire.

2. Appareil de traitement par jet de liquide selon la revendication 1, dans lequel le substrat est un textile.

3. Appareil de traitement par jet de liquide selon la revendication 1 ou 2, dans lequel ladite valeur d'écart des gouttelettes est définie par l'expression $n (4,51 D) S'/S$, où n est égal au nombre des espacements de projection moyen avec lequel une gouttelette est formée loin du point de fragmentation moyen, D est égal au diamètre de l'orifice, S est égal à la vitesse du jet et S' est égal à la vitesse de déplacement du substrat.

4. Appareil de traitement par jet de liquide selon la revendication 1, 2 ou 3, dans lequel chaque orifice a un diamètre D situé dans une plage comprise entre 0,0008 et 0,05 cm et la pression P se trouve dans une plage comprise entre 0,14 et 35 kg/cm².

5. Appareil de traitement par jet de liquide selon la revendication 1, 2 ou 3, dans lequel chaque orifice a un diamètre d'environ 0,0102 cm et la pression P se trouve dans une plage comprise entre 0,2 et 0,5 kg/cm².

6. Procédé de traitement par jet de liquide pour appliquer sélectivement du liquide en des emplacements prédéterminés le long d'une dimension transversale de machine à un substrat récepteur pendant qu'il traverse celle-ci le long d'une direction longitudinale transversale à ladite dimension transversale de machine, ledit procédé utilisant (a) une source de liquide de traitement sous pression (10) ayant une pression prédéterminée P, (b) un groupement d'orifices (14) de jet de liquide espacés les uns des autres le long de ladite direction transversale de machine, chaque orifice ayant un diamètre D prédéterminé et étant en communication de fluide avec ladite source, (c) une électrode de charge (18) de longueur prédéterminée L disposée en aval des orifices pour charger électriquement de façon sélective des gouttelettes lorsqu'elles sont fragmentées à partir de jets continus quittant lesdits orifices, par application sélective d'une tension de charge V à celle-ci, (d) au moins une électrode de déviation (20)

disposée en aval de l'électrode de charge pour dévier électriquement les gouttelettes chargées de façon à les éloigner du substrat textile récepteur, et (e) des moyens de collecte (22) pour collecter les gouttelettes déviées chargées, ledit procédé de traitement étant caractérisé par:

le fait de faire passer le substrat ayant une dimension de traitement transversale à la machine substantiellement supérieure à 26,7 cm (10,5 pouces) le long de ladite direction longitudinale; et

le fait de former de façon aléatoire des gouttelettes sans perturbation artificielle en donnant à chaque orifice un diamètre D inférieur à 0,05 cm et en délivrant le liquide de traitement sous pression à l'orifice à une pression P supérieure à 0,14 kg/cm² et en traitant sélectivement ledit substrat dans ladite dimension transversale de machine avec ledit liquide lorsqu'il passe le long de ladite direction longitudinale en chargeant sélectivement uniquement certaines desdites gouttelettes formées de façon aléatoire lorsqu'elles sont formées de façon aléatoire et en permettant au reste desdites gouttelettes formées de façon aléatoire de tomber sur ledit substrat avec une valeur d'écart des gouttelettes maximale prédéterminée.

7. Procédé de traitement par jet de liquide selon la revendication 6, dans lequel ladite pression prédéterminée P est au moins deux fois celle d'un appareil d'impression perturbé de façon cohérente ayant la même valeur d'écart des gouttelettes que ladite valeur d'écart des gouttelettes prédéterminée.

8. Procédé de traitement par jet de liquide selon la revendication 7, dans lequel ladite tension de charge V prédéterminée est au moins 1,5 fois celle d'un appareil d'impression perturbé de façon cohérente ayant la même valeur d'écart prédéterminée.

9. Procédé de traitement par jet de liquide selon la revendication 6, dans lequel la taille de l'orifice et la pression du liquide sont établies selon une valeur d'écart des gouttelettes prédéterminée $E = n (4,5/D) S'/S$, où n est égal au nombre des espacements de projection moyen avec lesquels une gouttelette est formée à une certaine distance de point de fragmentation moyen, D est égal au diamètre de l'orifice, S est égal à la vitesse du jet et S' est égal à la vitesse de déplacement du substrat.

10. Procédé selon la revendication 6, dans lequel le substrat est un textile et le liquide est constitué de teintures ou de colorants naturels ou synthétiques pour textiles ou de mélanges de ceux-ci.

INK UNDER PRESSURE

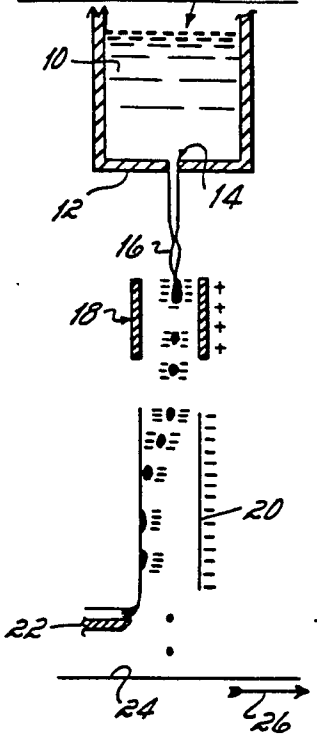


Fig. 1

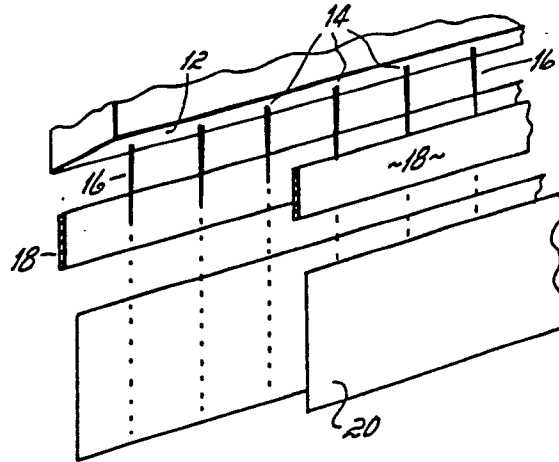


Fig. 2

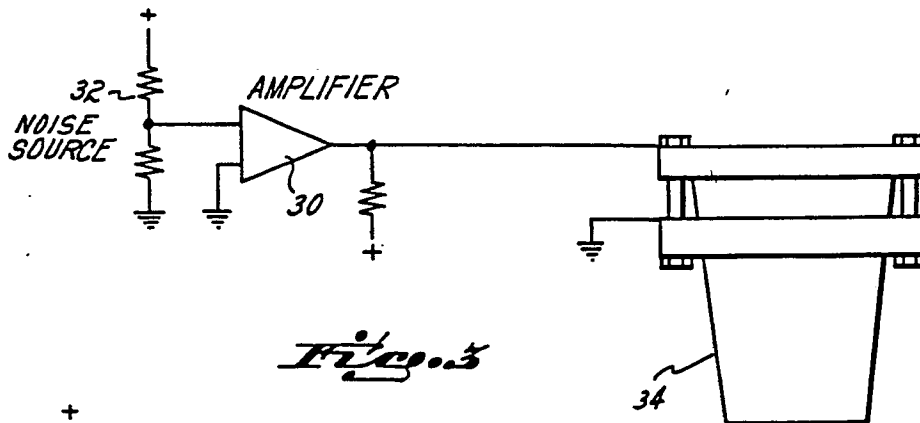


Fig. 3

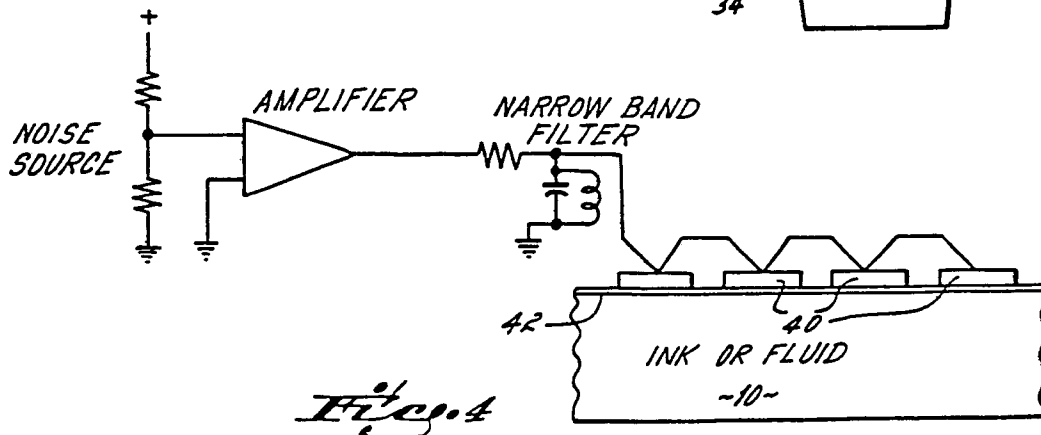


Fig. 4