(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number : **0 218 379**
B1

(12) # EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification : **13.12.89**

(51) Int. Cl.^{4} : **C 22 C 19/05**

(21) Application number : **86306987.8**

(22) Date of filing : **10.09.86**

(54) **Nickel-based alloys for high temperature applications.**

(30) Priority : **12.09.85 AU 2397/85**
24.09.85 AU 2587/85
07.05.86 AU 5792/85

(43) Date of publication of application :
15.04.87 Bulletin 87/16

(45) Publication of the grant of the patent :
13.12.89 Bulletin 89/50

(84) Designated contracting states :
DE FR GB IT

(56) References cited :
FR-A- 2 211 535
GB-A- 108 164
GB-A- 507 167
GB-A- 766 392
US-A- 2 422 489

(73) Proprietor : **BELL-IRH LIMITED**
32 Parramatta Road
Lidcombe New South Wales 2141 (AU)

(72) Inventor : **Burley, Noel Arthur**
28 Somers Street
Mitcham Victoria 3132 (AU)

(74) Representative : **Jenkins, Peter David et al**
PAGE, WHITE & FARRER 54 Doughty Street
London WC1N 2LS (GB)

EP 0 218 379 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

This invention relates to nickel-based alloys for high-temperature service.

The most common alloys conventionally used for the particular application of sheathing materials of metal-sheathed mineral-insulated conductor cables are various grades of stainless steel and inconel. These alloys are significantly deficient in one or more of the properties required for such an application.

The present inventor has proposed (Australian Petty Patent No. 548 519 of December 3, 1985, and Australian Patent Application No. 41 675 of April 24, 1985) & EP-A-0 161 986 that the best existing alloys for the particular application of sheathing materials of mineral-insulated metal-sheathed conductor cable are alloys hitherto not used for this purpose, namely the nickel alloys of his own invention known as NICROSIL (typically containing 14.2 % wt. Cr and 1.4 % wt. Si) and NISIL (typically containing 4.4 % wt. Si and 0.1 % wt. Mg). Whilst these alloys show most excellent resistance to high-temperature gas corrosion and are possessed of ultra-high thermoelectric stability, they do not exhibit the desired excellent degrees of tensile strength at high temperatures which are required for sheathing alloys for metal-sheathed mineral-insulated cables for the most demanding of the wide variety of applications involved. Such most demanding applications include some found, for examples amongst others, in the nuclear, aerospace and electronics industries.

Other alloys which have actual or potential application as sheathing for metal-sheathed mineral-insulated cables, such as stainless steel, inconel, nicrosil and nisil, are deficient in some or all of the aspects of very high resistance to gas corrosion, ultra-high thermoelectric stability, very high tensile strength and retention of strength at the highest application temperatures involved.

The present invention provides a nickel-based alloy consisting of, by weight, 13.5 % to 14.5 % chromium, 1.0 % to 1.5 % silicon, and the balance nickel, apart from impurities, characterized in that it also contains at least one element selected from molybdenum, tungsten, niobium, and tantalum, in concentration by weight molybdenum : up to 5.0 % maximum, tungsten : up to 1.0 % maximum, niobium : up to 3.0 % maximum, and tantalum : up to 2.0 % maximum, and optionally up to 0.5 % magnesium and/or up to 0.2 % cerium.

The present invention will now be described in greater detail by way of example only.

The alloys of the present invention possess a comprehensive range of enhanced properties at high temperatures and are therefore suitable for a wide variety of applications among which may be mentioned structural components of solid form in a variety of sections including tubular sections for furnaces, retorts and other heated enclosures of many kinds, protective sheathing for a number of devices including thermocouples, thermocouple cables, resistive heating elements, heat sensing and heat tracing cables, as well as igniter devices, rocket nozzles and other components for many other applications. A particular application of the alloys of this invention is for the sheathing material of mineral-insulated metal-sheathed electrical conductor cable for thermocouples and other devices including thermocouples where the sheath forms one of the thermoelement conductors of the thermocouple.

The alloys of this invention have improved high-temperature properties and are characterized, in particular, by possessing properties including :

(i) Outstanding resistance to high-temperature gas corrosion, more particularly oxidation resistance under conditions of both constant temperature and also cycling temperatures of either a continuous or intermittent kind and over a wide range of partial pressures of oxygen,

(ii) highly stable thermoelectric properties more particularly ultra-high stability of thermoelectromotive force and Seebeck coefficient over a wide range of temperatures and under conditions of both constant temperature and cycling temperatures of either a continuous or intermittent kind and over a wide range of partial pressures of oxygen and which properties are significantly and substantially enhanced over those of other nickel-base alloys for high-temperature applications,

(iii) high values of tensile strength at high temperatures and a high degree of retention of tensile strength at high temperatures, and

(iv) a high degree of mechanical workability at high temperatures by processes such as hot extrusion and at low temperatures by processes such a cold drawing, cold swaging and cold pilgering.

The alloys of this invention may be used as cast, and in the hot-worked, cold-worked or fully annealed conditions. While these alloys have excellent properties in both the cast and wrought conditions, these properties can be improved and stabilized by annealing treatments at temperatures above their minimum recrystallization temperatures. This stabilization applies particularly to their thermoelectric properties.

Whilst there are several nickel-base alloys which have some but not all of the abovementioned favourable properties there are none, to our knowledge, that possess all these properties in the one alloy.

Because the alloys of the present invention possess a comprehensive range of these enhanced properties, they are suitable for a wide variety of applications at high temperatures. These applications may occasionally require only one or a combination of the improved properties. The excellent resistance to high-temperature gas corrosion and excellent high-temperature tensile strength of the new alloys are important properties for load bearing structural components in furnaces, retorts, reactor vessels, heated enclosures of many kinds, gas turbine engines, rocket nozzles and a wide range of similar equipment. The

ultra-high thermoelectric stability of the new alloys is important for wires and tubes for thermoelement conductors and protective sheathing, respectively, for thermocouples particularly of the metal-sheathed mineral-insulated type of construction.

A particular application of the new alloys is in mineral-insulated metal-sheathed conductor cables for thermocouples, heater elements, heat sensing and heat tracing cables, stagnation probe transducers for gas turbine engines, gas flues, and like applications. It is in such applications that the unique combination of excellent properties at high temperature of the alloys of this invention of gas-corrosion resistance, thermoelectric stability and retained high tensile strength are of optimum benefit. In some of these applications a combination of the highest possible values of these properties is essential.

In this respect, our studies and extensive test programmes have shown that the desired combination of high property values of gas corrosion resistance and thermoelectric stability are achievable using a base-alloy composition of nickel-chromium-silicon in component concentrations which optimize these properties whilst retaining a single solid solution phase structure, which is an important feature of the preferred alloys of the invention. The enhanced high-temperature strength is achieved by the addition of one or more supplementary elemental components. It is believed that such addition achieves the required strengthening effect by a mechanism of crystal lattice modification appropriate to single solid solution structures. The desired effect of strengthening at high temperatures can, in fact, be achieved by a number of optional compositional variants which are the result of the addition of one or a number of optional strengthening elements to the base nickel-chromium-silicon lattice structure.

Some preferred embodiments of the range of possible alloys are set down in Table 1.

Table 1

Component Element	Alloy Option (composition - per cent weight)					
	1	2	3	4	5	6
Cr	13.5 to 14.5					
Si	1.0 to 1.5					
Mg	0.2 maximum					
Ce	0.2 maximum					
Mo	1.0 to 5.0	-	-	-	1.0	3.0
W	-	0.5 to 1.0	-	-	0.5	1.0
Nb	-	-	1.0 to 3.0	-	1.0	-
Ta	-	-	-	1.0 to 2.0	1.0	-
Ni	Balance					

In the ensuing discussion of the embodiments of the present invention reference is made to the accompanying figures and diagrams, wherein :

Figure 1 shows graphical plots of long-term drifts in thermoelectromotive force of 3.3 mm diameter thermoelements of (Instrument Society of America) type KP alloy Ni-9.3 Cr-0.4 Si (per cent weight) versus platinum, and of similar thermoelements of Ni-14.2 Cr-1.4 Si-0.05 Mg (per cent weight) versus platinum on exposure in air at 1 200 °C and 1 250 °C, respectively. The drifts are changes from thermoelectromotive force output values existent after 100 hours of constant temperature exposure ;

Figure 2 are photomicrographs which show oxide structures in Instrument Society of America type KP alloy Ni-9.3 Cr-0.4 Si (per cent weight) (top two panels) and in alloy Ni-14.2 Cr-1.4 Si-0.05 Mg (per cent weight) (bottom panel) resulting from constant-temperature exposure of 3.3 mm diameter specimens in air for 800 hours at 1 200 °C. The outer white annular zone is a layer of electrodeposited copper which was applied to support the fragile oxides ;

Figure 3 shows a graphical plot of the ultimate tensile strength of Ni-14.3 Cr-1.4 Si-0.1 Mg alloy (per cent weight) as a function of temperature. The graph also shows a plot of the tensile strengths of one of the preferred embodiments of the alloys of this invention as a function of temperature ; Tables 2 and 3 below include further experimental data ; and

Figure 4 are photomicrographs which show the grain structure, magnified 500 times, of initially as-rolled (to 85 % reduction of cross-section originally 8 mm) Ni-14.3 Cr-1.4 Si-0.1 Mg alloy (per cent weight) as a function of annealing for one hour at temperatures of 600 °C, 800 °C, and 1 000 °C.

In order to achieve the desired optimum combination of properties in the alloys of this invention, the alloy microstructure must comprise only one equilibrium phase which is a terminal solid-solution. The base ternary alloy of nickel-chromium-silicon, in the concentration ratios described in the preferred embodiments of Table 1, is of such single solid-solution equilibrium structure. In practice, we have found that the addition of the preferred strengthening elements molybdenum, tungsten, niobium and tantalum, either in the single or in the combined concentrations of the preferred embodiments, does not exceed limits of solid solubility in the ternary Ni-Cr-Si base alloy. Therefore no second phases, either solid-solutions or intermetallic compounds, are formed. Furthermore, we have found that the preferred alloys are amenable to both hot and cold mechanical working to change their shape because they possess adequate cold ductility, and that their microstructural recrystallization temperatures are about 800 °C so they can readily be softened by annealing above this temperature when they are work hardened by cold deformation. Furthermore, any property variations across a section of the preferred alloys due to compositional inhomogeneities in as-cast structures can be readily minimized by homogenizing heat-treatments.

The compositions of the alloys in the present invention require the careful selection of component elements of very high purity and the achievement of the correct proportions of each by adequate control of melting and casting techniques. In all cases the effects of one component element depend on those of the others and hence there is a synergistic interdependence of the elements within the overall compositions. In general, concentrations of alloying elements outside the compositional ranges specified for the alloys of this invention cause degradation of the optimum levels of property values of gas-corrosion resistance, thermoelectric stability and tensile strength, all at high temperatures.

Nickel-chromium-silicon alloys of the single solid-solution phase type, in the concentration ranges (9 to 15) % wt. Cr and (0.3 to 1.5) % wt. Si show relatively high thermoelectric stability at elevated temperatures in air. The actual degrees of instability of thermoelectromotive force output and Seebeck coefficient are functional not only upon temperature of exposure and the oxygen partial pressure of the air, but also upon the specific solute concentrations of chromium and silicon in the base nickel. The highest degree of stability of thermoelectromotive force is achievable only by selecting optimum critical concentrations of chromium and silicon in nickel.

Figure 1 shows the degree of thermoelectric instability exhibited by the most common Ni-Cr-Si alloys used as thermocouple thermoelements, namely the Ni-9.3 % wt. Cr-0.4 % wt.Si alloy designated type KP by the Instrument Society of America. This instability is expressed as drift in thermoelectromotive force in microvolt as a function of time of exposure in air at 1 200 °C. The figure also shows the greatly enhanced thermoelectric stability of the base Ni-Cr-Si alloy which is the preferred embodiment of this invention. For example it can be seen that the drift in the thermoelectromotive force of the type KP alloy after 700 hours is about minus 400 microvolt at 1 200 °C, but the Ni-Cr-Si base alloy which is the preferred embodiment of this invention shows virtually no drift in thermoelectromotive force even at the higher temperature of 1 250 °C.

Figure 2 shows the degree of oxidation occurring in the same type KP alloy after exposure for 800 hours in air at 1 200 °C. It is evident that not only is there massive external scale developed on the surface of the alloy but also that a process of internal oxidation has resulted in the massive precipitation of oxide particles of the component elements chromium and silicon in the internal matrix of the alloy. We have found that this latter process of internal oxidation produces gross changes in the solute concentrations of chromium and silicon and it is these changes in concentration, which are temporally progressive, that are the cause of the relatively high degree of instability of thermoelectromotive force in the KP alloys under the stated conditions. Of considerable significance is the evidence in the same figure that for the Ni-Cr-Si base alloy of the preferred embodiments of this invention there is very little oxide, either as external scale or as internal oxide precipitates. The consequent virtual absence of compositional changes in solute concentrations is the reason for the ultra-high thermoelectric stability of this base alloy.

The preferred strengthening elements of this invention, namely molybdenum, tungsten, niobium and tantalum, either in the single or the combined concentrations of the preferred embodiments, will not deleteriously affect the oxidation resistance of these preferred alloys in any significant way.

Vacuum melted ingots of each separate alloy were extruded into desired shapes from which special test-pieces were machined. Tests to determine tensile strength and ductility at various temperatures were carried out using a standard test-piece 80 mm long x 12.7 mm diameter, with a narrowed portion 32mm long. The gauge length = 5.65 /A, where A = cross-sectional area of the test-piece. A KN Zwick universal testing machine, specially modified to facilitate the high-temperature tests, was used. Each test involved straining the test-piece at a rate of 0.002 mm/mm/min. up to the 0.5 % proof stress and then at 3.2 mm/min. until fracture. Ductility was assessed by measuring the elongation of the test-piece between gauge marks and the reduction of cross-sectional area of the fracture face.

Figure 3 shows the tensile strength of the Ni-Cr-Si base alloy which is the preferred embodiment of this invention as a function of temperature in the fully annealed condition. Whilst the tensile strength of this alloy above 1 000 °C is adequate for many general purposes for which the alloys of this invention are intended, there are a number of critical applications in the nuclear, aerospace, electronics and general engineering fields for which the strength values shown in Figure 2 are inadequate. The Ni-Cr-Si alloy which is the base alloy of this invention is significantly strengthened at high temperatures by the addition of small amounts of one or more of the elements molybdenum, tungsten, niobium and tantalum.

The superior properties of specific examples of alloys according to the invention are shown in the following Tables 2 and 3.

(See Table 2 page 6)

Table 2

Tensile strengths at elevated temperatures

Nickel-Base Alloy (wt.-%)	Temperature (°C)											
	Room		400		600		800		1000		1200	
	1	2	1	2	1	2	1	2	1	2	1	2
(Base) 14.3Cr-1.4Si-0.1Mg	498	211	550	143	423	136	178	86	67	25	27	
Base + 0.5W	621	229	576	155	483	140	217	109	72		27	
Base + 3.0Mo	648	262	599	180	523	164	263	146	86		32	
Base + 3.0Nb	635	288	646	201	561	196	311	189	106		31	
Base + 1.0Ta	635	248	571	158	491	140	222	120	70		28	
Base + 1.0Mo-1.0Nb+ 0.5W-1.0Ta	651	258	585	170	513	145	278	155	84		32	
Base + 0.04 Ce	618	229	553	143	465	135	200	102				

Notes : Columns 1 give Ultimate Tensile Strengths in megapascal ($N \cdot mm^{-2}$)
Columns 2 give 0.2 % Proof Stresses in megapascal ($N \cdot mm^{-2}$)

Table 3

Ductilities at elevated temperatures

Nickel-Base Alloy (wt.-%)	Temperature (°C)											
	Room		400		600		800		1000		1200	
	1	2	1	2	1	2	1	2	1	2	1	2
(Base) 14.3Cr-1.4Si-0.1Mg	28	33	51	68	38	45	52	37	97	73	126	90
Base + 0.5W	49	73	53	77	41	47	80	63	117	71	125	100
Base + 3.0Mo	55	72	56	73	57	62	104	73	74	51	112	81
Base + 3.0Nb	53	61	58	67	60	66	91	71	108	70	135	98
Base + 1.0Ta	51	74	56	70	52	68	39	33	110	65	112	100
Base + 1.0Mo-1.0Nb-0.5W-1.0Ta	55	79	58	75	54	69	52	40	53	62	110	100
Base + 0.04 Ce	50	64	49	68	37	36	19	36				

Notes : Columns 1 give Ductilities by elongation (%)
Columns 2 give Ductilities by reduction in cross-sectional area (%)

EP 0 218 379 B1

All alloys tested show substantial high-temperature stength increases over that of the base alloy. It is of great interest that the best of them has a simple addition of 3.0 %-wt. niobium.

The strength increases for these alloys range from about 25 % to about 75 %. Despite the very high strength of the 3-Nb alloy, its ductility has not been adversely affected ; indeed it is somewhat more ductile than the base alloy.

Table 4 summarizes the results of another experiment, in which the base alloy was nicrosil. The alloys of the present invention were compared with inconel-600 and stainless steel-310.

Table 4

ALLOY		ULTIMATE TENSILE STRENGTH ($N.mm^{-2}$)	
IDENT.	COMPOSITION (weight %)	at 800°C	% increase/decrease (+) (-)
NICROSIL	Base alloy (Ni-14.2 Cr-1.4 Si)	175	
NPX-1	Base + 0.5 W	217	+24
NPX-2	Base + 3.0 Mo	263	+50
NPX-3	Base + 3.0 Nb	311	+78
NPX-4	Base + 1.0 Ta	222	+43
NPX-5	Base + 1.0 Mo + 0.5W + 1.0Nb + 1.0 Ta	278	+27
SS 310 *	Fe-25 Cr-20 Ni-2.0 Mn-1.5 Si	205	+17 (Base) -34 (NPX-3)
INC 600 *	(Ni + Co) -16Cr -7½ Fe - 1.0 Mn -½ Si - ½ Cu	135	-23 (Base) -57 (NPX-3)

* SS 310 = stainless steel 310
INC 600 = Inconel 600

Inconel-600 is about 23 % weaker than nicrosil and nearly 60 % weaker than NPX-3. Stainless steel-310 is about 25 % stronger than nicrosil, but is about 35 % weaker than NPX-3.

Nicrosil is more oxidation resistant than either stainless steel-310 or inconel-600. There is some evidence to suggest that niobium improves the oxidation resistance of Ni-Cr-Si alloys, particularly in atmospheres of low oxygen partial pressure.

The strengthening elements, namely Mo, W, Nb and Ta, when added to the preferred base alloy of Ni-Cr-Si, in any combination, have effects one with another as stated above. These elements are therefore interchangeable to a certain degree. Alloys of the invention may therefore be compositionally variant in respect of their Mo, W, Nb and Ta contents to a greater degree than is indicated by the preferred embodiments described in Table 1. A second group of preferred embodiments of the alloys of this invention are therefore described as follows :

Element	Concentration (% wt.)
Cr	13.5 to 14.5
Si	1.0 to 1.5
Mg	0.5 maximum
Ce	0.2 maximum
Mo	5.0 maximum
W	1.0 maximum
Nb	3.0 maximum
Ta	2.0 maximum
Ni	remainder, apart from impurities.

An important feature of the alloys of this invention is that the kinetic processes governing the variation of the size and shape of their crystal grains must occur with sufficiently high velocity to make possible a predetermined choice of grain size by a simple heat treatment in which the parameters of temperature and (relatively short) time are mutually variable. This is because in different applications of the alloys different average grain sizes are desirable even obligatory.

Figure 4 shows that the grain sizes of the Ni—Cr—Si base alloy of the preferred embodiments of this invention are inherently readily variable as a function of temperature.

The strengthening elements Mo, W, Nb, and Ta, of this invention do not have unduly large inhibitory effects either in the elevation of recrystallization temperatures or in the rates of grain growth in individual alloy embodiments.

Claims

1. A nickel-based alloy consisting of, by weight, 13.5 % to 14.5 % chromium, 1.0 % to 1.5 % silicon, and the balance nickel, apart from impurities, characterized in that it also contains at least one element selected from molybdenum, tungsten, niobium, and tantalum, in concentration by weight molybdenum : up to 5.0 % maximum, tungsten : up to 1.0 % maximum, niobium : up to 3.0 % maximum, and tantalum : up to 2.0 % maximum, and optionally up to 0.5 % magnesium and/or up to 0.2 % cerium.

2. An alloy according to claim 1 having the following composition by weight :

	%
Cr	13.5 to 14.5
Si	1.0 to 1.5
Mo (when present)	1.0 to 1.5
W (when present)	0.5 to 1.0
Nb (when present)	1.0 to 3.0
Ta (when present)	1.0 to 2.0

and the balance nickel, apart from impurities.

3. An alloy according to claim 2 containing 1.0 % Mo, 0.5 % W, 1.0 % Nb and 1.0 % Ta.

4. An alloy according to claim 1 containing 3.0 % Mo and 1.0 % W.

5. An alloy according to claim 1, containing up to 0.2 % magnesium and/or up to 0.2 % cerium.

6. An alloy according to claim 1 containing from 0.10 to 0.20 % magnesium.

7. An alloy according to claim 1 containing from 0.02 % to 0.06 % cerium.

8. An alloy according to claim 1 containing about 0.15 % magnesium.

9. An alloy according to claim 1 containing about 0.04 % cerium.

10. An alloy according to any one of claims 1 and 2 to 4, containing 0.15 % magnesium and 0.04 % cerium.

Patentansprüche

1. Legierung auf Nickelbasis, welche aus 13,5 bis 14 Gew.-% Chrom, 1,0 bis 1,5 Gew.-% Silizium und als Rest, abgesehen von Verunreinigungen, Nickel enthält, dadurch gekennzeichnet, daß sie ferner mindestens ein Element enthält, das aus Molybdän, Wolfram, Niob und Tantal ausgewählt ist, und zwar in einer Gewichtskonzentration von Molybdän : bis zu 5,0 % maximal, Wolfram : bis zu 1,0 % maximal, Niob : bis zu 3,0 % maximal, und Tantal : bis zu 2,0 % maximal, sowie wahlweise bis zu 0,5 % Magnesium und/oder bis zu 0,2 % Cer.

2. Legierung nach Anspruch 1, mit der folgenden Gewichtszusammensetzung :

	%
Cr	13,5 bis 14,5
Si	1,0 bis 1,5
Mo (wenn vorhanden)	1,0 bis 1,5
W (wenn vorhanden)	0,5 bis 1,0
Nb (wenn vorhanden)	1,0 bis 3,0
Ta (wenn vorhanden)	1,0 bis 2,0

und als Rest, abgesehen von Verunreinigungen, Nickel.

3. Legierung nach Anspruch 2 welche 1,0 % Mo, 0,5 % W, 1,0 % Nb und 1,0 % Ta enthält.

4. Legierung nach Anspruch 1, welche 3,0 % Mo und 1,0 % W enthält.

5. Legierung nach Anspruch 1, welche bis zu 0,2 % Magnesium und/oder bis zu 0,2 % Cer enthält.

6. Legierung nach Anspruch 1, welche von 0,10 bis 0,20 % Magnesium enthält.

7. Legierung nach Anspruch 1, welche von 0,02 % bis 0,06 % Cer enthält.

8. Legierung nach Anspruch 1, welche bis zu 0,15 % Magnesium enthält.

9. Legierung nach Anspruch 1, welche bis zu 0,04 % Cer enthält.

10. Legierung nach einem der Ansprüche 1 und 2 bis 4, welche 0,15 % Magnesium und 0,04 % Cer enthält.

Revendications

1. Alliage à base de nickel constitué, en poids, de 13,5 % à 14,5 % de chrome, de 1,0 % à 1,5 % de silicium, le reste étant du nickel, à part des impuretés, caractérisé en ce qu'il contient en outre au moins un élément choisi parmi le molybdène, le tungstène, le niobium, et le tantale, en une concentration en poids de molybdène : jusqu'à 5 % maximum, de tungstène : jusqu'à 1,0 % maximum, de niobium : jusqu'à 3,0 % maximum, et de tantale : jusqu'à 2,0 % maximum, et éventuellement jusqu'à 0,5 % de magnésium et/ou jusqu'à 0,2 % de cérium.

2. Alliage selon la revendication 1 ayant la composition suivante en poids :

Cr	13,5 à 14,5 %
Si	1 à 1,5 %
Mo (si présent)	1 à 1,5 %
W (si présent)	0,5 à 1,0 %
Nb (si présent)	1,0 à 3,0 %
Ta (si présent)	1,0 à 2,0 %.

le reste étant du nickel, à part des impuretés.

3. Alliage selon la revendication 2, contenant 1,0 % de Mo, 0,5 % de W, 1,0 % de Nb et 1,0 % de Ta.

4. Alliage selon la revendication 1, contenant 3,0 % de Mo et 1,0 % de W.

5. Alliage selon la revendication 1, contenant jusqu'à 0,2 % de magnésium et/ou jusqu'à 0,2 % de cérium.

6. Alliage selon la revendication 1, contenant de 0,10 à 0,20 % de magnésium.


7. Alliage selon la revendication 1, contenant de 0,02 % à 0,06 % de cérium.

8. Alliage selon la revendication 1, contenant environ 0,15 % de magnésium.

9. Alliage selon la revendication 1, contenant environ 0,04 % de cérium.

10. Alliage selon l'une quelconque des revendications 1 et 2 à 4, contenant 0,15 % de magnésium et 0,04 % de cérium.

FIG. 1.

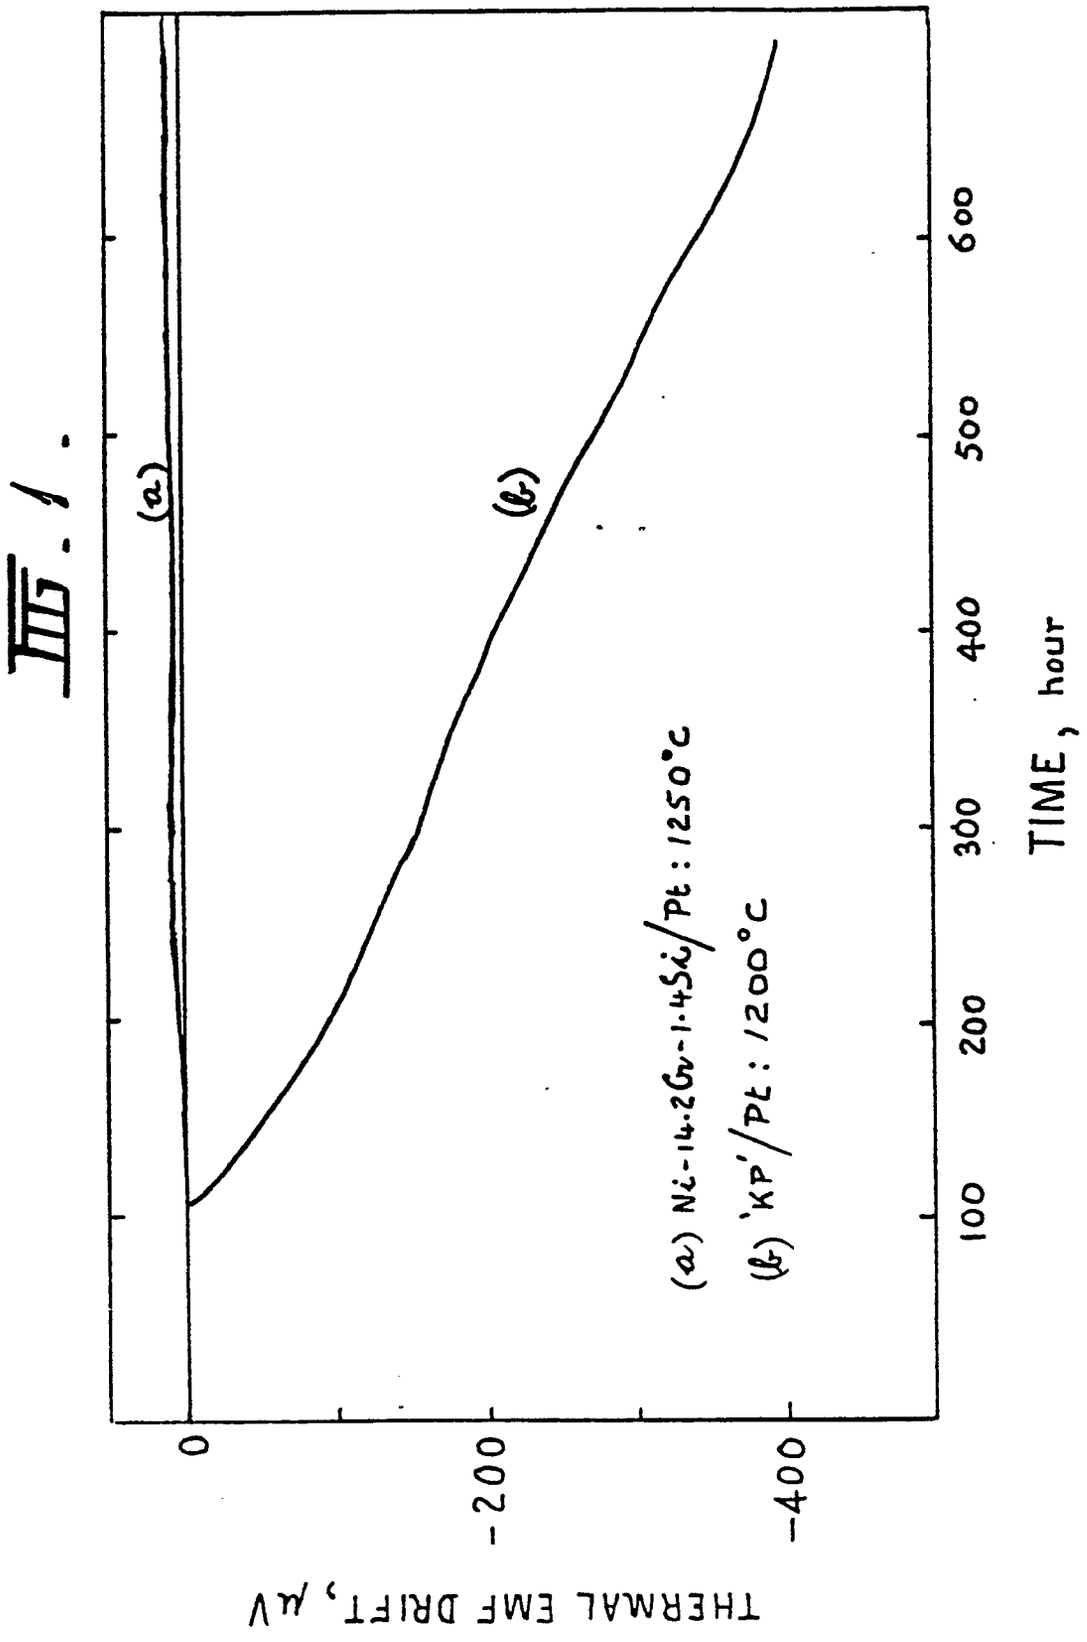
THERMAL EMF DRIFT, μV
0
-200
-400
100
200
300
400
500
600
TIME, hour
(a)
(b)
(a) Ni-14.2Cr-1.4Si/Pt : 1250°C
(b) 'KP'/Pt : 1200°C

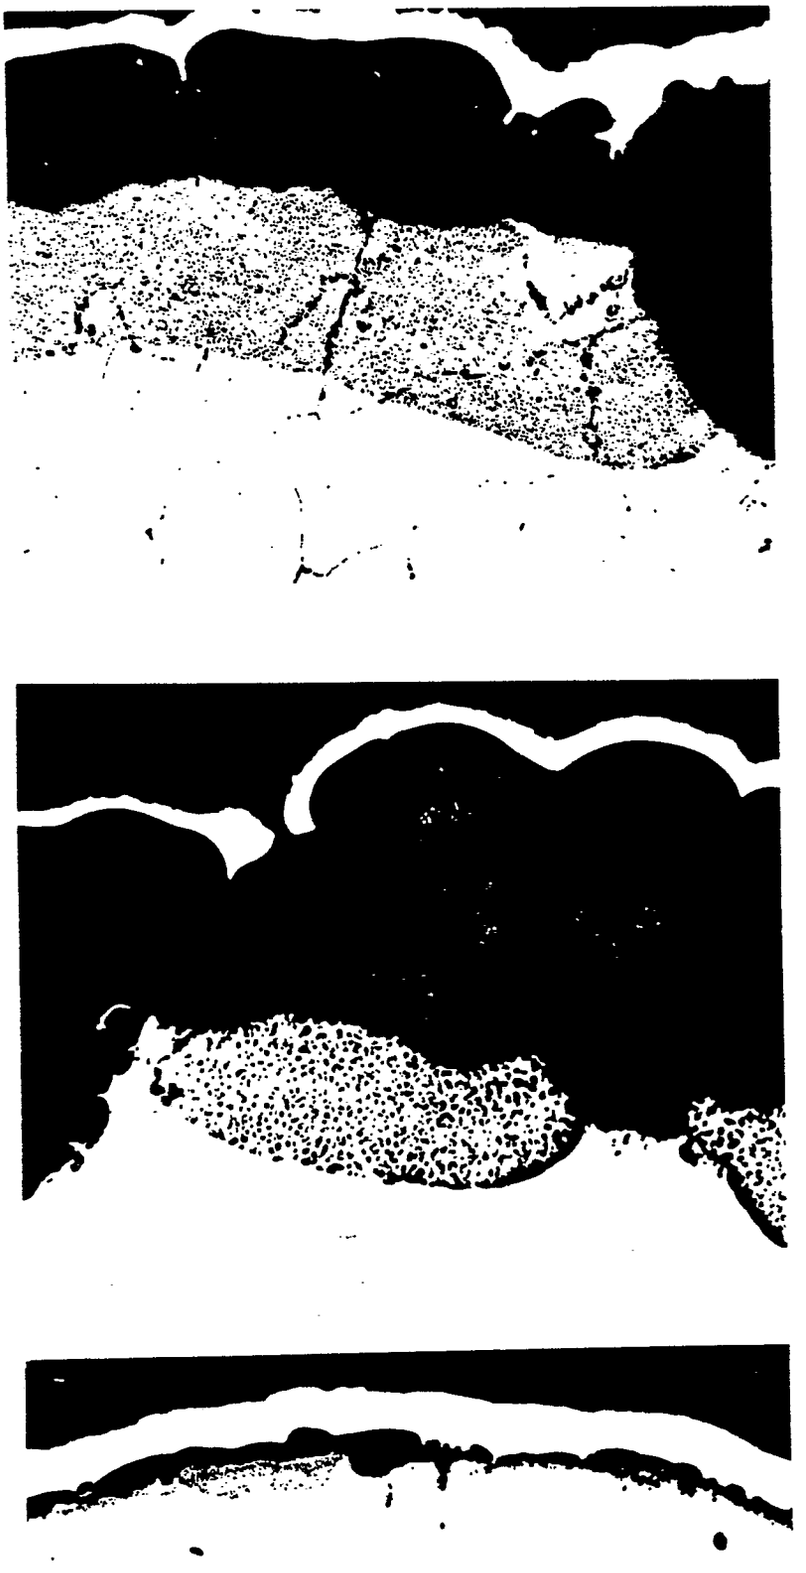


Figure 2





Ultimate Tensile Strength
MPa
600
500
400
300
200
100
0
200
400
600
800
1000
1200
TEMPERATURE (deg.C)
a
b
a... base (Ni-14.3Cr-1.4Si-0.1 Mg)
b... base + 3%-wt Nb

Fig. 3.


Annealing Trials




(a) As rolled x500

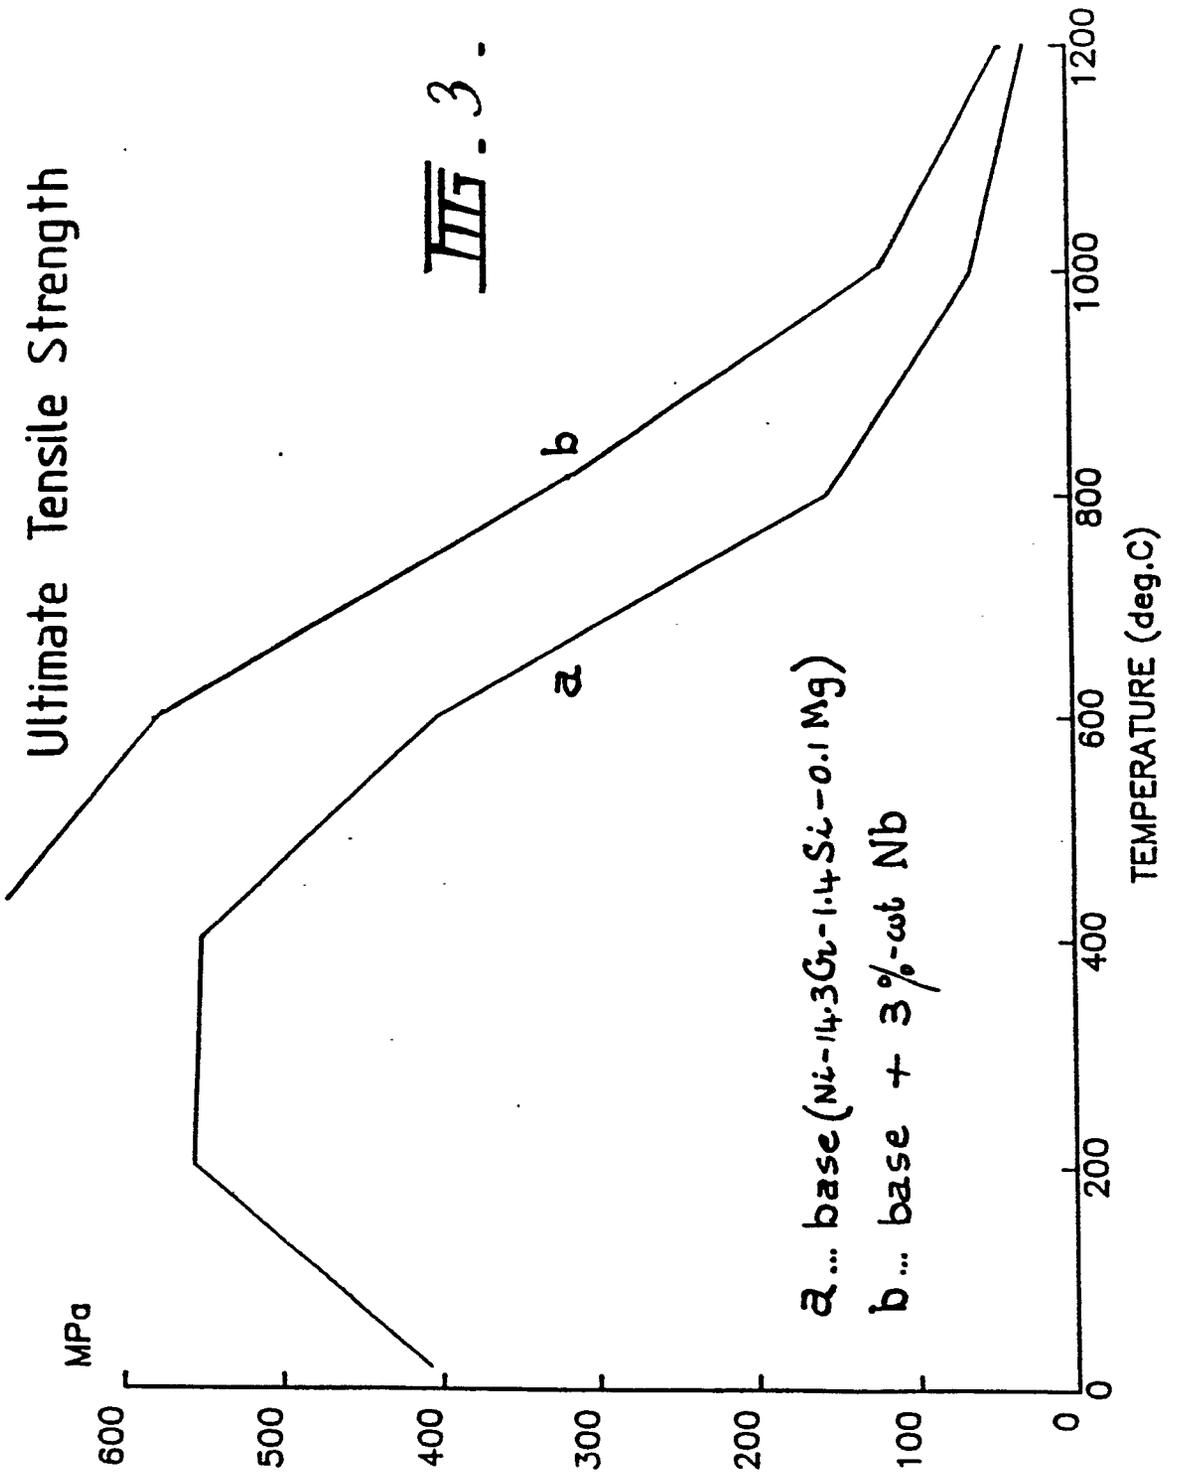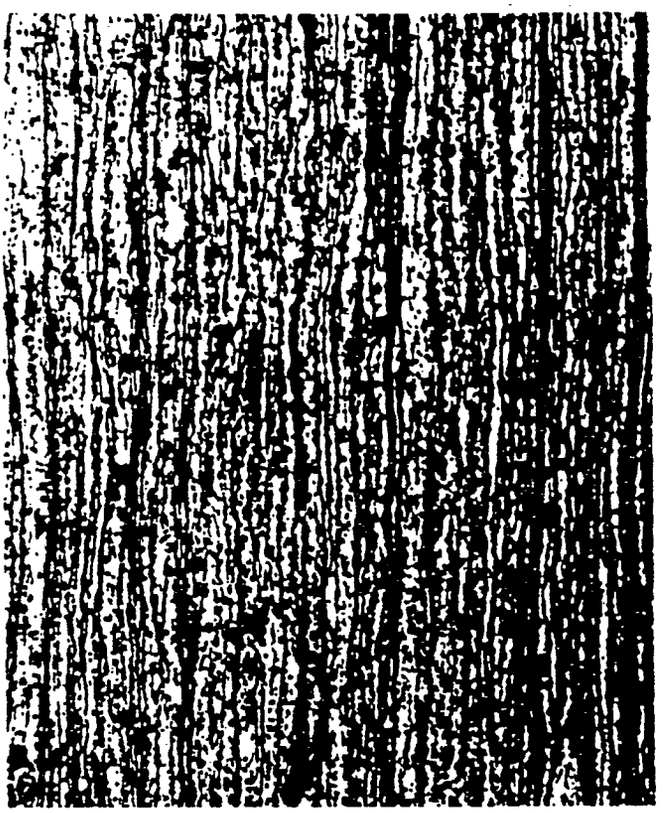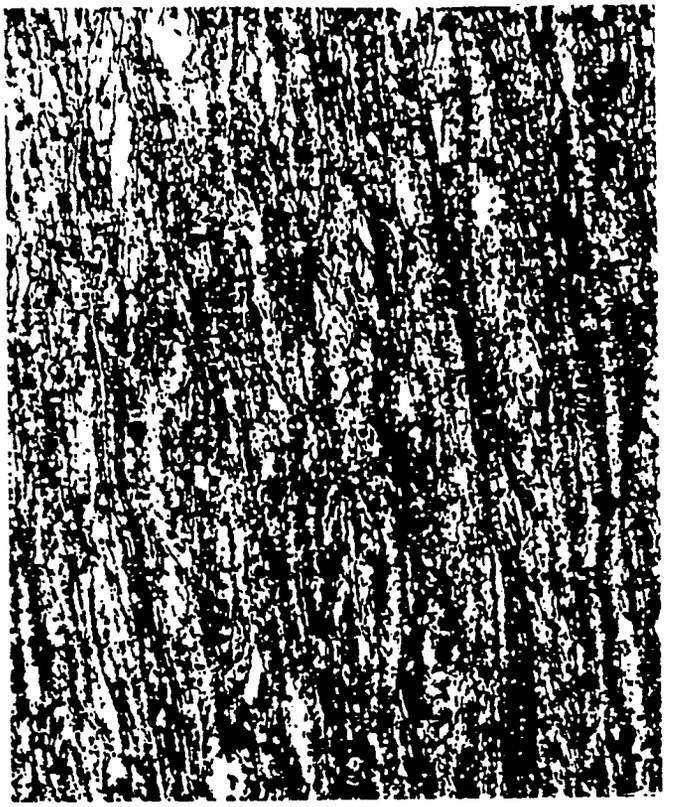

(b) 1 hour 600 deg.C x500

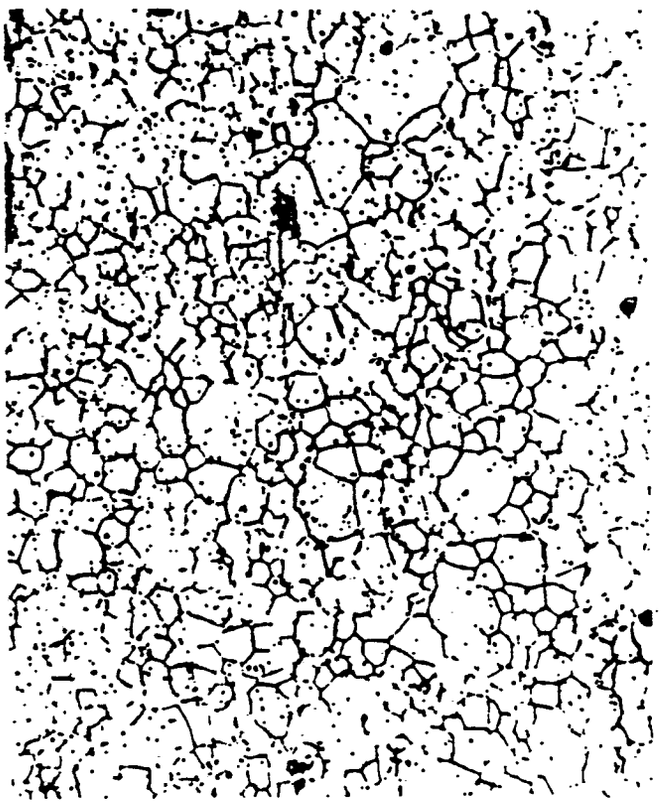

(c) 1 hour 800 deg.C x500

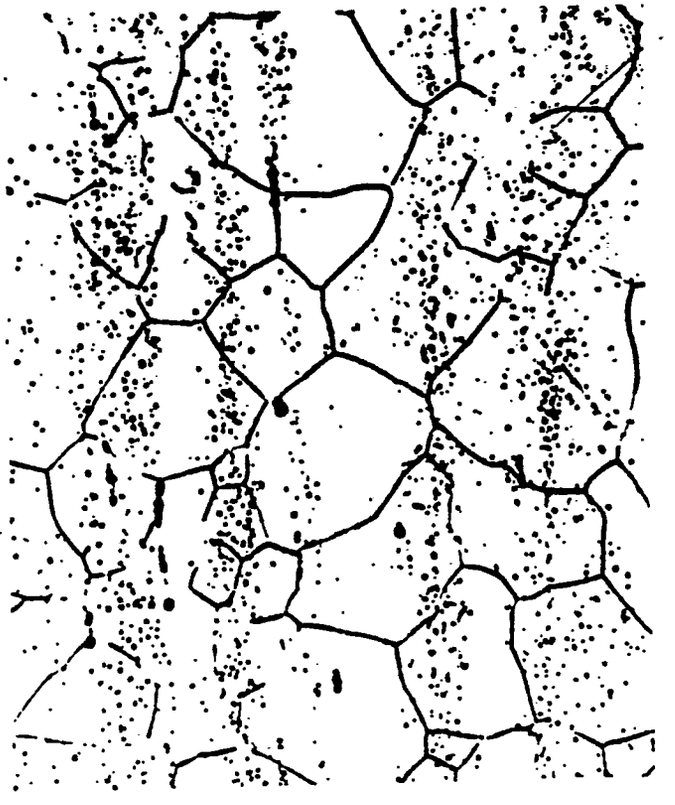

(d) 1 hour 1000 deg.C x500

Figure 4