

⑫

EUROPEAN PATENT SPECIFICATION

④⑤ Date of publication of the patent specification:
20.06.90

⑤① Int. Cl.⁵: **B63H 9/06, B63H 9/10**

②① Application number: **86302882.5**

②② Date of filing: **17.04.86**

⑤④ **Improvements in sails and sailing vessels.**

④③ Date of publication of application:
21.10.87 Bulletin 87/43

⑦③ Proprietor: **Anderson, Thomas Robert, 43 Kulgoa Avenue, Ryde New South Wales(AU)**

④⑤ Publication of the grant of the patent:
20.06.90 Bulletin 90/25

⑦② Inventor: **Anderson, Thomas Robert, 43 Kulgoa Avenue, Ryde New South Wales(AU)**

④④ Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

⑦④ Representative: **Keltie, David Arthur et al, Baron & Warren 18 South End Kensington, London W8 5BU(GB)**

⑤⑥ References cited:
DE-A- 2 810 355
FR-A- 889 560
GB-A- 612 193
US-A- 2 569 318
US-A- 4 561 374

EP 0 241 609 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

This invention provides a novel sail assembly which includes a closed sail envelope which can be varied in profile to take the best advantage of prevailing wind conditions. The assembly can also be moved rotationally to allow the angle of attack of the leading edge of the sail envelope to the wind to be varied.

As will be understood a sail having the above capabilities will provide a wide range of adjustment possibilities for the sailor and will allow the prevailing winds to be used to maximum advantage.

Sail assemblies of the air foil-type having flexible battens which allow to alter the contour of the sail are well known (see for instance US-A 2 569 318, FR-A 889 560). The known mechanisms for adjustment are however complicated and comprise a great number of elements which are susceptible to trouble in the function of adjustment.

The invention avoids these disadvantages and can be broadly said to comprise a sail assembly comprising a mast, parallel upper and lower elongated members fixed to and substantially normal to the mast between the mid-length positions and corresponding first ends of the members, connector means including track means joining the first ends of the members, flexible sail forming sheet material joined to the track means by runners and extending as two panels with terminal rear edges adjacent to the other ends of said members and with the mast between the panels, pairs of elongated flexible sail profiling elements with corresponding elements of said pairs mounted in the respective sail panels, sliding joints between exposed rear ends of the elements of said pairs at or adjacent the rear edges of said panels, and means to apply bending pressure to said elements by the application of longitudinal compressive forces to said elements.

Presently preferred forms of the invention will now be described with reference to the accompanying drawings in which:-

Fig.1 is a perspective view of a typical arrangement showing a conventional boat hull fitted with the sail assembly,

Fig.2 is a schematic side view of the sail assembly,

Fig.3 is a perspective view of the basic components of the sail assembly with the sail cloth removed,

Fig.4 is a cross-section on section line 3-3 of Fig.2,

Fig.5 is a view similar to Fig.4 of a second-form of the invention,

Fig.6 is a perspective view of a preferred form of an end connection between sail battens of the sail panels forming the sail envelope as proposed by the invention and

Fig. 7 is a view similar to Fig.4 showing one means for forming the sail envelope into an aerofoil shape of desired cross-section.

Referring to the drawings, Fig.1 illustrates a boat

hull 1 with a rotatably mounted mast 2 thereon. The manner of mast mounting so as to be rotatable and the means to provide rotation can be of many forms and as no inventive ingenuity is required to provide these features no preferred arrangement has been described. Braces indicated 3 and shrouds 3a from a cross arm assembly 4 rotatably mounted on the mast stabilise the top of the mast. A sail envelope generally indicated 5 is mounted so as to enclose the major portion of the mast.

Referring to Fig.2, the sail is shown as having a pronounced curvature in the trailing edge of the sail. It is preferred that the leading edge of the sail is also an arc of a circle. Benefits result when the leading and trailing edges of the sail are so formed that in at any stage in a sail raising and lowering operation the sail shape is still substantially a section of the preferred sail panel shape as illustrated. Fig.3 shows that the mast is, in the preferred form, of H section in the central portion with other shaped ends. The mast may have other shapes and may be of uniform shape throughout its length and may also be tapered, as shown in the drawings.

Adjacent the top of the mast 2 an upper sail end 6 is provided and a like but larger sail end 7 is fixed to the mast 2 adjacent its lower end. Preferably there is a hood of streamlined form 6a (see Fig.2) over the top of the end 6. The mast is positioned approximately 20 to 30 percent of the distance along the chord length of the members 6 and 7 to assist the sail assembly in weather cocking. Fixed to the mast and/or the end 7 there are two arms 8 and assembly stabilising and bracing wires or other tensioned elements indicated 9 extend from the arms 8 to the tail end of the member 6. There is also another assembly bracing like member 10 extending from the end 7 to the end 6.

The sail is a envelope and can be varied in profile to adopt a range of aerofoil shapes. The ends 6 and 7 in shape and size are such as to always cover the ends of the sail envelope for substantially all possible shapes. Whilst this is a desirable feature the invention is not limited to the ends 6 and 7 having the preferred shapes described.

In Figs.3 and 4 a preferred form of leading edge sail support is illustrated, it comprises an elongated member 11 preferably having a curvature along its length. The curvature may be induced by varying the length of ties 12 connecting the member 11 to the mast 2. Along the leading edge of the member 11 there is a track 13 of suitable form to accept runners in a captive manner whereby the sail cloth is attached to the member 11. Suitable halyards are provided to permit the raising and lowering of the sail relative to the member 11.

Fig.5 illustrates another form of leading edge sail support means which comprises two elongated members 14 with the members held in spaced relationship at intervals along the length of the members by cross ties 15 and tied to the mast 2 by ties 16 in a manner to provide the preferred curvature of the members 14. The members 14 have tracks 17 along their length to hold captive runners whereby the leading edges of two panels of sail cloth are attached to the members 14. In an alternative arrange-

ment the members 14 could be wires and the sail could have slides to run on the wires.

Fig.5 also shows a nosing indicated 18 which extends from the end 6 to the end 7 to provide a streamlined leading edge for the sail assembly. This was not needed in the Fig.4 arrangement where the sail cloth passes around the smooth profile of the member 11 to give the leading edge of the sail the required streamlined form. It is to be noted that there are flaps 19 connected by reduced section parts 20, providing a hinge effect, extending rearwardly from the member 18. The flaps are preferably of the form shown but could be flaps of sail cloth on the like fixed to the trailing edges of the member 18. The purpose of the flaps is to provide a smooth transition from the shape of the nosing 18 to the sides of the sail profile and so encourage turbulence free flow of air over the sail profile. In an alternative arrangement the legs of the U member 18 could be longer and of shape similar to the flaps 19 and could be from a flexible plastics or like material. The extended legs could then deflect to provide the required transitional blending of the shape of the member 18 to the shape of the sail panels. In yet another arrangement the member 18 could be pivotally mounted on members 6 and 7 allowing it to move with the sail profile changes to provide the required transitional blending of the shape of the member 18 to the shape of the sail panels.

As mentioned above the sail cloth can be in one piece fastened at approximately mid-length to the member 11 or in two pieces fastened at their leading edges to the members 14. In both cases there are two panels of sail cloth passing one to each side of the mast 2 and the line 10. In order to provide and maintain the required contour of the sail leading edge around the member 11 of the Fig.4 and 7 arrangements the portion in the zone X of Fig.7 is reinforced and stiffened, as by providing a number of layers of sail cloth in that zone or by the inclusion of a shaped fibreglass or like stiffening member.

The shaping of the sail panels is achieved by battens or batten like members housed in batten pockets on the inner faces of the sail panels. Referring to Fig.7 it will be seen that a sheet of sail cloth is fastened at its mid length position by runners in the track 13 of the member 11. There are two sail panels 5a and 5b passing one to either side of the mast 2. On the inner surfaces of the panels there are batten pockets 21 which are blind at the ends adjacent the member 11 and open at the rear edges of the panels 5a and 5b. The batten pockets of the panels 5a and 5b are in pairs and battens 22 and 23 in the pockets of the panels 5a and 5b extend from the open ends of the batten pockets and are joined as by a tongue and slot arrangement as shown in Fig.6. The tongue and slot arrangement is illustrative and other "joints" permitting relative sliding movement between the ends of the battens can be used.

By applying longitudinal compressive loads on the battens 22 and 23 they will be caused to bend. This is shown in Fig.7 where there is a convex curvature in the panel 5a of smaller radius than there is for the panel 5b. The compressive loads can be applied in several ways. In the preferred way, as shown in

Fig.7, lines 24 are anchored at 25 to the outer faces of the batten pockets adjacent the rear edges of the sail panels 5a and 5b and are passed over pulleys 26 on the outer faces of the batten pockets adjacent the member 11. The lines 24 then pass downwardly to the deck of the boat and tension is applied in any suitable manner. For example by hydraulic means attached to a head member to which the ends of all of the lines of one or other of the sail panels are anchored. Mechanical means such as levers or pulleys can alternatively be used. By tensioning all of the lines of a given sail panel the associated battens will, because of their lengths, profiles and cross-sections, adopt a predetermined curvature and the sail panel will adopt a predetermined shape.

In another load applying method (not illustrated) there is a leech line connecting the ends of the battens in the panel 5a and another connecting the ends of the battens in the sail panel 5b. The upper ends of the leech lines are fixed to the member 6, which is braced through the braces 3 back to the mast 2. The leech lines lie on a curve, due to the different lengths of the battens, and consequently tension applied to the leech lines from a tensioning means on the boat deck to straighten the curve in a leech line will cause the battens to "bow". The degree of bow induced in the battens will provide a corresponding sail panel curvature.

The foregoing is a description of several embodiments of the invention with preferred arrangements of members. It is to be understood that the members described can be varied without departing from the concept of the invention which is detailed in the following claims.

Claims

1. A sail assembly comprising a mast (2), an upper elongated member (6) fixed laterally to the mast, a lower elongated member (7) fixed laterally to the mast and parallel to the upper member, the points of fixing of the upper and lower members to the mast are between the mid-lengths of the upper and lower members and first ends of the members, connector means (11, 14) including track means (13, 17) joining the first ends of the upper and lower members, runners engaged in the track means and fastened to flexible sail forming sheet material (5) which extends from the track means as two panels (5a, 5b) one to either side of the mast with terminal edges of the panels adjacent the other ends of the upper and lower members, pairs of flexible elongated sail profiling elements (22, 23) with corresponding elements of said pairs mounted in elongated pockets (21) in the respective sail panels so as to lie parallel to and between the upper and lower members and so as to have forward ends anchored to the panels and rear ends which extend from the sail pockets adjacent the terminal edges of the sail panels, sliding joints between rear ends of the profiling elements, and means to apply bending pressure to said elements by the application of longitudinal compressive forces to said profiling elements.

2. A sail assembly as claimed in claim 1 wherein the connector means comprises an elongated tie

member (11) with two tracks along the length thereof respectively engaged by runners on leading edges of said panels.

3. A sail assembly as claimed in claim 1 wherein the connector means comprises two elongated tie members (14) each with a track (17) therein to house runners positioned along leading edges of said panels (5a, 5b).

4. A sail assembly as claimed in claim 1 wherein the connector means comprises an elongated tie member (11) with a track (13) therein to house runners located at an approximate mid-length position on the inner face of a continuous sheet of sail forming material (5) which partially embraces said tie member and then extends rearwardly towards the other ends of said upper and lower members as said two panels (5a, 5b) with both the mast (2) and the tie member between said panels.

5. A sail assembly as claimed in claim 2 or claim 3 including an elongated nosing (18) having a generally U shaped body which partially embraces the connector means (11) and said track means (13) to provide a streamlined leading edge for said sail assembly.

6. A sail assembly as claimed in 5 wherein said nosing (18) is mounted for part rotation about a long axis of said nosing.

7. A sail assembly as claimed in anyone of claims 2,3 or 5 wherein the nosing has flap extensions (19) of the legs of said U shaped body to provide streamlined bridging between the profile of said nosing and the profile of said panels (5a, 5b).

8. A sail assembly as claimed in anyone of the preceding claims wherein the means to provide bending pressure to said sail profiling elements comprises leech lines extending from the upper to the lower members (6, 7) and engaging the rear ends of said sail profiling elements.

9. A sail assembly as claimed in anyone of claims 1 to 8 wherein the means to provide bending pressure to said sail profiling elements (22, 23) comprises a plurality of lines (24) equal in number to the number of said elements which run in the direction of the chord section of said sail assembly between fixing points where first ends of said lines respectively lie adjacent first ends of said elements and direction diverters (26) for said lines which respectively lie adjacent the other ends of said elements.

10. A sail assembly as claimed in anyone of claims 1 to 9 wherein the leading edge and the trailing edge of the sail of the sail (5) assembly when set are both arcs of circles.

Patentansprüche

1. Segeleinrichtung, bestehend aus einem Mast (2), einem oberen, am Mast angeordneten spitz zulaufenden Teil (6), einem unteren, ebenfalls am Mast angeordneten spitz zulaufenden Teil (7), welches sich parallel zu dem oberen Teil (6) erstreckt, wobei die Befestigungspunkte des oberen und unteren Teils am Mast im vorderen Bereich der Teile im Schwerpunkt derselben liegen, weiterhin sind Verbindungsmittel (11, 14) vorgesehen, die mit Lauf-

schienen (13, 17) versehen sind, wobei der Anfangsbereich der oberen und unteren spitz zulaufenden Teile verbunden wird, weiterhin sind Gleitringe vorgesehen, die in den Laufschiene laufen und mit dem Segeltuch verbunden sind und hierdurch ein Segelschot (5) ausbilden, welches sich von den Laufschiene nach hinten als zwei flügelartige Segel (5a, 5b) erstreckt, wobei jedes der Segel seitlich den Mast umgibt und die Endbereiche der flügelartigen Segel an den oberen und unteren spitz zulaufenden Teilen befestigt sind, und weiterhin in paarweise Anordnung flexible sich in Längsrichtung erstreckende Segellatten (22, 23) vorgesehen sind, wobei diese in entsprechenden Segeltaschen in den flügelartigen Segelschot angeordnet sind, wobei sich die Segellatten in paralleler Anordnung zwischen den oberen und unteren spitz zulaufenden Teilen erstrecken, wobei die vorderen Enden der Segellatten am Segelschot verankert sind und die hinteren Enden sich in den Bereich der hinteren Teile der flügelartigen Segelschote erstrecken, wobei im hinteren Bereich die Segellatten eine ineinander greifende Verbindung aufweisen und schließlich Mittel vorgesehen sind, um mit Hilfe eines Preßdruckes eine kurvenartige Biegung auf die Segellatten zu erzeugen, wobei auf die Segellatten in Richtung auf deren Längserstreckung eine Kraft aufgebracht wird, welche die Segellatten zusammendrückt.

2. Segeleinrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Verbindungsmittel aus einem sich in Längsrichtung erstreckenden Verbindungsstück (11) bestehen, wobei das Verbindungsstück entlang seiner Länge zwei Laufschiene aufweist und in den Laufschiene Gleitringe bzw. Gleitrollen angeordnet sind, um die bogenförmige Segelschote im vorderen Bereich zu führen.

3. Segeleinrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Verbindungsmittel aus zwei sich in Längsrichtung erstreckenden Verbindungsstücken (14) bestehen, wobei jeder eine Laufschiene (17) aufweist und in den Laufschiene Laufrollen angeordnet sind, um dadurch den vorderen Bereich der flügelartigen Segelschote (5a, 5b) zu führen.

4. Segeleinrichtung nach Anspruch 1, dadurch gekennzeichnet, daß die Verbindungsmittel zwischen der Mastspitze und dem Mastfuß aus einem Verbindungsteil (11) mit einer eingearbeiteten Laufrille (13) bestehen, wobei in der Laufrille ein Gleitstück läuft und die Gleitstücke in Längsrichtung an dem Segelschot (5) angeordnet sind, wobei das Segelschot (5) teilweise die Stützanordnung umgibt und sich dann nach rückwärts nach den anderen Enden der oberen und unteren spitz zulaufenden Glieder, welche die zwei flügelartigen Segel (5a, 5b) abstützen, erstreckt, wobei sowohl der Mast (2) und auch die Verbindungsteile (11, 14) zwischen den flügelartigen Segelschoten angeordnet sind.

5. Segeleinrichtung nach Anspruch 2 oder 3, dadurch gekennzeichnet, daß eine nasenförmige Umrahmung (18) mit einem U-förmig ausgebildeten Körper vorgesehen ist, wobei der Körper teilweise die Verbindungsmittel (11, 14) und die Laufrillen (13) umgibt, um hierdurch im Bereich der Vorderseite des

Segels einen stromlinienförmigen Verlauf zu schaffen.

6. Segeleinrichtung nach Anspruch 5, dadurch gekennzeichnet, daß die nasenförmige Umrandung (18) so ausgebildet ist, daß entlang der Längsachse eine teilweise Rotation ermöglicht wird.

7. Segeleinrichtung nach einem der Ansprüche 2, 3 oder 5, dadurch gekennzeichnet, daß die nasenförmige Umrandung ausgehend von dem U-förmig geformten Körper nach hinten weisende Schenkel (19) aufweist, um hierdurch zwischen der profilierten nasenförmigen Umrandung und dem Profil der flügelartigen Segelschote (5a, 5b) eine stromlinienförmige Verbindung zu schaffen.

8. Segeleinrichtung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die Mittel, um auf die Segellatten mit einer Krümmung einzuwirken, aus einer Verschürung bestehen, die sich von dem oberen nach dem unteren Glied (6, 7) erstreckt und hierbei mit den hinteren Enden der Segellatten in Verbindung steht.

9. Segeleinrichtung nach einem der Ansprüche 1 bis 8, dadurch gekennzeichnet, daß die Mittel, um mit Hilfe einer Preßkraft eine Krümmung an den Segellatten (22, 23) zu schaffen, aus einer Vielzahl von Seilen nach Art einer Verschnürung besteht, wobei die Seile in der Anzahl der Zahl der Segellatten entsprechen und die Seile hierbei im Bereich der Bogensehne an den Segellatten zwischen Befestigungspunkten angeordnet sind, wobei die Verschnürung vom Anfang der Segellatten ausgeht und sich über einer Umlenk- bzw. Befestigungseinrichtung (26) an das andere Ende der Segellatten erstreckt und dort ebenfalls befestigt ist.

10. Segeleinrichtung nach einem der Ansprüche 1 bis 9, dadurch gekennzeichnet, daß die vordere Kante und die seitlichen Bereiche des Segels (5) der Segeleinrichtung im segelfertigen Zustand bogenförmige Kreisabschnitte darstellen.

Revendications

1. Ensemble de voilure comportant un mat (2), un organe supérieur (6) de forme allongée fixé latéralement au mat, un organe inférieur (7) de forme allongée fixé latéralement au mat et parallèle à l'organe supérieur, des points de fixation sur le mat des organes supérieur et inférieur sont entre les mi-longueurs des organes supérieur et inférieur et des premières extrémités desdits organes, des moyens de connecteur (11, 14) comportant des moyens de glissière de guidage (13, 17) joignant les premières extrémités des organes supérieur et inférieur, des curseurs engagés dans les moyens de glissière et fixés au matériau en feuille (5) formant la voile souple qui s'étend à partir des moyens de glissière sous forme de deux panneaux (5a, 5b), un de chaque côté du mat avec les bords terminaux des panneaux adjacents aux autres extrémités des organes supérieur et inférieur, des paires d'éléments de profilage de voile (22, 23) souples de forme allongée avec les éléments correspondants desdites paires montés dans des fourreaux allongés (21) dans les panneaux de voile respectifs de façon à être disposés parallèlement à, et entre les organes supérieur et infé-

rieur et de façon à avoir des extrémités avants créées sur les panneaux et des extrémités arrières qui s'étendent à partir desdits fourreaux adjacents aux bords terminaux des panneaux de voile, des joints glissants entre les extrémités arrières des éléments de profilage, et des moyens pour appliquer une pression de flexion auxdits éléments par l'application de forces de compression longitudinale auxdits éléments de profilage.

2. Ensemble de voilure selon la revendication 1, dans lequel les moyens de connecteur comprennent un organe de liaison de forme allongée (11) avec deux glissières sur toute sa longueur dans lesquelles sont engagés les curseurs sur les bords d'attaque desdits panneaux.

3. Ensemble de voilure selon la revendication 1, dans lequel les moyens de connecteur comprennent deux organes de liaison (14) de forme allongée, chacun avec une glissière (17) dedans pour abriter les curseurs disposés le long des bords d'attaque desdits panneaux (5a, 5b).

4. Ensemble de voilure selon la revendication 1, dans lequel les moyens de connecteur comprennent un organe de liaison (11) de forme allongée avec une glissière (13) dedans pour recevoir les curseurs disposés environ à un emplacement à demi-longueur sur la face intérieure d'une feuille continue du matériau (5) formant la voile, qui entoure partiellement ledit organe et ensuite s'étend en arrière vers les autres extrémités desdits organes supérieur et inférieur comme lesdits deux panneaux (5a, 5b) avec à la fois le mat (2) et l'organe de liaison entre lesdits panneaux.

5. Ensemble de voilure selon la revendication 2 ou la revendication 3, comportant un capotage allongé (18) ayant la forme générale d'un corps en U qui entoure partiellement les moyens de connecteur (11) et lesdits moyens de glissière (13) pour constituer un bord d'attaque profilé pour ledit ensemble de voilure.

6. Ensemble de voilure selon la revendication 5, dans lequel ledit capotage (18) est monté pour pouvoir tourner partiellement autour d'un axe longitudinal dudit capotage.

7. Ensemble de voilure selon une quelconque des revendications 2, 3 ou 5, dans lequel le capotage a des extensions en forme de pans (19) formant les bras dudit corps en forme de U pour constituer une liaison profilée entre le profilé dudit capotage et le profilé desdits panneaux (5a, 5b).

8. Ensemble de voilure selon une quelconque des revendications précédentes, dans lequel les moyens pour réaliser la pression de flexion sur lesdits éléments de profilage de voile comportent des tendeurs s'étendant de l'organe supérieur (6) à l'organe inférieur (7) et liés aux extrémités arrières desdits éléments de profilage de voile.

9. Ensemble de voilure selon une quelconque des revendications 1 à 8, dans lequel les moyens pour produire une pression de flexion auxdits éléments de profilage de voile (22, 23) comprennent une pluralité de tendeurs (24) égaux en nombre au nombre desdits éléments, et qui s'étendent en direction de la section de la corde dudit ensemble de voilure entre des points de fixation où les premières extrémités

desdits tendeurs sont disposées adjacentes respectivement aux premières extrémités desdits éléments et des changeurs de direction (26) pour lesdits tendeurs qui sont disposés adjacents respectivement aux autres extrémités desdits éléments.

5

10. Ensemble de voilure selon une quelconque des revendications 1 à 9, dans lequel le bord d'attaque et le bord de fuite de la voile (5) de l'ensemble de voilure une fois mis en position sont tous les deux des arcs de cercle.

10

15

20

25

30

35

40

45

50

55

60

65

6

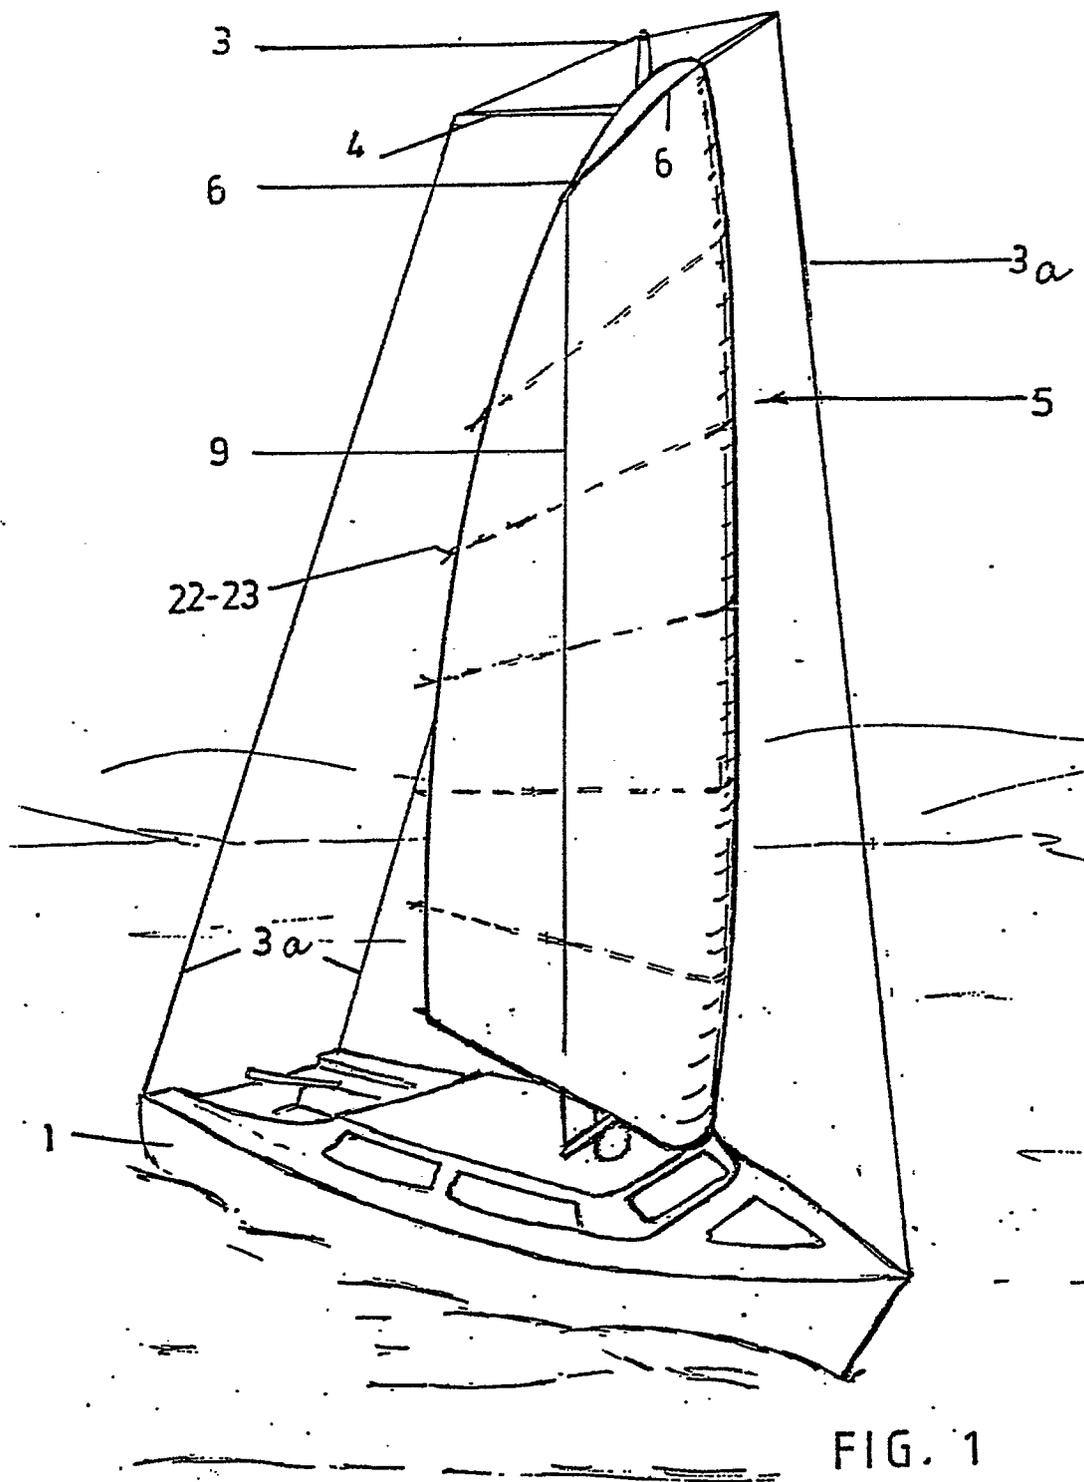


FIG. 1

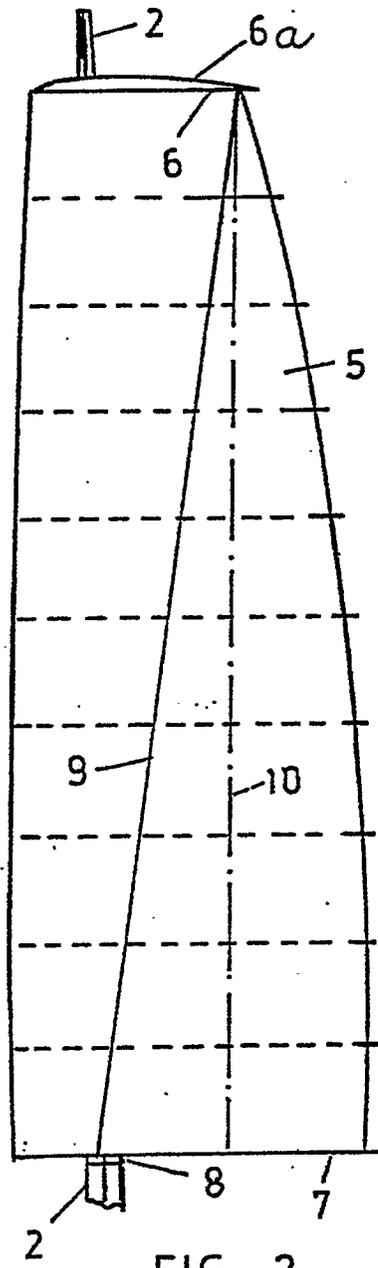


FIG. 2

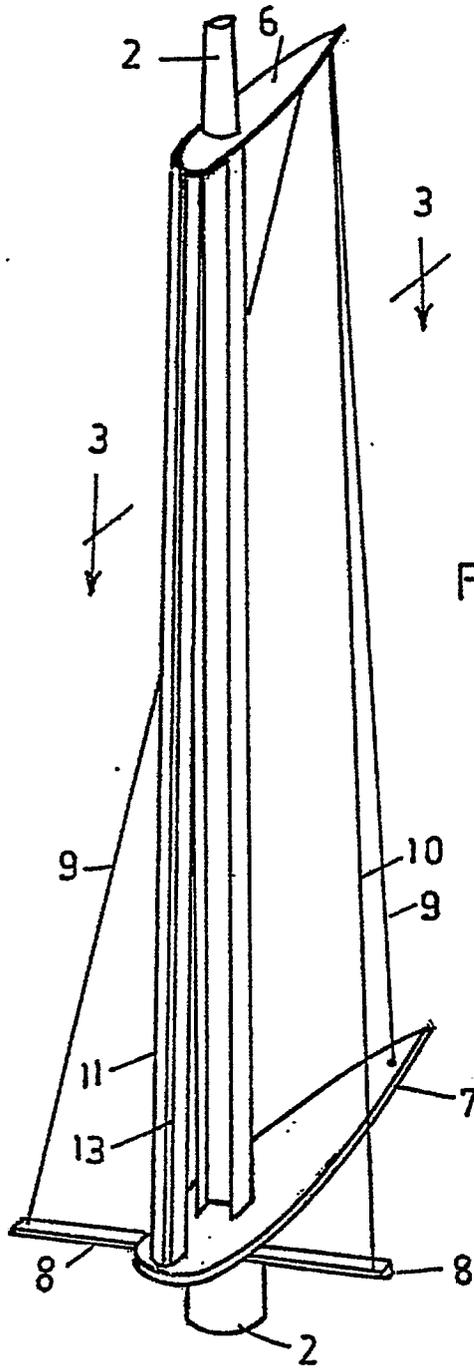


FIG. 3

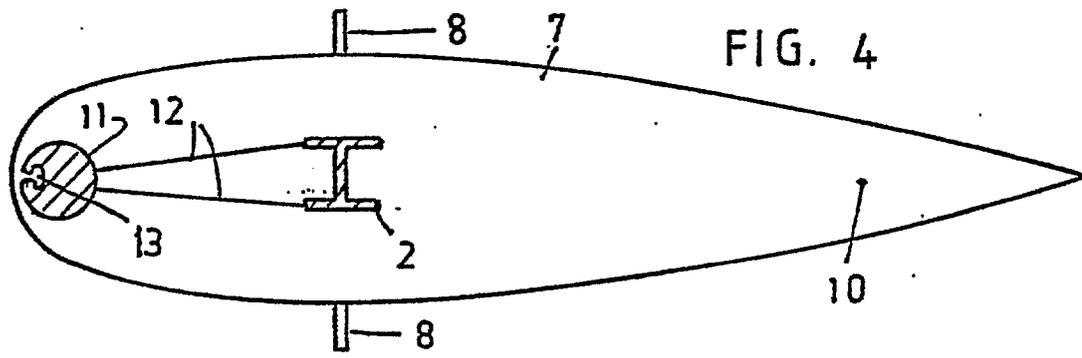


FIG. 4

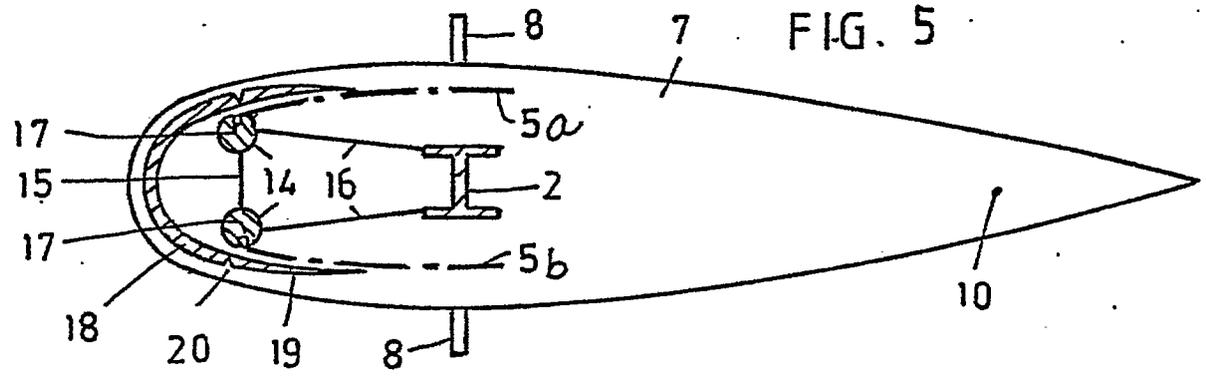


FIG. 5

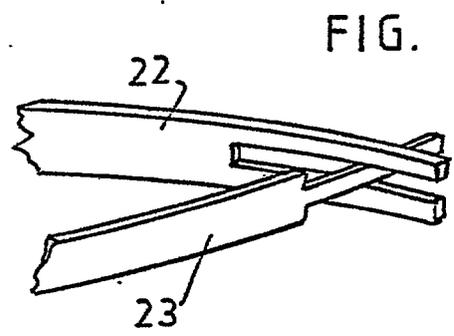


FIG. 6

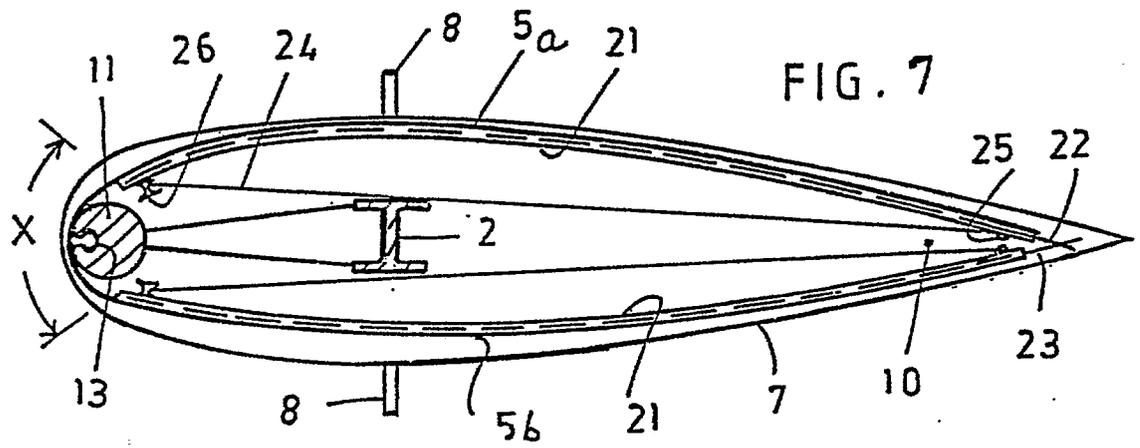


FIG. 7