

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 243 043 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **26.06.91** (51) Int. Cl.<sup>5</sup>: **B05B 5/04**

(21) Application number: **87303098.5**

(22) Date of filing: **09.04.87**

(54) **Electrostatic rotary atomizing liquid spray coating apparatus.**

(30) Priority: **18.04.86 US 853746**  
**13.02.87 US 14450**

(43) Date of publication of application:  
**28.10.87 Bulletin 87/44**

(45) Publication of the grant of the patent:  
**26.06.91 Bulletin 91/26**

(84) Designated Contracting States:  
**CH DE FR GB LI SE**

(56) References cited:  
**WO-A-85/01455**  
**FR-A- 1 547 354**  
**US-A- 4 576 827**

(73) Proprietor: **NORDSON CORPORATION**  
**555 Jackson Street P. O. Box 151**  
**Amherst Ohio 44001(US)**

(72) Inventor: **Wacker, Robert L.**  
**125 Pleasant Street**  
**Wellington, Ohio 44090(US)**  
Inventor: **Sharpless, John**  
**11643 Vermilion Road**  
**Oberlin, Ohio 44074(US)**  
Inventor: **Murphy, James C.**  
**3409 Elmbrook Drive**  
**Broadview Heights, Ohio 44147(US)**  
Inventor: **Shuster, Donald E.**  
**416 Longfellow**  
**Elyria, Ohio 44035(US)**  
Inventor: **Knobbe, Alan J.**  
**675 Appleseed Drive**  
**Lorain, Ohio 44053(US)**

(74) Representative: **Allen, Oliver John Richard et al**  
**Lloyd Wise, Tregear & Co. Norman House**  
**105-109 Strand**  
**London, WC2R 0AE(GB)**

**EP 0 243 043 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

This invention relates to electrostatic spray coating and more particularly to electrostatic liquid spray coating apparatus utilizing rotary atomization.

Electrostatic spray coating apparatus incorporating rotary atomizers have been available for many years. Typically a conductive cup or disc maintained at high voltage is rotated at very high speed causing liquid coating material fed to the central part of the cup or disc to migrate outwardly over the cup or disc surface under centrifugal force, eventually leaving the cup or disc at the outer edge thereof where it becomes atomized. Because the atomizing edge of the cup or disc is sharp, the high voltage applied to the conductive cup or disc causes ionization of the air in the region of the atomizing edge, imparting electrostatic charge to the atomized liquid coating particles in a manner well known in the field of electrostatic spray coating.

Over the years the hazards associated with the use of conductive atomizing cups and discs maintained at high voltage, which take the form of personnel shock and ignition when combustible coatings are employed, have become well publicised. In brief, the hazards exist by virtue of the fact that substantial electrical energy is stored in capacitive form by a conductive cup or disc maintained at high voltage which can rapidly discharge if inadvertently grounded or brought near a grounded object. To minimize these hazards various solutions have been proposed. For example, it has been proposed to make the atomized cup or disc of insulative material except for a conductive skin or layer which is provided on the surface of the atomizing member to conduct high voltage to the atomizing edge for the purpose of creating ionization thereat. Another proposal involves making the atomizing cup or disc of resistive material.

Previous proposals have not been entirely satisfactory for various reason, one of which is that the resulting transfer efficiency of the spray apparatus has not been sufficient to satisfy those desiring high coating transfer efficiencies in the range of 90% and above. By coating transfer efficiency is meant the percentage or proportion of coating material emitted from the spray device which actually gets coated. Accordingly, it has been an objective of this invention to provide a safe electrostatic spray device of the rotary atomizing type which affords high coating transfer efficiency.

US Patent No. 4576827 describes the incorporation in the high voltage path, between the high voltage electrostatic supply and the charging electrode of a electrostatic spray system, of a plurality of continuous silicon carbide fibres electrically connected in parallel. A rotary atomization coating de-

vice is described in which an electrode, in the form of a bundle of continuous silicon carbide fibres, is carried in a groove positioned adjacent the outer edge of the atomizing head. A second electrode is carried on the body of the device, its end being adjacent a circular conductor also formed from continuous silicon carbide fibres mounted on the atomizing head. Electrical connection between the first electrode and the circular conductor is via a network of silicon carbide fibres circumferentially spaced around and mounted on the outer surface of the atomizing head.

French Patent No. 1547354 describes a rotary atomization electrostatic spray gun in which air is supplied to an annular passage in the atomizing head and passes to a plurality of air passages in the head which exit at the front surface thereof. The jets of air so produced converge at varying angles on the central axis of the head and serve to ensure that there is no central gap in the circular paint spray pattern produced by the head. The paint is charged by an electrostatic field produced by a charged metal electrode mounted in the centre of the head, which head is formed from insulative material coated with conductive or semi-conductive material.

In accordance with one aspect of the invention an electrostatic atomizing liquid spray coating apparatus comprises a rotary atomizer of insulative material having a first surface over which liquid coating can flow outwardly to an atomizing edge thereof when the atomizer is rotated about its axis of rotation, and a second surface separated from the first surface by the atomizing edge, a circular ring-shaped charging electrode carried by the first surface and encircling the axis of rotation being connected to a circular electrical current-conducting element mounted on the second surface and encircling the axis of rotation, wherein at least one electrical conductor is stationarily mounted on the forward section of the body of the apparatus, the conductor having a free end located in closely spaced proximity to the circular electrical current-conducting element for transferring electrostatic energy thereto when the stationary electrical conductor is energized from a high voltage source characterised in that the charging electrode is connected to the circular electrical current-conducting element by a series of pins which extend through the walls of the atomizer between the circular electrical current-conducting element and the charging electrode, in that a plurality of circumferentially-spaced electrical conductors is provided and in that the charging electrode is flat and is embedded into the first surface for facilitating contact charging of liquid coating supplied to the first surface when the coating flows outwardly over the first surface in contact with the flat charging electrode toward the

atomizing edge.

An annular air ring provided with a circular array of forwardly directed air jet-defining ports may be removably mounted to the front of the support body. The air ring may include an annular recess in the rear wall thereof, to function as a circular manifold for distributing air to the circular array of passages to establish air jets for shaping the atomized liquid coating spray. The air ring rear wall preferably also includes an annular recess which encloses a singular circular conductor which is supplied with high voltage from the remote electrostatic source. The circular conductor may have connected to it the plural stationary conductors which transfer electrostatic energy to the charging electrode of the cup.

In accordance with another aspect of the invention an electrostatic atomizing liquid spray coating apparatus comprises a support body of insulative material having a front surface, a rotary atomizer of insulative material having an axis of rotation, and a surface over which liquid coating can flow outwardly to an atomizing edge thereof when the atomizer is rotated about the axis of rotation, the rotary atomizer including means for charging liquid coating material, drive means incorporated in the support body drivingly mounting the rotary atomizer to the support body for rotating the rotary atomizer about the axis of rotation, means fabricated of insulative material for supplying liquid coating to the surface of the rotary atomizer when the atomizer is rotating, air flow means comprising a circular array of air passages provided on a front surface of an annular ring detachably mounted to the support body and a first annular recess in the annular ring communicating with the circular array of air passages for supplying air thereto to establish a circular array of air jets for shaping the pattern of atomized liquid coating, and means for transferring electrostatic energy to the atomizer charging means from a high voltage source characterised in that the annular ring has a rear surface in contact with the front surface of the support body, the first annular recess and a second annular recess being provided in the rear surface of the annular ring, and in that the means for transferring electrostatic energy comprises a circular conductor mounted in the second annular recess and plural circumferentially-spaced electrical conductors stationarily mounted to the annular air ring, the conductors each having a rear end connected to the circular conductor and a forward free end located in closely spaced proximity to the rotary atomizer charging means for transferring electrostatic energy thereto when the stationary electrical conductors are energized from a high voltage source connected to said circular conductor for facilitating charging of liquid coating supplied to the

rotary atomizer surface when the coating flows outwardly over the surface toward the atomizing edge in charging relationship to the rotary atomizer charging means.

The stationary electrodes facilitate transfer of electrostatic energy to the cup electrode when the stationary conductor is energized from a high voltage source, enabling contact charging of liquid coating supplied to the surface when the coating flows under centrifugal force outwardly over the surface in contact with the charging electrode toward the atomizing edge. By minimizing the amount of conductive material incorporated in the rotating atomizer, electrical energy stored in capacitive form by the atomizer is kept within safe limits, while providing high transfer efficiency due to the arrangement of the plural stationary electrodes and their associated circular moving current-conducting element on the rotating atomizer and the contact charging provided by the conductive electrode which is embedded in the surface of the atomizer over which the coating flows under centrifugal force as it migrates toward the atomizing edge.

In a preferred form the safety of spray apparatus is even further enhanced by fabricating of semi-conductive material the circular contact-charging electrode and its associated circular current-conducting element and the connecting means therebetween.

In order still further to improve the safety of the spray apparatus, the free ends of the electrodes which transfer electrical energy to the contact electrode located inside the cup as well as the external ring electrode and the exterior of the cup are preferably protected from damage and inadvertent contact by being located substantially within the recess in which the cup rotates.

The support body of the spray apparatus in which the drive means for the rotary atomizer is encased may be provided within a generally cylindrical exterior shape and in three sections, the diameter of the intermediate section being substantially less than that of the forward and rear body sections, to define an annular cavity therebetween in which are located the liquid coating and cleansing solvent valves for controlling the flow of liquid coating and solvent to the rotary atomizer. This enables the liquid coating and solvent valves to be located not only in close proximity to the rotary atomizer, but also to be located within the overall envelope of the support body which houses the rotary drive assembly for the atomizer.

To facilitate mounting of the spray apparatus to a post or the like, a mounting bracket is preferably provided of desired length from which project in a forward direction several spaced parallel columns which at their forward end mount the support body

of the spray apparatus housing the various valves and the drive assembly for the rotary atomizing element. In a preferred form, one of the columns is hollow for housing an electrostatic energy-conducting core for transporting high voltage electrostatic energy between a remote high voltage source and the stationary electrodes which are located in close proximity to the circular conducting element on the rotating atomizer which is connected to the circular charging electrode. In the preferred embodiment, the hollow column also encases a gun resistor which is in series with the stationary conductor.

In one preferred form the stationary conductors are located in sheaths which are removably threaded into suitably threaded bores in the front surface of the air ring. The sheaths may also house charging resistors in series circuit with the stationary conductors. The foregoing construction has been found to be relatively simple in manufacture, assemble and maintain.

In an alternative embodiment, the annular air ring takes the form of a cap having an outer face which is aerodynamically contoured to help avoid eddy currents generated by the flow of air along the outside surface of the rotary atomizer cup. This improves transfer efficiency and reduces fouling of the sprayer with coating material by helping to avoid drawing the spraying pattern back toward the sprayer. The base of the cap may then include a groove which encloses a first circular conductor which is supplied with high voltage from the remote electrostatic source while the outer face of the cap includes a repulsion ring recessed about its periphery. The repulsion ring is preferably electrically connected to the first circular conductor as to be energized with at the same electrical polarity as the charge imparted to the atomized droplets of coating material in order to further enhance transfer efficiencies and avoid the buildup of coating material on the sprayer.

Instead of using sheaths threaded into an air ring, in the alternative embodiment the plural stationary conductors and associated charging resistors may be embedded within the cap. This protects and stabilizes the charging resistors and associated leads and helps shorten the overall length of the spray apparatus. The cap preferably includes a slightly oversized recess in which the atomizing cup is disposed to thereby define a gap between the wall of the recess and the outer surface of the cap. To help prevent the charging electrodes from being accidentally contacted, the free ends thereof and the circular conductor on the outside of the atomizing cup are each preferably located substantially within the gap.

The invention will now be further described by way of example with reference to the accompanying drawings in which:

Figure 1 is a side elevational view, partially in cross section, of one embodiment of rotary atomizing liquid spray coating device of this invention.

Figure 2 is a side elevational view, in cross section, of the front section of the rotary atomizing liquid spray coating device depicted in Figure 1, showing, among other things, the general relationship of the atomizing cup and its rotary drive, air jets for shaping the atomized coating spray, high voltage circuit paths, and liquid coating flow path and associated valve.

Figure 3 is a cross-sectional view along line 3-3 of Figure 2 showing, among other things, portions of the liquid coating and solvent flow paths to the rotary atomizing cup, as well as the general location of their respective valves, a portion of the air path for shaping the liquid coating spray pattern, and the electrical conductors which transmit high voltage to the ring-shaped liquid coating charging electrode mounted inside the atomizing cup.

Figure 4 is a cross-sectional view along line 4-4 of Figure 3 showing the flow passages and valving for solvent for cleansing the exterior of the rotary atomizing cup.

Figure 5 is a cross-sectional view along line 5-5 of Figure 3 showing a portion of the path for the air for shaping the atomized liquid spray coating pattern.

Figure 6 is a cross-sectional view along line 6-6 of Figure 1 showing the general relationship of the support columns between the front and rear body sections of the spray device, the housing, and the dump valve.

Figure 7 is a cross-sectional view along line 7-7 of Figure 1 showing the general relationship of the valves for the liquid coating material and the solvent for cleansing the interior and exterior of the rotary liquid atomizing cup.

Figure 8 is a cross-sectional view along line 8-8 of Figure 3 showing the flow passages and valving for cleansing the interior of the rotary atomizing cup.

Figure 9 is a cross-sectional view along line 9-9 of Figure 1 showing the rear body section of the spray device, support columns, and various air and solvent hoses.

Figure 10 is a front view of an alternate embodiment of the discharge nozzle of a rotary atomizing spray coating apparatus in accordance with the invention.

Figure 11 is a partial cross-sectional view taken on line 11-11 of Figure 10.

With reference to Figures 1 and 2, a rotary atomizing liquid spray coating device is shown which includes a support body 10 having a front or forward section 12 and a rearward section 14 between which is positioned an intermediate section 16. The body sections 12, 14, and 16 are generally

cylindrically shaped. The diameter of the forward and rear body sections 12 and 14 are substantially the same. The diameter of the intermediate body section 16 is substantially less than that of the body sections 12 and 14, defining therebetween an annular cavity 18 within which can be located and mounted, as will be described in more detail hereafter, various valves for controlling the flow of liquid coating material and solvent for cleansing the interior and exterior of the rotary atomizing cup described hereafter.

A rotary atomizing cup 20 extends forwardly from the front surface 22 of the forward body section 12. Removably secured to the front surface 22 of the forward section 12 of the body 10 in any suitable manner, such as by bolts, threaded engagement, or the like, is an annular ring 24. The ring 24 includes a circular air passage or manifold 26 formed in the rear surface thereof from which extend forwardly a plurality of circularly arranged air ports 28 for establishing a circular array of air jets for shaping the atomized liquid coating spray pattern 29 formed at the forward edge or rim 42 of the atomizing cup 20.

As noted, extending forwardly from the forward section 12 of the body 10 is the rotary atomizing cup 20. Cup 20 is drivingly mounted on a shaft 23 for rotation about its axis. The cup drive shaft 23 extends through a bore 12b in forward body section 12 and an air or ball bearing 25 of a conventional commercially available type located within a suitably configured bearing cavity or bore 27 in intermediate body section 16. Shaft 23 is driven at its rear (left as viewed in Figure 2) by a rotary actuator 31, such as an air-driven turbine, also of a conventional commercially available type which is located rearwardly of the bearing 25 in a turbine cavity or bore 31a in rear body section 14. A liquid coating control valve 33 mounted to the rear surface of the flange-defining portion of the forward section 12 of the body 10 controls the flow of liquid coating material to a coating nozzle 30 via a passage 32 formed in the forward section 12 of the body 10. Liquid coating under slight pressure exiting nozzle 30 enters an annular cavity 34 formed in the rear section of the cup 20. Under centrifugal force due to the rotation of cup 20 by drive shaft 23, the liquid coating material in the annular cavity 34 passes radially outwardly and forwardly through a series of coating passages 36 in radial cup wall 20c to a forward cup cavity 38. Once in the forward cup cavity 38 the liquid coating moves radially and forwardly along a first surface defined by interior cup wall 40 toward the forward atomizing edge 42 of the cup 20 whereat it is atomized under centrifugal force to form the atomized spray pattern 29. A flat circular ring-shaped charging electrode 46 embedded in the interior wall 40, which is con-

nected to a conventional high voltage electrostatic supply (not shown) in a manner to be described, charges the liquid coating material by contact as it passes thereover in its movement from passages 36 in wall 20c to the forward atomizing edge 42 of the cup whereat the liquid is centrifugally atomized to form spray pattern 29.

Disposed rearwardly of the body 10 and spaced therefrom is a mounting bracket 50. Bracket 50 consists of a circular plate 52 and a rearwardly extending collar 54. The plate 52 and the collar 54 are provided with a through bore into which can be positioned a circular post 56 supported in any suitable manner by a spray reciprocating device, stationary pedestal, or the like. A locking screw 58 threaded radially into the wall of collar 54 is provided for locking the bracket 50 on the post 56.

Extending between the circular plate 52 and the rear surface 60 of the rear section 14 of the body 10 are several mounting posts or columns 62, 64 and 66. Columns 64 and 66 can be fastened in any suitable manner to the plate 52 and the rear wall 60 of the rear section 14 of the body 10. For example, columns 64 and 66 can be threaded at their forward ends and screwed into suitable provided threaded bores in the rear wall 60 of the rear section 14 of the body 10. The columns 64 and 66 at their rearward ends may be provided with reduced diameter portions which extend through suitably provided bores in the plate 52 such that they project rearwardly (leftwardly as viewed in Figure 1) of rear surface 55 of the plate 52. By providing threads on the reduced diameter portion of the rear ends of the columns 64 and 66 which project rearwardly of the plate surface 55, nuts can be used to secure the rearward ends of the columns 64 and 66 to the plate 52, as is done with the rear end of column 62 in a manner to be described.

The support column 62 at its rear or left end has a reduced diameter portion 62c which passes through a suitable bore in plate 52, extending rearwardly of surface 55 thereof. A nut 62d threadably engages the column end portion 62c to secure column 62 to plate 52. The support column 62 at its forward end passes through a suitably provided bore 70 in the rear section 14 of body 10 and extends forwardly to the rear wall 12a of the forward body section 12. The forwardmost portion 62a of the column 62 is of reduced diameter and threaded such that it will threadably engage a suitable threaded bore 72 formed in the rear surface 12a of the forward body section 12.

The column 62 is provided with an axial internal bore 62b within which is positioned a high voltage insulated cable 74 connected at its rearward end to a high voltage electrostatic supply (not shown). The cable 74 at its forward end 74a con-

nects to a gun resistor 76. An electrical conductor 78 extends between the forward end of the gun resistor for energizing the electrode 46 in a manner to be described in more detail hereafter.

As shown in Figure 1, a dump valve 80 mounted to the forward wall 57 of the plate 52 connects to the liquid coating valve 33 via a flexible conduit 82 and to a waste receptacle 86 via a conduit 88. Dump valve 80 diverts cleansing solvent from coating valve 33 during color change operations in a manner well known in the art.

Mounted to the rear surface 12a of the flange-defining portion of the forward body section 12, in addition to the coating control valve 33, are solvent valves 90 and 92 which control the flow of solvent, in a manner to be described, to the exterior of the rotary atomizing cup 20 and the interior of the rotary atomizing cup, respectively, as shown in Figures 3, 4, 7, and 8. Valves 90 and 92 are located in the annular cavity 18.

The rotary atomizing cup 20, as best seen in Figure 2, includes a frusto-conical tubular section 20a and a nub 20b which are interconnected by radial wall 20c which collectively define the rear annular cavity 34 and the forward cavity 38. The non-uniform cross section of the tubular section 20 increases along the axis thereof in the direction of the atomizing edge 42. The nub 20b is provided with a tapered bore 20f which snugly engages a similarly tapered portion 23a of the drive shaft 23. The forward end 23b of the drive shaft 23 is threaded for threadedly receiving a retaining nut 100 which locks the nub 20b of the cup 20 in place on the drive shaft 23. Embedded in the outer surface 20d of the frusto-conical section 20a of cup 20 is a circular current-conducting flat ring element 102, preferably of semiconductive material. Ring element 102 is electrically connected to the flat electrode 46, which is also preferably fabricated of semiconductive material, via a series of conducting means in the form of pins 104 seated in suitably provided bores in the cup section 20a. The pins 104, which are preferably of semiconductive material, at their opposite ends are in electrical contact with the confronting surfaces of the ring 102 and the electrode 46. The cup 20 is preferably made of insular material, as is the nut 100, shaft 23, bearing 25, annular ring 24, body 10, rotary actuator 31, valves 33, 80, 90 and 92, and associated fluid conduits, mounting bracket 50, and mounting columns 62, 64 and 66 for the purpose of minimizing the storage of electrical energy in capacitive form in the spray coating device. A preferred type of insulating material for the cup 20 is PEEK (polyetheretherketone) available from I.C.I. of America, and for the remaining insulative elements if ERTALYTE (polyester) available from Erta Incorporated, Malvern, Pennsylvania.

Surrounding the bracket 50 and body 10, as well as the various valves, is a tubular housing, as best shown in Figure 1, for enclosing the various operating components of the spray device. The housing is preferably fabricated of insulative material.

The liquid coating valve 33, which may be of any conventional type, preferably includes a valve body 120 having a stepped diameter bore 122. Located in the forward end of the bore 122 is a valve seat insert mount 124 having a bore 126 within which is positioned a valve seat insert 128 having an axial passage 128a which is normally blocked by a ball valve element 130 formed at the forward end of a reciprocable rod 132 which is normally forwardly biased to close the valve by a spring-biased air-operated piston 134 secured to the rear end 132a of the shaft 132. A spring 135 normally biases the piston 134 in a forward direction (rightwardly as viewed in Figure 2). An air chamber 136 connects to a source of pressurized air via a passage 138 in the wall of the rear portion of the valve body 120. When pressurized air is admitted into the chamber 136 via passage 138 under control of means not shown, the piston 134 is urged rearwardly (leftwardly) to unseat the ball valve element 130 relative to the seat of the seat insert 128, interconnecting passage 128a with a liquid coating chamber 142. Chamber 142 communicates with a source of pressurized liquid coating (not shown) via a passage 144 formed in the wall of the valve body 120 which connects to a coating supply conduit 145.

Thus, when pressurized air is admitted into cavity 136 via passage 138 urging the piston 134 rearwardly and unseating the valve ball element 130, pressurized liquid coating in chamber 142 passes through passageway 128a into the passageway 32 of the forward body section 12 whereupon it exits under pressure from the nozzle 30 into the rear cavity 34 of the rotary cup 20. In a manner described heretofore, the liquid coating material in rear cavity 34 flows through passages 36 along interior wall 40 of the forward cavity 38 over flat ring electrode 46 whereat the coating material is electrostatically charged. Eventually the charged electrostatic coating is atomized at the forward edge 42 of the cup 20 to form spray pattern 29.

Air cavity 136 and coating cavity 142 are separated by suitable seals 150 which permit axial reciprocation of the rod 132. The cavity 142 of the valve 33 connects via passage 152 formed in the wall of the valve body 120 to the conduit 82, ultimately being passed to a waste receptacle 86 via the dump valve 80 and the conduit 88. The dump valve 80 is substantially identical to the valve 33, except it has, in addition to a single inlet

passage, only one outlet passage for the flow of liquid coating material. The dump valve 80, like the valve 33, is air-operated and for this purpose has a controlled source of pressurized air (not shown) connected to it via an air hose 80a.

Shaping of the atomized liquid coating spray pattern 29 emanating from the forward edge 42 of the rotary atomizing cup 20, as previously noted, is provided by a circular air passage 26 formed in the annular ring 24 which feeds a plurality of circularly arranged axially extending ports 28 which establish forwardly projecting air jets. To provide pressurized air to the circular air passage 26 formed in annular ring 24, the forward body section 12 is provided with a passage 160 which at its forward end communicates with the circular air passage 26 and at its rearward end connects to a suitable source of pressurized air (not shown) via a hose 162. Control means, also not shown, regulate the flow of air in the hose 162 in a conventional manner. When pressurized air is provided to the hose 162, air is emitted under pressure from the circularly arranged ports 28 in a forwardly direction, shaping the electrostatically charged atomized liquid coating particle spray pattern 29, as desired.

When it is desired to change the color of the liquid coating material being sprayed from the device of this invention, solvent is introduced into the port 144 of the valve 33, in a manner well known in the art, and the valve 80 opened. The solvent flows through and flushes the valve 33, the passage 32, and nozzle 30, as well as through passage 152 and hose 82 to the dump valve 80, allowing the solvent to pass through the dump valve into the waste receptacle 86 via hose 88. Cleansing of the exterior surface 20d of liquid coating material with solvent as an incident to color change is provided by means of a solvent nozzle 170 threaded into a suitable provided bore 172 in the front surface 22 of the forward body section 12. The passage 172 at its rear end connects to the output port 90a of the solvent valve 90. Connected to the input port 90b of the solvent valve 90 is a solvent hose 174 supplied from a suitable source of pressurized solvent (not shown). The valve 90 is constructed substantially identical to dump valve 80 and, like dump valve 80, is provided with an air-operated ball valve element 90c at the forward end of a rod 90d controlled by a spring-biased air-actuated piston 90e. A controlled source of pressurized air is connected to the valve 90 via a suitable air hose 176 to actuate the valve, as desired.

To cleanse the rearward cup cavity 34, passages 36, and forward cup cavity 38 of coating material as an incident to color changing, a solvent nozzle 94 and valve 92 shown in Figure 8 is provided, the valve being substantially identical to that shown in Figure 4 for cleansing the exterior

surface of the atomizing cup 20. The only difference between the solvent cleansing nozzle 94 and valve assembly 92 for cleansing the interior of the cup 20 and the nozzle 170 and valve 90 for cleansing the exterior of the cup is that the nozzle 94 for cleansing the interior of the cup projects from the forward surface section 22a of the forward body section 12 into the rear cavity 34 of the cup 20. The coordination of the various valves to effect color change and the flushing of the valves, nozzles, associated passages, hoses, and the like and cleansing the interior and exterior of the atomizing cup is accomplished in accordance with procedures well known in the art, and therefore are not further discussed herein.

A source of pressurized solvent 180 feeds a hose 174 which provides solvent to the valve 90 for controlling the flow of solvent for cleaning the exterior of the cup 20 and to supply a hose 175 which supplies solvent to the valve 92 which controls the flow of cleansing solvent to the interior cavity 34 of the atomizing cup 20.

A source of pressurized air 185 connects to hoses 186 and 188 which are input to the air turbine 31 for driving and braking the turbine rotor, respectively, the shaft 23 and ultimately the atomizing cup 20. A hose 190 vents exhaust air from the turbine 31. By selectively controlling the pressure and flow of air in hoses 186 and 188, the speed of the air turbine 31, and hence of the output shaft 23 and ultimately the rotary atomizing cup 20, can be controlled in a manner well known to those skilled in the art.

An air hose 192 connected to a selectively operable source of pressurized air controls the solvent valve 92 for cleansing the interior of the rotary atomizing cup 20. Air hose 192 functions with respect to solvent valve 92 in a manner analogous to air hose 176 which is connected to solvent valve 90 for controlling its operation and air hose 138 which connects to the paint valve 33 for controlling its operation.

To minimize the accumulation of coating material on the surface of the shaft 23, air purge means are provided to supply a positive air flow along the shaft toward the rotary atomizing member 20. In a preferred form the air purge means, includes, as shown in Figure 2, a port 300 provided in the back wall 12a of the forward body section 12 for connection to an air supply (not shown). The air line will supply air through a passage 302 to a discharge port 304 into the space 308 between the bore 12b of the forward body support section 12 and the shaft 23. This air supplies a positive air purge along the shaft 23 towards the cup 20 to prevent coating from migrating back along the shaft into the bearing 25.

High voltage electrostatic energy is coupled

from the electrode 78 at the output of the gun resistor 76 to the semiconductive ring 102 (and ultimately to the semiconductive electrode 46 via the semiconductive pins 104) via a path which includes an electrically conductive spring contact 200 located in the forward end of the bore 72 formed in the forward body section 12, an electrical conductor 202 snugly fitting in a bore formed in the forward body section, an electrode ring 204 embedded in an annular recess formed in the rear wall 206 of the annular ring 24, and several parallel circuit paths connected between the ring conductor 204 and the semiconductive ring 102. The series circuit paths between rings 204 and 102 include a resistor disposed between a) an electrical conductor 212 which is connected between the resistor 210 and the ring 204 and b) a conductor 214 extending from the forward end of the resistor 210 toward and in close proximity to the semiconductive ring 102. An insulative sheath 216 threaded at its inner or rear end into a suitably threaded bore in the annular ring 24 encases the resistor 210, conductor 212, and conductor 214, with conductor 214 projecting from the forward end of the sheath. Insulative sheaths 218 and 220, identical to sheath 216, mounted in circumferentially spaced relation around the annular ring 24 120° on either side of the sheath 216, contain resistors 218a (Figure 3) and 220a which are identical to resistor 210. Resistor 218a is connected between a) an outer electrical conductor 218b which extends from the forward end of its associated sheath toward and in close proximity to the semiconductive ring 102 and b) an electrical conductor 218c which is connected to the conductive ring 204 for transmitting electrostatic voltage to the resistor 218a. Resistor 220a is connected between a) an electrical conductor 220b which extends from the forward end of its associated sheath toward and in close proximity to the semiconductive ring 102 and b) an electrical conductor 220c which is connected between the resistor and the electrically conductive ring 204. The forwardly projecting ends of the electrical conductors 214, 218b, and 220b are spaced very slightly from the exterior surface of the semiconductive ring 102 such that when high voltage is transmitted thereto via the insulated cable 74, gun resistor 76, conductor 78, spring 200, conductor 202, ring conductor 204, and conductor/resistor pairs 210/212, 218a/218c, and 220a/220c, electrostatic energy is transmitted across the gap to the semiconductive ring 102 and ultimately to the ring electrode 46 via pins 104 for contact charging of liquid coating material which flows radially outwardly and forwardly along inner wall 40 over the surface of the semiconductive electrode 46.

It has been discovered that the coating transfer efficiency is enhanced by the use of three

circumferentially-spaced conductors 212, 218c and 220c in comparison to that achieved when only a single conductor is used. Thus, plural conductors provide improved results and are clearly preferred where high transfer efficiency is desired.

Gun resistor 76 can have a resistance which varies depending upon the operating range of the electrostatic power supply which energizes the cable 74. Preferably, for electrostatic supplies operating in the range of 50kV-125kV, the gun resistor has a resistance of 75 megohms. The resistors 210, 218a, and 220a can also have varying resistances, although preferably each such resistor has a resistance of approximately 12 megohms.

The insulated cable 74 may take a variety of forms, although the preferred cable is one in which the conductive core 74b is fabricated of silicon carbide in accordance with the disclosure and claims of Hastings et al U.S. Patent 4,756,827, granted March 18, 1986, assigned to the assignee of the present application, the entire disclosure of which is incorporated herein by reference. The semiconductive ring 102, pins 104, and electrode 46 are also preferably fabricated of RYTON (polyphenylene sulfide (PPS)), available from Phillips 66, although other semiconductive materials may be used. In addition, and although not preferred, the ring 102, pins 104, and/or electrode 46 can be fabricated of conductive material. However, when fabricated of conductive material, the capability of the rotating atomizing cup 20 to capacitively store electrical energy is increased over that which exists when the ring 102, pins 104, and electrode 46 are fabricated of semiconductive material. If desired, the conductive elements 78, 200, 202, 204, 212, 214, 218b and 218c, and 220b and 220c can be fabricated of semiconductive material rather than conductive material. Accordingly, and for the purpose of minimizing the electrical energy stored capacitively in the spray device of this invention, all elements of the spray device are preferably fabricated of insulative material, except for those which are fabricated of semiconductive and/or electrically conductive material for the purpose of transporting electrostatic energy at high voltage from a remote source (not shown) to the coating charging electrode 46 in the rotary atomizing cup 20.

In the preferred embodiment, the rotating atomizing cup 20 has been described as being frusto-conical in shape. As those skilled in the art will understand, other shapes can be utilized.

The valves 33, 80, 90, and 92 are generally constructed in accordance with the teachings of Hastings et al U.S. Patent 3,870,233, assigned to the assignee of this application, the disclosure of which is incorporated herein by reference.

Referring to Figs. 10 and 11, the alternate embodiment shown therein is substantially the



same as the first embodiment discussed above, with like parts having been assigned like reference numerals.

The alternate embodiment includes a support body 10 having a front or forward section 12. As with the first embodiment, an annular cavity 18 is located rearwardly of the forward section 12. Within cavity 18 are located, as will be described in more detail hereafter, various valves for controlling the flow of liquid coating material and solvent for cleansing the interior and exterior of the rotary atomizing cup 20.

Rotary atomizing cup 20 extends forwardly from the front surface 22 of the forward body section 12. Removably secured to the front surface 22 of the forward section 12 of the body 10 in any suitable manner, such as by bolts, threaded engagement, or the like, is a cap 400 having a generally convex outer face 402 and a centrally disposed, inwardly tapering recess 404 inside which, at least a portion of atomizing cup 20 may be located. Cap 400 includes a base 406 having a generally circular air passage or manifold 26 formed therein. A gasket 408 having suitably sized and positioned apertures is interposed between cap 400 and the front surface 22 of the forward section 12 of body 10 to provide a suitable seal for air and solvent passages, to be described later, which communicate between forward section 12 and cap 400. Similar to the annular ring 24 of the first embodiment, cap 400 includes a plurality of circularly arranged air ports 28 for establishing a circular array of air jets surrounding rotary atomizing cup 20 for shaping the atomized liquid coating spray pattern 29 formed at the forward edge or rim 42 of the atomizing cup 20 and projecting it toward a workpiece to be coated in the manner previously described.

As noted, extending forwardly from the forward section 12 of the body 10 is the rotary atomizing cup 20. Cup 20 is drivingly mounted for rotation on a shaft 23 of a rotary actuator (not shown). The cup drive 23 extends through a bore 12b in forward body section 12. As in the first embodiment, a liquid coating control valve 33 is mounted to the rear surface of the forward section 12 and controls the flow of liquid coating material to the coating nozzle 30. Liquid coating under slight pressure exiting nozzle 30 enters the cup 20 and passes therethrough there as previously described with reference to the first embodiment.

Mounted within cavity 18 and on the rear surface of the forward body section 12, in addition to the coating control valve 33, is a single solvent valve 412 which, in lieu of the dual interior and exterior solvent valves 90, 92 of the first embodiment. Valve 412 controls the flow of solvent, in a manner to be described, to both the interior and

exterior of the rotary atomizing cup 20.

The diameter of frusto-conical rotary atomizing cup 20 increases along the axis of the cup in the direction of the atomizing edge 42. Embedded in the outer surface 20d of the frusto-conical cup 20 is a circular current-conducting flat ring element 102, preferably of semiconductive material. According to one aspect of the invention, ring element 102 is recessed substantially entirely within the recess 104 in which cup 20 is disposed thereby decreasing the likelihood that personnel or objects can contact element 102 creating a shock hazard. As with the first embodiment, ring element 102 is electrically connected to the charging flat electrode located on the interior surface of cup 20 in the manner previously described. A housing 416 is used to enclose all the operating components and the various conduits for coating material solvent and waste as well as the high voltage electrical cable are preferably routed rearwardly through appropriate apertures (not shown) in the rear mounting bracket rather than through the side walls as shown in Fig. 1. This locates the conduits and cable as far as possible from the spray pattern 29 emanating from the edge of atomizing cup 20 to help prevent the accumulation of coating material on them. It also provides a sleek, attractive uncluttered appearance.

When it is desired to change the colour of the liquid coating material being sprayed from the device, coating valve 33 is flushed with solvent by way of dump valve in the manner previously described. According to the alternate embodiment, interior and exterior cleansing of atomizer cup 20 of liquid coating material with solvent as an incident to colour change is performed using single solvent valve 412. To this end, valve 412 communicates with a bore 420 in body section 12. The bore 420 has a pair of branch bores 422, 424. Branch bore 422 connects with nozzle 32 to cleanse the interior of cup 20 in the manner previously described. The other branch bore 424, exits through a suitable aperture in gasket 408 and connects with a bore 426 in cap 400. This bore 426 has an exit port 428 at the wall of inwardly tapering recess 404 directed to cleanse the exterior 20d of cup 20. Valve 412 is constructed substantially identically to dump valve 30 as previously described and is actuated by a controlled source of pressurized air to simultaneously flush the interior and exterior of cup 20 with solvent prior to a colour change or for periodic cleaning.

In the first embodiment, purge air was provided to minimize the accumulation of coating material on the surface of the shaft 23. According to the alternate embodiment, bearing 25 is selected to be an air bearing. This eliminates a separate purging air passage such as passage 302 previously de-

scribed with reference to the first embodiment, since the normal air leakage of the air bearing (not shown) to flow along shaft 23 as an air purge means in the space 308. This flow of leakage air supplies a positive air purge along the shaft 23 towards the cup 20 to prevent coating from migrating back along the shaft into the bearing (not shown).

The path for conducting high voltage electrostatic energy from gun resistor 76 to the charging electrode 102 embedded in the interior wall 20d of atomizing cup 20 according to the alternate embodiment will now be described in further detail. An annular conductor 430 which substantially encircles cap 400 is disposed in an annular stepped groove 432 cut in the base or rear face 434 of cap 400. Conductor 430 is captured within groove 432 by an insulating ring 436 which is sealed in the larger step of groove 432 using a suitable adhesive sealant such as an epoxy. The conductor 430 is connected by soldering, brazing or other suitable means to a conductive disk 438, which is preferably of brass or other electrically conductive corrosion resistant material. Disk 438 nests within a recess 440 of an electrically insulating bushing 442 which, in turn nests partially inside the front end 62a of the support column 62 which houses gun resistor 76. The opposite end of bushing 442 nests in a pocket in the ring 436. Bushing 442 includes an axial bore 444 which receives a cylindrical projecting portion 446 of column 62. Column end 62a and projection 446 include a bore 448 which communicates with gun resistor 76. Received within bore 448 is the hollow tubular body portion 450 of electrically conductive spring contact assembly 452. Body portion 448 contains a spring 454 which is compressively biased by a plunger 456 having a head 458 which abuts disk 438 as the base of body portion 450 abuts gun resistor 76 thereby providing good electrical contact between gun resistor 76 and disk 438 which is in turn connected to annular conductor 430.

Electrostatic energy is transferred from conductor 430 to charging electrode 102 by way of three charging resistors 210 of identical nominal resistance connected electrically in parallel between charging electrode 102 and conductor 430. According to the alternate embodiment, the charging resistors 210 are physically mounted within cap 400 in evenly circumferentially spaced relation to one another. Resistors 210 all fit snugly within bores 460 which communicate with conductor 430, and which are disposed with the recess 404 of cap 400 wherein atomizer cup 20 is located. Bores 460 each intersect recess 404 at a location opposite the ring element 102 of atomizer cup 20 so that the free ends 462 of the charging resistors act as electrodes which terminate in closely spaced prox-

imity to semiconductive ring element 102. By embedding charging resistors 210 within cap 400 substantial protection is afforded against their being damaged or misaligned due to accidental impact. Also, since the electrode leads 462 are located within recess 404 there is less likelihood they can be contacted by personnel or objects thereby reducing the risk of electrical shock or mechanical damage. The opposite leads 464 of the charging resistors 210 pass through reduced diameter portions of bores 460 which intersect groove 432, at which point leads 464 are connected to conductor 430 by soldering or other suitable means.

Thus, high voltage electrostatic energy is transmitted by way of high voltage cable 74 as previously described to gun resistor 76. It is then carried to conductor 430 by way of spring contact 452 and disk 438. From conductor 430, electrostatic energy is carried to charging electrode 102 of atomizing cup 20 by way of the three charging resistors 210 connected electrically in parallel between conductor 430 and the gap between the electrodes or free ends 462 of said resistors and the ring element 102 on the outside of atomizing cup 20. Electrostatic energy is then transmitted across the gap between each said electrodes 462 and semiconductive ring element 102. From ring element 102, the electrostatic energy is utilized in the manner of the first embodiment to impart a charge to the coating material.

The resistances of gun resistor 76 and charging resistors 210 are selected as previously described. As with the embodiments previously described, and for the purpose of minimizing the electrical energy stored capacitively in the spray device of this invention, all elements of the spray device are preferably fabricated of insulative material, except for those which are fabricated of semiconductive and/or electrically conductive material for the purpose of transporting electrostatic energy at high voltage from a remote source (not shown) to the coating charging electrode 102 in the rotary atomizing cup 20.

The alternate embodiment of the rotary atomizing liquid spray system includes several features which help to project the spray pattern 29 forwardly toward the workpiece to be coated and avoid the accumulation of coating material on the sprayer itself thereby increasing transfer efficiency and decreasing fouling of the sprayer. One such feature, namely the provision of a plurality of air ports 28 for establishing an array of forwardly directed air jets surrounding atomizing cup 20 for shaping and projecting spray pattern 29 toward the workpiece to be coated has already been described.

The sprayer of this embodiment also preferably includes at least one of the additional features which will now be described.

Atomizer cup 20 is surrounded by electrostatic repulsion means which preferably takes the form of a substantially continuous conductive, or more preferably, semiconductive ring 470. Ring 470 is embedded in a groove 472 cut in the outer face 402 of cap 400 as to lie substantially flush therewith as not to interfere significantly with its contour for reasons which will later become apparent. Ring 470 is electrically connected directly to conductor 430 by way of a conductive pin 474 so that the ring 470 is energized with a high voltage charge of the same polarity as the charge carried by the coating droplets. This helps to promote the migration of spray pattern away from the spray apparatus and toward the workpiece to be coated.

Another important aspect which has been found to help increase transfer efficiency by avoiding air flow eddies which tend to inhibit the forward migration of spray pattern 29 and to be useful in avoiding the accumulation of coating material on the spray apparatus is the provision of a curved, aerodynamically contoured outer face 402 on cap 400 as shown. The forward portion of cap 400 defines a circular dome having a contoured outer face 402 and a central recess 404 in which frusto-conical atomizing cup 20 is recessed. For the purpose of avoiding reverse air flow eddies, the degree to which cup 20 is recessed within cap 400 is not believed to be critical. In fact, recess 404 may be eliminated so that outer face 402 lies substantially entirely behind cup 20. However, so that conductive ring 102 and electrodes 462 may be protected as previously described, cup 20 is preferably recessed within cap 400 from to approximately one-half to two-thirds of its overall length. Recess 404 tapers inwardly at a slightly greater rate than the wall of cup 20 so that the gap between cup 20 and recess 404 is slightly narrower at its base than at its mouth. The transition edge between tapered recess 404 and curved outer face 402 is not sharp but rather is provided with a generous radius as shown in the drawings. This aspect will become further apparent in light of its theory of operation which is believed to be as follows.

As atomizer cup 20 rotates at an angular speed sufficient to atomize coating material, usually in the range of 10,000 to 40,000 R.P.M., its atomizing edge 42, which is a larger diameter than its base 480, rotates at a greater surface speed than its base. Since the air surrounding cup 20 will tend to move with the surface of the cup 20 due to drag, there will be a pressure gradient along the outside wall 20d of cup 20 tending to cause a flow of air along the outside wall 20d in a direction generally parallel to wall 20d and oriented from base 480 toward edge 42. Since the aforementioned air flow would tend to partially evacuate the region near the base of the cup, it is believed that a make-up air

flow takes place along outer face 20d inwardly toward the base 480 of cup 20 along the wall of recess 404. The shape of cap 400, particularly the shape of its outer face 402 is selected such that under conditions of normal operation, the flow of make-up air across its surface will be in a substantially laminar flow regime. This is believed to help avoid the generation of eddy currents in the vicinity of cup 20 which would otherwise tend to draw coating material back toward the spray apparatus rather than permit it to be directed toward the workpiece as desired.

## Claims

1. Electrostatic atomizing liquid spray coating apparatus comprising a rotary atomizer of insulative material having a first surface over which liquid coating can flow outwardly to an atomizing edge thereof when the atomizer is rotated about its axis of rotation, and a second surface separated from the first surface by the atomizing edge, a circular ring-shaped charging electrode carried by the first surface and encircling the axis of rotation being connected to a circular electrical current-conducting element mounted on the second surface and encircling the axis of rotation, wherein at least one electrical conductor is stationarily mounted on the forward section of the body of the apparatus, the conductor having a free end located in closely spaced proximity to the circular electrical current-conducting element for transferring electrostatic energy thereto when the stationary electrical conductor is energized from a high voltage source characterised in that the charging electrode (46) is connected to the circular electrical current-conducting element (102) by a series of pins (104) which extend through the wall (40) of the atomizer (20) between the circular electrical current-conducting element (102) and the charging electrode (46), in that a plurality of circumferentially-spaced electrical conductors (218) is provided and in that the charging electrode (46) is flat and is embedded into the first surface for facilitating contact charging of liquid coating supplied to the first surface when the coating flows outwardly over the first surface in contact with the flat charging electrode (46) toward the atomizing edge (42).
2. Apparatus as claimed in Claim 1 wherein drive means (23, 31) is provided for rotating the rotary atomizer (20) about its axis of rotation.
3. Apparatus as claimed in either Claim 1 or Claim 2 wherein the atomizer (20) is frusto-

- conically shaped, the diameter of the forward atomizing edge (42) thereof exceeding that of the rear edge, wherein a cap (400) is provided at the front of the support body (10), the cap (400) including a generally convex outer face (402) along a portion thereof, the outer face (402) being adapted to provide a substantially laminar flow of air thereacross when the rotary atomizer (20) rotates about its axis of rotation and air flow means (28) is located rearward of the atomizing edge (42) for establishing a generally forwardly directed flow of air.
4. Electrostatic atomizing liquid spray coating apparatus comprising a support body of insulative material having a front surface, a rotary atomizer of insulative material having an axis of rotation, and a surface over which liquid coating can flow outwardly to an atomizing edge thereof when the atomizer is rotated about the axis of rotation, the rotary atomizer including means for charging liquid coating material, drive means incorporated in the support body drivingly mounting the rotary atomizer to the support body for rotating the rotary atomizer about the axis of rotation, means fabricated of insulative material for supplying liquid coating to the surface of the rotary atomizer when the atomizer is rotating, air flow means comprising a circular array of air passages provided on a front surface of an annular ring detachably mounted to the support body and a first annular recess in the annular ring communicating with the circular array of air passages for supplying air thereto to establish a circular array of air jets for shaping the pattern of atomized liquid coating, and means for transferring electrostatic energy to the atomizer charging means from a high voltage source characterised in that the annular ring (24, 400) has a rear surface in contact with the front surface (22) of the support body (10), the first annular recess (26) and a second annular recess (432) being provided in the rear surface of the annular ring (24, 400), and in that the means for transferring electrostatic energy comprises a circular conductor (204, 430) mounted in the second annular recess (432) and plural circumferentially-spaced electrical conductors (210) stationarily mounted to the annular air ring (24), the conductors (210) each having a rear end connected to the circular conductor (204, 430) and a forward free end located in closely spaced proximity to the rotary atomizer charging means (102) for transferring electrostatic energy thereto when the stationary electrical conductors (210) are energized from a high voltage source connected to said circular conductor (204, 430) for facilitating charging of liquid coating supplied to the rotary atomizer surface when the coating flows outwardly over the surface toward the atomizing edge (42) in charging relationship to the rotary atomizer charging means.
5. Apparatus as claimed in Claim 4 wherein the annular ring forms part of a cap (400) having a generally convex outer face (402) being adapted to provide a substantially laminar flow of air thereacross as the rotary atomizer (20) rotates about its axis of rotation.
6. Apparatus as claimed in either claim 3 or claim 5 including a repulsion ring (470) adapted to be energized to a polarity the same as the polarity of the electrostatic charge imparted to the coating material, whereby the outer face (402) of the cap (400), the air flow means and the repulsion ring (470) cooperate to urge the spray pattern generally forwardly of the rotary atomizer (20).
7. Apparatus as claimed in any one of Claims 3, 5 or 6 wherein the cap (400) further includes a recess (404) the rotary atomizer (20) being at least partially disposed within the recess.
8. Apparatus as claimed in any preceding claim including a solvent spray nozzle (94, 170) stationarily mounted to the support body (10) proximate the or each atomizer surface(s) for directing solvent thereat to cleanse the surface(s), solvent valve means (92, 90, 412) mounted proximate the front surface (22) of the support body (10), and solvent conduit means interconnecting the solvent valve means (92, 90, 412) and the solvent nozzles (94, 170) for transporting solvent to the solvent nozzles (94, 170) under control of the solvent valve means (92, 90, 412) to cleanse the surface(s).
9. Apparatus as claimed in any preceding claim wherein the support body (10) is generally cylindrical and has forward and rear sections (12, 14) disposed on opposite sides of an intermediate section (16), the intermediate section (16) having a diameter substantially less than that of the forward and rear body sections (12, 14) to define an annular cavity (18) therebetween, wherein means for supplying liquid coating to the surface of the rotary atomizer (20), over which liquid coating can flow, when the atomizer (20) is rotating about its rotational axis, is provided the means including a) a liquid coating valve (33) mounted in the annular cavity proximate the forward section of

the support body, and b) a liquid coating nozzle (30) mounted on the forward body support section (12) in proximity to the surface of the rotary atomizer (20), and c) a liquid coating conduit (32) interconnecting the liquid coating valve (33) to the liquid coating nozzle (30).

10. Apparatus as claimed in Claim 9 when dependent on any one of claims 2 to 8 wherein the drive means include a) an air turbine (31) located within a cavity (31a) in the rear body support section (14) b) a drive shaft (23) connected between the turbine and the rotary atomizer and extending through a bore (12b) in the forward body support section (12), and c) a bearing (25) located in a cavity (27) in the intermediate body support section (16) for rotatably supporting the shaft (23).
11. Apparatus as claimed in Claim 9 when dependent on Claim 8 wherein the solvent and liquid coating valves (92, 90, 412, 33) are fabricated substantially of insulative material.

#### Revendications

1. Appareil de revêtement par projection de liquide à atomisation électrostatique comprenant un atomiseur rotatif de matière isolante ayant une première surface sur laquelle l'enduit liquide peut couler extérieurement vers un de ses bords d'atomisation quand l'atomiseur est tourné autour de son axe de rotation, et une deuxième surface séparée de la première surface par le bord d'atomisation, une électrode de charge en forme d'anneau circulaire portée par la première surface et encerclant l'axe de rotation étant connectée à un élément conducteur de courant électrique circulaire monté sur la deuxième surface et encerclant l'axe de rotation, dans lequel au moins un conducteur électrique est monté de manière stationnaire sur la section avant du corps de l'appareil, le conducteur ayant une extrémité libre située très près de l'élément conducteur de courant électrique circulaire pour y transférer l'énergie électrostatique quand le conducteur électrique stationnaire est excité à partir d'une source de haute tension, caractérisé en ce que l'électrode de charge (46) est connectée à l'élément conducteur de courant circulaire (102) par une série d'ergots (104) qui s'étendent à travers la paroi (40) de l'atomiseur (20) entre l'élément conducteur de courant électrique circulaire (102) et l'électrode de charge (46), en ce qu'une multiplicité de conducteurs électriques (218) espacés circonférentiellement est fournie et en ce que l'électrode de charge (46) est

plate et est logée dans la première surface pour faciliter la charge par contact de l'enduit liquide fourni à la première surface quand l'enduit coule extérieurement sur la première surface en contact avec l'électrode de charge plate (46) vers le bord d'atomisation (42).

2. Appareil selon la revendication 1, dans lequel un moyen d'entraînement (23, 31) est fourni pour faire tourner l'atomiseur rotatif (20) autour de son axe de rotation.
3. Appareil selon la revendication 1 ou la revendication 2, dans lequel l'atomiseur (20) est en forme de cône tronqué, le diamètre du bord d'atomisation avant (42) de celui-ci étant supérieur à celui du bord arrière, dans lequel un chapeau (400) est fourni à l'avant du corps de support (10); le chapeau (400) comportant une face extérieure généralement convexe (402) le long d'une portion de celui-ci, la face extérieure (402) étant adaptée de manière à assurer un flux substantiellement laminaire de l'air sur celui-ci quand l'atomiseur rotatif (20) tourne autour de son axe de rotation et le moyen d'écoulement d'air (28) est situé à l'arrière du bord d'atomisation (42) pour établir un flux d'air généralement dirigé vers l'avant.
4. Appareil de revêtement par projection de liquide à atomisation électrostatique comprenant un corps de support de matière isolante ayant une surface avant, un atomiseur rotatif de matière isolante ayant un axe de rotation, et une surface par dessus laquelle l'enduit liquide peut s'écouler extérieurement vers un bord d'atomisation de celui-ci quand l'atomiseur est tourné autour de son axe de rotation, l'atomiseur rotatif comprenant un moyen de charger la matière d'enduit liquide, un moyen d'entraînement incorporé dans le corps de support montant de manière menante l'atomiseur rotatif au corps de support pour faire tourner l'atomiseur rotatif autour de l'axe de rotation, un moyen fabriqué en matière isolante pour amener l'enduit liquide à la surface de l'atomiseur rotatif quand l'atomiseur tourne, le moyen d'écoulement d'air comprenant un arrangement circulaire de passages d'air fournis sur une surface avant d'un anneau circulaire monté de manière détachable au corps de support et une première cavité annulaire de l'anneau circulaire communiquant avec l'arrangement circulaire de passages d'air pour y fournir de l'air pour établir un arrangement circulaire de jets d'air pour former la configuration de la couche de liquide atomisé et un moyen de transférer l'énergie électrostatique au moyen

- de charger, l'atomiseur à partir d'une source de haute tension, caractérisé en ce que l'anneau circulaire (24, 400) comporte une surface arrière en contact avec la surface avant (22) du corps de support (10), la première cavité annulaire (26) et une deuxième cavité annulaire (432) étant fournies à la surface arrière de l'anneau circulaire (24, 400) et en ce que le moyen de transférer l'énergie électrostatique comprend un conducteur circulaire (204, 430) monté dans la deuxième cavité annulaire (432) et plusieurs conducteurs électriques espacés circonférentiellement (210) montés de manière stationnaire à l'anneau d'air circulaire (24), les conducteurs (210) ayant chacun une extrémité arrière connectée au conducteur circulaire (204, 430) et une extrémité libre avant située très près d'un moyen de charger (102) l'atomiseur rotatif pour y transférer l'énergie électrostatique quand les conducteurs électriques stationnaires (210) sont excités à partir d'une source de haute tension connectée au conducteur circulaire (204, 430) pour faciliter la charge d'un enduit liquide amené à la surface de l'atomiseur rotatif quand l'enduit coule extérieurement par dessus la surface vers le bord d'atomisation (42) en rapport de charge avec le moyen de charger l'atomiseur rotatif.
5. Appareil selon la revendication 4, dans lequel l'anneau circulaire fait partie d'un chapeau (400) ayant une surface extérieure généralement convexe (402) adaptée pour fournir un flux substantiellement laminaire d'air au dessus de celle-ci quand l'atomiseur rotatif (20) tourne autour de son axe de rotation.
6. Appareil selon la revendication 3 ou la revendication 5, comportant un anneau à répulsion (470) adapté pour être excité à une polarité semblable à la polarité de la charge électrostatique fournie au matériau de recouvrement, ce par quoi la face extérieure (402) du chapeau (400), le moyen de flux d'air et l'anneau à répulsion (470) coopèrent pour pousser la configuration de pulvérisation généralement en avant de l'atomiseur rotatif (20).
7. Appareil selon l'une quelconque des revendications 3, 5 ou 6 dans lequel le chapeau (400) comprend en outre une cavité (404), l'atomiseur rotatif (20) étant au moins partiellement disposé dans la cavité.
8. Appareil selon l'une quelconque des revendications qui précèdent, comportant un ajutage de pulvérisation de solvant (94, 170) monté de manière, stationnaire sur le corps de support (10) proche de chaque surface pour y diriger le solvant afin de nettoyer la(les) surface(s), des clapets à solvant (92, 90, 412), montés près de la surface avant (22) du corps de support (10), et des conduits de solvant connectant les clapets à solvant (92, 90, 412) et les ajutages à solvant (94, 170) pour transporter le solvant aux ajutages à solvant (94, 170) sous la commande des clapets à solvant (92, 90, 412) pour nettoyer la(les) surface(s).
9. Appareil selon l'une quelconque des revendications qui précèdent, dans lequel le corps de support (10) est généralement cylindrique et comporte des sections avant et arrière (12, 14) disposées aux côtés opposés d'une section intermédiaire (16), la section intermédiaire (16) ayant un diamètre substantiellement inférieur à celui des sections de corps avant et arrière (12, 14) de façon à définir une cavité annulaire (18) entre celles-ci dans laquelle un moyen d'amener l'enduit liquide à la surface de l'atomiseur rotatif (20), sur laquelle l'enduit liquide peut s'écouler, quand l'atomiseur (20) tourne autour de son axe de rotation, est fourni, ce moyen comprenant a) un clapet d'enduit liquide (33) monté dans la cavité annulaire proche de la section avant du corps de support, et b) un ajutage à enduit liquide (30) monté sur la section support du corps avant (12) près de la surface de l'atomiseur rotatif (20), et c) un conduit d'enduit liquide (32) connectant le clapet d'enduit liquide (33) à l'ajutage d'enduit liquide (30).
10. Appareil selon la revendication 9 quand il dépend de l'une quelconque des revendications 2 à 8 dans lequel la commande comprend une turbine à air (31) située dans une cavité (31a) dans la section support du corps arrière (14), b) un arbre de commande (23) connecté entre la turbine et l'atomiseur rotatif et passant par un alésage (12b) dans la section support du corps avant (12) et c) un palier (25) situé dans une cavité (27) dans la section support du corps intermédiaire (16) pour soutenir l'arbre (23) de manière rotative (23).
11. Appareil selon la revendication 9 quand il dépend de la revendication 8, dans lequel les clapets de solvant et d'enduit liquide (92, 90, 412, 33) sont fabriqués substantiellement en matière isolante.
- Ansprüche**
1. Vorrichtung zur Beschichtung durch elektrostatische Zerstäubung einer Flüssigkeit, umfas-


- send einen Rotationszerstäuber aus Isoliermaterial mit einer ersten Oberfläche, über welche eine Flüssigkeitsschicht nach aussen zu einer Zerstäuberante davon fliessen kann, wenn der Zerstäuber um seine Rotationsachse rotiert wird, und einer zweiten Oberfläche, die von der ersten Oberfläche durch die Zerstäuberante getrennt ist, einer runden ringförmigen Ladungselektrode, die von der ersten Oberfläche getragen wird und die Rotationsachse umgibt, die mit einem runden elektrischen stromführenden Element, das auf der zweiten Oberfläche angebracht ist und die Rotationsachse umgibt, verbunden ist, worin wenigstens ein elektrischer Leiter stationär auf dem vorderen Abschnitt des Körpers der Vorrichtung angebracht ist, wobei der Leiter ein freies Ende hat, das in nah angeordneter Nähe des runden elektrischen stromführenden Elements liegt, um elektrostatische Energie dahin zu übertragen, wenn der stationäre elektrische Leiter von einer Hochspannungsquelle unter Spannung gesetzt wird, dadurch gekennzeichnet, dass die Ladungselektrode (46) mit dem runden elektrischen stromführenden Element (102) durch eine Reihe von Nadeln (104), die sich durch die Wand (40) des Zerstäubers (20) zwischen dem runden elektrischen stromführenden Element (102) und der Ladungselektrode (46) erstrecken, verbunden ist, dass eine Vielzahl von peripherisch verteilten elektrischen Leitern (218) vorgesehen ist, und dass die Ladungselektrode (46) flach ist und in die erste Oberfläche eingebettet ist, um Kontaktladung der Flüssigkeitsschicht, die der ersten Oberfläche zugebracht wird, zu ermöglichen, wenn die Schicht nach aussen über die erste Oberfläche in Kontakt mit der flachen Ladungselektrode (46) zu der Zerstäuberante (42) fliesst.
2. Vorrichtung nach Anspruch 1, worin ein Antriebsmittel (23, 31) zur Rotation des Rotationszerstäubers (20) um seine Rotationsachse vorgesehen ist.
3. Vorrichtung nach entweder Anspruch 1 oder Anspruch 2, worin der Zerstäuber (20) kegelförmig ist, der Durchmesser der vorderen Zerstäuberante (42) davon denjenigen der hinteren Kante überschreitet, worin eine Kappe (400) vor dem Stützkörper (10) vorgesehen ist, wobei die Kappe (400) eine im allgemeinen konvexe äussere Oberfläche (402) längs eines Abschnittes davon einschliesst, wobei die äussere Oberfläche (402) dazu angepasst ist, einen im wesentlichen laminaren Luftfluss dort entlang vorzusehen, wenn der Rotationszer-

stäuber (20) um seine Rotationsachse rotiert und ein Luftflussmittel (28) hinter der Zerstäuberante (42) liegt, um einen im allgemeinen nach vorne gerichteten Luftfluss zu schaffen.

4. Vorrichtung zur Beschichtung durch elektrostatische Zerstäubung einer Flüssigkeit, umfassend einen Stützkörper aus Isoliermaterial mit einer vorderen Oberfläche, einen Rotationszerstäuber aus Isoliermaterial mit einer Rotationsachse, und eine Oberfläche, über welche eine Flüssigkeitsschicht nach aussen zu einer Zerstäuberante davon fliessen kann, wenn der Zerstäuber um die Rotationsachse rotiert wird, wobei der Rotationszerstäuber eine Vorrichtung zum Laden von Flüssigkeitsschichtmaterial einschliesst, ein in einem Stützkörper eingebautes Antriebsmittel, das den Rotationszerstäuber betreibbar an dem Stützkörper befestigt, um den Rotationszerstäuber um die Rotationsachse zu rotieren, ein aus Isoliermaterial hergestelltes Mittel, um eine Flüssigkeitsschicht zu der Oberfläche des Rotationszerstäubers zu liefern, wenn der Zerstäuber rotiert, Luftflussmittel mit einer runden Anordnung von Luftkanälen, welche auf einer vorderen Oberfläche eines ringförmigen Ringes auf dem Stützkörper abnehmbar befestigt vorgesehen sind und eine erste ringförmige Vertiefung in dem ringförmigen Ring, die mit der runden Anordnung von Luftkanälen in Verbindung steht, um sie mit Luft zu versorgen, um eine runde Anordnung von Luftdüsen zur Bildung des Musters von zerstäubter Flüssigkeitsschicht einzurichten, und Mittel zur Übertragung elektrostatischer Energie zu der Zerstäuberladevorrichtung von einer Hochspannungsquelle, dadurch gekennzeichnet, dass der ringförmige Ring (24, 400) eine hintere Oberfläche in Kontakt mit der vorderen Oberfläche (22) des Stützkörpers (10) hat, wobei die erste ringförmige Vertiefung (26) und eine zweite ringförmige Vertiefung (432) in der hinteren Oberfläche des ringförmigen Ringes (24, 400) vorgesehen sind, und dass das Mittel zur Übertragung elektrostatischer Energie einen runden Leiter (204, 430), der in der zweiten ringförmigen Vertiefung (432) angebracht ist und mehrere peripherisch angeordnete elektrische Leiter (210) umfasst, die stationär an dem ringförmigen Luftring (24) angebracht sind, wobei die Leiter (210) je ein hinteres Ende haben, das mit dem runden Leiter (204, 430) verbunden ist, und ein vorderes freies Ende, das in nah angeordneter Nähe zum Rotationszerstäuberlademittel (102) liegt, um elektrostatische Energie dahin zu übertragen, wenn die stationären elektrischen Leiter (210) von einer Hoch-

- spannungsquelle, die mit dem runden Leiter (204, 430) verbunden ist, unter Spannung gesetzt werden, um das Laden der Flüssigkeitsschicht, die zu dem Rotationszerstäuber geliefert wird, zu ermöglichen, wenn die Schicht nach aussen über die Oberfläche zu der Zerstäuberkannte (42) in ladendem Verhältnis zu dem Rotationszerstäuberlademittel fließt.
5. Vorrichtung nach Anspruch 4, worin der ringförmige Ring Teil einer Kappe (400) mit einer generell konvexen äusseren Oberfläche (402) bildet, die angepasst ist, um einen im wesentlichen laminaren Luftfluss dort entlang vorzusehen, während der Rotationszerstäuber (20) um seine Rotationsachse rotiert.
6. Vorrichtung nach entweder Anspruch 3 oder 5, mit einem Abstossring (470), der angepasst ist, um auf eine Polarität gebracht zu werden, welche dieselbe wie die Polarität der elektrostatischen Ladung ist, die auf das Schichtmaterial gebracht wird, wobei die äussere Oberfläche (402) der Kappe (400), das Luftflussmittel und der Abstossring (470) zusammenwirken, um das Sprühmuster generell vor den Rotationszerstäuber (20) zu treiben.
7. Vorrichtung nach einem der Ansprüche 3, 5 oder 6, worin die Kappe (400) weiterhin eine Vertiefung (404) einschliesst, wobei der Rotationszerstäuber wenigstens teilweise innerhalb der Vertiefung angeordnet ist.
8. Vorrichtung nach einem der vorhergehenden Ansprüche mit einer Lösungsmittelsprühdüse (94, 170) die stationär auf dem Stützkörper (10) in der Nähe der oder jeder Zerstäubungsoberfläche(n) angebracht ist, um Lösungsmittel darauf zu richten, um die Oberfläche(n) zu reinigen, ein Lösungsmittelventilmittel (92, 90, 412), das in der Nähe der vorderen Oberfläche (22) des Stützkörpers (10) angebracht ist, und ein Lösungsmittelführungsmittel, das das Lösungsmittelventilmittel (92, 90, 412) und die Lösungsmitteldüsen (94, 170) zum Transport von Lösungsmittel zu den Lösungsmitteldüsen (94, 170) unter Kontrolle des Lösungsmittelventilmittels (92, 90, 412) miteinander verbindet, um die Oberfläche(n) zu reinigen.
9. Vorrichtung nach einem der vorhergehenden Ansprüche, worin der Stützkörper (10) generell zylindrisch ist und vordere und hintere Abschnitte (12, 14) hat, die auf gegenüberliegenden Seiten eines Zwischenabschnitts (16) liegen, wobei der Zwischenabschnitt (16) einem Durchmesser hat, der wesentlich geringer als der der vorderen und hinteren Körperabschnitte (12, 14) ist, um einen ringförmigen Hohlraum (18) dazwischen zu definieren, worin ein Mittel zum Liefern einer Flüssigkeitsschicht zu der Oberfläche des Rotationszerstäubers (20), über welche die Flüssigkeitsschicht fließen kann, vorgesehen ist, wenn der Zerstäuber (20) um seine Rotationsachse rotiert, wobei das Mittel folgendes einschliesst: a) ein Flüssigkeitsschichtventil (33), das in dem ringförmigen Hohlraum in der Nähe des vorderen Abschnittes des Stützkörpers angebracht ist, und b) eine Flüssigkeitsschichtdüse (30), die auf dem vorderen Körperstützabschnitt (12) in der Nähe der Oberfläche des Rotationszerstäubers (20) angebracht ist, und c) einen Flüssigkeitsschichtkanal (32), der das Flüssigkeitsschichtventil (33) mit der Flüssigkeitsschichtdüse (30) verbindet.
10. Vorrichtung nach Anspruch 9, wenn er von einem der Ansprüche 2 bis 8 abhängig ist, worin das Antriebsmittel folgendes einschliesst: a) eine Luftturbine (31), die innerhalb eines Hohlraums (31a) in dem hinteren Körperstützabschnitt (14) angebracht ist, b) eine Antriebswelle (23), die zwischen der Turbine und dem Rotationszerstäuber angeschlossen ist und sich durch eine Bohrung (12b) in den vorderen Körperstützabschnitt (12) erstreckt, und c) ein Lager (25), das in einem Hohlraum (27) in dem mittleren Körperstützabschnitt (16) angebracht ist, um die Welle (23) rotierbar zu tragen.
11. Vorrichtung nach Anspruch 9, wenn er von Anspruch 8 abhängig ist, worin die Lösungsmittel- und Flüssigkeitsschichtventile (92, 90, 412, 33) weitgehend aus Isoliermaterial hergestellt sind.



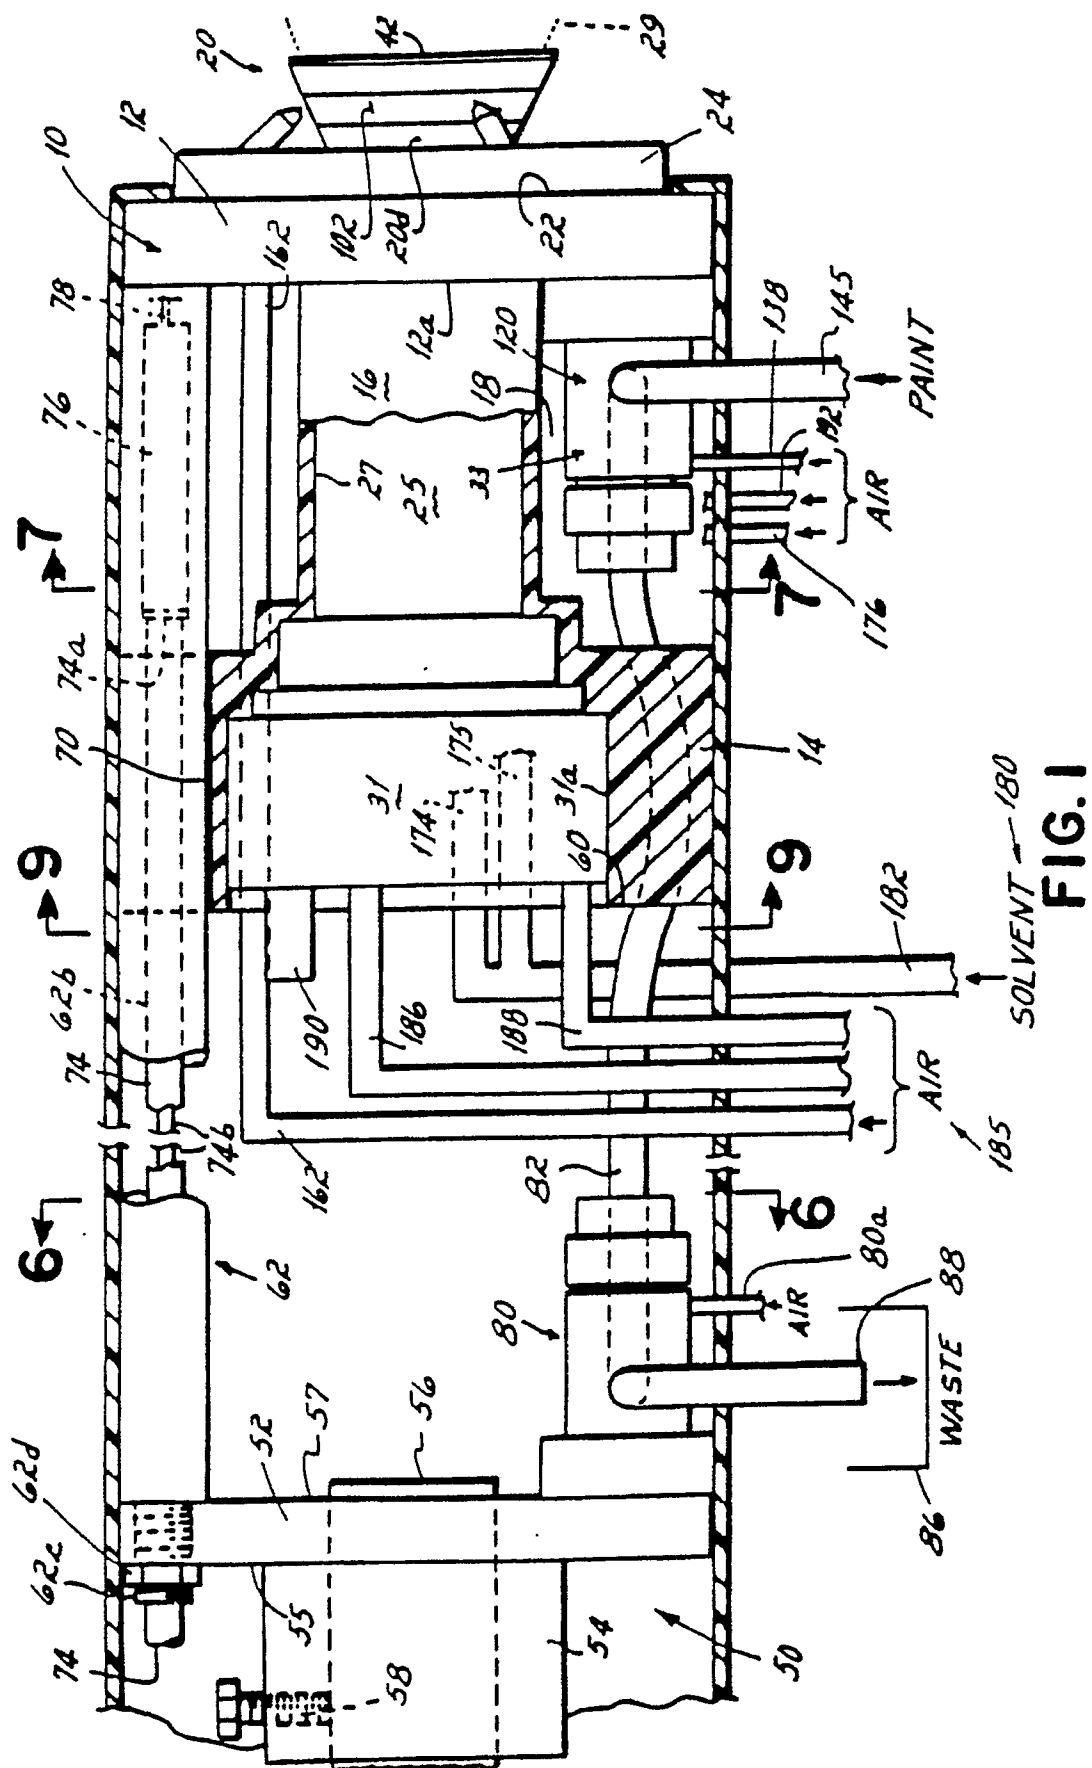

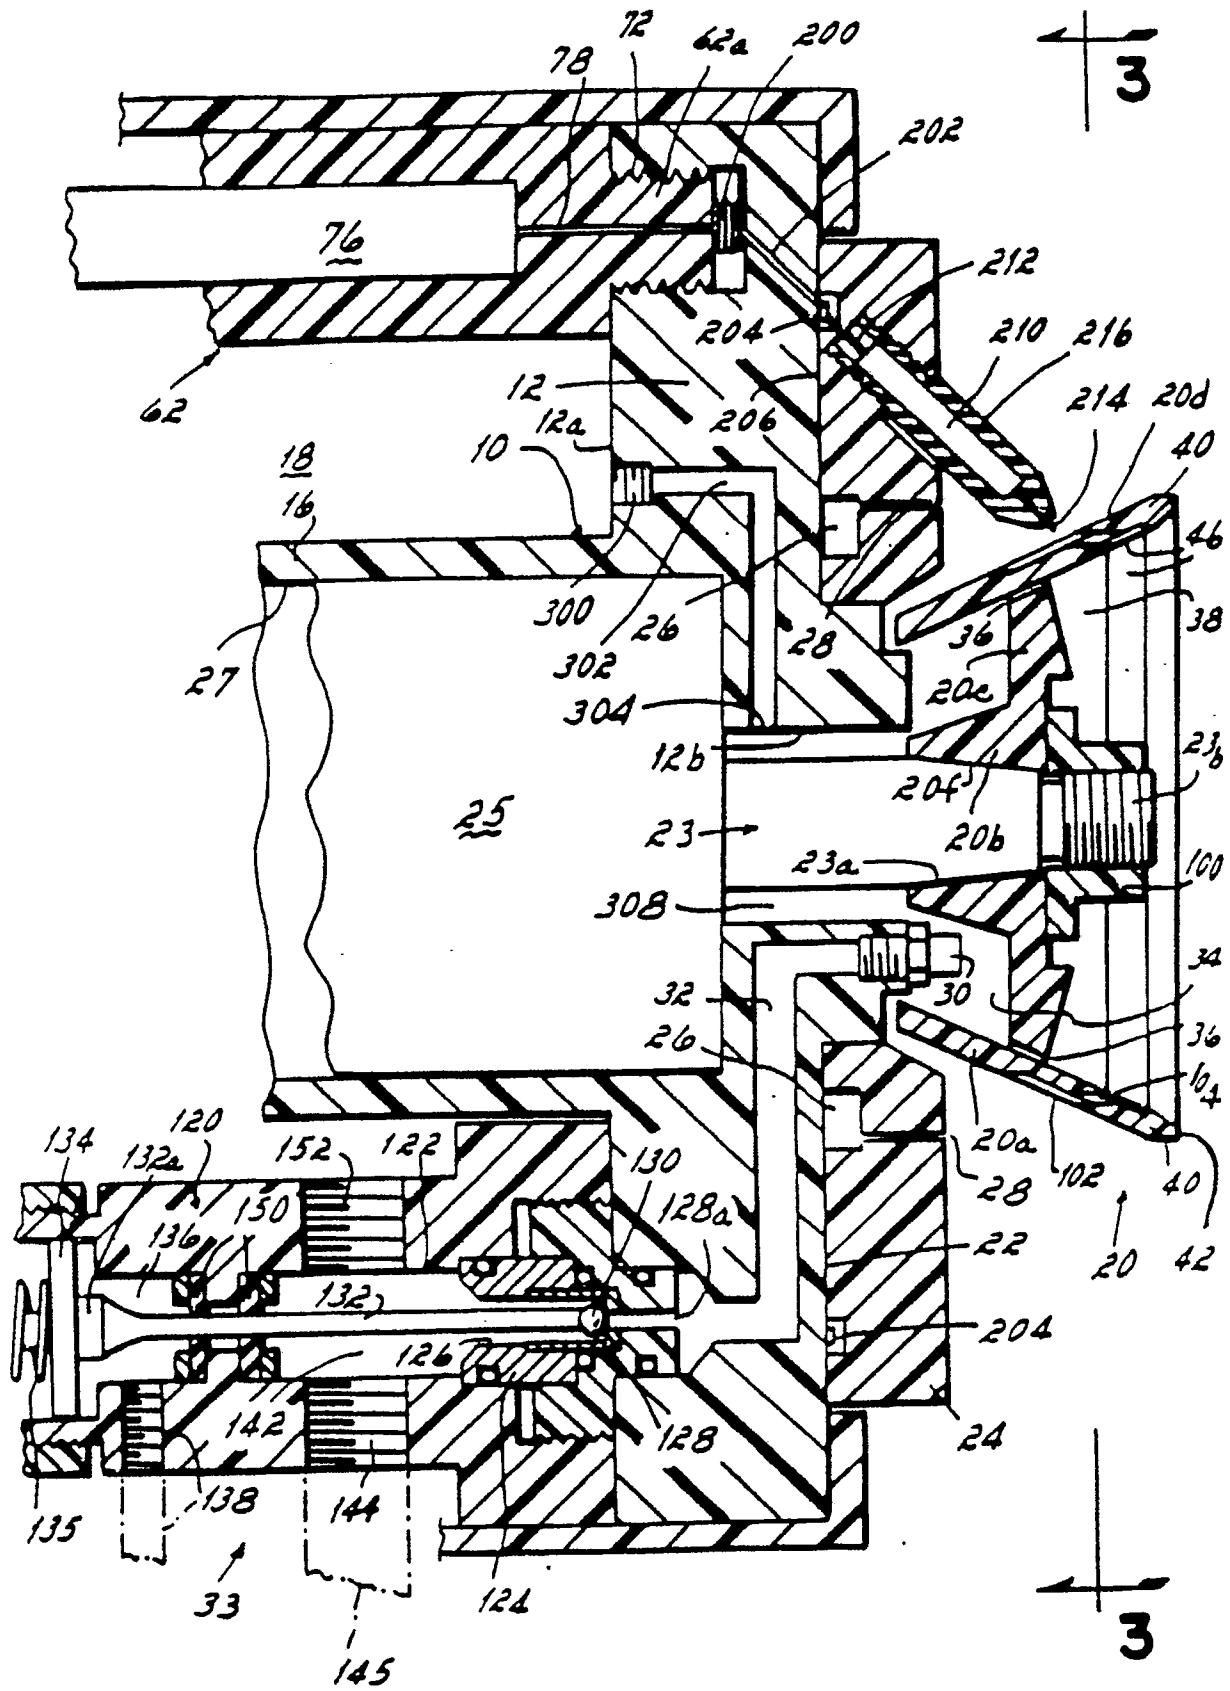


FIG. 2

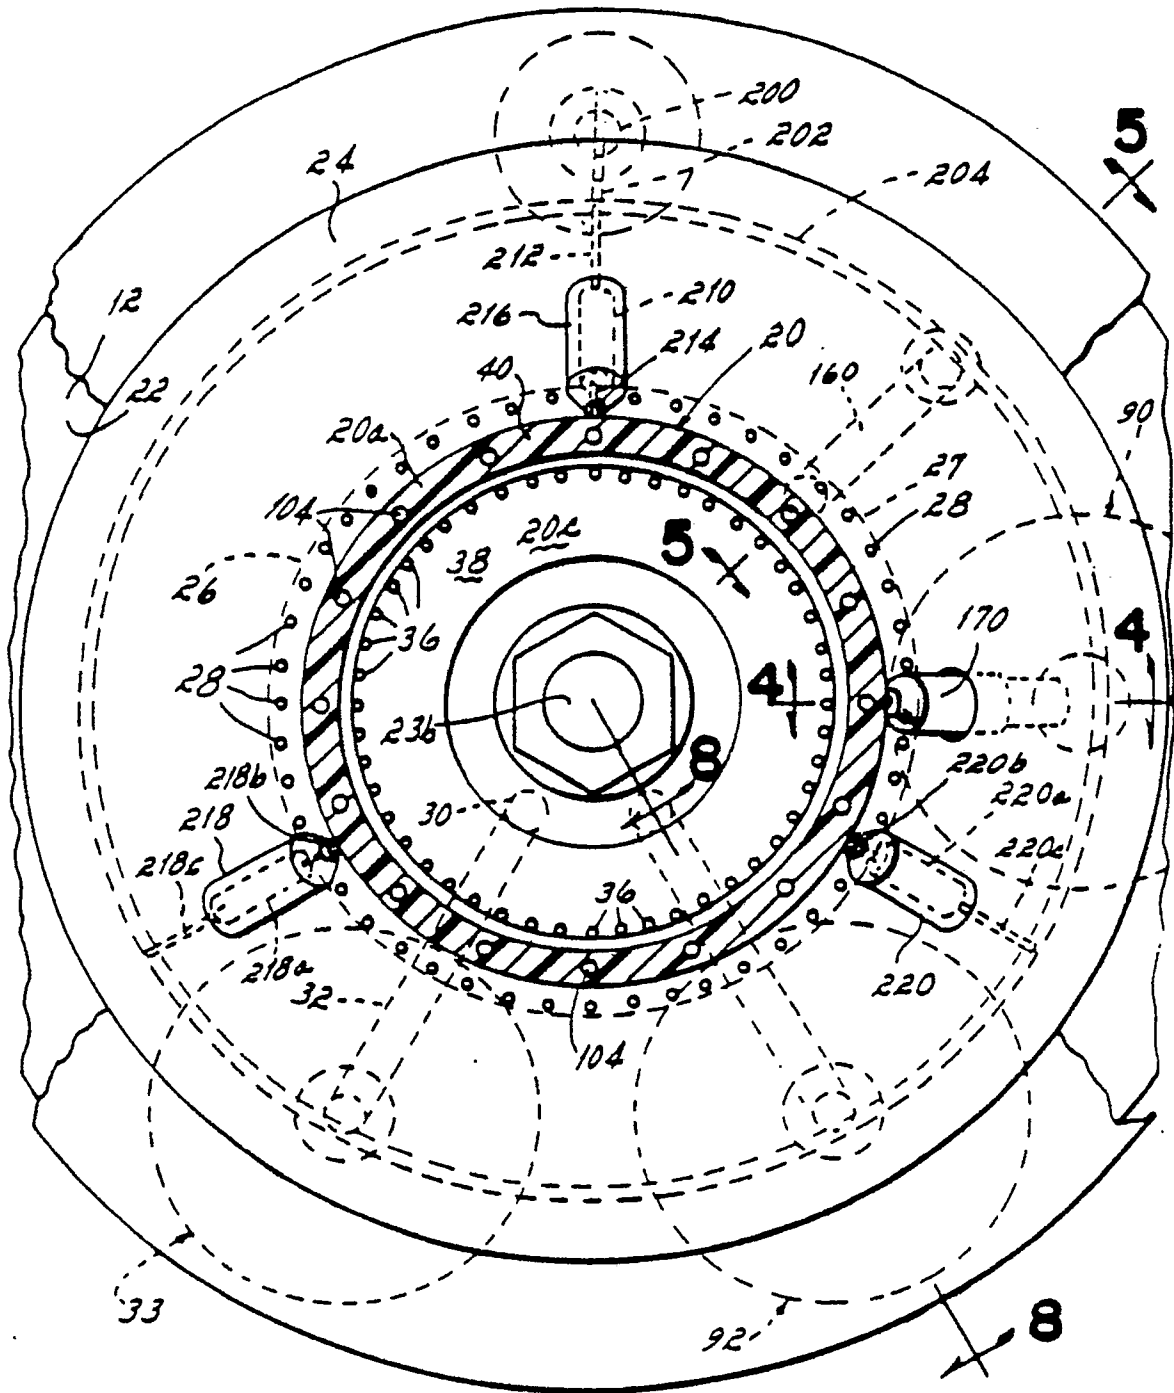


FIG. 3

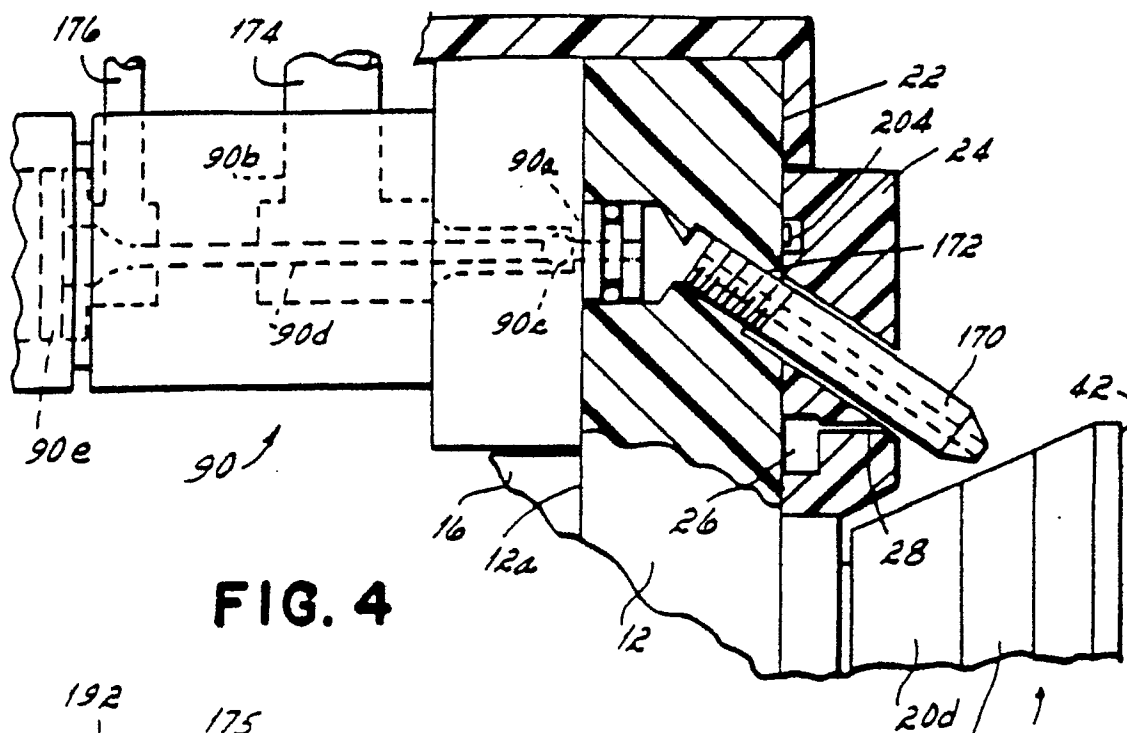


FIG. 4

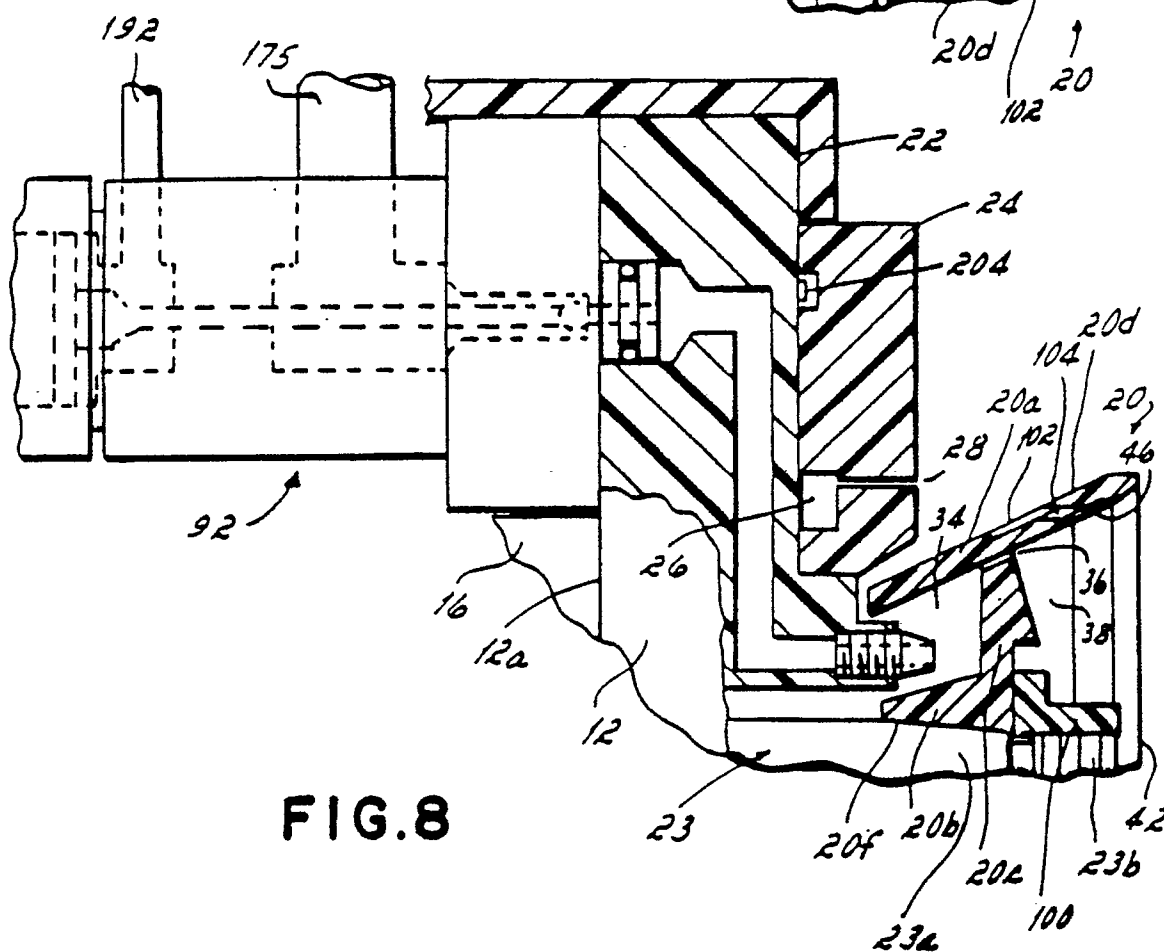


FIG. 8

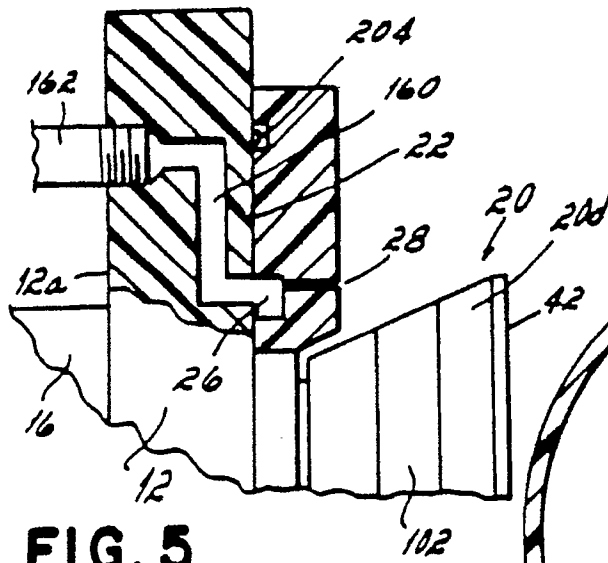


FIG. 5

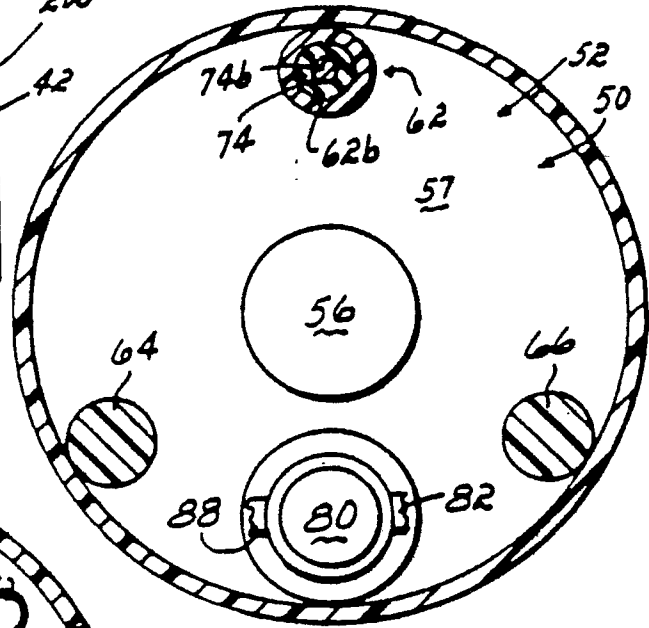


FIG. 6

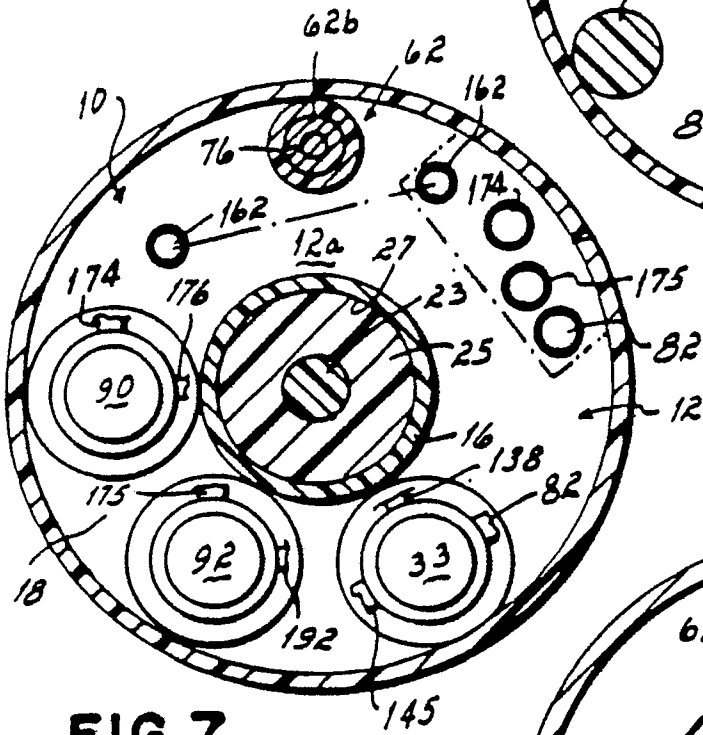


FIG. 7

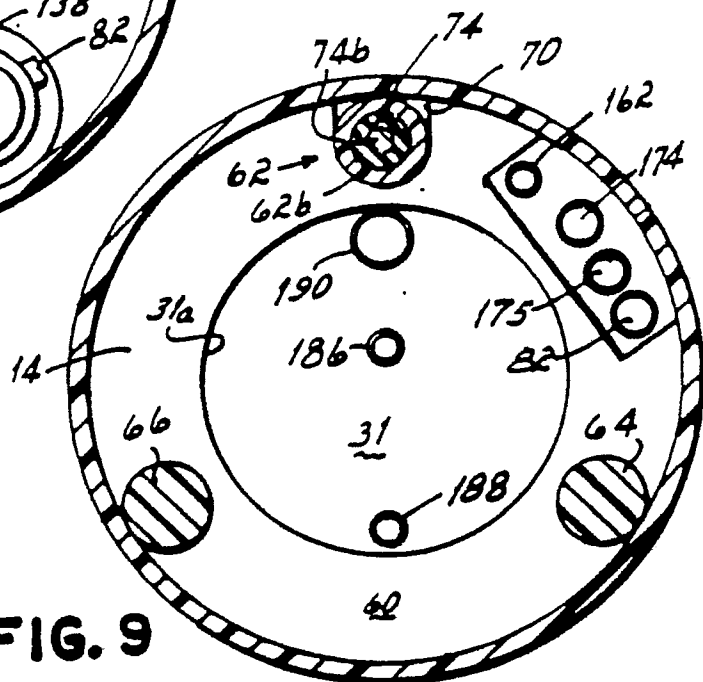


FIG. 9

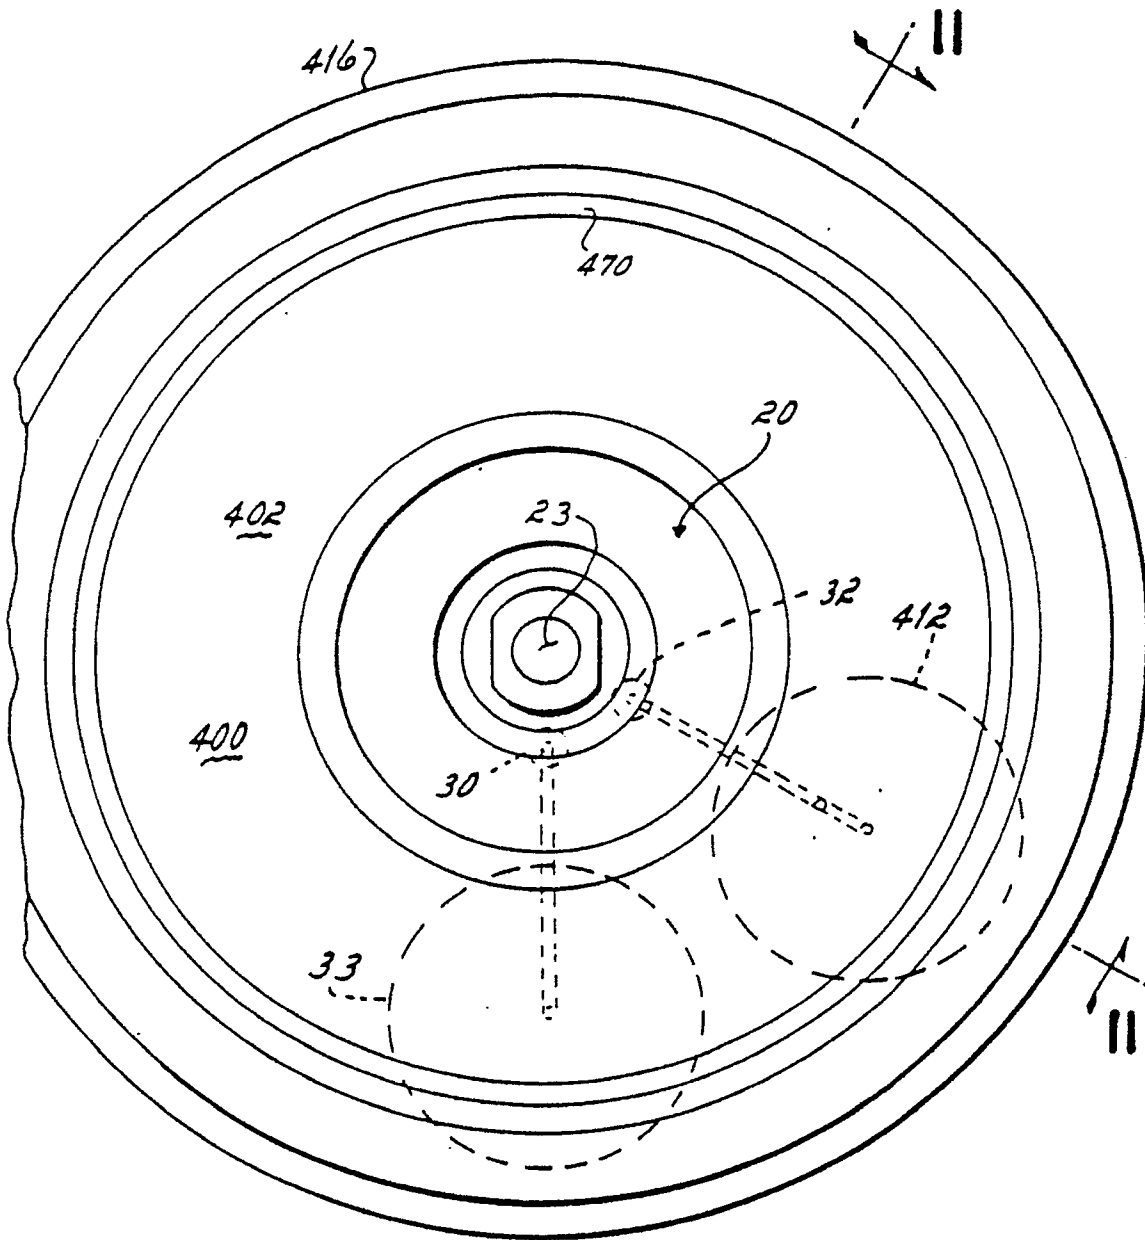


FIG. 10

