

①⑫

EUROPEAN PATENT SPECIFICATION

④⑤ Date of publication of the patent specification:
09.05.90

⑤① Int. Cl.⁵: **F02D 41/14, F02D 41/22,**
F02D 41/26

②① Application number: **87308674.8**

②② Date of filing: **30.09.87**

⑤④ **Air-fuel ratio control system for internal combustion engines.**

③⑩ Priority: **30.09.86 JP 233581/86**
30.09.86 JP 233582/86
30.09.86 JP 233583/86

④③ Date of publication of application:
06.04.88 Bulletin 88/14

④⑤ Publication of the grant of the patent:
09.05.90 Bulletin 90/19

②④ Designated Contracting States:
DE GB

⑤⑥ References cited:
EP-A-0 127 018
US-A-4 212 273

PATENT ABSTRACTS OF JAPAN, vol. 10,
no. 40 (M-454)[2097], 18th February 1986; &
JP-A-60 192871 (SUTEKIYO UOZUMI) 01-10-1985
PATENT ABSTRACTS OF JAPAN, vol. 7,
no. 50 (M-197)[1195], 26th February 1983; &
JP-A-57 200 645 (MITSUBISHI DENKI K.K.) 08-12-1982
PATENT ABSTRACTS OF JAPAN, vol. 8,
no. 216 (M-329)[1653], 3rd October 1984; &
JP-A-59 101 561 (MAZDA K.K.) 12-06-1984

⑦③ Proprietor: **MITSUBISHI DENKI KABUSHIKI KAISHA, 2-3,**
Marunouchi 2-chome Chiyoda-ku, Tokyo 100(JP)

⑦② Inventor: **Kojima, Shinji c/o Himeji Seisakusho of,**
Mitsubishi Denki Kabushiki Kaisha 840, Chiyoda-cho,
Himeji City Hyogo Prefecture(JP)
Inventor: **Wataya, Seiji c/o Himeji Seisakusho of,**
Mitsubishi Denki Kabushiki Kaisha 840, Chiyoda-cho,
Himeji City Hyogo Prefecture(JP)
Inventor: **Nishiyama, Ryoji c/o Ohyokiki Kenkyusho of,**
Mitsubishi Denki K. K. 1-1, Tsukaguchi Hon-machi,
8-chome Amagasaki City Hyogo Prefecture(JP)

⑦④ Representative: **Hackett, Sean James et al, Marks &**
Clerk 57-60 Lincoln's Inn Fields, London WC2A 3LS(GB)

EP 0 262 956 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an air-fuel ratio control system for internal combustion engines and, more particularly, to an air-fuel ratio control system in which the feed-back control of the air-fuel ratio of a mixture supplied to an internal combustion engine is conducted in accordance with a signal from an air-fuel ratio sensor with a heater. Still more particularly, the invention is concerned with an air-fuel ratio control system of the type mentioned above, which is improved to prevent destruction of the air-fuel ratio sensor when the ambient air temperature is low.

Description of the Prior Art

A feed-back type air-fuel control system has been known which employs an air-fuel ratio sensor (oxygen sensor) in which the output is inverted when the air-fuel ratio changes across the stoichiometric point. In order for this type of air-fuel ratio control system to operate satisfactorily, it is essential that the air-fuel ratio sensor is well activated by being heated to and maintained at a high temperature. In some cases, however, this requirement cannot be met particularly when the exhaust gas temperature is comparatively low due to light loads on the engine or when the air-fuel ratio sensor is installed at the downstream portion of the exhaust pipe. In order to obviate this problem, air-fuel control systems have been proposed and actually used in which the air-fuel ratio sensor incorporates an electric heater which heats and activates the sensor.

Air-fuel ratio sensors adapted to produce a digital output which changes linearly in response to a change in the air-fuel ratio have also been put into practical use. Such sensor also incorporate electric heaters for the purpose of improving the sensing accuracy and sufficiently activating the sensors.

Air-fuel ratio control systems using air-fuel ratio sensors of the types mentioned above are broadly used in various internal combustion engines for the purpose of cleaning exhaust gases, regardless of whether the engines are carbureted or fuel injected.

A known air-fuel ratio control system combined with speed-density-type fuel injection and employing an air-fuel ratio sensor adapted to produce a linear output in relation to a change in the air-fuel ratio will be described hereunder by way of example.

The description will be made with reference to Fig. 4 which also will be used in the description of an embodiment of the invention.

In Fig. 4, an internal combustion engine A has an engine proper 1, an intake pipe 2 and a throttle valve 3 disposed in the intake pipe 2.

The pressure of the intake air in the intake pipe 2 is sensed by a pressure sensor 4 which delivers the sensing output to an A/D converter 91 of a later-

mentioned control device 9. The temperature of the engine proper may be detected by a cooling water temperature sensor (not shown), the output of which also is delivered to the A/D converter 91.

The engine speed is sensed by an rpm sensor 5 which produces pulses of a frequency proportional to the engine speed. The output pulses of the rpm sensor are delivered to an input circuit 92 of the control device 9. The control device 9 has an output circuit 96 which delivers a control output in accordance with which a fuel injector 6 operates to inject a fuel into the intake pipe 2.

An air-fuel ratio sensor 8 is disposed in an exhaust pipe 7 which is connected to the engine proper 1. The air-fuel ratio sensor 8 is capable of sensing the air-fuel ratio of the mixture fed to the engine through measurement of components of the exhaust gas flowing in the exhaust gas pipe 7.

Thus, the control device 9 receives various data concerning the state of engine operation, including the intake air pressure data derived from the pressure sensor 4, engine speed data from the rpm sensor 5 and the air-fuel ratio from the air-fuel ratio sensor 8. Upon receipt of these data, the control device 9 computes the optimum fuel injection rate and controls the duty ratio or the pulse width of the driving pulses for driving the fuel injector 6 in accordance with the thus computed optimum fuel injection rate.

The AD converter 91 of the control device 9 is adapted to convert the analog signals such as those derived from the air-fuel ratio sensor 8 and the pressure sensor 4 into digital signals which are delivered to a microprocessor 93.

The input circuit 92 of the control device 9 has a function to conduct a level-conversion of the pulse signal derived from the rpm sensor 5. The signal from this circuit 92 also is delivered to the microprocessor 93. The microprocessor 93 computes the amount of fuel to be supplied to the engine proper 1 in accordance with the digital and pulse signals from the AD converter 91 and the input circuit 92, to produce a signal for controlling the duty ratio or the pulse width of the driving pulses for driving the injector 6.

The processes to be executed by the microprocessor 93 and other related data are stored beforehand in a read-only memory (ROM) 94, while data obtained in the course of computation are temporarily stored in a random access memory (RAM) 95. The delivery of the output signal from the microprocessor 93 to the fuel injector 6 is conducted through the output circuit 96.

The construction of the air-fuel ratio sensor 8 will be described hereunder with reference to Fig. 5. Specifically, the air-fuel ratio sensor 8 has an oxygen pump cell 81, an oxygen battery cell 82, a pair of electrodes 83a, 83b made of a porous material, a diffusion chamber 84, a reference voltage 85, a comparison amplifier 86, a pump driving circuit 87, and a resistor 88 which is used for the purpose of detecting the electric current in the pump cell.

Reference numeral 103 denotes an electrical insulator on which is formed a resistor 100. The resistor 100 serves as a heat-generating element. An air

gap 102 is formed between the portion of the electric insulator 103 having the resistor 100 and the oxygen battery cell 82. This basic arrangement of the air-fuel ratio sensor 8 is already known from the disclosures of Japanese Patent Laid-Open Nos. 59-19046 and 60-128349. In operation, the voltage generated in the oxygen battery cell 82 and the voltage of a reference voltage source 85 which is set, for example, at 0.4V are input to the comparison amplifier 86 so as to be compared with each other. At the same time, the pump driving circuit 87 is driven to supply an electric current to the oxygen pump cell 81 so as to reduce the offset of the voltage in the oxygen battery cell 82 from the reference voltage to zero, whereby a state of the exhaust gas corresponding to the stoichiometric ratio is obtained in the diffusion chamber 84.

With this arrangement, it is possible to detect the air-fuel ratio of the mixture which is being fed to the engine, regardless of whether it is on the leaner or richer side of the stoichiometric point, and the result of measurement is taken out as a voltage across the resistor 88. In consequence, an output voltage which linearly changes in relation to a change in the air-fuel ratio over a wide range is obtained as shown in Fig. 6.

During operation of the engine, the resistor 100 is supplied with an electric current through the output circuit 97 in the control device 9 so as to heat and activate the air-fuel ratio sensor 8.

A description will be made hereunder with specific reference to Fig. 7 as to a typical known feed-back control of air-fuel ratio conducted by using the above-described air-fuel ratio sensor 8. Fig. 7 is a flow chart showing the process of the control performed by the control device 9 shown in Fig. 4.

The pulse signal from the rpm sensor 5, representing the rpm N_e of the engine, is read in Step S 1, and the signal from the pressure sensor 4 indicative of the absolute pressure P_b in the intake pipe is read in Step S 2. In Step S 3, the basic driving pulse width r_0 of the pulses for driving the injector 6 is computed on the basis of the data read in Steps S 1 and S 2.

The pulse width r_0 can be expressed by $r_0 = K \cdot P_b \cdot \eta_v$, where K represents a constant, while η_v represents charging efficiency which is determined by the intake pressure P_b and the engine rpm N_e .

Although not shown in fig 7, a temperature - compensation may be conducted on the driving pulse width in accordance with the temperature signal derived from the cooling water temperature sensor 10 such that the actual driving pulse width τ_0 is increased as compared with the computed by the above mentioned formula when the cooling water temperature is low.

A target air-fuel ratio (A/F) S is set in Step S 4. The target air-fuel ratio (A/F) S is determined beforehand in such a manner as to optimize the air-fuel ratio for attaining the maximum dynamic performance of the engine while minimizing the fuel consumption under varying engine rpm N_e and the intake pressure P_b , as will be seen from Fig. 8 in which a flow chart (a) shows operation cycle of the

engine and in which a flow chart (b) shows the on-off cycle of the heater 100 in the air-fuel ratio sensor 8. The target air-fuel ratio, however, may be determined taking into account also other factors such as the engine temperature and the state of acceleration or deceleration of the engine.

The output signal (A/F) R from the air-fuel ratio sensor 8 is read in Step S 5 and, in Step S 6, the deviation of the air-fuel ratio from the target air-fuel ratio, i.e., $(A/F)S - (A/F)R$, is computed and integrated with a suitable gain. In Step S 7, it is determined whether the integrated value I falls within a predetermined limit range $I(LMT)$. If this integrated value falls within a predetermined range, a correction value I_1 is set as $I_1 = I$ in Step S 8, whereas, if this integrated value does not fall within a predetermined range, a correction value I_1 is set as $I_1 = IL$ in Step S 9.

In Step S 10, the pulse width r of the injector driving pulses is determined by multiplying the basic pulse width r_0 determined in Step S 3 with the correction value I_1 determined in Step S 8 or S 9.

It will be understood that the feed-back control of the air-fuel ratio is conducted to follow the target air-fuel ratio as the above-described control process is repeated momentarily.

The described control operation, however, essentially requires that the air-fuel ratio sensor 8 correctly detect momentary changes in the air-fuel ratio and, therefore, the air-fuel ratio sensor has to be sufficiently activated by being heated. However, exhaust gas temperature is normally so low when the engine is operating under a light load that the air-fuel ratio sensor 8 cannot be sufficiently activated. In order to obviate this problem, it has been a common measure to provide an electric heater 100 in the air-fuel ratio sensor 8 and to supply electric power to the heater 100 whenever the engine is operating, as shown in Fig. 8.

The known air-fuel ratio control system for internal combustion engines described hereinabove can operate satisfactorily under normal ambient air temperature. A problem is encountered, however, particularly when the ambient air temperature is extremely low, e.g., between 0° and -30°C . Namely, under such low ambient air temperatures, if the engine is stopped before the engine and the exhaust system are completely heated, the moisture contained in the exhaust gas condenses within the exhaust pipe 7 to become water droplets which cling to the air-fuel ratio sensor.

The air-fuel ratio sensor 8 has tiny apertures such as the air gap 102 and very small holes formed in the electrodes 83a, 83b. If the engine is left to stand without operating under such cold temperatures, the water droplets clinging to such tiny apertures freeze increasing their volumes to produce mechanical forces which break the cells in the air-fuel ratio sensor 8.

US patent No. 4 212 273 describes a system which has an air-fuel sensor for sensing the ratio of a mixture which is fed into an internal combustion engine. The air-fuel ratio sensor has a heater which is switched on when the engine is started so that the heater can quickly achieve maximum efficiency.

SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide an air-fuel ratio control system for internal combustion engines, which is improved in such a way as to prevent destruction of the air-fuel ratio sensor attributable to freezing of water droplets, thereby overcoming the above-described problems of the prior art.

According to the present invention there is provided an air-fuel ratio control system for internal combustion engines, comprising:

an air-fuel ratio sensor (8) for providing information indicative of the air-fuel ratio of a mixture supplied to the engine (1), and heating means (100) for heating the air-fuel ratio sensor (8), characterized in that control means (212) is provided for operating the heating means (100) for a predetermined time after the engine has stopped running.

In an embodiment of the present invention, there is provided an air-fuel ratio control system for internal combustion engines, comprising: an air-fuel ratio sensor mounted in an exhaust pipe of an internal combustion engine and adapted to produce an output indicative of the air-fuel ratio of a mixture supplied to the engine on the basis of the composition of exhaust gases in the exhaust pipe; heating means for heating the air-fuel ratio sensor; an engine operation sensor adapted to sense whether the engine has been stopped; and control means for controlling the heating means such that it is operated for a predetermined time after the engine operation sensor has sensed that the internal combustion engine has been stopped.

A temperature sensor for sensing the temperature of the ambient air and/or the internal combustion engine may be provided. In this case, the control means is operative for allowing, when the engine has been stopped while the temperature sensed by the temperature sensor is below a predetermined level, the heating means to operate for a predetermined time after the engine operation sensor has sensed that the engine has been stopped.

The above and other objects, features and advantages of the present invention will become clear from the following description of the preferred embodiment when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic illustration of a critical portion of an air-fuel ratio control system for internal combustion engines in accordance with the present invention;

Fig. 2 is a flow chart showing the operation of the air-fuel ratio control system shown in Fig. 1;

Fig. 3 is a timing chart showing the operations of a timer and a heater of the air-fuel ratio control system of Fig. 1 in relation to the operation of an internal combustion engine;

Fig. 4 is a schematic illustration of a known air-fuel ratio control system for internal combustion engines;

Fig. 5 is an illustration of the detailed construction of an air-fuel ratio sensor shown in Fig. 4;

Fig. 6 is a chart showing the operation characteristics of the air-fuel ratio sensor of Fig. 5;

Fig. 7 is a flow chart showing the operation of the known air-fuel ratio control system;

Fig. 8 is a timing chart showing the operation of a heater in the known air-fuel ratio control system in relation to the operation of an internal combustion engine;

Fig. 9 is a schematic illustration of a critical portion of an air-fuel ratio control system for internal combustion engines in accordance with an alternative embodiment of the present invention; and

Fig. 10 is a flow chart showing the operation of the air-fuel ratio control system shown in Fig. 9

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A preferred embodiment of the present invention will be described hereinafter. In the following description and the associated figures of the drawings, the same reference numerals are used to denote the same parts or members as those appearing in the foregoing description of the prior art.

The general arrangement of the air-fuel ratio control system of the present invention is basically the same as that of the known system explained before in connection with Fig. 4, but is distinguished from the described known art in that the arithmetic function of the microprocessor 93 in the control device 9 and the manner of setting of data are changed.

More specifically, the air-fuel ratio control system in accordance with the present invention has additional functions as shown in the flow chart in Fig. 2.

Namely, as illustrated in Fig. 1, the air-fuel ratio control system embodying the present invention has an air-fuel ratio sensor 8 mounted in an exhaust pipe of an internal combustion engine and adapted to produce an output indicative of the air-fuel ratio of a mixture supplied to the engine on the basis of the composition of exhaust gases in the exhaust pipe; heating means 100 such as an electric heater being operable to heat the air-fuel ratio sensor 8 during the operation of the engine; and engine operation sensor 211 adapted to sense whether the engine has been stopped; and control means 212 for controlling the heating means 100 such that it is operated for a predetermined time after the engine operation sensor 211 has sensed that the internal combustion engine has been stopped.

The air fuel ratio sensor 8 is similar in construction and operation to the one shown in Fig. 5.

Preferably, the control means 212 comprises a timing means which is adapted to allow the heater 100 to operate for a predetermined time after the engine operation sensor 211 has sensed that the engine has been stopped. Such a timing means may be constructed as software like a control program built in the microprocessor 93 of the control device 9 or as hardware like a timer.

The operation of this embodiment will be described hereinafter with reference to the flow chart

shown in Fig. 2 and the timing charts shown in Fig. 3. When the engine is started to operate, current is supplied to the electric heater 100 under the control of the control device 9 so that the heater serves to heat the air-fuel ratio sensor 8 to an appropriate temperature during the operation of the engine. In Step 200, the engine operation sensor 211 determines whether the engine has been stopped or not, through detection of the state of a key or ignition switch. If the engine has been stopped, the process proceeds to Step 201 in which the timing means 212 for controlling the power supply to the heater 100 is started to operate, as illustrated in the timing charts (a) and (b) of Fig. 3. During the operation of the timing means 212, electric power is supplied from a power source 104 to the electric heater 100 of the air-fuel ratio sensor 8 through the output circuit 97 of the control device 9, as illustrated in the timing chart (c) of Fig. 3, so that the air-fuel ratio sensor 8 is heated. The time set in the timing means 212 is determined beforehand and is long enough to ensure that any wetness on the air-fuel ratio sensor 8 is completely removed by evaporation. For instance, the timing means 212 is set to continue the electric power supply to the heater 100 for several minutes when the engine is stopped.

As will be understood from the foregoing description, in the air-fuel ratio control system of the present invention, when an internal combustion engine is stopped after a short operation before the engine is fully warmed up, electric power is supplied to the heater 100 of the air-fuel ratio sensor 8 for a predetermined time after the stop of the engine, thereby to completely evaporate any water content attached to the air-fuel ratio sensor 8.

An alternative embodiment of the invention is described with reference to Figures 9 and 10. This differs from the previous embodiment in that a temperature sensor 10 is provided, and the control means 212 operates in dependence upon the sensed temperature.

Namely, the air-fuel ratio control system of this embodiment has an air-fuel ratio sensor 8 mounted in an exhaust pipe of an internal combustion engine and adapted to produce an output indicative of the air-fuel ratio of a mixture supplied to the engine on the basis of the composition of exhaust gases in the exhaust pipe; heating means 100 such as an electric heater for heating the air-fuel ratio sensor; a temperature sensor 10 for sensing the temperature of the internal combustion engine; an engine operation sensor 211 adapted to sense whether the engine has been stopped; and control means 212 for allowing, when the engine operation sensor 211 has sensed that the internal combustion engine has been stopped while the engine temperature sensed by the temperature sensor 10 is below a predetermined level, the heating means to operate for a predetermined time after the engine operation sensor 211 has sensed that the internal combustion engine has been stopped.

Preferably, the control means 212 includes temperature determining means 213 for determining whether the engine temperature sensed by the temperature sensor is below the predetermined level,

and a timer 214 adapted to allow, when the engine operation sensor 211 has sensed that the internal combustion engine has been stopped while the engine temperature is judged by the temperature judging means 213 to be below the predetermined level, e.g., 70°C, the heating means to operate for a predetermined time after the engine operation sensor has sensed that the internal combustion engine has been stopped.

The operation of this embodiment will be described hereunder with reference to the flow chart shown in Fig. 10. In Step 200, the engine operation sensor 211 determines whether the engine has been stopped or not, through detection of the state of a key or ignition switch. If the engine has been stopped, the process proceeds to Step 201 in which the temperature determining means 213 determines whether the cooling water temperature is above a predetermined level which is, for example, set at 70°C, by means of the signal derived from the water temperature sensor 10. If the cooling water temperature is below the predetermined level, a timer 214 for controlling the power supply to the heater is started in Step 202. During the operation of the timer 214, electric power is supplied from the power supply 104 to the electric heater 100 in the form of a resistor of the air-fuel ratio sensor 8, through the output circuit 97 of the control device 9 so that the air-fuel ratio sensor 8 is heated. The time set in the timer 214 is determined beforehand and is long enough to ensure that any wetness on the air-fuel ratio sensor is completely removed by evaporation. For instance, the timer 214 is set to continue the electric power supply to the heater for several minutes when the ambient air temperature is low.

As will be understood from the foregoing embodiment in the air-fuel ratio control system of the present invention, when an internal engine is stopped after a short operation before the engine is fully warmed up, the engine temperature is determined through detection of the cooling water temperature and, if the engine temperature is below a predetermined level, electric power is supplied to the heater 100 of the air-fuel ratio sensor 8 for a predetermined time after the stop of the engine, thereby to completely evaporate any water content attached to the air-fuel ratio sensor 8.

Although in the described embodiment the supply of the electric power to the heater 100 is controlled in accordance with the engine temperature sensed by the cooling water temperature sensor 10, this is not exclusive and the air-fuel ratio control system of the invention may employ a temperature sensor for sensing the ambient air temperature in place of the cooling water temperature sensor 10. In such a case, the temperature determining means 213 determines is below a predetermined level, e.g., 0°C and, if so, a signal is generated to operate the timer 214 thereby allowing the electric power supply to the heater 100.

According to the invention, therefore, it is possible to avoid destruction of the air-fuel ratio sensor 8 which may otherwise be caused due to freezing of water droplets clinging to the air-fuel ratio sensor when the ambient air temperature is low.

Claims

1. An air-fuel ratio control system for internal combustion engines, comprising:
an air-fuel ratio sensor (8) for providing information indicative of the air-fuel ratio of a mixture supplied to the engine (1), and heating means (100) for heating the air-fuel ratio sensor (8), characterized in that control means (212) is provided for operating the heating means (100) for a predetermined time after the engine has stopped running.

2. An air-fuel ratio control system according to Claim 1, wherein the control means is provided for operating the heating means (100) for a predetermined time after the engine has stopped running and the ambient temperature and/or engine temperature has fallen below a predetermined level.

3. An air-fuel ratio control system according to claim 1, wherein the air-fuel ratio sensor (8) is mounted in an exhaust pipe (7) of internal combustion engine (1) and is adapted to produce an output indicative of the air-fuel ratio of the mixture supplied to said engine on the basis of the composition of exhaust gases in said exhaust pipe; characterized in that

an engine operation sensor (211) is provided and is adapted to sense whether said engine has been stopped; the control means (212) being provided for controlling said heating means to operate for a predetermined time after said engine operation sensor has sensed that said internal combustion engine has been stopped.

4. An air-fuel ratio control system according to Claim 3, wherein a temperature sensor (10) is provided for sensing the temperature of the ambient air and/or said internal combustion engine (1), and the control means (212) is operative for allowing, when said engine operation sensor has sensed that said internal combustion engine has been stopped, while the ambient air and/or the engine temperature sensed by said temperature sensor is below a predetermined level, said heating means to operate for a predetermined time after said engine operation sensor has sensed that said internal combustion engine has been stopped.

5. An air-fuel ratio control system for internal combustion engines according to claim 4, wherein said control means includes temperature determining means for determining whether the engine temperature sensed by said temperature sensor is below said predetermined level, and a timer adapted to allow, when said engine operation sensor has sensed that internal combustion engine has been stopped while the engine temperature is determined by said temperature determining means to be below said predetermined level, said heating means to operate for a predetermined time after said engine operation sensor has sensed that said internal combustion engine has been stopped.

6. An air-fuel ratio control system for internal combustion engines according to any preceding claim, wherein said heating means comprises an electric heater.

7. An air-fuel ratio control system for internal combustion engines according to any preceding

claim, wherein said engine operation sensor senses that said engine has been stopped, upon detecting turning off of the ignition switch of said engine.

8. An air-fuel ratio control system according to any one of claims 1 to 4, wherein said control means comprises a timing means adapted to allow said heating means to operate for a predetermined time after stop of said engine.

9. An air-fuel ratio control system for internal combustion engines according to claim 8, wherein said timer controls the length of time of electric power supply to said electric heater.

Patentansprüche

1. Kraftstoff-Luft-Verhältnis-Regleinrichtung für Brennkraftmaschinen, umfassend:
einen Kraftstoff-Luft-Verhältnis-Sensor (8), der Information über das Kraftstoff-Luft-Verhältnis eines der Maschine (1) zugeführten Gemischs liefert, und eine Heizvorrichtung (100), die den Kraftstoff-Luft-Verhältnis-Sensor (8) erwärmt, dadurch gekennzeichnet, daß eine Steuereinheit (212) vorgesehen ist, die die Heizvorrichtung (100) für eine vorbestimmte Zeitdauer nach Anhalten der Maschine betätigt.

2. Kraftstoff-Luft-Verhältnis-Regleinrichtung nach Anspruch 1, wobei die Steuereinheit vorgesehen ist, um die Heizvorrichtung (100) für eine vorbestimmte Zeitdauer nach Anhalten der Maschine und Fallen der Umgebungstemperatur und/oder Maschinentemperatur unter einen vorbestimmten Pegel zu betätigen.

3. Kraftstoff-Luft-Verhältnis-Regleinrichtung nach Anspruch 1, wobei der Kraftstoff-Luft-Verhältnis-Sensor (8) in einer Abgasleitung (7) der Brennkraftmaschine (1) angeordnet ist und auf der Basis der Abgaszusammensetzung in der Abgasleitung ein Ausgangssignal erzeugt, das das Kraftstoff-Luft-Verhältnis des der Maschine zugeführten Gemischs bezeichnet; dadurch gekennzeichnet, daß ein Maschinenbetriebssensor (211) vorgesehen ist, der erfaßt, ob die Maschine angehalten worden ist; wobei die Steuereinheit (212) vorgesehen ist, um die Heizvorrichtung so zu steuern, daß sie für eine vorbestimmte Zeitdauer nach Erfassen des Anhaltens der Brennkraftmaschine durch den Maschinenbetriebssensor in Betrieb ist.

4. Kraftstoff-Luft-Verhältnis-Regelsystem nach Anspruch 3, wobei ein Temperatursensor (10) vorgesehen ist, der die Temperatur der Umgebungsluft und/oder der Brennkraftmaschine (1) erfaßt, und die Steuereinheit (212) den Betrieb der Heizvorrichtung für eine vorbestimmte Zeitdauer nach Erfassen des Anhaltens der Brennkraftmaschine durch den Maschinenbetriebssensor gestattet, wenn der Maschinenbetriebssensor erfaßt hat, daß die Brennkraftmaschine angehalten worden ist, während die vom Temperatursensor erfaßte Temperatur der Umgebungsluft und/oder der Maschine unter einem vorbestimmten Pegel liegt.

5. Kraftstoff-Luft-Verhältnis-Regelsystem für Brennkraftmaschinen nach Anspruch 4, wobei die Steuereinheit eine Temperaturbestimmungseinrichtung, die bestimmt, ob die vom Temperatursensor er-

faîte Maschinentemperatur unter dem vorbestimmten Pegel liegt, und ein Zeitglied aufweist, das den Betrieb der Heizvorrichtung für eine vorbestimmte Zeitdauer nach Erfassen des Anhaltens der Brennkraftmaschine durch den Maschinenbetriebssensor gestattet, wenn der Maschinenbetriebssensor erfaßt hat, daß die Brennkraftmaschine angehalten worden ist, während die Temperaturbestimmungseinrichtung bestimmt, daß die Maschinentemperatur unter dem vorbestimmten Pegel liegt.

6. Kraftstoff-Luft-Verhältnis-Regelsystem für Brennkraftmaschinen nach einem der vorhergehenden Ansprüche, wobei die Heizvorrichtung ein elektrisches Heizelement aufweist.

7. Kraftstoff-Luft-Verhältnis-Regelsystem für Brennkraftmaschinen nach einem der vorhergehenden Ansprüche, wobei der Maschinenbetriebssensor bei Erfassen des Abschaltens des Zündschalters der Maschine erfaßt, daß die Maschine angehalten worden ist.

8. Kraftstoff-Luft-Verhältnis-Regelsystem nach einem der Ansprüche 1 bis 4, wobei die Steuereinheit ein Zeitglied aufweist, das den Betrieb des Heizelements für eine vorbestimmte Zeitdauer nach Anhalten der Maschine gestattet.

9. Kraftstoff-Luft-Verhältnis-Regelsystem für Brennkraftmaschinen nach Anspruch 8, wobei das Zeitglied die Zeitdauer der elektrischen Stromzufuhr zum elektrischen Heizelement steuert.

Revendications

1. Système de contrôle du rapport air-carburant pour moteurs à combustion interne, comprenant:

Un capteur du rapport air-carburant (8) pour produire une information indiquant le rapport air-carburant d'un mélange fourni au moteur (1) et un moyen chauffant (100) pour chauffer le capteur (8) du rapport air-carburant, caractérisé en ce que le moyen de contrôle (212) est prévu pour faire fonctionner le moyen chauffant (100) pendant un temps prédéterminé après arrêt de fonctionnement du moteur.

2. Système de contrôle du rapport air-carburant selon la revendication 1, où le moyen de contrôle est prévu pour faire fonctionner le moyen chauffant (100) pendant un temps prédéterminé après que le moteur a arrêté de fonctionner et que la température ambiante et/ou la température du moteur est tombée en-dessous d'un niveau prédéterminé.

3. Système de contrôle du rapport air-carburant selon la revendication 1, où le capteur (8) du rapport air-carburant est monté dans un tuyau d'échappement (7) du moteur à combustion interne (1) et est adapté à produire une sortie indiquant le rapport air-carburant du mélange fourni audit moteur sur la base de la composition des gaz d'échappement dans ledit tuyau d'échappement ; caractérisé en ce que

Un capteur (211) du fonctionnement du moteur est prévu et est adapté à détecter si ledit moteur a été arrêté,

Le moyen de contrôle (212) étant prévu pour contrôler ledit moyen chauffant pour qu'il fonctionne pendant un temps prédéterminé après que ledit capteur du fonctionnement du moteur a détecté que ledit moteur à combustion interne a été arrêté.

4. Système de contrôle du rapport air-carburant selon la revendication 3, où un capteur de température (10) est prévu pour capter la température de l'air ambiant et/ou dudit moteur à combustion interne (1) et le moyen de contrôle (212) fonctionne pour permettre, quand ledit capteur de fonctionnement du moteur a détecté que ledit moteur à combustion interne a été arrêté, alors que la température de l'air ambiant et/ou du moteur détectée par ledit capteur de température est en-dessous d'un niveau prédéterminé, audit moyen chauffant de fonctionner pendant un temps prédéterminé après que le capteur de fonctionnement du moteur a détecté que ledit moteur à combustion interne a été arrêté.

5. Système de contrôle du rapport air-carburant pour moteurs à combustion interne selon la revendication 4, où ledit moyen de contrôle comporte un moyen déterminant la température pour déterminer si la température du moteur détectée par ledit capteur de température est en-dessous dudit niveau prédéterminé, et un temporisateur adapté à permettre, quand ledit capteur de fonctionnement du moteur a détecté que le moteur à combustion interne a été arrêté tandis que la température du moteur est déterminée par ledit moyen déterminant la température comme étant en-dessous dudit niveau prédéterminé, audit moyen chauffant de fonctionner pendant un temps prédéterminé après que ledit capteur de fonctionnement du moteur a détecté que ledit moteur à combustion interne a été arrêté.

6. Système de contrôle du rapport air-carburant pour moteurs à combustion interne selon toute revendication précédente, où ledit moyen chauffant comprend un réchauffeur électrique.

7. Système de contrôle du rapport air-carburant pour des moteurs à combustion interne selon toute revendication précédente, où ledit capteur de fonctionnement du moteur détecte que ledit moteur a été arrêté, lors de la détection de la mise hors circuit du démarreur dudit moteur.

8. Système de contrôle du rapport air-carburant selon toute revendication 1 à 4, où ledit moyen de contrôle comprend un moyen de temporisation adapté à permettre audit moyen chauffant de fonctionner pendant un temps prédéterminé après arrêt dudit moteur.

9. Système de contrôle du rapport air-carburant pour moteurs à combustion interne selon la revendication 8, où ledit temporisateur contrôle la durée de la fourniture de courant électrique audit réchauffeur électrique.

FIG. 1

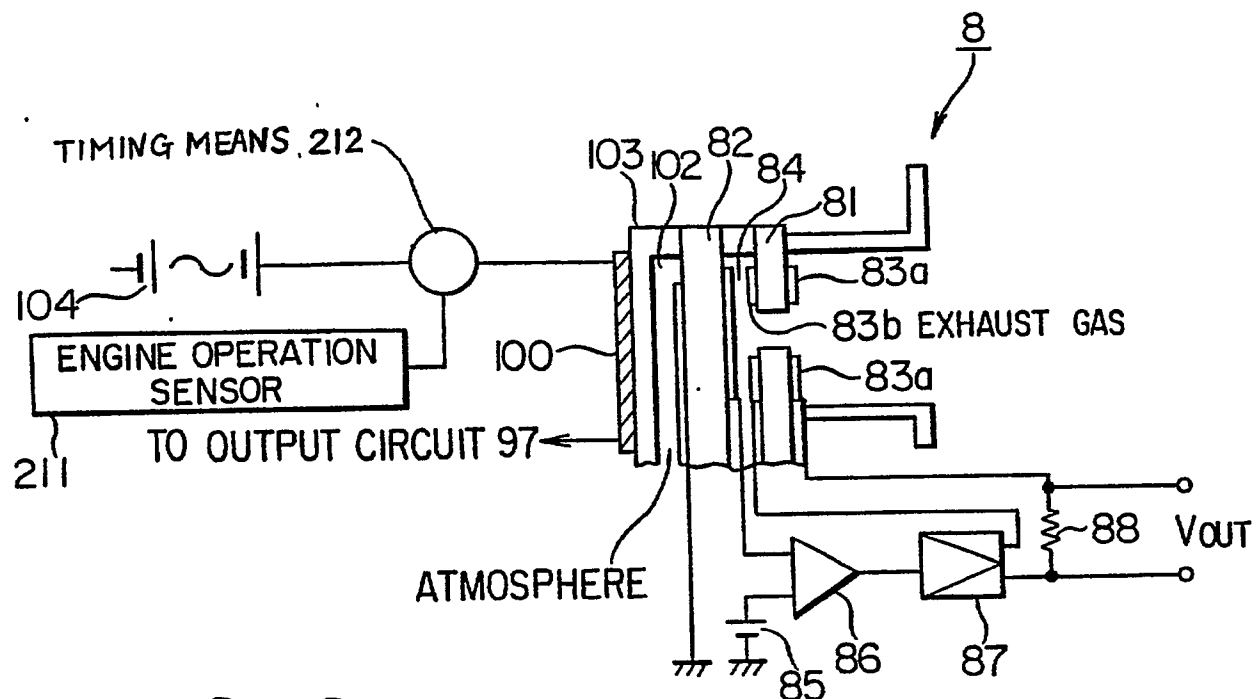


FIG. 2

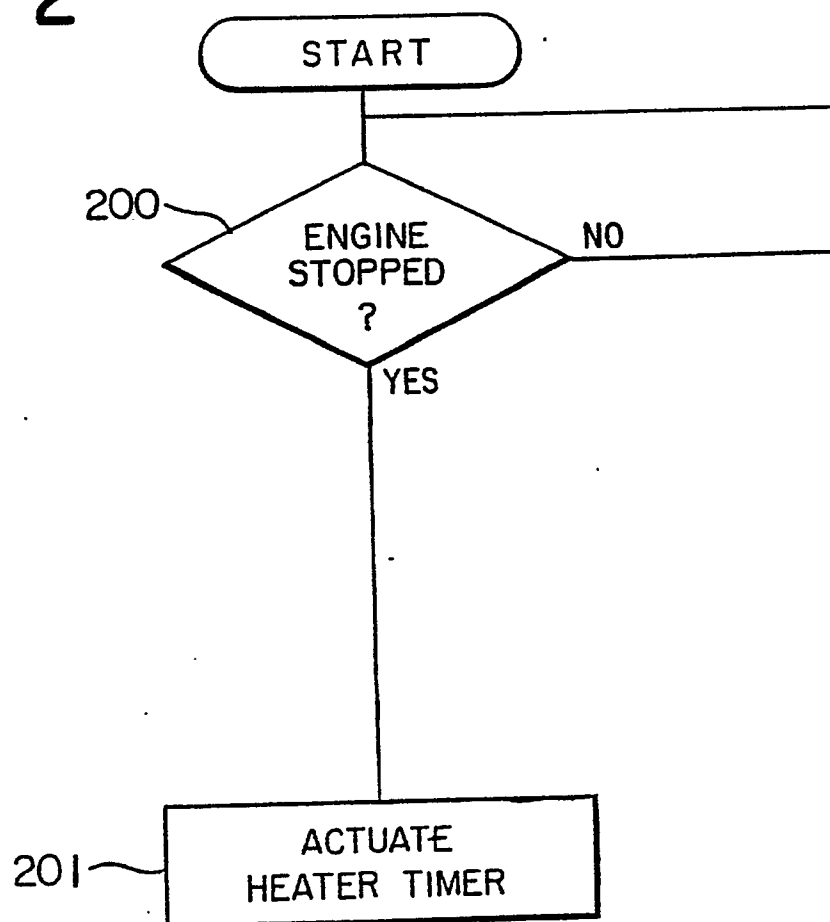


FIG. 8
PRIOR ART

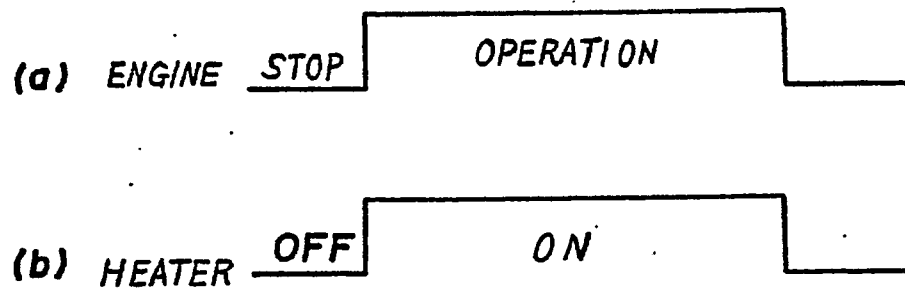


FIG. 3

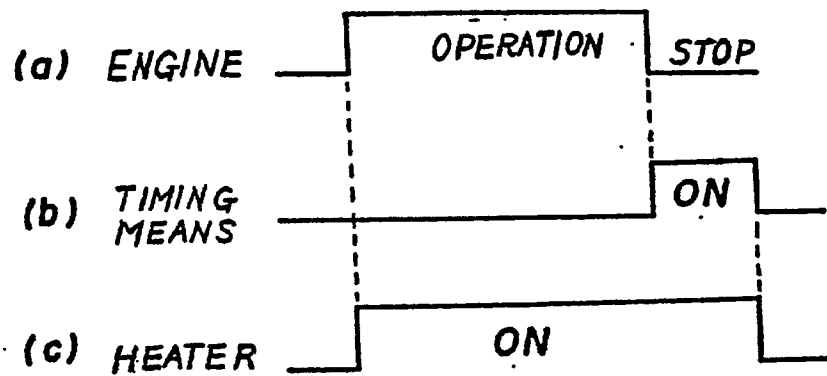


FIG. 4

PRIOR ART

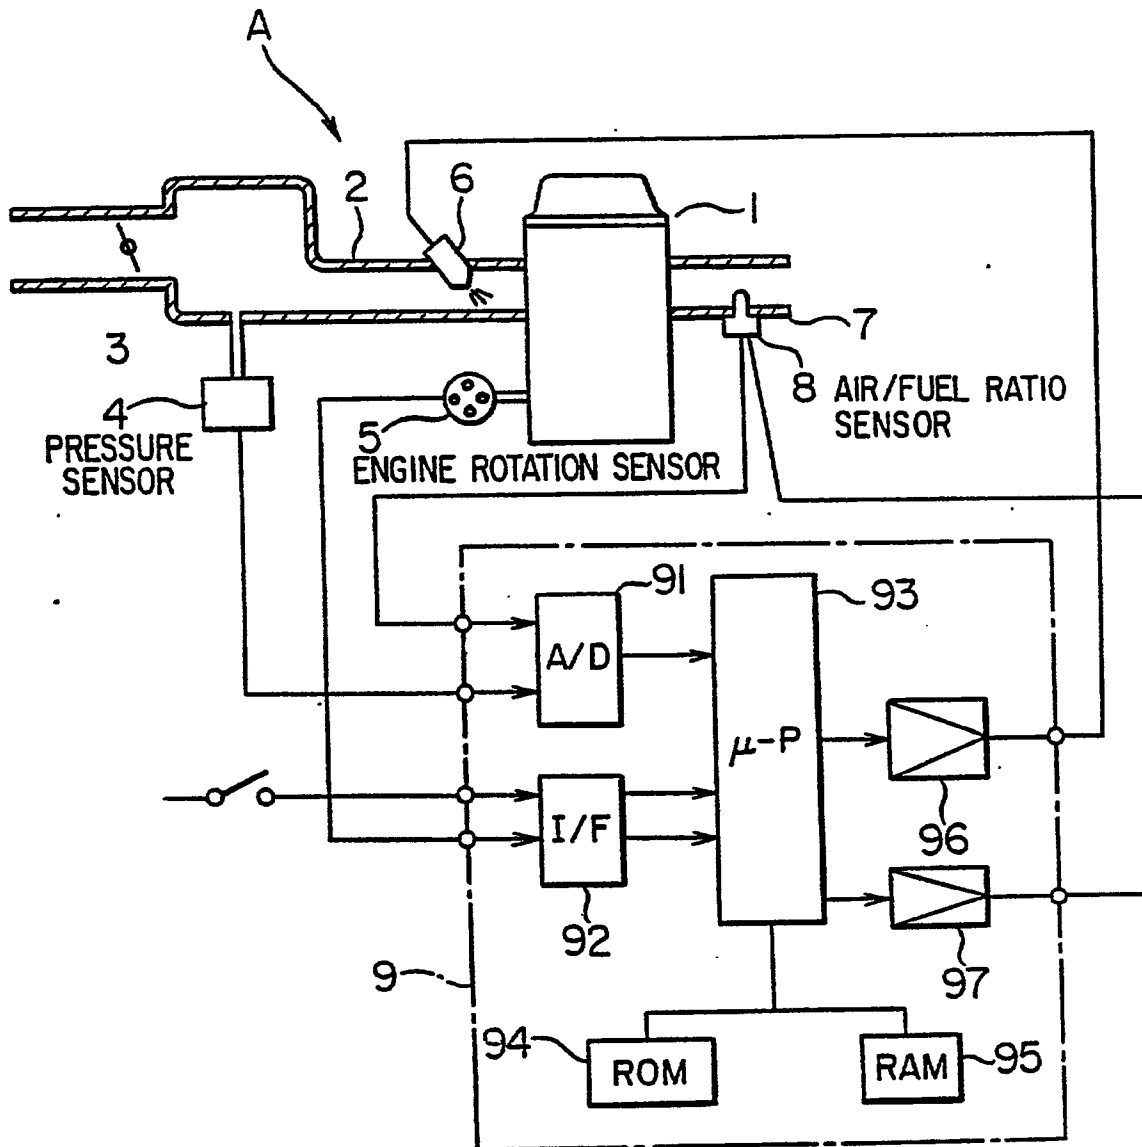


FIG. 5
PRIOR ART

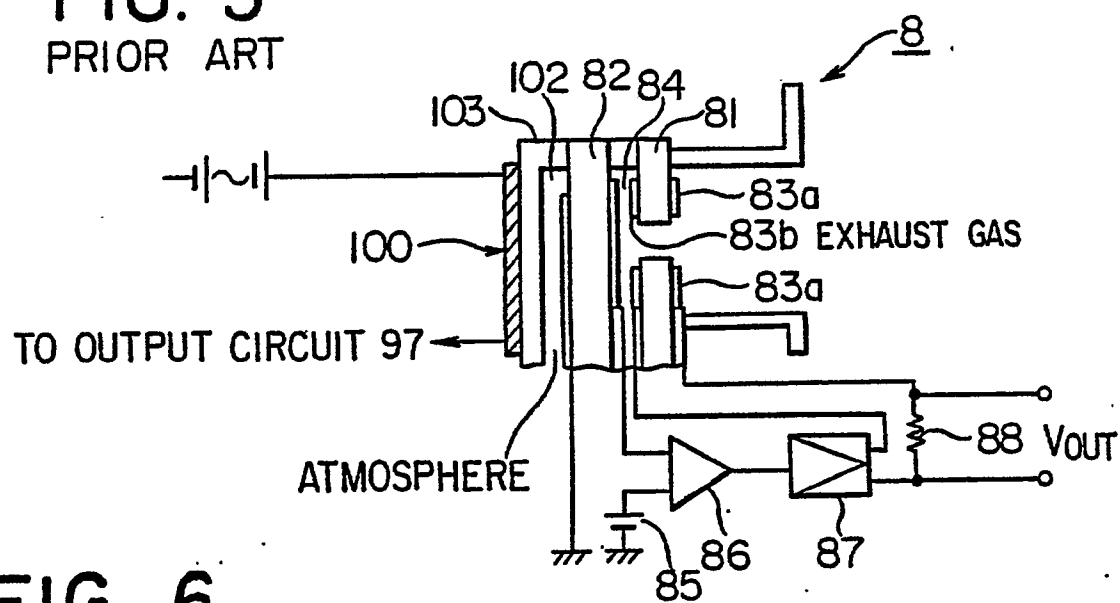


FIG. 6
PRIOR ART

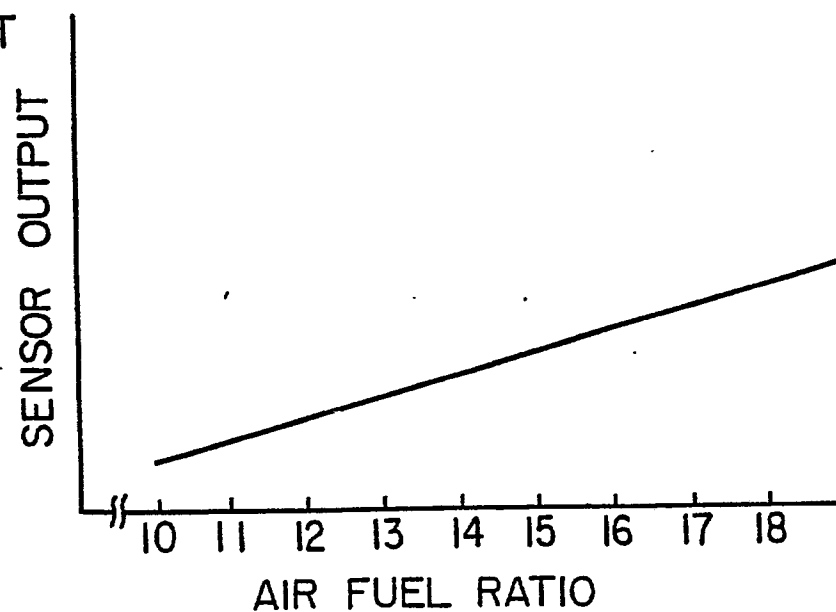


FIG. 7 PRIOR ART

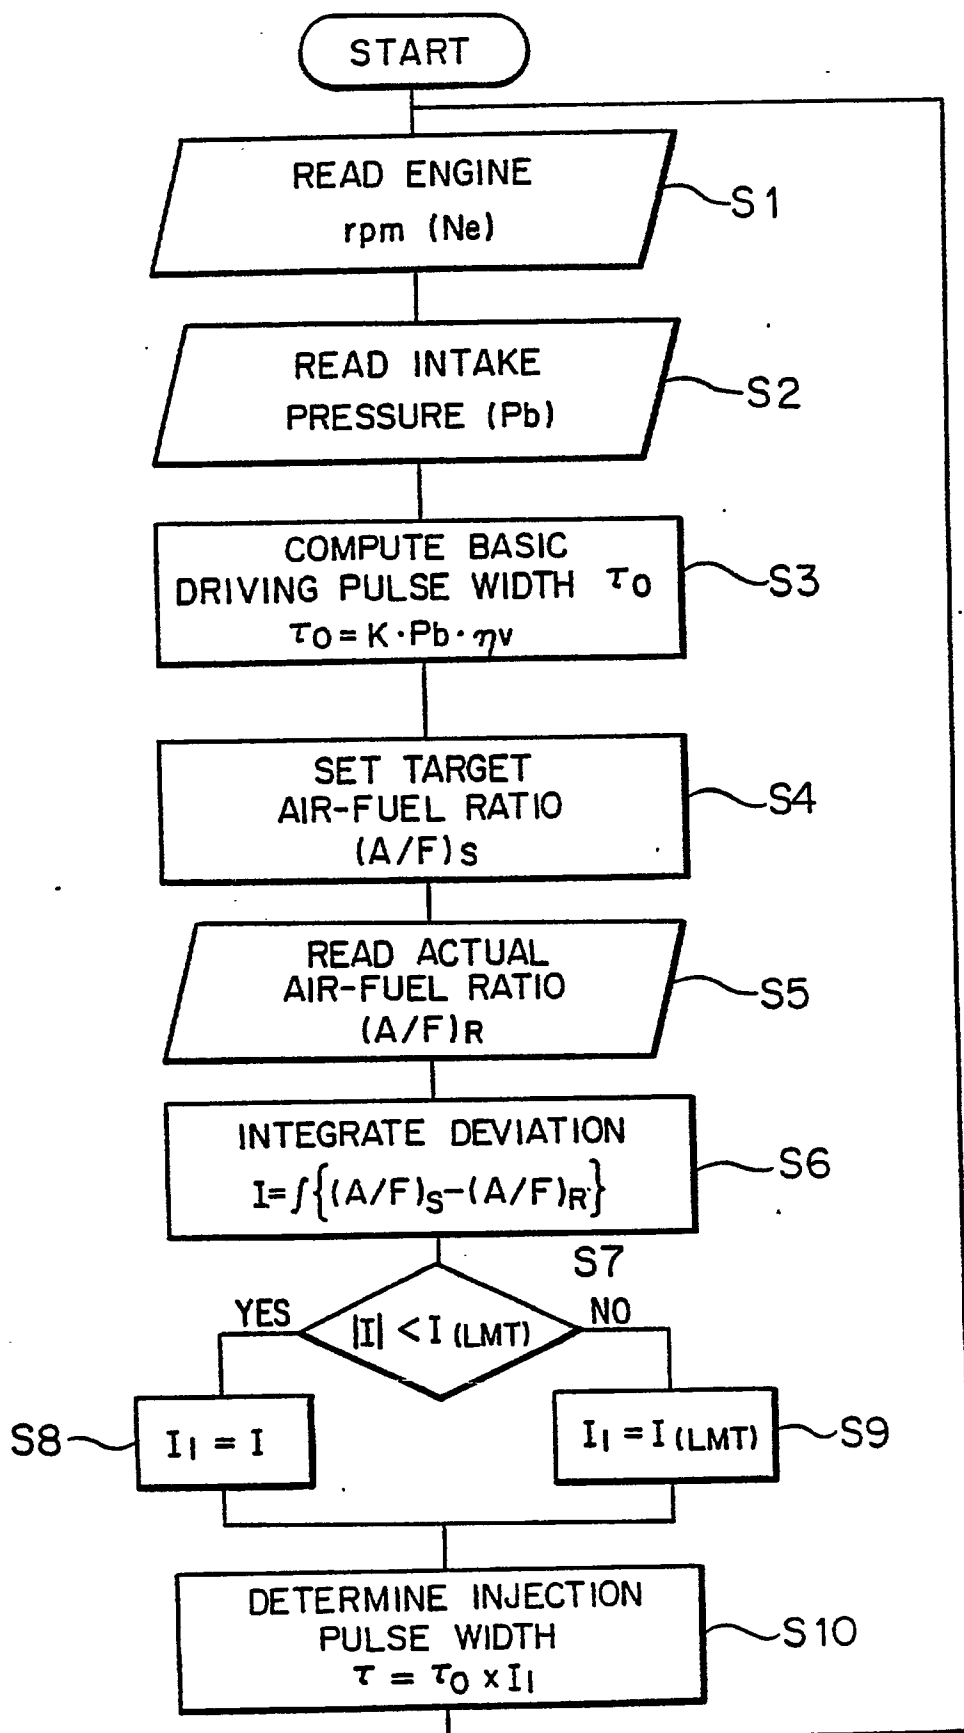


FIG. 9

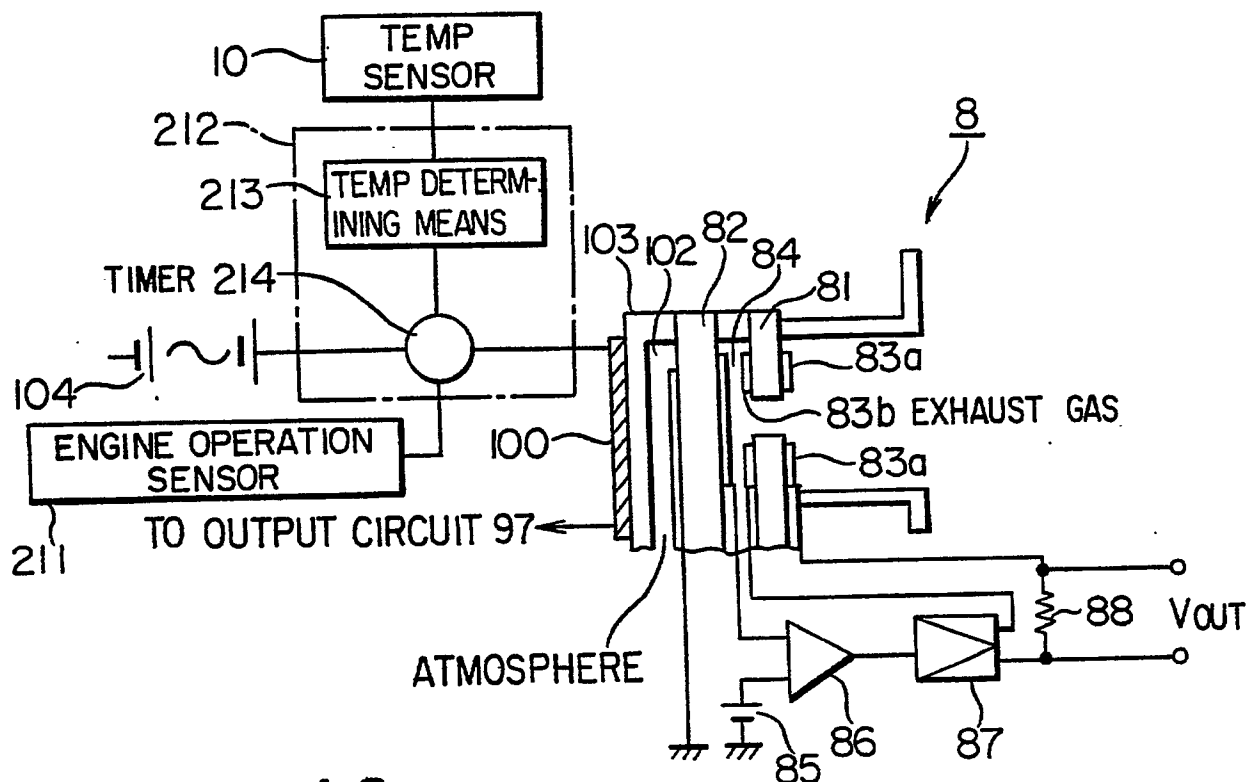


FIG. 10

