

12 **EUROPEAN PATENT APPLICATION**

21 Application number: 87308935.3

51 Int. Cl. 4: A47G 1/06

22 Date of filing: 08.10.87

30 Priority: 08.10.86 GB 8624083

43 Date of publication of application:
 11.05.88 Bulletin 88/19

64 Designated Contracting States:
 AT BE CH DE ES FR GB GR IT LI LU NL SE

71 Applicant: PRINT LAMINATION PLASTICS LTD.
 Apex Works Oxford Road
 Uxbridge Middlesex UB9 4BJ(GB)


72 Inventor: Gilbert, Gordon J.
 4 Kingshill Road
 High Wycombe, Bucks(GB)

74 Representative: Mayes, Stuart David et al
 BOULT, WADE & TENNANT 27 Farnival Street
 London, EC4A 1PQ(GB)

54 Display apparatus.

57 Display apparatus comprises a frame (10) around a rigid backing surface, which frame has a channel-shaped cross-section which is shaped to grip the outer margin of a semi-rigid display sheet (11) sufficiently to prevent the sheet from being distorted and hence removed from the frame.

FIG. 1

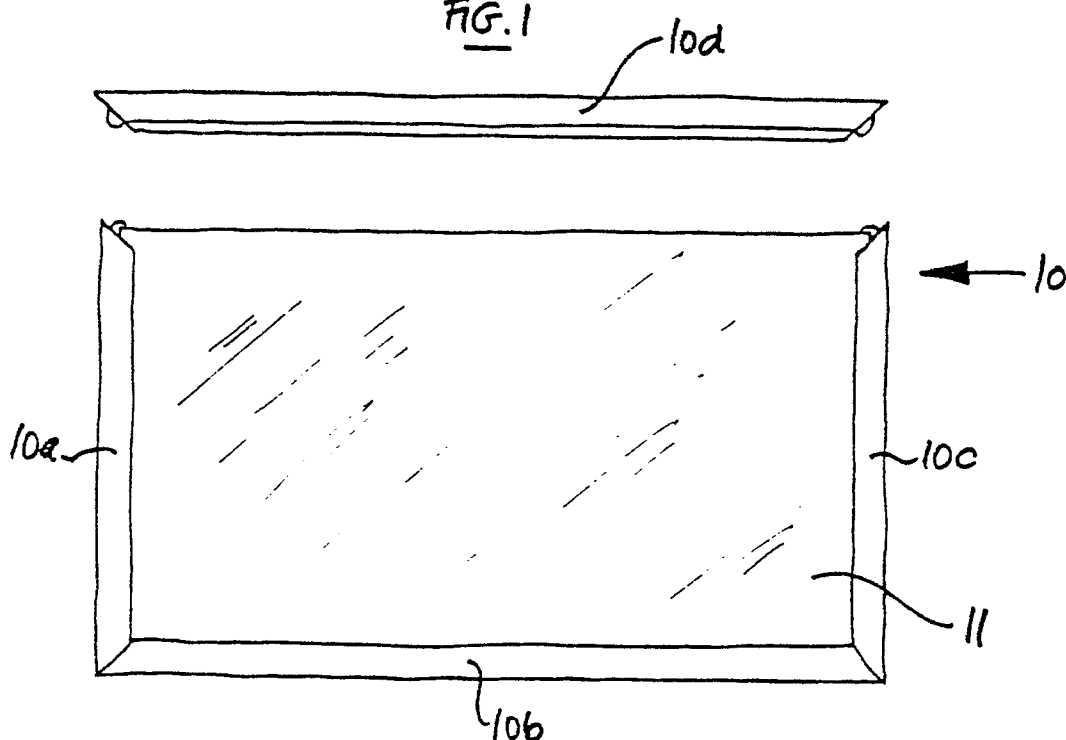

EP 0 266 916 A1

DISPLAY APPARATUS

This invention relates to display apparatus.

The invention provides display apparatus comprising a frame around a rigid backing surface, the frame having a channel-shaped cross-section which is shaped to grip the outer margin of a semi-rigid sheet sufficiently to prevent the sheet from being distorted and hence removed from the frame.

In this context, semi-rigid has the meaning that the sheet is relatively easy to flex in one plane but relatively very much harder to flex in two different planes at once. Examples of such semi-rigid sheets are laminated or encapsulated signs as are conventionally used for advertisements, eg in Underground stations.

Preferably a double bend is put in the outer margin of the sheet to provide the sufficient grip and preferably the channel-shaped cross-section of the frame is shaped to provide three bearing points with which to put the double bend in the outer margin of the sheet.

The rigid backing surface may be a panel to which the frame is attached or it may be the surface on which the frame is mounted.

The semi-rigid sheet may itself contain the display or it may simply be a transparent sheet for sandwiching an ordinary paper display against the rigid backing surface.

In the preferred embodiment, the frame comprises a plurality of assemblable frame members and means is provided for releasably assembling together the frame members, which means is inaccessible after assembly of the frame, and there is preferably also provided means for gaining access to the means for releasably assembling together the frame members to enable disassembly of the frame. Such means may be a special key and may require sacrificing the display sheet itself.

By way of example, embodiments of the invention will now be described with reference to the accompanying drawings, in which:

Figure 1 illustrates an example of display apparatus according to the invention,

Figure 2 is a detail showing an example of a locking mechanism,

Figure 3 shows an example of a frame section profile,

Figure 4 shows a modified form of the profile of Figure 3,

Figure 5 is a detail showing a corner of an assembled display,

Figures 6 to 9 show further examples of frame section profiles.

The example of display apparatus which can be seen in Figure 1 comprises a four-sided frame 10 to surround and retain a rectangular display 11. After the display 11 has been positioned within three pre-assembled sides 10a, 10b, 10c of the frame, the fourth side 10d of the frame is locked into position. The mechanism for locking the fourth side 10d of the frame into position may take many forms, and one example is seen in Figure 2. At the top left hand corner of the frame, a tongue 12 on the fourth side 10d is engagable with a catch 13 on the first side 10a. There is sufficient play in this connection to allow some relative pivotal movement of the fourth side 10d. This enables the fourth side 10d to be swung downwardly into engagement with the third side 10c. Upon this action, a tongue 14 on the fourth side 10d engages a latch 15 which is pivotally mounted by a pivot 16 to the third side 10c. The latch 15 is biased towards its engaged position by a spring 17. The engagement mechanism is housed within the confines of the frame members so that, once engaged, the frame cannot be released without the use of a special tool. The special tool is, for example, a key which has to be inserted through the display (which is therefore sacrificed) to disengage the latch 15.

An example of a frame section profile is seen in more detail in Figure 3. The frame member is of a basically channel-shaped cross-section, conveniently extruded aluminium, with an interior 20 defined between front and back walls, 21 and 22 respectively, and an end wall 23. The frame member here is attached to a rigid panel 24. The frame member may, however, be attached directly to some other rigid backing surface, eg a wall. A semi-rigid sheet 25 is supported against the panel 24, with its margin gripped within the interior 20 of the frame member. The sheet 25 is semi-rigid in the sense that the sheet is relatively easy to flex in one plane, but very much harder to flex in two different planes at once. Examples of semi-rigid sheets are conventional laminated or encapsulated signs which are used eg in advertisements in Underground stations. The margin of the sheet 25 is gripped by a three point bearing. As can be seen in Figure 3, the front wall 21 of the frame section has a turned over lip 26. The point of contact between this lip 26 and the sheet 25 forms the first bearing point 27. The back wall 22 of the frame section has a ridge 28, and the point of contact between this ridge 28 and the sheet 25 forms the second bearing point 29. The third bearing point 30 is the point where the outer edge of the sheet 25 contacts the interior face of the outer wall 21 of the frame section. It will be seen that the three point

bearing from the frame section puts a double bend in the margin of the sheet. Referring now to Figure 5, it will be seen that in the region of a corner of the frame, as shown, there will be a compound flexure of the sheet, ie, flexure in two planes at once. Since the sheet is semi-rigid, such compound flexure of the sheet will be effective to grip the sheet firmly. Thus, in use of the frame in a display, the sheet is gripped sufficiently to prevent its being distorted and hence removed from the frame.

In Figure 4 there is seen a modified form of the frame section profile of Figure 3. Here, the interior surface of the end wall 23' is radiused and the ridge 28' on the interior of the back wall 22' is somewhat smaller. The first and second bearing points 27' and 29' are as in Figure 3, but the third bearing point 30' is formed by the point of contact of the outer edge of the sheet 25 with the interior radiused surface of the end wall 23'.

There are seen in Figures 6 to 9 various alternative examples of frame section profile. In Figure 6, the lip 40 is provided as a separate item which is attached, eg with dowel pins, to the main frame section. Also seen in the frame section profile of Figure 6 is an additional channel opening 41. This provides useful space behind the display. The space can be used to house back-lighting for the display, for example. More sophisticated devices such as a removal alarm or selective lighting with touch control can also be incorporated in this space. The frame section seen in Figure 7 is extrusion-rolled and those of Figures 8 and 9 are rolled sections.

Claims

1. Display apparatus comprising a frame around a rigid backing surface, the frame having a channel-shaped cross-section which is shaped to grip the outer margin of a semi-rigid sheet sufficiently to prevent the sheet from being distorted and hence removed from the frame.

2 Apparatus as claimed in Claim 1 where a double bend is put in the outer margin of the sheet to provide the sufficient grip.

3. Apparatus as claimed in Claim 2 wherein the channel-shaped cross-section of the frame is shaped to provide three bearing points with which to put the double bend in the outer margin of the sheet.

4. Apparatus as claimed in any preceding claim wherein the frame comprises a plurality of assemblable frame members and means is provided for releasably assembling together the frame members, which means is inaccessible after assembly of the frame.

5. Apparatus as claimed in Claim 4 and comprising means for gaining access to the means for releasably assembling together the frame members to enable disassembly of the frame.

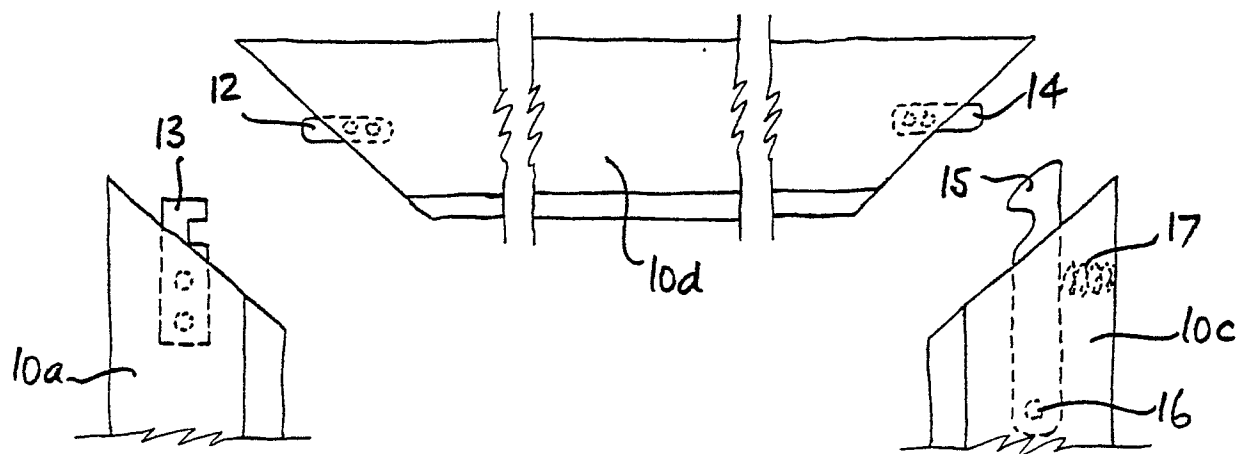
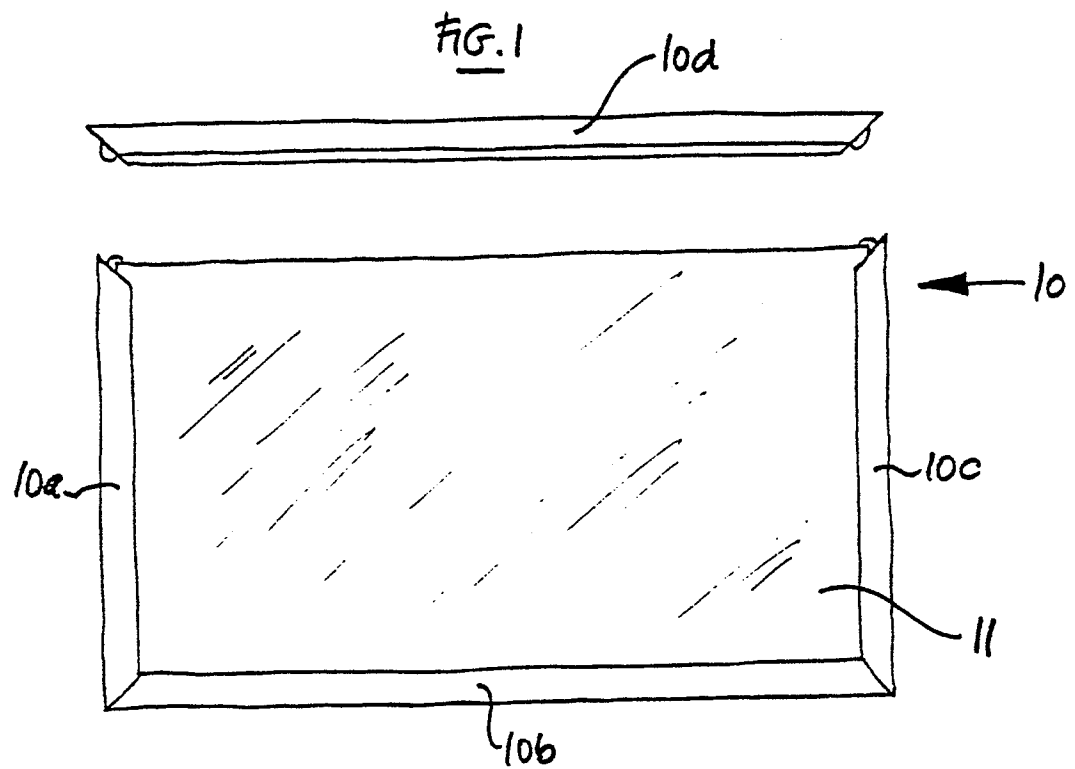


FIG. 2

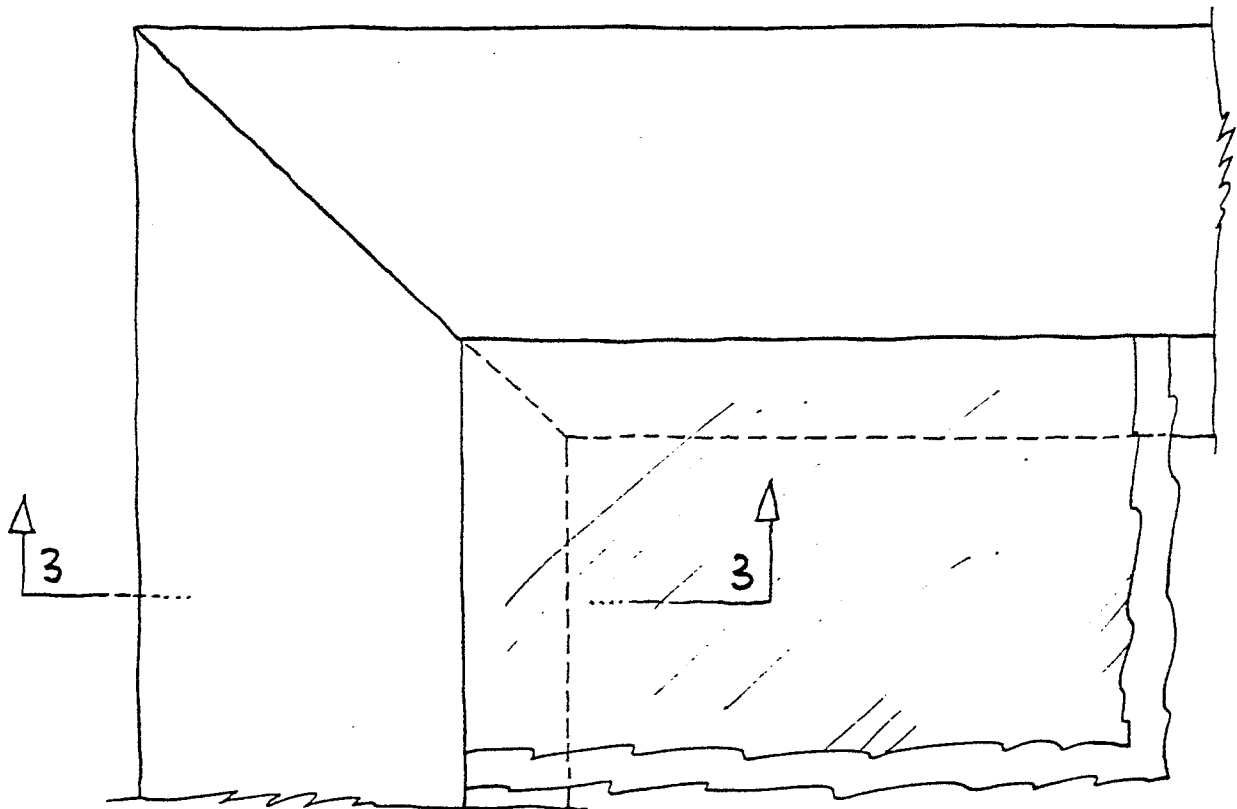
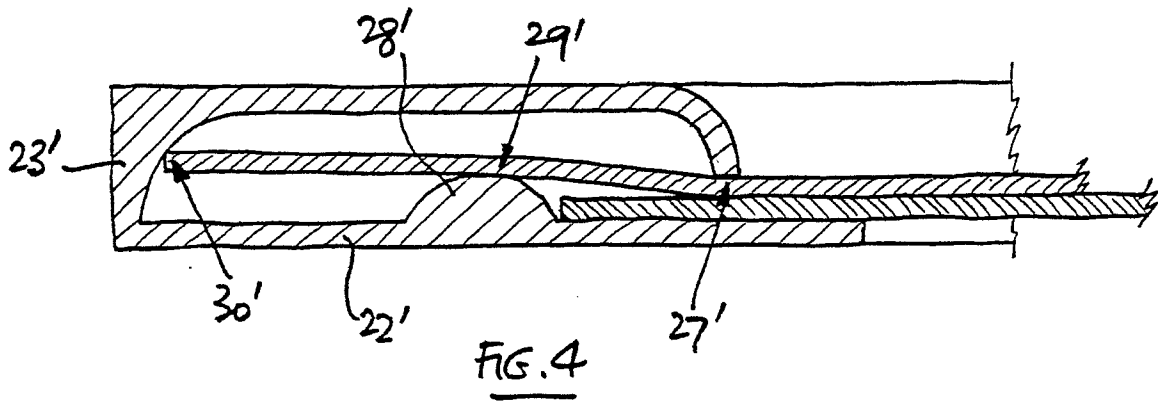
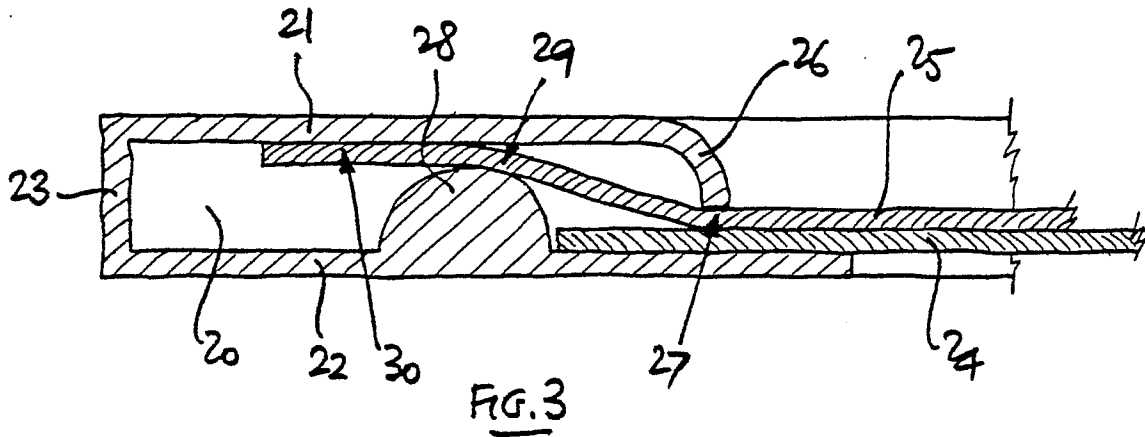


FIG. 6

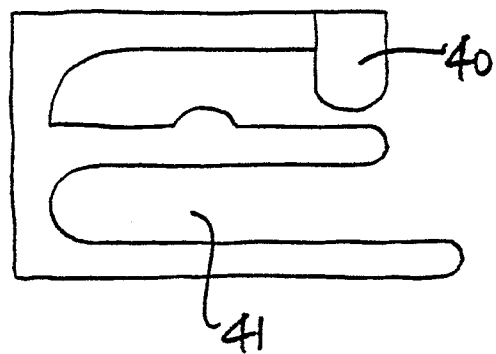


FIG. 7



FIG. 8

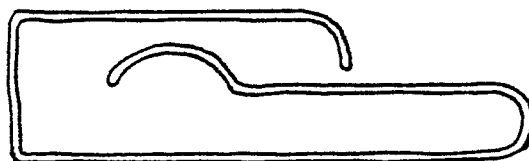


FIG. 9





EP 87 30 8935

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
X	US-A-3 060 606 (PEACH) * Figures 1,2 *	1	A 47 G 1/06
X	US-A-4 364 192 (LLOYD) * Figure 5 *	1	
A	US-A-1 919 003 (WIEZEL) * Figure 4 *	1-3	
A	FR-A-1 456 927 (ANGOSSE) * Abstract; figure 2 *	1-3	
A	GB-A-2 160 690 (JOHN MANIFOLD REPRODUCTIONS) * Claim 1 *	4,5	
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			A 47 G G 09 F B 42 F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 02-02-1988	Examiner BEUGELING G.L.H.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	