

EUROPEAN PATENT APPLICATION

Application number: **87117493.4**

Int. Cl.⁴ **G21K 4/00**

Date of filing: **09.04.85**

Priority: **06.04.84 JP 69583/84**
06.04.84 JP 69585/84
06.04.84 JP 69586/84
06.04.84 JP 69587/84
06.04.84 JP 69588/84
29.08.84 JP 180124/84
06.04.84 JP 69584/84

Date of publication of application:
12.10.88 Bulletin 88/41

Publication number of the earlier application in
accordance with Art.76 EPC: **0 159 613**

Designated Contracting States:
BE DE FR GB NL

Applicant: **FUJI PHOTO FILM CO., LTD.**
No. 210, Nakanuma Minami-Ashigara-shi
Kanagawa-ken(JP)


Inventor: **Tamura, Kaoru - c/o Fuji Photo Co.**
Ltd
No. 798, Miyanodai, Kaisei-Machi
Ashigara-kami-gun, Kanagawa(JP)
 Inventor: **Matsuda, Terumi - c/o Fuji Photo**
Film Co. Ltd.
No. 798, Miyanodai, Kaisei-machi
Ashigara-kami-gun, Kanagawa(JP)
 Inventor: **Torii, Shumpeita - c/o Fuji Photo**
Film Co. Ltd.
No. 798, Miyanodai, Kaisei-machi
Ashigara-kami-gun, Kanagawa(JP)

Representative: **Patentanwälte Grünecker,**
Kinkeldey, Stockmair & Partner
Maximilianstrasse 58
D-8000 München 22(DE)

Stimulable phosphor sheet.

The invention relates to a stimulable phosphor sheet comprising a support, a phosphor layer containing a stimulable phosphor and a binder, and a protective film superposed in this order, which is characterized in that at least both sides of the phosphor layer along the direction to be conveyed are retracted from the corresponding side edges of the support, and both of said side edges of the phosphor layer and support are protected by a polymer coating layer, a polymer film, or a solid material.

FIG. 1



STIMULABLE PHOSPHOR SHEET

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a stimuable phosphor sheet employable in a radiation image recording and reproducing method utilizing a stimuable phosphor.

Description of Prior Arts

For obtaining a radiation image, there has been conventionally employed a radiography utilizing a combination of a radiographic film having a sensitive silver salt material layer and an intensifying screen.

As a method replacing the above-mentioned conventional radiography, a radiation image recording and reproducing method utilizing a stimuable phosphor as described, for instance, in U.S. Patent No. 4,239,968, has been developed and paid much attention. The method involves steps of causing a stimuable phosphor to absorb a radiation having passed through an object or having radiated from an object; sequentially exciting (or scanning) the phosphor with an electromagnetic wave such as visible light or infrared rays (stimulating rays) to release the radiation energy stored in the phosphor as light emission (stimulated emission); photoelectrically detecting the emitted light to obtain electric signals; and reproducing the radiation image of the object as a visible image, numerals, symbols, etc. from the electric signals.

In the radiation image recording and reproducing method, a radiation image is obtainable with a sufficient amount of information by applying a radiation to the object at a considerably smaller dose, as compared with the conventional radiography. Accordingly, the radiation image recording and reproducing method is of great value, especially when the method is used for medical diagnosis.

In performing the radiation image recording and reproducing method, a stimuable phosphor is generally employed in the form of a stimuable phosphor sheet (also referred to as a radiation image storage panel, and generally in the form of a sheet of rectangle, square, etc.) which comprises a support and a phosphor layer provided thereon. The phosphor layer comprises a stimuable phosphor and a binder. Further, a protective film made of a transparent plastic film is provided on a surface of the phosphor layer to protect the phosphor layer from physical and chemical deterioration.

The stimuable phosphor sheet does not serve to finally record image information, but only stores the information temporarily to provide the image or the like on an independently prepared final recording medium as described above. Accordingly, the stimuable phosphor sheet can be repeatedly used and such repeated use brings about economical advantage.

The repeated use of the stimuable phosphor sheet is particularly advantageous, for instance, in the case that a radiation image information recording and reading device employing the stimuable phosphor sheet is mounted on a traveling station such as a radiographic apparatus-carrying car to conduct mass radiographic examination in various places. More in detail, it is inconvenient to carry a great number of stimuable phosphor sheets on a traveling station, and there is a limitation on the number of sheets capable of being carried on a car such as a radiographic apparatus-carrying car. Accordingly, it is practically useful that the stimuable phosphor sheets are mounted on a radiographic car under such conditions that the stimuable phosphor sheets are repeatedly used; radiation image information of an object is recorded on each stimuable phosphor sheet and read out to obtain image information as a signal; and the obtained signal is transferred to a recording medium having a great recording capacity such as a magnetic tape so as to repeatedly use the stimuable phosphor sheet in cycle. This means that radiation images of a number of objects can be obtained by the use of a small number of stimuable phosphor sheets. Further, the combination of the repeated uses of the stimuable phosphor sheets with a continuous radiographic process enables to perform rapid radiography in the mass radiographic examinations. This combination is of great value in practical use.

In the case of performing repeated uses of the stimuable phosphor sheets in cycle, after the radiation energy stored in the stimuable phosphor sheet is read out and aimed image information is obtained, the remaining energy in the sheet is released and erased in a manner as disclosed, for instance, in Japanese Patent Provisional Publications No. 56(1981)-11392 and 56(1981)-12599. By employing such manner, the stimuable phosphor sheet can be efficiently and repeatedly used in cycle.

Thus, the radiation image information recording and reading device, in one aspect, is desirably mounted on a traveling station such as a radiographic apparatus-carrying car in the form of a unit-built-in device which comprises an image recording means for exposing a stimuable phosphor

sheet to a radiation having passed through an object so as to record and store a radiation image in the stimuable phosphor sheet, a read-out means for reading out the radiation image stored in the stimuable phosphor sheet, an erasure means for releasing and erasing radiation energy remaining in the stimuable phosphor sheet for the next use of the stimuable phosphor sheet, and a conveyance means for moving the stimuable phosphor sheet in cycle to each of the above-mentioned means. The radiation image information recording and reading device having the above-mentioned constitution have various advantages not only in mounting in the traveling station such as a radiographic apparatus-carrying car but also in setting in hospitals, so that the above device is convenient in practical use.

The radiation image information recording and reading device utilizing the above-mentioned system of repeatedly and cyclically using the stimuable phosphor sheet is disclosed in Japanese Patent Application No. 58(1983)-66730 filed in the present applicant (assignee). In the device, the stimuable phosphor sheet is occasionally conveyed vertically or almost vertically for the purpose of making the device compact.

If a stimuable phosphor sheet has physical deterioration such as a scratch on a surface thereof (a phosphor layer-side surface of the sheet), the quality of image or the accuracy of image information provided by the phosphor sheet tends to decrease markedly. For this reason, it is necessary to select the means for conveying a stimuable phosphor sheet with such a careful consideration that the surface of the stimuable phosphor sheet is not damaged. From this viewpoint, as a means for conveying a stimuable phosphor sheet, a belt conveyor made of a soft sheet-material is generally employed. However, while the belt conveyor is suitable for conveying the stimuable phosphor sheet horizontally, it is unsuitable for conveying the stimuable phosphor sheet in the direction other than the horizontal direction, particularly in the vertical or almost vertical direction. More in detail, in the process for conveying a stimuable phosphor sheet vertically or almost vertically using a belt conveyor, it is necessary to arrange a pair of belt conveyors in such a manner that the belt conveyors are in face to face contact with each other so as to convey the stimuable phosphor sheet under the condition that the stimuable phosphor sheet is sandwiched between that pair of belt conveyors. However, said conveying device is complicated in structure, and it is difficult to make the device compact. Further, there are other problems such

that the surface of the stimuable phosphor sheet tends to suffer scratches when the rate of one belt conveyor is made different from that of the other, even if the difference therebetween is very small

SUMMARY OF THE INVENTION

The present invention provides a stimuable phosphor sheet preferably employable in the conveying method.

The stimuable phosphor sheet of the invention comprises, in one aspect, a support, a phosphor layer containing a stimuable phosphor and a binder, and a protective film superposed in this order, which is characterized in that at least both sides of the phosphor layer along the direction to be conveyed are retracted from the corresponding side edges of the support, and both of said sides of the phosphor layer and support are protected by a polymer coating layer or a polymer film.

The stimuable phosphor sheet of the invention comprises, in another aspect, comprises a support, a phosphor layer containing a stimuable phosphor and a binder, and a protective film superimposed in this order, which is characterized in that at least both sides of the phosphor layer along the direction to be conveyed are retracted from the corresponding side edges of the support, and both of said retracted sides of the phosphor layer are protected by a solid material fixedly placed in the area formed by the retraction of the side of phosphor layer.

The stimuable phosphor sheet of the invention, in a further aspect, comprises a substrate, a support, a phosphor layer containing a stimuable phosphor and a binder, and a protective film superposed in this order, which is characterized in that at least both sides of the phosphor layer and support along the direction to be conveyed are retracted from the corresponding side edges of the substrate, and both of said sides of the sheet are protected by a polymer coating layer or a polymer film.

The stimuable phosphor sheet of the invention, in a still further aspect, comprises a substrate, a support, a phosphor layer containing a stimuable phosphor and a binder, and a protective film superposed in this order, which is characterized in that at least both sides of the phosphor layer and support along the direction to be conveyed are retracted from the corresponding sides edges of the substrate, and both of said retracted sides of the phosphor layer and support are protected by a solid material fixedly placed in the area formed by the retraction of the side of phosphor layer.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic view illustrating the constitution of a conventional stimuable phosphor sheet, and

Fig. 2 is a schematic view illustrating the constitution of the device preferably employed in the method of conveying a stimuable phosphor sheet according to the present invention.

Fig. 3-(1) is a schematic view illustrating the constitution of another device preferably employed in the conveying method. Fig. 3-(2) is a side view of the device of Fig. 3-(1) seen along the indicated arrow A.

Figs. 4a, 4b and 4c are schematic views illustrating the constitutions of embodiments of the stimuable phosphor sheet.

Figs. 5a and 5b are schematic views illustrating the constitutions of embodiments of the stimuable phosphor sheet.

Figs. 6a and 6b are schematic views illustrating the constitutions of embodiments of the stimuable phosphor sheet.

Figs. 7a and 7b are schematic views illustrating the constitutions of embodiments of the stimuable phosphor sheet.

Figs. 8a, 8b and 8c are schematic views illustrating the constitutions of embodiments of the stimuable phosphor sheet.

DETAILED DESCRIPTION OF THE INVENTION

The present invention will be described more in detail hereinafter referring to the accompanying drawings.

The general constitution of the conventional stimuable phosphor sheet which is an object of the conveyance in the present invention is well known. The stimuable phosphor sheet is generally employed, as described above, in the form of a sheet comprising a support and a phosphor layer provided thereon which comprises a stimuable phosphor and a binder. On the surface of the phosphor layer is provided a protective film of a transparent plastic material, because the phosphor layer is easily affected by physical shocks.

Fig. 1 schematically illustrates the constitution of the conventional stimuable phosphor sheet.

In Fig. 1, the stimuable phosphor sheet comprises a support 11, a phosphor layer 12 and a protective film 13. Examples of the support material include plastic films such as films of cellulose acetate and polyethylene terephthalate, metal sheets such as aluminum foil, ordinary papers, baryta paper, and resin-coated papers. On the surface of the support (phosphor layer-side surface of the support) may be provided other functional lay-

ers such as an adhesive layer, a light-reflecting layer and a light-absorbing layer.

The phosphor layer essentially comprises stimuable phosphor particles dispersed in a binder. A great number of stimuable phosphors are known. The stimuable phosphor employed in the invention can be selected from the known stimuable phosphors. Examples of the known stimuable phosphor include a divalent europium activated alkaline earth metal fluorohalide phosphor ($M^{II}FX:Eu^{2+}$, in which M^{II} is at least one alkaline earth metal selected from the group consisting of Mg, Ca and Ba; and X is at least one halogen selected from the group consisting of Cl, Br, and I); an europium and samarium activated strontium sulfide phosphide ($SrS:Eu,Sm$); an europium and samarium activated lanthanum oxysulfide phosphor ($La_2O_2S:Eu,Sm$); an europium activated barium aluminate phosphor ($BaO \cdot Al_2O_3:Eu$); an europium activated alkaline earth metal silicate phosphor ($M^{2+}O \cdot SiO_2:Eu$, in which M^{2+} is at least one alkaline earth metal selected from the group consisting of Mg, Ca and Ba); a cerium activated rare earth oxyhalide phosphor ($LnOX:Ce$, in which Ln is at least one rare earth element selected from the group consisting of La, Y, Gd and Lu; and X is at least one halogen selected from the group consisting of Cl, Br and I) and the like.

A transparent protective film is then provided on the surface of the phosphor layer to physically and chemically protect the phosphor layer. Examples of the material employable for the preparation of the transparent protective film include cellulose acetate, polymethyl methacrylate, polyethylene terephthalate and polyethylene. The transparent protective film generally has a thickness within the range of approx. 0.1 - 20 μm .

The stimuable phosphor sheet can be colored with an appropriate colorant as described in U.S. Patent No. 4,394,581 and U.S. Patent Application No. 326,642. Further, white powder may be dispersed in the phosphor layer as described in U.S. Patent No. 4,350,893.

Figs. 2 and 3 [(1) and (2)] are schematic views of the conveying device which are preferably employed in the method of conveying a stimuable phosphor sheet according to the present invention. The method of conveying a stimuable phosphor sheet of the invention is described hereinafter, by referring to an embodiment employing the conveying devices shown in Figs. 2 and 3.

The conveying device preferably employed in the method of conveying a stimuable phosphor sheet according to the invention is a device basically comprising guiding members 22 and 23 (22a, 23a, 22b, 23b, ...) [32 and 33 (32a, 33a, 32b, 33b, ...)] for keeping both sides of a stimuable phosphor sheet 21[31], and two or more driving

members 24 (24a, 24b, 24c, ...) [34 (34a, 34b, 34c, ...)] arranged along the conveying direction (direction along the indicated arrow) for providing a driving force on both surfaces of the stimuable phosphor sheet 21[31], in which the distance between said two driving members which adjoin each other along the conveying direction (e.g., 24b and 24c) [e.g., 34b and 34c] is smaller than the length of the stimuable phosphor sheet measured in the conveying direction.

The guiding members of the device keep the stimuable phosphor sheet at the both sides thereof. The guiding members prevent the sheet from bending in the vertical direction against the surface plane of the sheet (namely, flexure) and from moving laterally. The guiding member is, for instance, U-shaped in the section. Accordingly, the guiding member is not necessarily in contact with the stimuable phosphor sheet to keep it. As is evident from Figs. 2 and 3, between the two driving members 24[34], the surface of the sheet on which the radiation image is stored and recorded is kept being from contact with members of the device, since the stimuable phosphor sheet 21 is kept by the guiding members 22 and 23[32 and 33] at both sides of the sheet which do not participate in storing and recording the radiation image. Accordingly, the surface of the sheet is hardly damaged. The shape of the guiding member is not restricted to one as shown in Figs. 2 and 3, and any shape can be optionally used, as far as the guiding member has the above-described functions. Further, there is no specific limitation on the material of the guiding member. The guiding member is not necessarily employed in the form of individually separated member as shown in Figs. 2 and 3, and a united guiding member, for instance, a member in which one guiding member 22[32] is combined with another guiding member 23[33] on the back surface-side of the stimuable phosphor sheet 21-[31] (support side-surface of the sheet) in Figs. 2 and 3, can be employed with appropriate selection of the driving members as described hereinafter.

The driving members of the conveying device apply a driving force to the surface(s) of the stimuable phosphor sheet, and make it possible to convey (i.e., move) the stimuable phosphor sheet in a given direction. The driving members comprises at least two members, and the distance (l) between the two driving members which are adjacent to each other along the conveying direction is smaller than the length (m) of the stimuable phosphor sheet in the conveying direction. Two or more driving members having the above-described constitution can convey the stimuable phosphor sheet with little error.

Representative examples of the driving member for providing a driving force on the surfaces of

the stimuable phosphor sheet are a driving member comprising a pair of rollers as shown in Figs. 2 and 3. The length of the roller is preferably as almost the same as width of the stimuable phosphor sheet (length measured in the lateral direction, but the length of the roller is not restricted to the above-mentioned length. The roller may comprise a plurality of short rollers. The driving member may not consist of a pair of rollers, and for example, a driving member comprising a driving roller and a fixed supporting member which is associated with the roller is employable. Further, other driving members than the above-mentioned rollers can be employed in the invention.

The surface of the driving member, especially the surface thereof which are to be in contact with the surface of the stimuable phosphor sheet, are preferably formed by a soft and elastic material such as rubber. By employing a driving member having a surface of such material, the surface of the stimuable phosphor sheet can be protected from physical shock so as not to be damaged.

The driving force is generally supplied to the driving members 24 (24a, 24b, 24c, ...) [24 (34a, 34b, 34c, ...)] from a means 26[37] such as a motor through a driving power-transmitting means 25[36] such as a chain and a belt. This driving force is then supplied to the stimuable phosphor sheet 21-[31] under rotation via surfaces thereof.

The guiding member and driving members are supported by an appropriate means such as a fixing means or a supporting means so as to fulfill each function in the area.

In the method of conveying a stimuable phosphor sheet according to the present invention, the stimuable phosphor sheet can be easily and reliably conveyed in directions other than horizontal direction, particularly in the vertical or almost vertical direction (upward and/or downward conveying), without damaging the surfaces of the sheet. The vertical or almost vertical conveyance giving no damage to the surface of stimuable phosphor sheet has been hardly attained in the conventional method using a belt conveyor. The method of conveying the stimuable phosphor sheet of the invention can be effectively used not only in the conveyance of a stimuable phosphor sheet in the vertical or almost vertical direction but also in the conveyance with alteration of the direction (e.g. L-turn and U-turn). Further, the method can be effectively employed in the conveyance of a stimuable phosphor sheet in the horizontal direction. A belt conveyor is conventionally used in the conveyance thereof in such direction. Furthermore, the method can be employed in combination with a conventional method using a belt conveyor in conveying the stimuable phosphor sheet in a radiation image information recording and reading device.

The device illustrated in the Fig. 3 is further provided with a guiding means 35 (35a, 35b, 35c, ...) for guiding the front end of the stimuable phosphor sheet. The guiding means 35 is arranged in the vicinity of the driving means 34, for instance, just in front of the driving means 34. The guiding means 35 serves to smoothly engage the coming stimuable phosphor sheet with the driving means. Although the stimuable phosphor sheet essentially comprising a support and a phosphor layer is considerably rigid, flexure may occasionally happen on most of the conventional stimuable phosphor sheet used in a relatively thin plate having a width of approx. 30 -60 cm at the front end. If flexure takes place at the front end of the stimuable phosphor sheet, the front end sometimes suffers damage, or in the worst case, the conveying action is stopped by unsuitable engagement between the sheet and the driving means. The guiding means 35 for guiding the front end of the stimuable phosphor sheet is very effective to enable smooth engagement between the stimuable phosphor sheet and the driving means.

There is no specific limitation on the shape, size, and location of the front end-guiding means, as far as it serves to enable the smooth engagement. Otherwise, the front end-guiding means can be in the form of a roller arranged in the vicinity of the driving means. The front end-guiding means can be arranged merely on one side of the conveyor. The front end-guiding means is generally made of plastic material, metal, or a composite material of plastic material and metal.

As described above, the method is suitable for conveying a stimuable phosphor sheet in the vertical or almost vertical direction. Accordingly, from the viewpoint of making the device compact, the method can be preferably and practically employed in the radiation image information recording and reading device in which the stimuable phosphor sheet is required to be conveyed in such direction so as to be repeatedly used in cycle.

Both sides of the stimuable phosphor sheet to be employed in the conveying method are preferably formed or processed to have enhanced protection against the physical (mechanical) shock given to these sides by the side-guiding means in the course of the conveying stage, as well as enhanced protection against chemical deterioration.

For instance, at least both sides of the phosphor layer along the direction to be conveyed are retracted from the corresponding side edges of the support, as illustrated in Fig. 4a in which the support, phosphor layer and protective layer are indicated by 41, 42 and 43, respectively. Alternatively, at least both sides of the phosphor layer and support are protected by a polymer coating layer, as illustrated in Fig. 4b in which the support, phos-

phor layer, protective layer and polymer coating layer are indicated by 41, 42, 43 and 44, respectively. Alternatively, at least both sides of the phosphor layer and support are protected by a polymer film, as illustrated in Fig. 4c in which the support, phosphor layer, protective layer and polymer film are indicated by 41, 42, 43 and 45, respectively. The polymer film 45 is fixed to the side by an adhesive layer 46.

In other aspects, at least both sides of the phosphor layer along the direction to be conveyed are retracted from the corresponding side edges of the support, and both of said sides of the phosphor layer and support are protected by a polymer coating layer, as illustrated in Fig. 5a in which the support, phosphor layer, protective layer and polymer coating layer are indicated by 51, 52, 53 and 54, respectively. The side edges on the bottom surface of the support can be chamfered, as illustrated in Fig. 5b.

In other aspects, at least both sides of the phosphor layer along the direction to be conveyed are retracted from the corresponding side edges of the support, and both of said sides of the phosphor layer and support are protected by a polymer film, as illustrated in Fig. 6a in which the support, phosphor layer, protective layer and polymer film are indicated by 61, 62, 63 and 65, respectively. The polymer film 65 is fixed to the side by an adhesive layer 64. The side edges on the bottom surface of the support can be chamfered, as illustrated in Fig. 6b.

In another aspect, at least both sides of the phosphor layer along the direction to be conveyed are retracted from the corresponding side edges of the support, and both of said retracted sides of the phosphor layer are protected by a solid material fixedly placed in the area formed by the retraction of the phosphor layer, as illustrated in Fig. 7a in which the support, phosphor layer, protective layer and solid material are indicated by 71, 72, 73 and 74, respectively. The side edges on the bottom surface of the support can be chamfered, as illustrated in Fig. 7b.

In another aspect, a stimuable phosphor sheet may comprise a substrate, a support, a phosphor layer and a protective film superposed in this order, in which at least both sides of the phosphor layer and support along the direction to be conveyed are retracted from the corresponding side edges of the substrate, and both of said sides of the sheet are protected by a polymer coating layer. This embodiment is illustrated in Fig. 8a, in which the substrate, support, phosphor layer, protective layer and polymer coating layer are indicated by 81, 82, 83, 84, and 85, respectively. The protection can be made by means of an adhesive layer 86 and a polymer film 87, as illustrated in Fig. 8b. The

protection can be made by means of a solid material 88, as illustrated in Fig. 8c.

There is no specific limitation on the material of the substrate. For instance, the substrate can be produced from any material employable for the production of the support.

The above-described protections can be given to the front and/or rear ends of the stimuable phosphor sheets, to protect the phosphor layer against physical shocks, as well as to keep the phosphor layer from chemical deterioration. The front and/or rear ends can be chamfered on the bottom surface.

In the above-described embodiments, the sides of the protruded support or substrate can effectively keep the phosphor layer from physical shock, friction, and the like applied to the sides of the stimuable phosphor sheet.

The polymer coating layer can be provided to the side of the stimuable phosphor sheet, for instance, by applying a solution of a film-forming polymer in a solvent to the side and then drying to remove the solvent, or applying reactive material(s) to form a polymer material to the side and causing the reaction to form in-situ the polymer coating film. There is no specific limitation on the film-forming polymer employed in the above process. For instance, a polyurethane-acrylic resin and a mixture of an acrylic resin and vinyl chloride-vinyl acetate copolymer (which is discussed in Japanese Patent Provisional Publication 58(1983)-68746) can be used.

The polymer film can be produced from the same material as that employed for the production of the protective material. For instance, cellulose acetate, polymethyl methacrylate, polyethylene terephthalate, and polyethylene can be mentioned. The polymer film employed for this purpose may be transparent or not. The film can be fixed to the side, for instance, by an adhesive or another sticky material.

There is no specific limitation on the solid material to be arranged adjacent to the side of the phosphor layer. For instance, a solid polymer material and a metal can be employed. The solid polymer material can be that mentioned hereinbefore as the material for production of the surface protective film or a polymer film for protection of the side. The solid material can be provided adjacent to the side of the phosphor layer by placing it. Otherwise, a polymer material solution can be introduced in the area and the solid polymer can be formed in-situ after removal of the solvent. Otherwise, a solid polymer material can be formed in-situ by a reaction of reactive compound(s). The solid material can be fixed to the side of the phosphor layer and/or the upper surface of the support or substrate.

Claims

1. A stimuable phosphor sheet comprising a support, a phosphor layer containing a stimuable phosphor and a binder, and a protective film superposed in this order, which is characterized in that at least both sides of the phosphor layer along the direction to be conveyed are retracted from the corresponding side edges of the support, and both of said sides of the phosphor layer and support are protected by a polymer coating layer or a polymer film.

2. The stimuable phosphor sheet as claimed in claim 1, wherein at least one of the front and rear ends is protected by a polymer coating layer or a polymer film.

3. A stimuable phosphor sheet comprising a support, a phosphor layer containing a stimuable phosphor and a binder, and a protective film superposed in this order, which is characterized in that at least both sides of the phosphor layer along the direction to be conveyed are retracted from the corresponding side edges of the support, and both of said retracted sides of the phosphor layer are protected by a solid material fixedly placed in the area formed by the retraction of the phosphor layer.

4. The stimuable phosphor sheet as claimed in claim 3, wherein the solid material is a polymer material.

5. The stimuable phosphor sheet as claimed in claim 3, wherein at least one of the front and rear ends is protected by a polymer coating layer or a polymer film.

6. A stimuable phosphor sheet comprising a substrate, a support, a phosphor layer containing a stimuable phosphor and a binder, and a protective film superposed in this order, which is characterized in that at least both sides of the phosphor layer and support along the direction to be conveyed are retracted from the corresponding side edges of the substrate, and both of said sides of the sheet are protected by a polymer coating layer or a polymer film.

7. A stimuable phosphor sheet comprising a substrate, a support, a phosphor layer containing a stimuable phosphor and a binder, and a protective film superposed in this order, which is characterized in that at least both sides of the phosphor layer and support along the direction to be conveyed are retracted from the corresponding side edges of the substrate, and both of said retracted sides of the phosphor layer and support are protected by a solid material fixedly placed in the area formed by the retraction of the phosphor layer.

8. The stimuable phosphor sheet as claimed in claim 7, wherein the solid material is a polymer material.

FIG. 1




FIG. 2

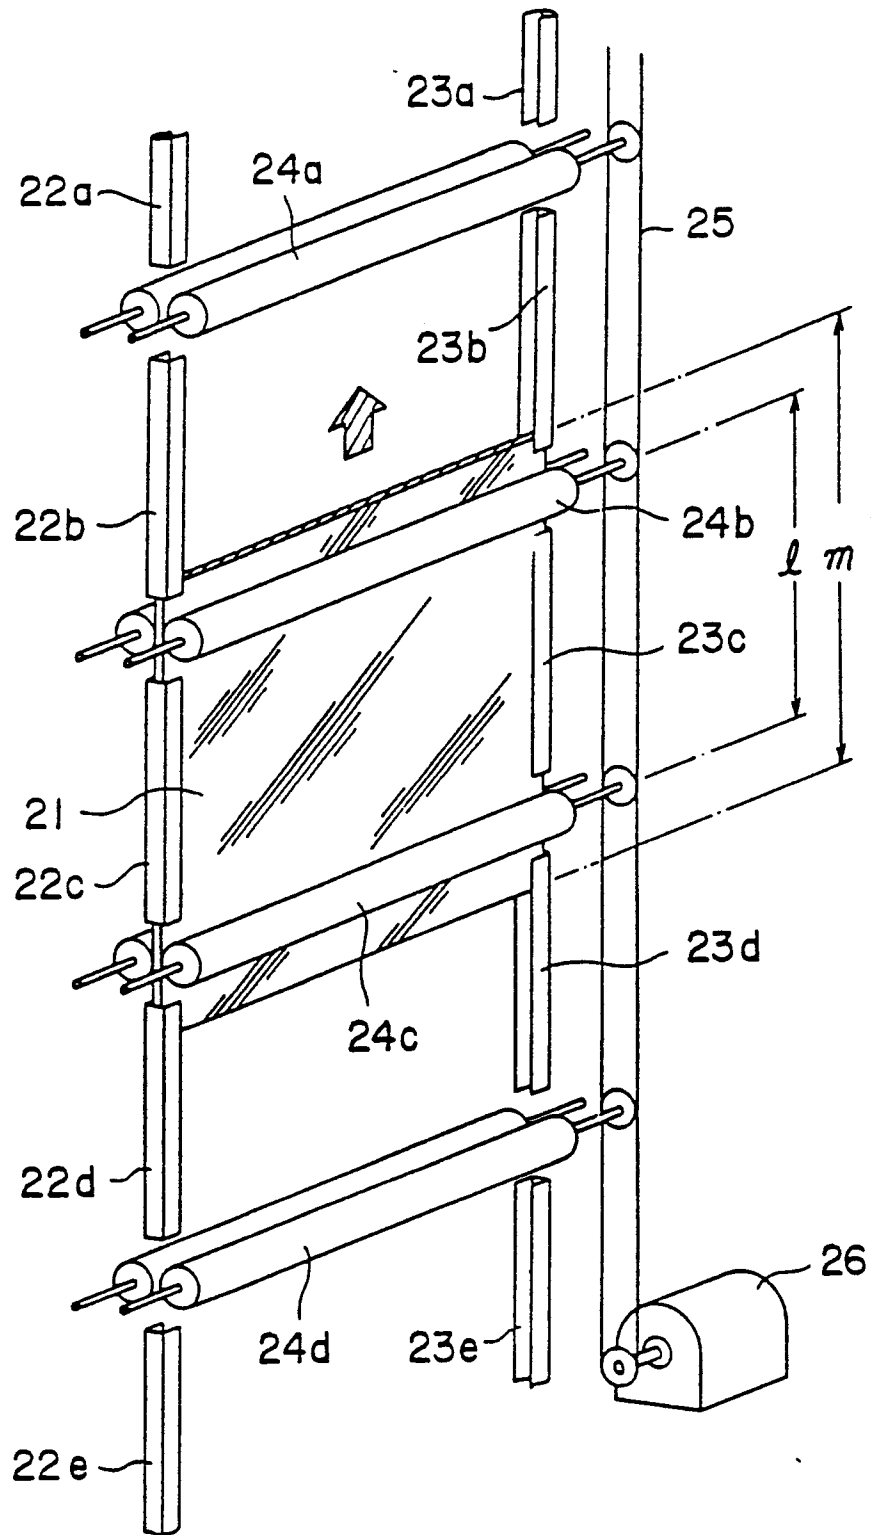


FIG. 3

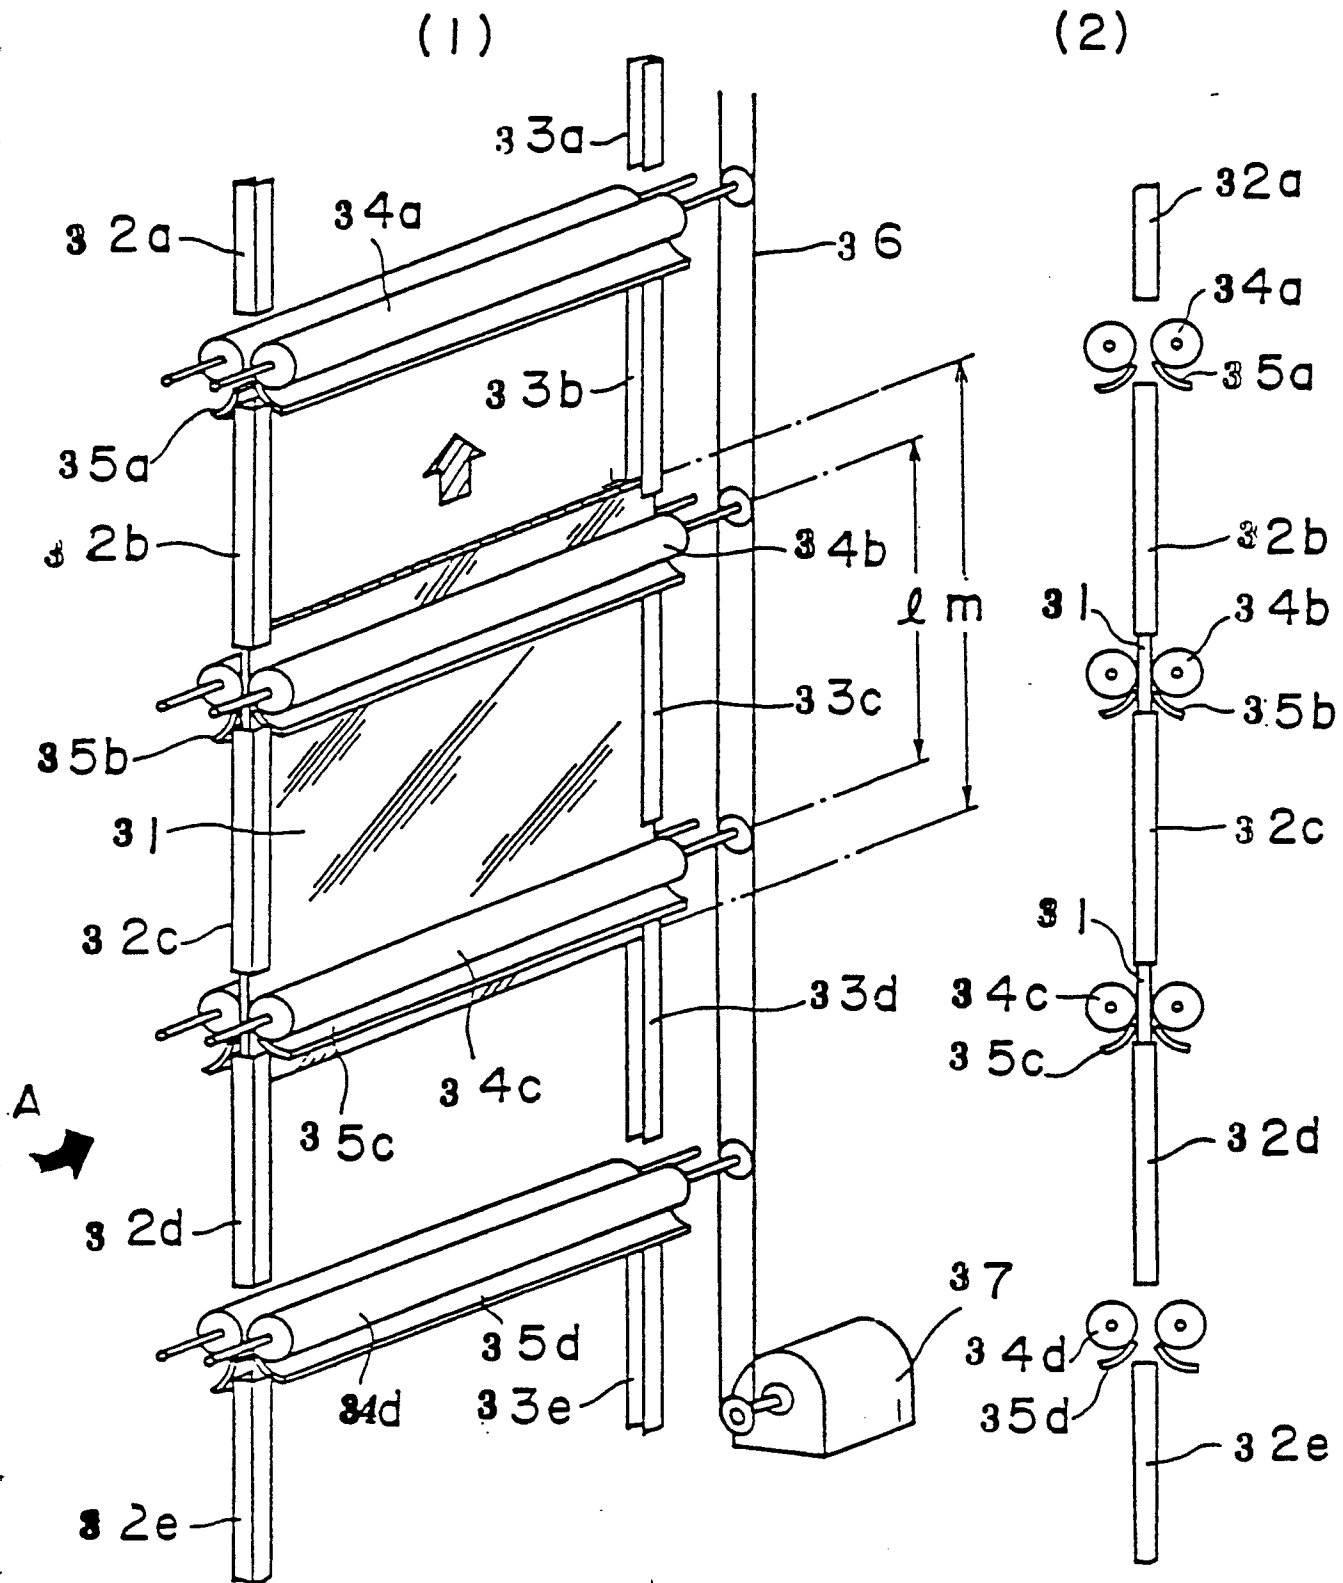


FIG. 4 a

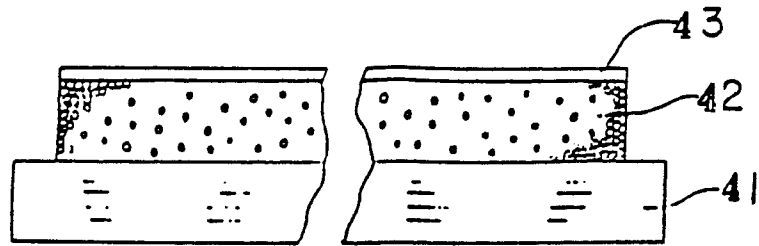


FIG. 4 b

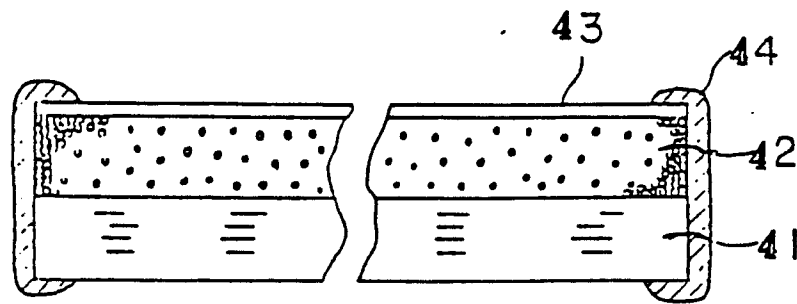


FIG. 4 c

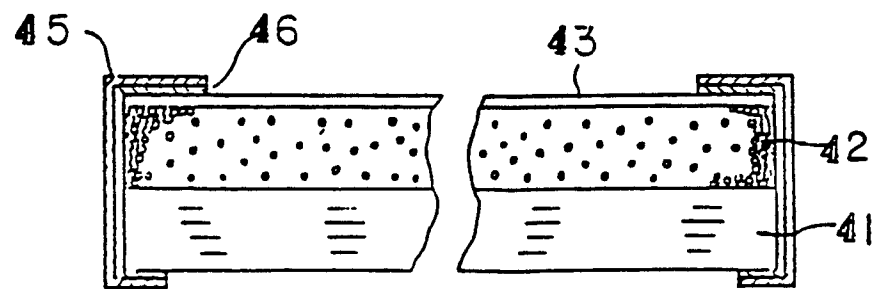


FIG. 5 a

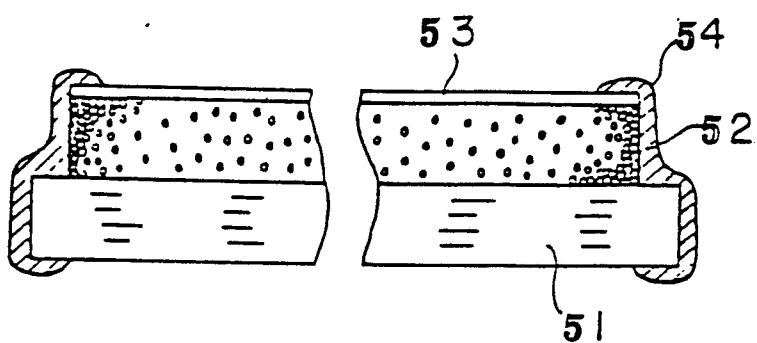


FIG. 5 b

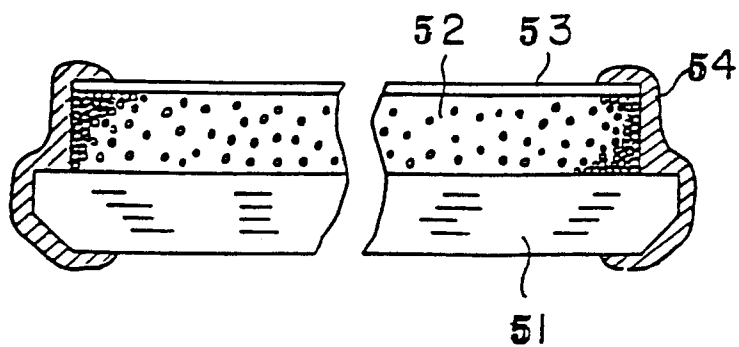


FIG. 6 a

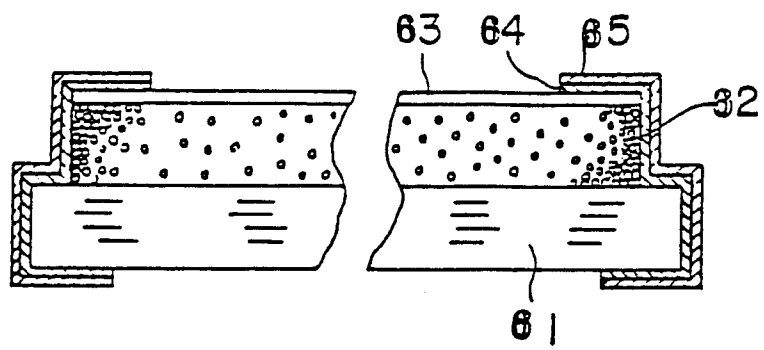


FIG. 6 b

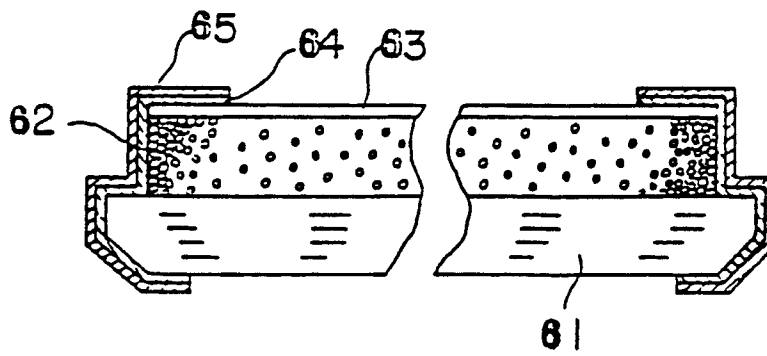


FIG. 7 a

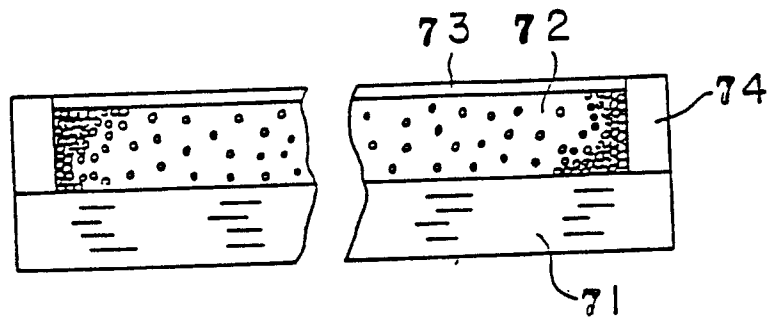


FIG. 7 b

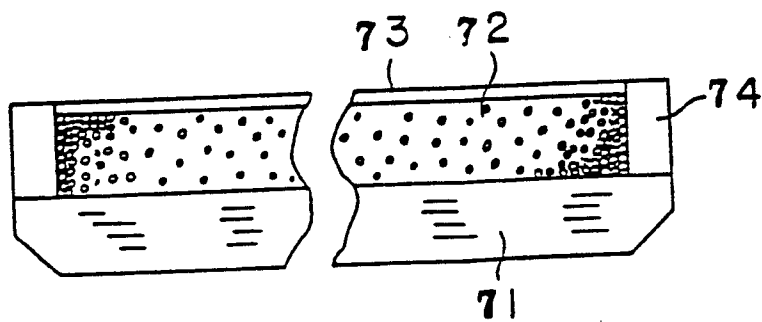


FIG. 8 a

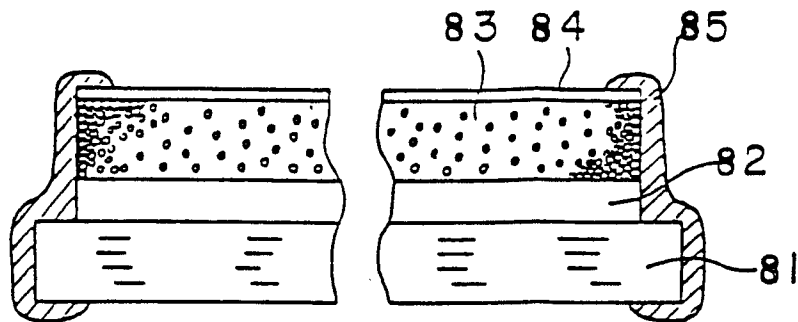


FIG. 8 b


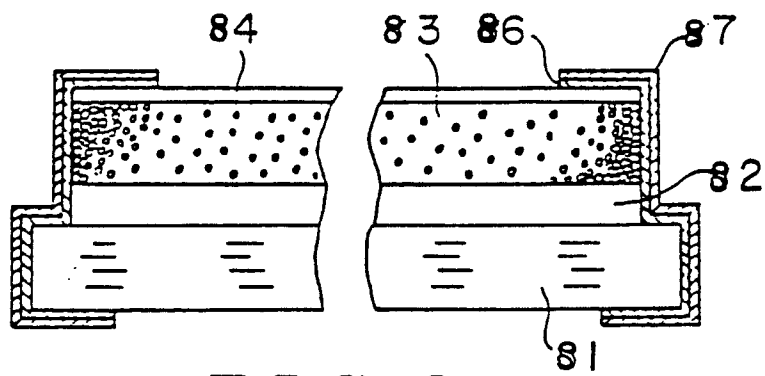


FIG. 8 c



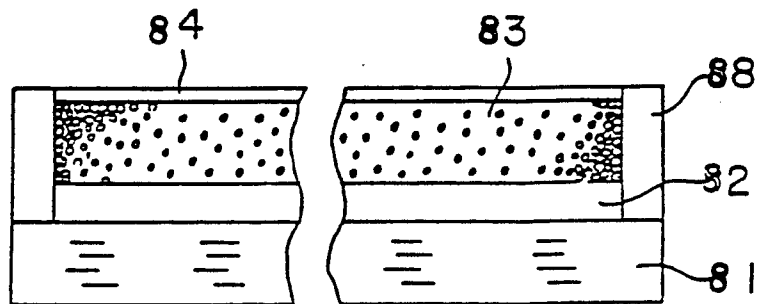

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 87 11 7493

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
X,E	EP-A-0 158 959 (FUJI PHOTO FILM CO., LTD) * Claims 1-10 * ---	1-8	G 21 K 4/00 -
X,E	US-A-4 684 592 (FUJI PHOTO FILM CO., LTD) * Claims 1-10 * ---	1-8	
X	FR-A-2 266 901 (IMAGEX) * Claims 1-17 * ---	1-8	
X	EP-A-0 095 188 (FUJI PHOTO FILM CO., LTD) * Claims 1-9 * -----	1-8	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
			G 21 K 4/00 -
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28-07-1988	Examiner DROUOT M.C.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			