

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 303 957 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **25.03.92** (51) Int. Cl.⁵: **C22C 19/05**

(21) Application number: **88112984.5**

(22) Date of filing: **10.08.88**

(54) **Corrosion resisting alloy and corrosion resisting member.**

(30) Priority: **11.08.87 JP 200577/87**
19.01.88 JP 9233/88

(43) Date of publication of application:
22.02.89 Bulletin 89/08

(45) Publication of the grant of the patent:
25.03.92 Bulletin 92/13

(84) Designated Contracting States:
DE FR GB SE

(56) References cited:
GB-A- 451 601 GB-A- 459 848
GB-A- 1 383 995 GB-A- 1 470 911
GB-A- 1 532 851 SU-A- 450 844
US-A- 2 809 139

(73) Proprietor: **MITSUBISHI MATERIALS CORPO-
RATION**
6-1, Otemachi 1-chome
Chiyoda-ku Tokyo(JP)

(72) Inventor: **Takizawa, Yoshio**
160-4, Sasayama
Hasuda-City Saitama(JP)
Inventor: **Noguchi, Masatoshi**
279, Niitsutsumi
Ohmiya-city Saitama(JP)
Inventor: **Sekine, Ichiro**
11-103, Parktown Wakamiya 1-8, Wakamiya
Okegawa-city Saitama(JP)

(74) Representative: **Türk, Gille, Hrabal**
Brucknerstrasse 20
W-4000 Düsseldorf 13(DE)

EP 0 303 957 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The present invention relates to a corrosion resisting Ni-base alloy and a member thereof having excellent corrosion resistance and excellent bending workability. The alloy member is suitable for constituting a dipping equipment represented by a dipping bath, a dipping jig such as a bucket, an agitating instrument or the like within the dipping bath, and a pipe, a valve, a pump component or the like.

The inventors of this application have found that, because of the corrosion resistance and the excellent workability, the alloy according to the invention is not limited merely to the dipping equipment, but reveals remarkable advantages in application also to, for example, an electrode of an electrolytic polishing apparatus or other electrodes exposed to corrosion atmosphere. The inventors also recognize that the alloy according to the invention is not limited to the above applications, but is epoch-making new one having both corrosion resistance and workability.

Corrosion resisting alloys are known, for example, from U.S. Patent No. 2,777,766 (Hastelloy G), U.S. Patent No. 3,203,792 (Hastelloy C-276), U.S. Patent No. 3,160,500 (Inconel 625), U.S. Patent No. 3,573,901 (Inconel 690) and the like. However, any of these alloys are not sufficient in corrosion resistance. In view of these circumstances, the inventors of this application have developed an alloy improved in corrosion resistance, as disclosed in Japanese Patent Application Laid-Open No. 58-17247. However, the alloy developed by the inventors cannot be said to be superior in plastic workability, and is limited in application to cast material. Further, G.B. Patent No. 1,281,597 has proposed a technique of improvement in mechanical strength of a corrosion resisting alloy formed of a Ni-base alloy high in Cr, exposed to high temperature. The present invention can be said to be a further improvement in a mechanical characteristic of the alloy disclosed in the G.B. patent.

The inventors of this application have developed the alloy improved in corrosion resistance in Japanese Patent Application Laid-Open No. 58-17247. However, uses of the developed alloy are limited only to cast component parts. Accordingly, a conventional corrosion resisting alloy, which is insufficient in corrosion resistance, but is excellent in plastic workability, in particular, in bending workability, has been used for a member for which bending working is required at manufacturing of the member, such as, for example, a dipping equipment represented by a dipping bath, a dipping jig such as a bucket, an agitating instrument or the like within the dipping equipment, and a pipe, a valve, a pump component or the like, as well as an electrode of, for example, an electrolytic polishing apparatus exposed to corrosion atmosphere.

Subject of the present invention is a corrosion resisting Ni-base alloy containing 43 to 47 wt% Cr having a metallic structure in which an alpha phase of a Cr solid solution is at equal to or less than 10 %, 0.1 to 2 wt% of at least one of Mo and W, 0 to 2 wt% Cu, 0 to 3 wt% Zr, 0 to 3 wt% Nb, 0 to 3 wt% Ta, 0 to 3 wt% Hf, 0 to 0.01 wt% Ca, 0 to 0.01 wt% of Y and/or other rare-earth elements, 0 to 0.05 wt% C, and 0 to 0.04 wt% N, balance Ni apart from impurities.

Further embodiments of the invention are defined in the claims 2-17.

The inventors of this application have perceived the fact that when the content of the Cr having a metallic structure in which an alpha phase of a Cr solid solution as at equal or less than 10%, is brought to 43 to 47 wt%, a Ni-Cr alloy fundamentally maintains a predetermined corrosion resistance while damages such as cracking or the like at working or processing are difficult to occur. Further, said alloy makes it possible to secure the corrosion resistance and the plastic workability at a high level. In addition thereto, when a solid soluble range of one or both of Mo and W is 0.1 to 2 wt%, corrosion resistance and plastic workability remarkably coexist within the range.

Cu, together with Cr, Mo and W, has a function of improving corrosion resistance of the alloy. However, the content of Cu exceeding 2% does not reveal a further improvement in effect. Accordingly, the content of Cu is determined to 2% or less.

Further, the inventors of this application have found that double fusion by the use of a vacuum fusion method and an electroslag fusion method makes it possible to bring contents of respective C and N elements serving as unavoidable impurities, to a value equal to or less than 0.05 wt% for C and a value equal to or less than 0.04 wt% for N. In particular, damages of a member represented by "cracking" at working high in degree of processing can remarkably be improved.

Furthermore, Cu, Zr, Nb, Ta and Hf have conventionally been added by 1 to 3% by volume as principal elements, for the purposes of improving corrosion resistance for Cu and workability for Zr, Nb, Ta and Hf. In this invention, however, C is brought to a value equal to or less than 0.01 wt% and N is brought to a value equal to or less than 0.01 wt%, whereby excellent corrosion resistance and plastic workability can be obtained without addition of the principal elements referred to above.

It has also been known that Y and other rare-earth elements improve the workability of the alloy. In this invention, however, a value equal to or above 0.01 wt% has not revealed further advantages or effects.

Ca has advantageous in deoxidation and desulfurization at dissolution and manufacturing of the alloy. However, if the content of Ca exceeds 0.01 wt%, the alloy is embrittled, so that damages tend to occur in the member after having been worked or processed.

Additionally, other than the elements mentioned above, the Ni-Cr alloy according to the invention contains, as unavoidable impurities, 0.3 wt% or less Fe, 0.3 wt% or less Mn, 0.3 wt% or less Ti, 0.3 wt% Al and 0.05 wt% or less Mg.

Figs. 1a and 1b are schematic cross-sectional views showing alloy plates which are subjected to bending tests in accordance with JIS;

Fig. 1c is schematic cross-sectional view showing alloy plate which is subjected to an additional bending test performed after the bending test as shown Figs. 1a and 1b;

Fig. 2 is a perspective view of a dipping jig for a dipping equipment, which is a first example formed of an alloy according to an embodiment of the invention;

Fig. 3 is a perspective view of a bucket for the dipping equipment, which is a second element example formed of the alloy;

Fig. 4a is a diagrammatic vertical cross-sectional view of an agitator having incorporated therein an agitating propeller which is a fourth example formed of the alloy;

Fig. 4b is a view similar to Fig. 4a, but showing another aspect of the agitator having incorporated therein the agitating propeller;

Fig. 5a is a perspective view of the electrode formed by the clad member;

Fig. 5b is a view similar to Fig. 5a, but showing another aspect of the electrode formed by the clad member; and

Figs. 6 to 9 are photomicrographs of cross-sections of alloy plates of the present invention, respectively.

Various examples of the alloy according to the invention will be described below.

[Examples]

Firstly, molten metals of the alloy having a required compositions were melted by using a high-frequency vacuum furnace, and cast in dies to form ingot of 60 mm in diameter and 200 mm in length. Subsequently, the ingots were melted again by using device for melting electroslog, and each ingot of 100 mm in diameter having compositions shown in Table 1 was prepared. Each ingot was held at the temperature from 1150 to 1250°C for 10 hours to be homogenized and then subjected to hot casting and hot rolling at a temperature suitable for starting the hot operations within the range of the above-identified temperature to form a hot rolling plate of 4 mm in thickness. This plate was held at the temperature from 1100 to 1200°C for 30 minutes to be homogenized and then subjected to cool rolling to form cool rolling plate of 2 mm in thickness. This plate was held at the latter condition to be homogenized, and thereby manufacturing alloy plates 1 to 55 of the present invention, and comparative alloy plates 56 to 67.

Note that each of the comparative alloy plates Run no. 56 to 67 had a composition in which the content (represented by * in Table 1) of any of the components falls outside the range of the present invention.

Metallic structures of the alloy plates Run no. 2, 8, 10 and 55 are shown in Figs. 6 to 9, respectively. Each of area ratios of the alpha phase of the Cr solid solution of the alloy plates as shown in Figs. 6 to 9 was measured by instrument for image analysis, that may be sold by Leitz company in the name of "TAS PLUS". The results are shown as follows:

	Content of Cr	Area Ratio of Alpha Phase
Alloy No. 2	43%	1%
Alloy No. 8	45.6%	1 to 1.3%
Alloy No. 10	46.5%	8%

As seen the results, each of the area ratios of the alpha phase of the Cr solid solution is restrained to a value equal to or less than 10% when the content of Cr of the alloy plate is at equal to or less than 47%.

Subsequently, as for the alloy plates Run no 2 to 52 of the present invention and the comparative alloy plates Run no. 56 to 67, their extensions of a tensile test at a room temperature were measured to evaluate their formabilities, especially bending properties. Also, the plates were subjected to a bending test in accordance with JIS or Japanese Industrial Standard, bending them 180° to bring one inner face of each bending plate into contact with the other inner face and thereby detecting whether cracks appear or not on the bent portion of the plates. Then, the plates having no cracks after the bending test were subjected to an additional bending test, by which the plates were bent in the contrary direction to the former bending test to

detect whether cracks appear or not on the bent portion.

According to JIS, the former bending test is prescribed as a test that the alloy plate 1 shown in Fig. 1 (a) is bent as shown in Fig. 1 (b) to detect whether cracks appear or not on the bent portion. Also, the latter bending test is prescribed as a severe or hard test that the alloy plate 1 bent by the former bending test is furthermore bent in a direction which is contrary to the bending direction of the former test to detect whether cracks appear or not on the bent portion. As for both the former and latter bending tests, the results are shown in Table 1.

In Table 1, symbol "X" represents a state that cracks are appeared before alloy plates are completely bent and therefore the alloy plates cannot be bent by the former bending test. Symbol "○" represents a state that cracks are not appeared by the former bending test, and that they are appeared by the latter bending test. Symbol "⊙" represents a state that cracks are not appeared both the former and latter bending test.

Further, to evaluate corrosion, the alloy plates were held to dip in a mixed acid such as an aqueous solution of 17% HNO₃ containing 3% HF at 60 °C for 24 hours, and were held to dip in a mixed acid having composition which is contrary to an aqua regia or an aqueous solution of 55% HNO₃ containing 8% HCl at 60 °C for 240 hours. The contents of the corrosion were measured by performing the dippings, and the results are shown in Table 1.

Member Example 1 (Dipping Jig Example):

A dipping jig shown in Fig. 2 was made of a rolled strip 5 of 3 mm in thick and a rod 6 of 5 mm in diameter made of the alloy of the present invention, which consists of 46 wt% Cr, 1 wt% Mo, 1 wt% Zr, 0.03 wt% C, 0.004 wt% N and the remainder Ni. The thus made dipping jig serves as an exemplified member. Two kinds of typical alloy compositions employed conventionally were set as follows, and were likewise formed respectively into dipping jigs. These two dipping jigs serve respectively as comparative members. Hereinafter, the members corresponding to their respective alloy compositions will be referred respectively to as "exemplified member", "comparative member A" and "comparative member B".

Alloy A:

23 wt% Cr, 7 wt% Mo, 19 wt% Fe, 2 wt% Cu, 1 wt% Ta, 1 wt% Nb, 0.04 wt% C and the remainder Ni

Alloy B:

30 wt% Cr, 10 wt% Fe, 0.03 wt% C and the remainder Ni

These three kinds of dipping jigs were simultaneously dip in an aqueous solution of 20% HNO₃ + 3% HF (60 °C) for ten days and, thereafter, reduction amounts of the respective dipping jigs due to corrosion were measured. The reduction amount of the comparative member A revealed 0.71 mm/year, and the reduction amount of the comparative member B revealed 0.25 mm/year. However, the reduction amount of the instant exemplified member revealed only 0.05 mm/year.

Member Example 2 (Dipping Jig Example):

Three buckets, each as shown in Fig. 3, were made of respective rolled strips 11 of 3 mm in thick and respective wire materials 12 of 2 mm in diameter formed of respective three alloys the same in composition as the respective dipping jigs described above. The three buckets were dip in the aqueous solution of 20% HNO₃ + 3% HF (60 °C) for ten days and, thereafter, reductions in weight of the respective buckets were measured. As a result, the weight reduction amount of the comparative member A was 121 g/m², and the weight reduction amount of the comparative member B was 53 g/m², whereas the weight reduction amount of the instant exemplified member was 12 g/m².

Member Example 3 (Dipping Jig Example):

An exemplified member was formed into a pipe of 10 mm in diameter and 1 m in length, by an alloy composition consisting of 44 wt% Cr, 1.5 wt% Mo, 0.02 wt% C, 0.006 wt% N and the remainder Ni. As comparative members, two pipe members each the same in size as the exemplified member were made of respective comparative alloys A and B the same in composition as the dipping jig example. Subsequently, an aqueous solution of 50% P₂O₅ (80 °C) was recirculated through each of the three members at flow

velocity of 30 m/min for 2400 hours. Thereafter, corrosion rates of the respective pipe members were compared with each other in terms of a weight reduction amount.

The weight reduction amount of the comparative pipe A was 512 g/m², and the weight reduction amount of the comparative pipe B was 174 g/m², whereas the weight reduction amount of the pipe according to this exemplified member was 61 g/m².

Member Example 4 (Dipping Equipment Member Example):

As exemplified members, a dipping equipment member (agitating propeller) having its configuration shown in Fig. 4a or 4b was made of strip material 8 or 10 and pipe material 7 or 9 each having an alloy composition consisting of 44 wt% Cr, 1.2 wt% Mo, 0.5 wt% W, 0.007 wt% C, 0.006 wt% N and the remainder Ni. Comparative members A and B were prepared each of which was the same in composition as the aforesaid dipping jig example and each of which was the same in size and configuration as the exemplified member. These two comparative members and the exemplified member were rotated within an aqua regia (25% HCl + 20% HNO₃) (60 °C) at 120 revolutions per minute. Consumptive amounts of the respective members were compared with each other. As a result, the consumptive amount of the comparative member A was 14 g/m², and the consumptive amount of the comparative member B was 3.8 g/m², while the consumptive amount of the instant exemplified member was 0.02 g/m² even after an elapse of 240 hours.

Member Example 5 (Electrode Member Example):

As an exemplified member, a clad member was made, by a usual method, of an ordinary steel plate Run no. 2 or 4 and an alloy plate Run no. 3 having its alloy composition consisting of 44 wt% Cr, 0.8 wt% Mo, 0.005 wt% C, 0.004 wt% N and the remainder Ni. Subsequently, the clad member was formed into an electrode member for an electrolytic bath as shown in Fig. 5a or 5b. For comparison, clad members each made of conventional steel plate and stainless steel plate made of SUS304 in accordance with JIS were formed respectively into comparative electrode members each having the same size as the instant exemplified member.

The steel plate sections of the respective exemplified member and comparative member were properly sealed. Subsequently, these two members were used respectively as cathodes, and a stainless steel was employed as an anode. Electrolytic polishing was carried out by the use of an electrolytic solution of 30% HNO₃ + 2% HCl (50 °C) at current density of 20 A/m². The cathodes were compared in consumptive amount with each other. As a result, the consumptive amount of the comparative electrode member was 1.3 mm after the use for 24 hours, whereas the consumptive amount of the electrode member according to the instant exemplified member was 0.1 mm after the use for 24 hours.

As described above, it is possible for the alloy according to the invention to extremely easily form requisite various kinds of members for which corrosion resistance is required, without substantial anxiety of restriction in workability. In particular, the alloy according to the invention is excellent as a member accompanied with plastic working such as rolling, wire stretching, drawing or the like. The alloy according to the invention is effective in use for a dipping equipment represented by a dipping bath, a dipping jig such as a bucket, an agitating member or the like within the dipping bath, and a pipe, a valve, a pump component or the like, as well as an electrode member employed in corrosion atmosphere.

Table 1-1

Run No.		Composition													(wt %)		Tensile Extension At a Temperature	Existence Of Cracks	Corrosion Rate (mm/year)	
		Cr	Mo	W	Cu	Ca	Zr	Nb	Ta	Hf	Y	Rare Earth Elements	Impurities		Ni and the other impurities	Mixed Acid			Inverse Aqua Regia	
													C	N						
1	38.6	0.96	—	—	—	—	—	—	—	—	—	—	0.045	0.004	rem.	rem.	65.6	⊙	0.106	0.050
2	43.0	—	1.23	—	—	—	—	—	—	—	—	—	0.028	0.003	rem.	rem.	60.3	⊙	0.088	0.049
3	44.2	0.97	0.27	—	—	—	—	—	—	—	—	—	0.014	0.021	rem.	rem.	62.6	⊙	0.074	0.046
4	40.5	0.68	—	—	—	—	—	—	—	—	—	—	0.029	0.004	rem.	rem.	61.6	⊙	0.098	0.040
5	45.5	0.12	—	—	—	—	—	—	—	—	—	—	0.022	0.006	rem.	rem.	58.5	⊙	0.071	0.052
6	42.1	0.96	—	—	—	—	—	—	—	—	—	—	0.018	0.003	rem.	rem.	50.3	⊙	0.087	0.053
7	44.6	1.52	—	—	—	—	—	—	—	—	—	—	0.031	0.003	rem.	rem.	55.6	⊙	0.078	0.035
8	45.6	—	0.11	—	—	—	—	—	—	—	—	—	0.032	0.004	rem.	rem.	59.2	⊙	0.075	0.054
9	44.6	—	0.96	—	—	—	—	—	—	—	—	—	0.037	0.004	rem.	rem.	66.1	⊙	0.078	0.042
10	46.5	1.21	—	—	—	—	—	—	—	—	—	—	0.029	0.006	rem.	rem.	60.4	⊙	0.077	0.049
11	44.2	0.97	0.27	1.0	—	—	—	—	—	—	—	—	0.014	0.021	rem.	rem.	62.0	⊙	0.074	0.030
12	44.6	1.52	—	1.5	—	—	—	—	—	—	—	—	0.031	0.003	rem.	rem.	52.3	⊙	0.058	0.020
13	44.6	—	0.96	0.5	—	—	—	—	—	—	—	—	0.037	0.004	rem.	rem.	53.4	⊙	0.068	0.037
14	44.2	0.97	0.27	—	0.032	—	—	—	—	—	—	—	0.014	0.004	rem.	rem.	63.6	⊙	0.072	0.048
15	44.6	1.52	—	—	0.005	—	—	—	—	—	—	—	0.031	0.003	rem.	rem.	52.7	⊙	0.075	0.038
16	44.6	—	0.96	—	0.008	—	—	—	—	—	—	—	0.014	0.004	rem.	rem.	69.3	⊙	0.081	0.041
17	44.2	0.97	0.27	—	—	3.0	—	—	—	—	—	—	0.014	0.004	rem.	rem.	64.7	⊙	0.083	0.051
18	44.6	1.52	—	—	—	—	0.5	—	—	—	—	—	0.031	0.003	rem.	rem.	57.8	⊙	0.063	0.021
19	44.6	—	0.96	—	—	—	—	0.8	—	—	—	—	0.014	0.004	rem.	rem.	69.3	⊙	0.060	0.027
20	45.6	—	0.11	—	—	—	—	—	1.2	—	—	—	0.032	0.004	rem.	rem.	63.2	⊙	0.075	0.041

Table 1-2

Run No.		Composition													(wt %)		Tensile Extension At a Temperature	Existence of Cracks	Corrosion Rate (mm/year)	
		Cr	Mo	W	Cu	Ca	Zr	Nb	Ta	Hf	Y	Impurities		NI and the other Impurities					Mixed Aqua Regia	Inverae Aqua Regia
												Rare Earth Elements	C		N					
21	45.5	0.12	—	—	—	—	—	—	1.6	—	—	0.022	0.006	rem.	60.2	0.071	0.035			
22	43.0	—	1.83	—	—	2.5	0.2	—	—	—	—	0.028	0.003	rem.	63.4	0.077	0.041			
23	44.2	0.97	0.27	—	—	—	—	1.3	1.1	—	—	0.014	0.004	rem.	64.2	0.068	0.031			
24	44.2	0.97	0.27	—	—	0.1	0.15	0.13	0.5	—	—	0.014	0.004	rem.	65.7	0.061	0.026			
25	45.5	0.12	—	—	—	—	—	—	—	—	0.005	0.022	0.006	rem.	63.4	0.078	0.054			
26	43.0	—	1.82	—	—	—	—	—	—	0.005	—	0.028	0.003	rem.	64.1	0.077	0.046			
27	45.6	—	0.11	1.0	0.005	—	—	—	—	—	—	0.032	0.004	rem.	60.3	0.065	0.026			
28	44.2	0.97	0.27	1.0	—	1.5	—	—	—	—	—	0.014	0.004	rem.	63.5	0.061	0.025			
29	44.6	1.52	—	1.2	—	0.5	0.3	1.0	—	—	—	0.031	0.003	rem.	60.3	0.051	0.030			
30	44.6	—	0.96	0.5	—	1.8	—	—	1.2	—	—	0.014	0.004	rem.	71.2	0.068	0.031			
31	44.2	0.97	0.27	—	0.003	—	1.6	—	—	—	—	0.014	0.004	rem.	66.8	0.074	0.039			
32	45.6	—	0.11	—	0.008	0.7	—	1.3	—	—	—	0.032	0.004	rem.	64.1	0.080	0.039			
33	44.2	0.97	0.27	—	—	1.2	—	—	—	—	0.003	0.014	0.004	rem.	70.9	0.073	0.041			
34	44.6	—	0.96	—	—	—	1.5	—	—	—	0.007	0.014	0.004	rem.	74.1	0.058	0.034			
35	43.0	—	1.83	—	—	—	—	1.1	1.2	0.001	0.009	0.028	0.003	rem.	67.2	0.064	0.033			
36	44.2	0.97	0.27	1.7	0.001	2.3	1.0	—	—	—	—	0.014	0.004	rem.	73.1	0.074	0.042			
37	44.6	—	0.96	0.8	0.004	—	—	1.0	1.0	—	—	0.014	0.004	rem.	75.2	0.054	0.029			
38	44.6	1.52	—	1.5	0.005	1.5	—	1.5	—	—	—	0.031	0.003	rem.	61.4	0.061	0.032			
39	45.5	0.12	—	0.7	0.005	—	—	—	—	0.005	—	0.022	0.006	rem.	60.8	0.054	0.034			

Table 1-3

Run No.	Composition (wt. %)														Existence of Cracks	Tensile Extension At a Temperature	Corrosion Rate (mm/year)	
	Cr	Mo	W	Cu	Ca	Zr	Nb	Ta	Hf	Y	Rare Earth Elements	Impurities		Ni and the other impurities				
												C	N					
40	44.2	0.97	0.27	0.1	0.002	—	—	—	—	—	0.01	0.014	0.004	rem.	83.9	0.072	0.039	
41	44.6	—	0.96	0.6	—	2.5	—	—	—	—	0.001	0.014	0.004	rem.	66.7	0.058	0.027	
42	44.6	1.52	—	1.8	—	—	2.5	—	1.3	—	0.008	0.031	0.003	rem.	59.7	0.058	0.034	
43	43.0	—	1.82	2.0	—	0.8	—	0.5	—	0.003	—	0.028	0.003	rem.	64.3	0.065	0.025	
44	44.2	0.97	0.27	—	0.003	1.3	—	1.0	—	—	0.003	0.014	0.004	rem.	72.3	0.076	0.037	
45	44.2	0.97	0.27	—	0.005	1.5	1.5	—	—	—	0.005	0.014	0.004	rem.	73.1	0.070	0.041	
46	44.6	—	0.90	—	0.007	0.3	—	0.5	1.2	0.006	—	0.014	0.004	rem.	67.4	0.062	0.036	
47	44.6	1.52	0.30	1.0	0.005	1.0	—	—	1.0	—	0.006	0.014	0.004	rem.	58.2	0.059	0.043	
48	44.2	0.97	0.27	0.3	0.006	0.5	0.3	0.3	0.3	0.001	0.007	0.014	0.004	rem.	74.2	0.063	0.034	
49	43.0	—	1.23	—	—	—	—	—	—	—	—	0.005	0.002	rem.	62.4	0.055	0.038	
50	44.6	1.52	—	—	—	—	—	—	—	—	—	0.003	0.004	rem.	60.7	0.038	0.034	
51	44.6	—	0.90	—	—	—	—	—	—	—	—	0.002	0.003	rem.	68.1	0.036	0.025	
52	45.6	—	0.11	—	—	—	—	—	—	—	—	0.001	0.002	rem.	60.3	0.033	0.029	
53	47.5	0.85	—	—	—	—	—	—	—	—	—	0.028	0.005	rem.	46.2	0.088	0.040	
54	48.5	—	0.11	—	—	—	—	—	—	—	—	0.031	0.004	rem.	43.1	0.081	0.038	
55	49.0	0.68	0.96	—	—	—	—	—	—	—	—	0.014	0.003	rem.	40.3	0.094	0.046	

Table 1-4

Run No.	Composition (wt %)													Existence of Cracks	Corrosion Rate (mm/year)			
	Cr	Mo	W	Cu	Ca	Zr	Nb	Ta	Hf	Y	Rare Earth Elements	Impurities			Ni and the other Impurities	Tensile Extension At a Temperature	Mixed Acid	Inverse Aqua Regia
												C	N					
56	36.1*	0.77	—	—	—	—	—	—	—	—	—	0.025	0.007	rem.	67.2	⊙	0.325	0.205
57	51.2*	0.86	—	—	—	—	—	—	—	—	—	0.030	0.004	rem.	19.6	×	0.082	0.026
58	44.3	—	—	—	—	—	—	—	—	—	—	0.031	0.005	rem.	68.2	⊙	0.217	0.138
59	46.7	2.13*	—	—	—	—	—	—	—	—	—	0.028	0.005	rem.	25.3	×	0.078	0.041
60	41.8	—	2.19*	—	—	—	—	—	—	—	—	0.033	0.004	rem.	28.3	×	0.076	0.045
61	46.2	1.00	—	—	—	—	—	—	—	—	—	0.081*	0.002	rem.	15.2	×	0.146	0.089
62	45.3	0.93	—	—	—	—	—	—	—	—	—	0.036	0.050*	rem.	16.4	×	0.033	0.047
63	45.3	0.93	—	1.8	0.012*	—	—	—	—	—	—	0.035	0.005	rem.	38.9	×	0.057	0.024
64	43.2	0.86	—	—	—	—	—	—	—	—	—	0.072*	0.052*	rem.	17.8	×	0.192	0.093
65	44.8	1.00	0.86	—	0.013*	—	—	—	—	—	—	0.031	0.004	rem.	30.7	×	0.072	0.041
66	44.2	0.97	0.27	0.3	0.006	0.5	0.3	0.3	0.3	0.001	0.007	0.07*	0.003	rem.	27.5	×	0.082	0.043
67	44.2	0.97	0.27	0.3	0.006	0.5	0.3	0.3	0.3	0.001	0.005	0.035	0.05*	rem.	26.7	×	0.059	0.040

In the above-indicated Table 1-4, each of values marked * is out of the range of the preferred values of the present invention.

In the column "Existence of Cracks" of all of the tables, a mark of X represents a result that cracks are brought into existence on a piece of an alloy when it is bent so as to hold it in halves, a mark of O represents a result that cracks are not brought into existence on the piece when it is bent so as to hold it in halves and that cracks are brought into existence when it is bent in a direction and then is extant and is also bent in the inverse direction, and a mark of ⊙ represents a result that cracks are not brought into existence on a piece even when it is bent so as to hold in halves and then is extend and is also bent in the inverse direction.

Claims

1. A corrosion resisting Ni-base alloy containing 43 to 47 wt% Cr having a metallic structure in which an alpha phase of a Cr solid solution is at equal to or less than 10 %, 0.1 to 2 wt% of at least one of Mo and W, 0 to 2 wt% Cu, 0 to 3 wt% Zr, 0 to 3 wt% Nb, 0 to 3 wt% Ta, 0 to 3 wt% Hf, 0 to 0.01 wt% Ca,

0 to 0.01 wt% of Y and/or other rare-earth elements, 0 to 0.05 wt% C, and 0 to 0.04 wt% N, balance Ni apart from impurities.

2. A corrosion resisting Ni-base alloy according to claim 1 containing 0 to 0.01 wt% C and 0 to 0.01 wt% N.
3. A corrosion resisting Ni-alloy according to claim 2, wherein Zr is 0 to 0.01 wt%, Nb is 0 to 0.01 wt%, Ta is 0 to 0.01 Wt% and Hf is 0 to 0.01 wt%.
4. Member for a dipping equipment formed by the alloy according to claim 1.
5. Member according to claim 4, which is a dipping jig.
6. Member according to claim 4, which is an agitating instrument within the dipping bath.
7. Member according to claim 4, which is a pipe.
8. Member according to claim 4, which is a valve.
9. Member according to claim 4, which is a pump component.
10. Member for a dipping equipment formed by the alloy according to claims 2 or 3.
11. Member according to claim 10, which is a dipping jig.
12. Member according to claim 10, which is an agitating instrument within the dipping bath.
13. Member according to claim 10, which is a pipe.
14. Member according to claim 10, which is a valve.
15. Member according to claim 10, which is a pump component.
16. An electrode member consisting of the alloy according to claim 1.
17. An electrode member consisting of the alloy according to claims 2 or 3.

Revendications

1. Un alliage à base de Ni, résistant à la corrosion et renfermant de 43 à 47 % en poids de Cr présentant une structure métallique dans laquelle une phase α d'une solution solide Cr est égale à ou inférieure à 10 %, 0,1 à 2 % en poids d'au moins un élément parmi Mo et W, de 0 à 2 % en poids de Cu, de 0 à 3 % en poids de Zr, de 0 à 3 % en poids de Nb, de 0 à 3 % en poids de Ta, de 0 à 3 % en poids de Hf, de 0 à 0,01 % en poids de Ca, de 0 à 0,01 % en poids de Y et/ou d'autres éléments des terres rares, 0 à 0,05 % en poids de C et de 0 à 0,04 % en poids de N, le reste étant du Ni à l'exception des impuretés.
2. Un alliage à base de nickel, résistant à la corrosion, selon la revendication 1, renfermant de 0 à 0,01 % en poids de C et de 0 à 0,01 % en poids de N.
3. Un alliage à base de Ni, résistant à la corrosion, selon la revendication 2, dans lequel Zr est de 0 à 0,01 % en poids, Nb est de 0 à 0,01 % en poids, Ta est de 0 à 0,01 % en poids, et Hf est de 0 à 0,01 % en poids.
4. Élément pour un appareillage destiné à être immergé, constitué par l'alliage selon la revendication 1.
5. Élément selon la revendication 4, qui est un gabarit de positionnement en immersion.

6. Element selon la revendication 4, qui est un instrument d'agitation dans un bain d'immersion.
7. Element selon la revendication 4, qui est un tuyau.
- 5 8. Element selon la revendication 4, qui est une valve.
9. Element selon la revendication 4, qui est un un constituant d'une pompe.
- 10 10. Element pour un appareillage destiné à être immergé, constitué par l'alliage selon les revendications 2 ou 3.
11. Element selon la revendication 10, qui est un gabarit de positionnement en immersion.
12. Element selon la revendication 10, qui est un instrument d'agitation dans le bain d'immersion.
- 15 13. Element selon la revendication 10, qui est un tuyau.
14. Element selon la revendication 10, qui est une valve.
- 20 15. Element selon la revendication 10, qui est un constituant de pompe.
16. Un élément d'électrode constitué de l'alliage selon la revendication 1.
17. Un élément d'électrode constitué de l'alliage selon les revendications 2 ou 3.

25

Patentansprüche

1. Korrosionsbeständige Legierung auf Nickel-Basis, enthaltend:
43 bis 47 Gew.-% Chrom mit metallischer Struktur, in welcher eine alpha-Phase einer Chrom-Festkörperlösung gleich oder kleiner als 10 % ist, 0,1 bis 2 Gew.-% von wenigstens einem von Mo und W, 0 bis 2 Gew.-% Cu, 0 bis 3 Gew.-% Zr, 0 bis 3 Gew.-% Nb, 0 bis 3 Gew.-% Ta, 0 bis 3 Gew.-% Hf, 0 bis 0,01 Ca, 0 bis 0,01 Gew.-% Y und/oder andere seltene Erden-Elemente, 0 bis 0,05 Gew.-% C, und 0 bis 0,04 Gew.-% N, Rest Nickel abgesehen von Verunreinigungen.
- 30 2. Korrosionsbeständige Legierung auf Nickelbasis nach Anspruch 1, welche 0 bis 0,01 Gew.-% C und 0 bis 0,01 Gew.-% N enthält.
3. Korrosionsbeständige Nickellegierung nach Anspruch 2, worin 0 bis 0,01 Gew.-% Zr ist, 0 bis 0,01 Gew.-% Nb ist, 0 bis 0,01 Gew.-% Ta ist und 0 bis 0,01 Gew.-% Hf ist.
- 40 4. Bestandteil einer Taucheinrichtung, gebildet durch die Legierung nach Anspruch 1.
5. Bestandteil nach Anspruch 4, welches eine Eintauchvorrichtung ist.
- 45 6. Bestandteil nach Anspruch 4, welches ein Rührinstrument im Tauchbad ist.
7. Bestandteil nach Anspruch 4, welches ein Rohr ist.
8. Bestandteil nach Anspruch 4, welches ein Ventil ist.
- 50 9. Bestandteil nach Anspruch 4, welches eine Pumpenkomponente ist.
10. Bestandteil für eine Taucheinrichtung, gebildet durch eine Legierung nach Anspruch 2 oder 3.
- 55 11. Bestandteil nach Anspruch 10, welches eine Eintauchvorrichtung ist.
12. Bestandteil nach Anspruch 10, welches ein Rührinstrument im Tauchbad ist.

EP 0 303 957 B1

13. Bestandteil nach Anspruch 10, welches ein Rohr ist.

14. Bestandteil nach Anspruch 10, welches ein Ventil ist.

5 **15.** Bestandteil nach Anspruch 10, welches eine Pumpenkomponente ist.

16. Elektrodenbestandteil, welcher aus einer Legierung nach Anspruch 1 besteht.

17. Elektrodenbestandteil, welcher aus einer Legierung nach Anspruch 2 oder 3 besteht.

10

15

20

25

30

35

40

45

50

55

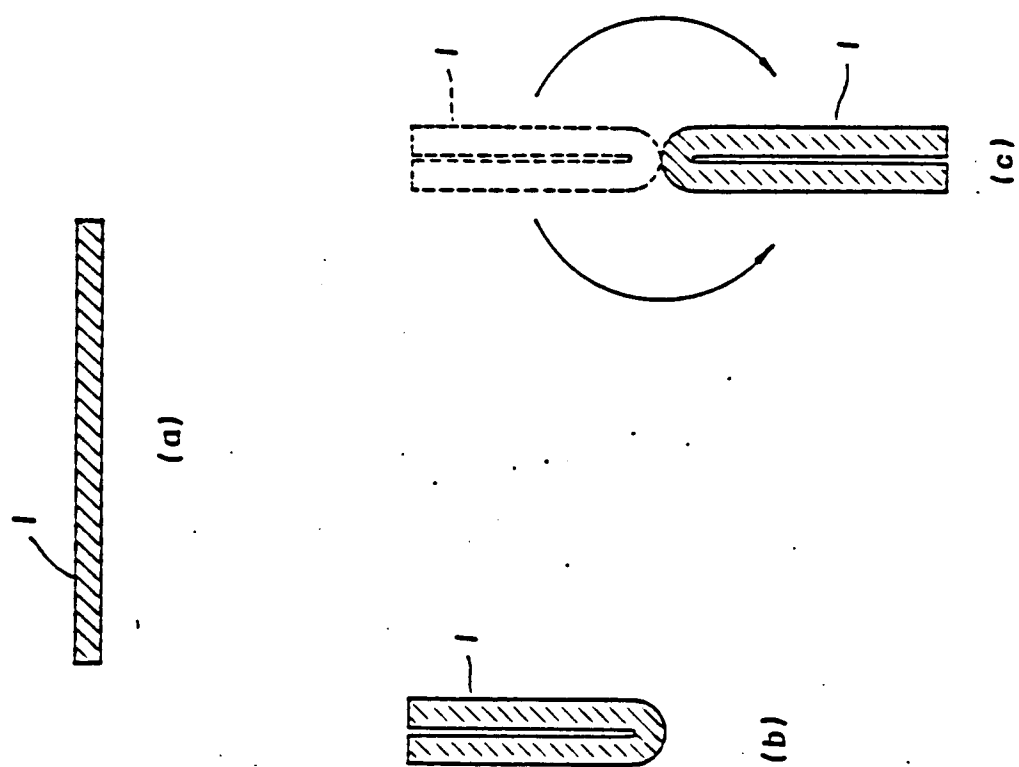


Fig. 1

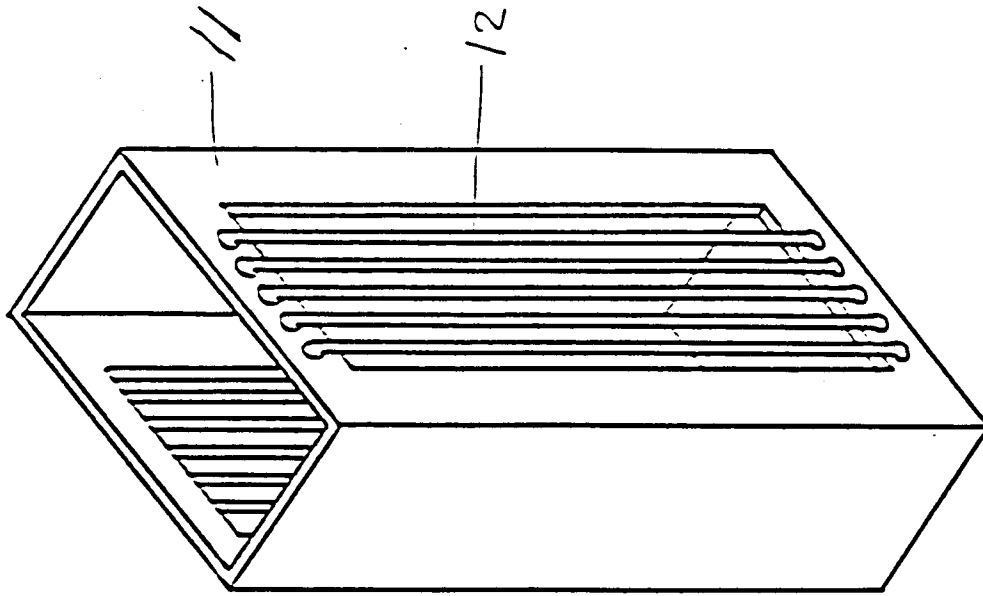


Fig 3

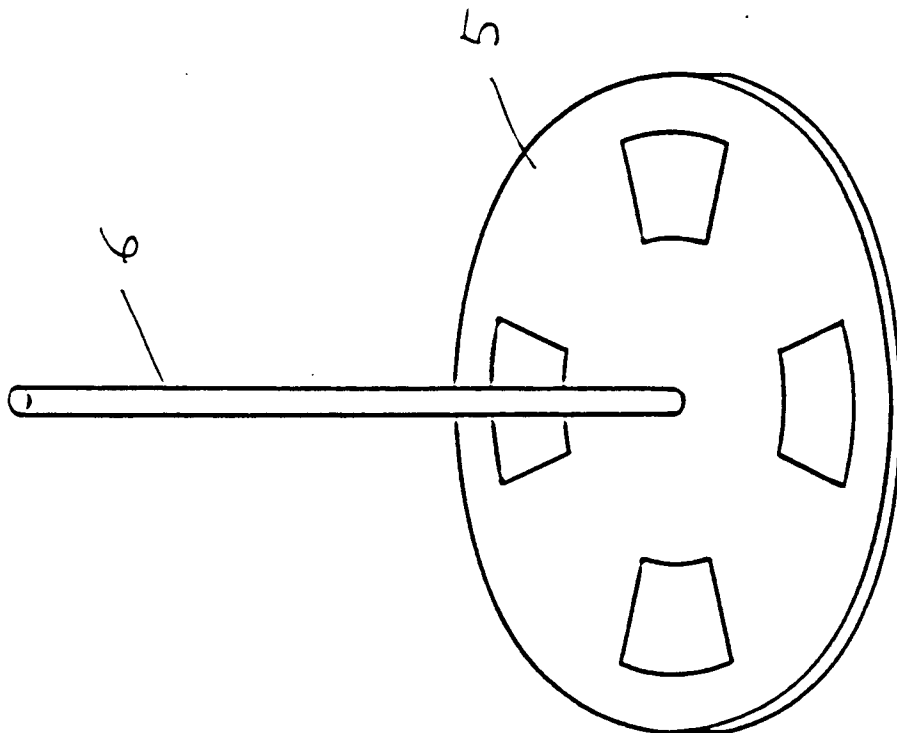


Fig 1

Fig 4a

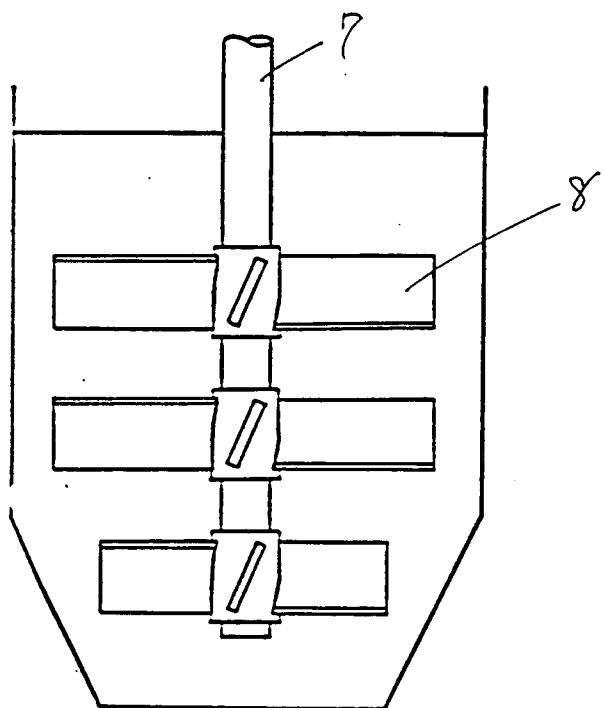


Fig 4b

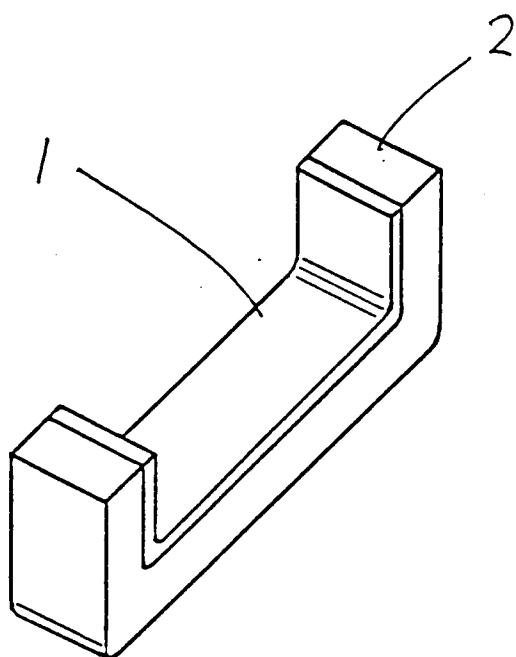
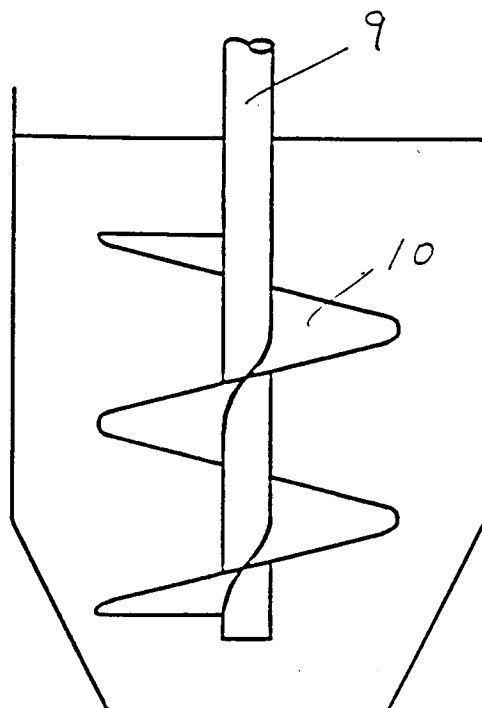


Fig 5a


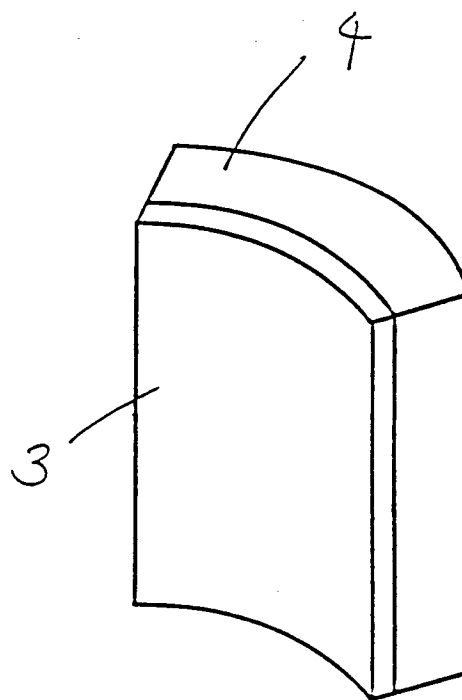


Fig 5 b

Fig 6 alloy No. 2

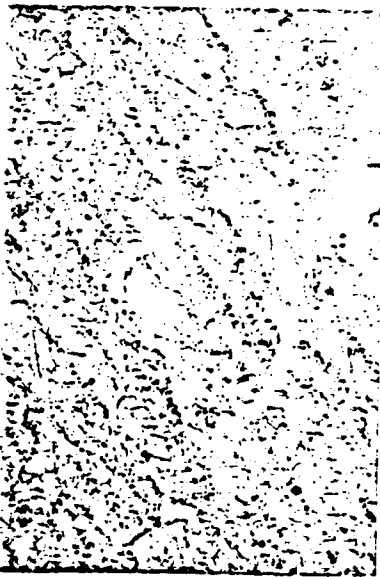

scale $\frac{0.1 \text{ mm}}{(\times 100)}$

Fig 8 alloy No. 10



scale $\frac{0.1 \text{ mm}}{(\times 100)}$

Fig 7 alloy No. 8



scale $\frac{0.1 \text{ mm}}{(\times 100)}$

Fig 9 alloy No. 55



scale $\frac{0.1 \text{ mm}}{(\times 100)}$