- 1) Publication number:
- **0 304 067** A2


(12)

EUROPEAN PATENT APPLICATION

- (21) Application number: 88113455.5
- (5) Int. Cl.4: G03C 7/26, G03C 7/36

- 2 Date of filing: 18.08.88
- 3 Priority: 20.08.87 JP 207254/87
- Date of publication of application:22.02.89 Bulletin 89/08
- Designated Contracting States:
 DE FR GB NL

- Applicant: Fuji Photo Film Co., Ltd.
 210 Nakanuma Minamiashigara-shi Kanagawa-ken(JP)
- Inventor: Takahashi, Osamu c/o Fuji Photo Film Co., Ltd. 210, Nakanuma Minami Ashigara-shi Kanagawa(JP) Inventor: Furutachi, Nobuo c/o Fuji Photo Film Co., Ltd. 210, Nakanuma Minami Ashigara-shi Kanagawa(JP)
- Representative: Patentanwälte Grünecker, Kinkeldey, Stockmair & Partner Maximilianstrasse 58 D-8000 München 22(DE)
- Silver halide color photographic light-sensitive material containing epoxy compound.
- (57) A silver halide color photographic light-sensitive material having, on a support, at least an emulsion layer containing a yellow coupler represented by the general formula (I) and a sparingly water soluble epoxy compound represented by the general formula (II):

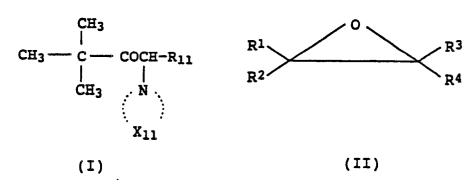

(Symbols are defined as in claim 1)

0 304

An excellent dye images with improved yellow image storability, particularly, heat and wet heat fastness can be obtained.

SILVER HALIDE COLOR PHOTOGRAPHIC LIGHT-SENSITIVE MATERIAL CONTAINING EPOXY COMPOUND

FIELD OF THE INVENTION

5

10

45

The present invention concerns a silver halide color photographic light-sensitive material and, particularly, it relates to a silver halide color photographic lihgt-sensitive material with improved storability of yellow color image obtained by using less water soluble epoxy compounds.

BACKGROUND OF THE INVENTION

By applying color development after exposure to a silver halide photographic material, an aromatic primary amine developing agent oxidized with a silver halide and a color forming coupler are reacted to form color images.

In this method, the subtractive color process has often been used and, for reproducing blue, green and red colors, color images of yellow, magenta and cyan which respectively are complimentary to the above colors are formed.

Conventional yellow couplers include those using an imide group as a releasing group as disclosed, for example, in U.S. Patents 4,022,620, 4,057,432, 4,269,936 and 4,404,274, those using a heterocyclic group as a releasing group as disclosed, for example, in U.S. Patents 4,046,575, 4,326,024, which discclose an improvement in the color forming rate and fastness of color images.

Furthermore, for improving the fastness of color images formed from these yellow couplers, hindered amine type compounds as disclosed in U.S. Patent 4,268,593 have been proposed.

However, as compound with the technical progress in magenta color images and cyan color images, less progress has been made in fastness of yellow color images. The fastness thereof remains at lower level than magenta and cyan color images, and an improvement is eagerly sought.

As has been described above, it is desirable in color photography that the fastness of yellow, magenta and cyan color images to light, heat and wet heat are uniformly strong, at identical levels for all three colors. The present inventors have generally sought compounds capable of improving the fastness of the color image of the yellow coupler.

There have been known epoxy compounds as disclosed in U.S. Patent 4,239,851 that improve the fastness of cyan color images to heat and wet heat, epoxy compounds as disclosed in U.S. Patent 4,540,657 which are effective to reduce yellow stains resulting from decomposition of magenta couplers. Although U.S. Patent 4,540,657 describes the light and heat fastness of color images obtained from aryloxy-releasing yellow couplers, the effect thereof remains insufficient.

In addition, compounds such as cyclic ether compounds described in JP-A-62-75450 (the term JP-A as used herein means an "unexamined published Japanese patent application") are effective to reduce stains resulting from processing with a particular stabilizing solution. Surprisingly, it has now been found that epoxy compounds within the scope of the present invention can remarkably improve the fastness, particularly, light fastness, of the yellow color image used in the present invention.

SUMMARY OF THE INVENTION

Accordingly, it is a first object of the present invention to provide a silver halide color photographic light-sensitive material capable of forming yellow color images which are fast to light and heat.

A second object of the present invention is to provide a silver halide color photographic lightsensitive material having an excellent balance for the fastness of color images of three colors, that is, yellow, magenta and cyan, particularly, the balance of the light fastness between yellow and magenta images.

It has now been found that these and other objects can been attained by a silver halide color photographic light-sensitive material composed of a support having thereon at least one light-sensitive emulsion layer containing at least one yellow coupler represented by the general formula (I) and a sparingly water soluble epoxy compound represented by the general formula (II):

$$\begin{array}{c}
\text{CH}_{3} \\
\text{CH}_{3} \longrightarrow \text{C} \longrightarrow \text{COCH-R}_{11} \\
\mid \qquad \qquad \mid \qquad \qquad \\
\text{CH}_{3} \longrightarrow \text{N} \\
X_{11}
\end{array}$$

15


30

40

45

50

where R₁₁ represents an N-aryl Carbamoyl group and X₁₁ represents a non-metallic atomic group required for forming a 5- or 6-membered ring; and the coupler may form a dimer or a higher polymer;



R₁, R₂, R₃ and R₄, which may be the same or different, each represents a hydrogen atom, an aliphatic group, an aryl group, an aliphatic oxycarbonyl group, an aromatic oxycarbonyl group or a carbamoyl group, provided at least one of R₁, R₂, R₃ and R₄ represents a group other than hydrogen atoms; total number of the carbon atoms contained in R₁, R₂, R₃ and R₄ is from 8 to 60; R₁ and R₂, R₃ and R₄, or R₁ and R₃ may be linked to form a 5- to 7-membered ring; at least one of R₁, R₂, R₃ and R₄ may have at least one epoxy group; and the epoxy compound may form a dimer or a higher polymer.

DETAILED DESCRIPTION OF THE INVENTION

The term "aliphatic group" as used in the present invention means a linear, branched or cyclic aliphatic hydrocarbon group and includes saturated and unsaturated groups such as alkyl, alkenyl and alkynyl groups.

The term "aromatic group" or "aryl group" used herein refers to a substituted or unsubstituted phenyl group or naphthyl group preferably with 6 to 42 carbon atoms.

The term "heterocyclic group" as used herein means a 5- to 7-membered heterocyclic group containing at least one of O, S and N atoms as a hetero atom.

The term "sulfonyl" as used herein includes aliphatic sulfonyl and aromatic sulfonyl.

The term "sulfonamido group" as used herein includes an aliphatic sulfonamido group and an aromatic sulfonamido group.

In addition, it has also been found that the objects of the present invention can be attained more effectively by using at least one of couplers represented by the general formula (M-I) and the general formula (M-II) as a magenta coupler for a light-sensitive emulsion layer in the silver halide color photosensitive material described above.

$$R_{22}$$
 R_{27}
 R_{29}
 R

In formula (M-I), Ar represents an aryl group; R_{21} represents a hydrogen atom, an acyl group, or a sulfonyl group, R_{22} represents a halogen atom or an alkoxy group; R_{23} represents an alkyl group, an aryl group, a halogen atom, an alkoxy group, an aryloxy group, an acylamino group, an imido group, a sulfonamido

group, an alkoxycarbonyl group, a carbamoyl group, a sulfamoyl group, an alkylthio group or a sulfonyl group; R_{27} represents an alkyl group, an alkoxy group, an aryloxy group or an acylamino group; R_{28} represents a hydrogen atom, a halogen atom, a hydroxyl group, an alkyl group, an alkoxy group or an aryl group; R_{28} represents an amino group, an acylamino group, a ureido group, an alkoxycarbonylamido group, an imido group, a sulfonamido group, a sulfamoylamino group, an alkoxycarbonyl group, a carbamoyl group, an acyl group, cyano group or an alkylthio group; provided that at least one of R_{27} and R_{29} represents an alkoxy group, m1 is an integer of 1 to 4, m2 is an integer of 1 to 4, m3 is 0 or an integer of 1 to 3, m4 is 0 or 1, when m4 is 0, the coupling position is occupied by a hydrogen atom; and the coupler may form a dimer or a higher polymer.

10

15

$$\begin{array}{c|c}
R_{24} & Z_{21} \\
N & Z_{24} \\
Z_{22} = Z_{23}
\end{array}$$
(M-II)

20

R₂₄ represents a hydrogen atom or a substituent; Z₂₁ represents a hydrogen atom or a coupling-off group capable of being released by a reaction with an oxidized product of an aromatic primary amine color developing agent; Z₂₂, Z₂₃ and Z₂₄, which may be the same or different, each represents

25

-N = or -NH-, provided that one of the Z_{24} - Z_{23} bond and the Z_{23} - Z_{22} bond is a double bond and the other is a single bond, when the Z_{23} - Z_{22} bond is a carbon-carbon double bond, it constitutes a part of an aromatic ring; and the coupler may form a dimer or a higher polymer.

Referring more specifically to the yellow coupler represented by the general formula (I), specific examples of the N-aryl carbamoyl group represented by R₁₁ are an N-phenylcarbamoyl group or a substituted N-phenylcarbamoyl group having 7 to 42 carbon atoms.

The substituent can include an aliphatic group (for example, methyl, allyl and cyclopentyl), a heterocyclic group (for example, 2-pyridyl, 2-imidazolyl, 2-furyl and 6-quinolyl), an aliphatic oxy group (for example, methoxy, 2-methoxyethoxy and 2-propenyloxy), an aromatic oxy group (for example, 2,4-di-tertamylphenoxy, 4-cyanophenoxy and chlorophenoxy), an acyl group (for example, acetyl and benzoyl), an ester group (for example, butoxy carbonyl, hexadecyloxy carbonyl, phenoxy carbonyl, dodecyloxy carbonyl, methoxycarbonyl, acetoxy, benzoyloxy, tetradecyloxy sulfonyl or hexadecane sulfonyloxy), an amid0 group (for example, acetylamino, dodecanesulfonamido, 2-butoxy-5-tetradecane sulfonamido, phenylsulfonamido, α -(2,4-di-tert-pentylphenoxy)butanamido, or γ (2,4-di-tert-pentylphenoxy)butanamido, a carbamoyl group (for example, N-tetradecylcarbamoyl, N,N-dihexylcarbamoyl), a sulfamoyl group (for example, N-butanesulfamoyl, N-methyl-N-tetradecanesulfamoyl), an imido group (for example, succineimido, N-hydantoinyl, 3hexadecenylsuccinimido), a ureido group (for example, phenylureido, N,N-dimethylureido, N-(3-(2,4-di-tertpentylphenoxy)propyl)ureido), a sulfonyl group (for example, methanesulfonyl, phenylsulfonyl, dodecanesulfonyl, 2-butoxy-5-tert-octylbenzene sulfonyl), an aliphatic or aromatic thio group (for example, phenylthio, ethylthio, hexadecylthio, 4-(2,4-di-tert-phenoxyacetamido)benzylthio), a hydroxyl group, a sulfonic acid group, or a halogen atom (for example, fluorine, chlorine or bromine). Where there are two or more substituents, they may be identical or different.

X₁₁ represents a non-metallic atomic group required for forming a 5- or 6-membered ring.

Preferred specific examples of the 5- or 6-membered ring are represented by the following general formulae (III) to (V):

$$\begin{array}{cccc}
& & & & & & & \\
& & & & & & \\
N & & & & & \\
R_{72} & & & & & \\
R_{82} & & & & \\
\end{array}$$
(III) (IV)

where R_{71} , R_{72} , R_{81} and R_{82} , which may be the same or different, each represents a hydrogen atom, a halogen atom, a carboxylic ester group, an amino group, an alkyl group, an alkylthio group, an alkylsulfonyl group, an alkylsulfinyl group, a carboxylic acid group, a substituted or unsubstituted phenyl group or a substituted or unsubstituted heterocyclic group.

$$0 \bigvee_{\mathsf{Wg}_1}^{\mathsf{I}} 0 \qquad (\mathsf{V})$$

where $W_{9\,1}$ represents a non-metallic atomic required for forming a 5-membered or 6 membered ring together with

in the formula.

Further preferred specific examples of the group represented by general formula (V) are represented by the following formulae (VI) to (VIII).

EP 0 304 067 A2

where R_{101} and R_{102} , which may be the same or different, each represents a hydrogen atom, an alkyl group, an aryl group, an alkoxy group, an aryloxy group or a hydroxyl group; R_{103} , R_{104} and R_{105} , which may be the same or different, each represents a hydrogen atom, an alkyl group, an aryl group, an aralkyl group or an acyl group; and W_{101} represents an oxygen or sulfur atom.

More preferred yellow couplers represented by general formula (I) are represented by the following general formula (I-A).

wherein X_{12} represents a non-metallic atomic group necessary for forming a 5-membered ring; R_{12} represents a substituent the same as those defined for the substituted N-phenylcarbamoyl group described above for R_{11} , among which are preferred an aliphatic group, an aliphatic oxy group, an aromatic oxy group, an ester group, an amido group, a carbamoyl group, a sulfamoyl group, an imido group or a halogen atom and ℓ represents an integer of from 1 to 4, preferably 1.

Specific examples of the 5-membered ring formed by X_{12} are represented by the foregoing general formulae (VI), (VII) and (VIII), and those represented by the general formula (VI) and (VIII) are particularly preferred. Particularly preferred examples represented by general formula (VI) are those in which at least one of R_{101} and R_{102} represents a group other thana hydrogen atom.

The couplers represented by the general formula (I) are disclosed, for example, in U.S. Patents 4,622,287 and 4,623,616. Specific examples of the couplers are shown below, but the present invention is not to be construed as being limited thereto.

$$(I-1)$$

$$CL$$

$$C_{4}H_{9}$$

$$CC_{10}$$

$$CC_{11}$$

CH3

45

50

55

7

OC6H13

$$(I-4) \qquad CR \\ (CH_3)_3C-COCHCONH \\ (I-5) \qquad CR \\ (CH_3)_3C-COCHCONH \\ (CH_3)_3C-COCHCONH \\ (CH_2) \\ (CH_2) \\ (CH_2) \\ (CH_3)_3C-COCHCONH \\ (CH_3)_3C-COCHCON$$

·

C1
$$(CH_3)_3C-COCHCONH$$

$$C_2H_5$$

$$N+CO(CH_2)_4O$$

$$C_5H_{11}(t)$$

$$C_2H_5$$

$$N-N$$

The epoxy compounds represented by general formula (II) preferably have solubility in water (at 18 °C) of not more than 1% by weight.

45

In the general formula (II), R₁, R₂, R₃ and R₄ represent a hydrogen atom, an aliphatic group, an aryl group, an aliphatic oxy carbonyl group (for example, dodecyloxy carbonyl, allyloxy carbonyl), an aromatic oxy carbonyl group (for example, phenoxy carbonyl group) or a carbamoyl group (for example, tetradecyl-carbamoylphenylmethylcarbamoyl), provided that not all of R₁, R₂, R₃ and R₄ represent hydrogen atoms and the total number of carbon atoms of these groups is from 8 to 60, preferably from 15 to 60.

Typical examples of the aliphatic group are methyl, ethyl, butyl, dodecyl, octadecyl, eicosenyl, isopropyl, tert-butyl, tert-octyl, tert-dodecyl, cyclohexyl, cyclopentyl, allyl, vinyl, 2-hexadecenyl, and propargyl.

These aliphatic groups and aryl groups may further be substituted with a group selected from an alkyl group, an aryl group, a heterocyclic group, an alkoxy group (for example, methoxy, 2-methoxyethoxy), an

aryloxy group (for example, 2,4-di-tert-amylphenoxy, 2-chlorophenoxy, 4-cyanophenoxy), an alkenyloxy group (for example, 2-propenyloxy), an acyl group (for example, acetyl or benzoyl), an ester group (including an alkoxycarbonyl group, an aryloxycarbonyl group and an acyloxy group, and a phosphoric acid ester group, for example, butoxycarbonyl, phenoxycarbonyl, acetoxy, benzoyloxy, butoxysulfonyl or toluene sulfonyloxy), an amido group (for example, acetylamino), a carbamoyl gorup (for example, ethylcarbamoyl or dimethylcarbamoyl), a sulfamoyl amino group (for example, butyl sulfamoyl), a sulfamido group (for example, methanesulfonamido), a sulfamoyl amino group (for example, dipropylsulfamoyl amino), an imido group (for example, succinimido, hydantoinyl), a ureido group (for example, phenylureido, dimethylureido), a sulfonyl group (for example, methanesulfonyl or phenylsulfonyl), an aliphatic or aromatic thio group (for example, ethylthio or phenylthio), a hydroxyl group, a cyano group, a carboxyl group, a nitro group, a sulfonic acid group, and a halogen atom.

The epoxy compounds according to the present invention represented by the general formula (II) and synthetic methods thereof are disclosed, for example, in U.S. Patents 4,239,851 and 4,540,657 and JP-A-62-75450. Specific examples of the epoxy compound are shown below, but the present invention is not to be construed as being limited thereto.

(II-1)20 CH (CH2)7COOC4H9 CH3 (CH2) 7HC (II-2)25 CH3 (CH2) 7HC CH(CH2)8OCOCH3 (II-3)30 (CH3 (CH2)7HC CH(CH2)7COO-CH272-CH2 35 (II-4)CH3 (CH2) 7HC CH (CH₂)₇CON (C₄H₉)₂ 40 (II-5)C₂H₅ COOCH2CHC4H9 45 COOCH2CHC4H9 50 C₂H₅

(II-14)

OC(CH₂)8CH

CH₂

OC(CH₂)8CH

CH₂

OC(CH₂)8CH

OCH₂

CH₃
CON(CH₂)₅CH
CH₂
CON(CH₂)₅CH
CH₂
CH₃
CON(CH₂)₅CH
CH₂

(II-16)

CH₃

O

CH₂) 5CH


CH₂) 3

35

40

45

50

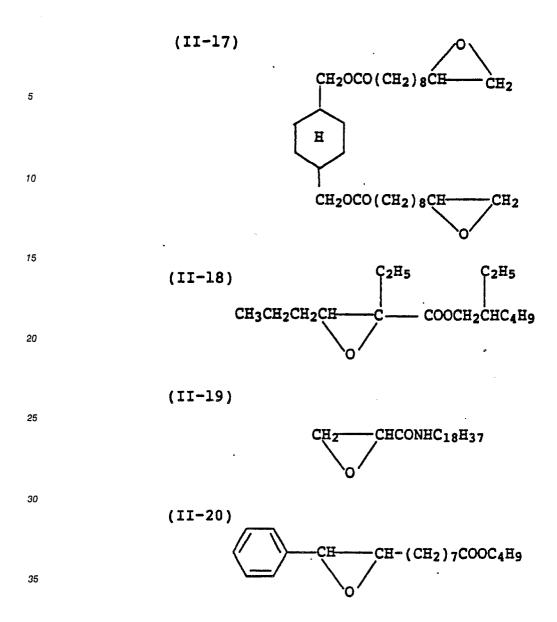

The epoxy compound used in the present invention can be added in co-emulsification with the yellow coupler of the formula (I) to a silver halide photographic emulsion. For the co-emulsification, a high boiling solvent described later may be used together.

The amount of the yellow coupler is generally from 1 x 10^{-2} to 1 mol, preferably from 1 x 10^{-1} to 5 x 10^{-1} mol per mol silver halide in the silver halide emulsion layer.

The amount of the epoxy compound is generally within a range from 0.5 to 300% by weight, preferably, within the range from 20 to 200% by weight by weight, based on the yellow coupler of the formula (I).

45

Specific examples of the substituents of the general formula (M-I) are now explained in greater detail.

Ar represents an aryl group with 6 to 36 carbon atoms (for example, phenyl, 2,4.6-trichlorophenyl, 2,5-dichloro-4-methoxyphenyl, 2,4-dimethyl-6-methoxyphenyl, 2,6-dichloro-4-ethoxycarbonylphenyl, 2,6-dichloro-4-cyanophenyl); R₂₁ represents a hydrogen atom, an acyl group with 2 to 10 carbon atoms (for example, acetyl, benzoyl, propanoyl, butanoyl and monochloroacetyl), an aliphatic or aromatic sulfonyl group with 1 to 16 carbon atoms (for example, methanesulfonyl, butanesulfonyl, benzenesulfonyl, toluenesulfonyl and 3-hydroxypropanesulfonyl); R₂₂ represents a halogen atom (for example, chlorine, bromine and fluorine) or an alkoxy group with 1 to 22 carbon atoms (for example, methoxy, butoxy, benzyloxy and 2-methoxyethoxy); R₂₃ represents an alkyl group with 1 to 24 carbon atoms (for example, methyl, butyl, t-butyl, t-octyl, dodecyl, 2,4-di-tert-pentylphenoxymethyl and hexadecyl), an aryl group preferably having from 6 to 36 carbon atoms (for example, phenyl and 2,4-dichlorophenyl), a halogen atom (for example, chlorine, fluorine and bromine), an alkoxy group with 1 to 22 carbon atoms (for example, methoxy, dodecyloxy, benzyloxy and hexadecyloxy), an aryloxy group with 6 to 36 carbon atoms (for

example, phenoxy and 4-dodecylphenoxy), an acylamino group with 2 to 36 carbon atoms (for example, acetylamino, tetradecanamido, α -(2,4 di tert-pentylphenoxy)butylamido, α -(4-hydroxy-3-tert-butylphenoxy)tetradecanamido and α -(4-(4-hydroxyphenylsulfonyl)phenoxy)dodecanamido), an imido group with 2 to 36 carbon atoms (for example, N-succinimido, N-maleinimido, 1-N-benzyl-5,5 dimethyl-hydantoin-3-yl and 3-hexadecenyl-1-succinimido), a sulfonamido group with 1 to 36 carbon atoms (for example, methane sulfonamido, benzene sulfonamido, tetradecane sulfonamido, 4-dodecyloxy benzene sulfonamido and 2-octyloxy-5-tert-octylbenzene sulfonamido), an alkoxycarbonyl group with 1 to 22 carbon atoms (for example, ethoxycarbonyl, dodecyloxycarbonyl and hexadecyloxycarbonyl), a carbamoyl group with 1 to 36 carbon atoms (for example, N-phenylcarbamoyl, N-ethylcarbamoyl, N-dodecylcarbamoyl, N-(2-dodecyloxyethyl)-carbamoyl, N-(3-(2,4-di-tertpentylphenoxy)propyl)carbamoyl), a sulfamoyl group with 1 to 36 carbon atoms (for example, N,N-diethylsulfamoyl, N-ethyl-N-(2-dodecyloxyethyl)sulfamoyl, N-(3-(2,4-di-tert-pentylphenoxy)propyl)sulfamoyl), an alkylthio group with 1 to 22 carbon atoms (for example, ethylthio, dodecylthio, octadecylthio and 3-(2,4-di-tert-phenoxy)propylthio) or a sulfonyl group with 1 to 36 carbon atoms (for example, methanesulfonyl, tetradecanesulfonyl, i-octadecanesulfonyl, benzenesulfonyl). R₂₃ is preferably present at the meta position with respect to -NH- group.

 R_{27} represents alkyl group with 1 to 22 carbon atoms (for example, methyl, ethyl, n-hexyl, n-dodecyl, t-butyl, 1,1,3,3-tetramethylbutyl, 2-(2,4-di-tert-amylphenoxy)ethyl), an alkoxy group with 1 to 22 carbon atoms (for example, methoxy, ethoxy, n-butoxy, n-octyloxy, 2-ethylhexyloxy, n-dodecyloxy, n-hexadecyloxy, 2-ethoxyethoxy, 2-dodecyloxyethoxy, 2-methanesulfonyl ethoxy, 2-methanesulfonamido 3-(N-2-hydroxyethyl-sulfamoyl)propoxy, 2-(N-2-methoxyethylcarbonyl)ethoxy), an aryloxy group with 6 to 32 carbon atoms (for example, phenoxy, 4-chlorophenoxy, 2,4-dichlorophenoxy, 4-methoxyphenoxy, 4-dodecyloxyphenoxy and 3,4-methylenedioxyphenoxy) or an acylamino group including an aliphatic, aromatic and heterocyclic acylamino groups.

The aliphatic acylamino group includes a cycloalkyl carbonylamino group. The preferred aliphatic acylamino group is a branched alkyl carbonylamino group and the most preferred group is -NHCOC₄H₉(t).

Examples of the aromatic acylamino includes a benzoylamino group and a benzoylamino group of which the benzene ring is substituted with, for example, a halogen atom (e.g., bromine atom, chlorine atom) or an alkoxy group.

An example of the heterocyclic acylamino group is

35

40

25

30

5

R₂₉ represents a hydrogen atom, a halogen atom (for example, fluorine, chlorine and bromine), a hydroxy group, an alkyl or alkoxy group with 1 to 22 carbon atoms as defined in R₂₇, an aryl group with 6 to 32 carbon atoms (for example, phenyl, 2,4-dichlorophenyl, 4-methoxyphenyl, 4-dodecyloxyphenyl, 2,4-ditert-amylphenoxy, 4-tert-octylphenyl and 4-(2-ethylhexanamido)phenyl).

R28 represents an amino group (a substituted or unsubstituted amino group such as an N-alkylamino group, an N,N-dialkylamino group, an N-anilino group, an N-alkyl-N-arylamino group and a heterocyclic amino group. The carbon number of the alkyl group in these groups are preferably from 1 to 22 and the aryl group in these groups are preferably from 6 to 32. Examples of these groups include N-butylamino, N,N-diethylamino, N-(2-(2,4-di-tert-amylphenoxy)ethyl)amino, N,N-dibutylamino, N-piperidino, N,N-bis-(2dodecyloxyethyl)amino, N- cyclohexylamino, N,N-di-hexylamino, N-phenylamino, 2,4-di-tert-amylphenylamino, N-(2-chloro-5-tetradecanamidophenyl)amino, N-methyl-N-phenylamino, N-(2-pyridyl)amino), an acylamino group (for example, acetamido, benzamido, tetradecanamido, (2,4-di-tert-amylphenoxy)acetamido, 2-chlorobenzamido, 3-pentadecylbenzamido, 2-(2-methanesulfonamidephenoxy)dodecanamido, 2-(2-chlorophenoxy)tetradecanamido), a ureido group (for example, methylureido, phenylureido and 4cyanophenylureido), an alkoxycarbonylamino group (for example, methoxy carbonylamino, dodecyloxycarbonylamino, 2-ethyloxycarbonylamino), an imido group (for example, N-succin imido, N-phthalimido, Nhydantoinyl, 5,5-dimethyl-2,4-dioxooxazol-3-yl, N-(3-octadecenyl)succinimido), a sulfonamido group (for example, methane sulfonamido, octane sulfonamido, benzene sulfonamido, 4-chlorobenzene sulfonamido, 4dodecylbenzene sulfonamido, N-methyl-N-benzene sulfonamido, 4-dodecyloxybenzene sulfonamido and hexadecane sulfonamido), a sulfamoylamino group (for example, N-octyl sulfamoylamino, N,N-dipropyl sulfamoylamino, N-ethyl-N-phenyl sulfamoylamino, N-(4-butyloxy) sulfamoylamino), an alkoxycarbonyl group (for example, methoxycarbonyl, butoxycarbonyl, dodecyloxycarbonyl and benzyloxycarbonyl), a carbamoyl group (for example, N-octylcarbamoyl, N,N-dibutylcarbamoyl, N-phenylcarbamoyl and N-(3-(2,4di-tert-amylphenoxy)propyl)carbamoyl), an acyl group (for example, acetyl, benzoyl, hexanoyl, 2-ethylhexanoyl and 2-chlorobenzoyl), a cyano group, an alkylthio group (for example, dodecylthio, 2-ethylhexylthio, benzylthio, 2-oxocyclohexylthio, 2-(ethyltetradecanoate)thio, 2-(dodecylhexanoate)thio, 3-phenoxypropylthio and 2-dodecane sulfonylethylthio).

R₂₈ and R₂₉ are preferably present at the metha and/or para position with respect to the -S- group.

Among the compound represented by the general formula (M-I), particularly preferred compounds are compounds in which R_{21} represents a hydrogen atom, R_{22} represents a halogen atom, R_{27} represents an alkoxy group with 1 to 22 carbon atoms, m1 and m2 each is 1, and m3 is 0.

Specific examples of the substituent for R₂₄ in the general formula (M-II) include, for example, a halogen atom, an alkyl group, an aryl group, a heterocyclic group, a cyano group, an alkoxy group, an aryloxy group, a heterocyclic oxy group, an acyloxy group, a carbamoyloxy group, a silyloxy group, a sulfonyloxy group, an acylamino group, an anilino group, a ureido group, an imido group, a sulfamoylamino group, an alkoxycarbonylamino group, an aryloxycarbonylamino group, an aryloxycarbonylamino group, a sulfonamido group, a carbamoyl group, an acyl group, a sulfamoyl group, a sulfonyl group, a sulfonyl group, an alkoxycarbonyl group and an aryloxycarbonyl group. The carbon numbers of groups represented by R₂₄ are the same as those of R₂₉.

More specifically, these substituentsinclude a halogen atom (for example, chlorine and bromine), an alkyi group (for example, methyl, propyl, isopropyl, t-butyl, trifluoromethyl, tridecyl, 3-(2,4-di-t-amylphenoxy)propyl, allyl, 2-dodecyloxyethyl, 3-phenoxypropyl, 2-hexylsulfonylethyl, 3-(2-butoxy-5-t-hexyl phenylsulfonyl)propyl, cyclopentyl and benzyl), an aryl group (for example, phenyl, 4-t-butylphenyl, 2,4-di-tamylphenyl and 4-tetradecanamidophenyl), a heterocyclic group (for example, 2-furyl, 2-thienyl, 2pyrimidinyl and 2-benzothiazolyl), a cyano group, an alkoxy group (for example, methoxy, ethoxy, 2methoxyethoxy, 2-dodecyloxyethoxy, 2-phenoxyethoxy and 2-methanesulfonylethoxy), an aryloxy group (for example, phenoxy, 2-methylphenoxy, 2-methoxyphenoxy, 4-t-butylphenoxy), a heterocyclic oxy group (for example, 2-benzimidazolyloxy), an aliphatic and aromatic acyloxy group (for example, acetoxy and hexadecanoyloxy), a carbamoyloxy group (for example, N-phenylcarbamoyloxy and N-ethylcarbamoyloxy), a silyloxy group (for example, trimethylsilyloxy), a sulfonyloxy group (for example, dodecylsulfonyloxy), an acylamino group (for example, acetamido, benzamido, tetradecanamido, α -(2,4-di-t-amylphenoxy)- α -(4-(4-hydroxyphenylsulfonyl)phenoxy)- γ -(3-t-butyl-4-hydroxyphenoxy)butylamido ' and butylamido, phenylamino, 2-chloroanilino, group (for example, decanamido), anilino tetradecanamidoanilino, 2-chloro-5-dodecyloxycarbonylanilino, N-acetylanilino, 2-chloro-5-(α-(3-t-butyl-4hydroxyphenoxy)dodecanamido)anilino), a ureido group (for example, phenylureido, methylureido, N,Ndibutylureido), an imido group (for example, N-succineimido, 3-benzylhydantoinyl, 4-(2-ethylhexanoylamino)phthalimido), a sulfamoylamino group (for example, N,N-dipropylsulfamoylamino and N-methyl-N-decylsulfamoylamino), an alkylthio group (for example, methylthio, octylthio, tetradecylthio, 2-phenoxyethylthio, 3-phenoxypropylthio and 3-(4-t-butylphenoxy)propylthio), an arylthio group (for example, phenyl-2-carboxyphenylthio 3-pentadecylphenylthio, 2-butoxy-5-t-octylphenylthio, tetradecanamidophenylthio), a heterocyclic thio group (for example, 2-benzothiazolylthio), an alkoxycarbonylamino group (for example, methoxycarbonylamino and tetradecyloxycarbonylamino), an aryloxycarbonylamino group (for example, phenoxycarbonylamino and 2,4-di-tert-butylphenoxycarbonylamino), a sulfonamido group (for example, methanesulfonamido, hexadecanesulfonamido, benzenesulfonamido, ptoluenesulfonamido, octadecanesulfonamido and 2-methyloxy-5-t-butylbenzenesulfonamido), a carbamoyl group (for example, N-ethylcarbamoyl, N,N-dibutylcarbamoyl, N-(2-dodecyloxyethyl)carbamoyl, N-methyl-Ndodecylcarbamoyl and N-(3-(2,4-di-tert-amylphenoxy)propyl)carbamoyl), an acyl group (for example, acetyl-(2,4-di-tert-amylphenoxy)acetyl and benzoyl), a sulfamoyl group (fcr example, N-ethylsulfamoyl, N,Ndipropylsulfamoyl, N-(2-dodecyloxyethyl)sulfamoyl, N- ethyl-N-dodecylsulfamoyl and N,N-diethylsulfamoyl), a sulfonyl group (for example, methanesulfonyl, octanesulfonyl, benzenesulfonyl, toluenesulfonyl and 2butoxy-5-tert-octylphenylsulfonyl), a sulfinyl group (for example, octanesulfinyl, dodecylsulfinyl and phenylsulfinyl), an alkoxycarbonyl group (for example, methoxycarbonyl, butyloxycarbonyl, dodecyloxycarbonyl and octadecyloxycarbonyl), aryloxycarbonyl group (for example, phenyloxycarbonyl and 3-pentadecyloxvcarbonyl).

In the general formula (M-II), Z_{21} represents a hydrogen atom or a releasing group in the reaction with an oxidized product of an aromatic primary amine color developing agent. Referring more specifically to the releasing group Z_{21} , it includes a halogen atom (for example, fluorine, chlorine and bromine), an alkoxy group (for example, dodecyloxy, dodecyloxycarbonylmethoxy, methoxycarbamoylmethoxy, and carboxypropyloxy), an aryloxy group (for example, 4-methylphenoxy, 4-tert-butylphenoxy, 4-methoxyphenoxy, 4-methoxyphenoxy, and 4-(4-benzyloxyphenylsulfonyl)phenoxy), an acyloxy group (for example, acetoxy, tetradecanoyloxy and benzoyloxy), a sulfonyloxy group (for example, methanesulfonyloxy and

EP 0 304 067 A2

toluenesulfonyloxy), an amido group (for example, dichloroacetylamino, methanesulfonylamino, triphenylphosphonamido), an alkoxycarbonyloxy group (for example, ethoxycarbonyloxy and benzyloxycarbonyloxy), an ryloxycarbonyloxy group (for example, phenoxycarbonyloxy), an aliphatic or aromatic thio group (for example, phenylthio, dodecylthio, benzylthio, 2-butoxy-5-tert-octylphenylthio, 2,5-di-octyloxyphenylthio, 2-(2-ethoxyethoxy)-5-tert-octylphenylthio and tetrazolylthio), an imido group (for example, succinimido, hydantoinyl, 2,4-dioxooxazolidin-3-yl and 3-benzyl-4-ethoxyhydantoin-1-yl), an N-containing heterocyclic ring (for example, 1-pyrazolyl, 1-benzotriazolyl and 5-chloro-1,2,4-triazol-1-yl), and an aromatic azo group (for example, phenylazo). These releasing group may include photographically useful groups.

The coupler may form a dimer or higher polymer at a group of R_{24} , Z_{21} , Z_{22} or Z_{23} in the general formula (M-II) .

Among the compounds represented by the general formula (M-II), particularly preferred compounds are represented by the general formula (M-III) or (M-IV).

$$R_{24}$$
 R_{21}
 N
 N
 N
 N
 R_{25}
 R_{25}

where R₂₄ and Z₂₁ have the same meanings as in the general formula (M-II), and R₂₅ has the same meaning as R₂₄. The R₂₄ and R₂₅ groups may be identical or different.

The compounds represented by the general formula (M-III) or (M-IV) may form a dimer or a higher polymer.

Among the compounds represented by general formulae (M-III) and (M-IV), those represented by the general formula (M-IV) are particularly preferred.

Examples of the magenta coupler represented by the general formula (M-I) or general formula (M-II) are described below, but the present invention is not restricted thereto.

45

50

$$(M-1)$$

$$C \neq Q$$

$$C_{13}H_{27}CONH$$

$$C \neq Q$$

Č L

(t)
$$C_{5}H_{11}$$

C ℓ

C ℓ

O $-CH_{2}CH_{2}O-CH_{2}CH_{2}-OC_{2}H_{5}$

C ℓ

O $-CH_{2}CH_{2}O-CH_{2}CH_{2}-OC_{2}H_{5}$

C ℓ

C ℓ

C ℓ

C ℓ

•

$$(t) C_{5}H_{11} \leftarrow \begin{pmatrix} C & \ell & C & \ell \\ C_{2}H_{5} & C & \ell \\ C_{5}H_{11}(t) & C & \ell \\ C_{5}H_{11}(t) & C & \ell \\ C_{6}H_{11}(t) & C & \ell \\ C_{7}H_{11}(t) & C & \ell \\ C_{7}H_{11}($$

(M-5) $C_{2}H_{5}$ $C_{2}H_{5}$ $C_{3}H_{11}$ $C_{5}H_{11}(t)$ $C_{5}H_{11}(t)$ $C_{6}H_{11}(t)$ $C_{7}H_{11}(t)$

ξ

$$(M-9)$$

$$C \stackrel{?}{\underset{}{\stackrel{}}{\stackrel{}}} C \stackrel{?}{\underset{}{\stackrel{}}{\stackrel{}}} C - NH - (CH_2)_{2}OCH_{2}$$

$$C \stackrel{?}{\underset{}{\stackrel{}}{\stackrel{}}} C \stackrel{?}{\underset{}{\stackrel{}}{\stackrel{}}} C - NH - (CH_2)_{2}OCH_{2}$$

$$C \stackrel{?}{\underset{}{\stackrel{}}{\stackrel{}}} C \stackrel{?}{\underset{}} C \stackrel{?}{\underset{}{\stackrel{}}{\stackrel{}}} C \stackrel{?}{\underset{}} C \stackrel{$$

$$C_{2}H_{5}$$

$$C_{2}H_{5}$$

$$C_{4}H_{4}(t)$$

$$C_{5}H_{5}$$

$$C_{7}H_{7}(t)$$

$$C_{8}H_{7}(t)$$

30.

35

55

20 (M-13)

CH₂ Cl

NNH

OC. H₁₇

OC. H₁₇

OC. H₁₇

CH3

C. H17(t)

40

50

(M-14)

20 -

45

50

(M-16)

(M-17)

$$(M-18)$$

(M-19)

(M-20)

(M-21)

(M-23)

20 (M-24)

$$(M-27)$$

$$CH_3 O - C\ell$$

$$N NH C + H_4$$

$$(CH_2)_2NHC-CHO - C_5H_{11}(t)$$

$$C_5H_{11}(t)$$

$$(M-28)$$

$$C_{10}H_{21}$$

$$O - CHCNH - (CH_2)_2 C_2$$

$$O - CH_2$$

$$O - CH_3$$

$$(M-29)$$

(M-30)

CH₃ C
$$\ell$$
NNNH

C₁₀H₂₁

$$\downarrow$$
HO—SO₂—O—CHCNH—(CH₂)₃

$$(M-31)$$

CH₃

$$CH_3$$

$$CH_3$$

$$CH_3$$

$$CH_3$$

$$CH_4$$

$$N$$

$$N$$

$$N$$

$$N$$

$$N$$

$$SO_2 (CH_2)_3$$

$$C \cdot H_{17}(t)$$

$$(M-33)$$

(M-34)

$$C_{\bullet}H_{17}(t)$$
 $C_{\bullet}H_{17}(t)$
 $C_{\bullet}H_{17}(t)$
 $C_{\bullet}H_{17}(t)$
 $C_{\bullet}H_{17}(t)$
 $C_{\bullet}H_{17}(t)$
 $C_{\bullet}H_{17}(t)$
 $C_{\bullet}H_{17}(t)$

(M-35)

(molar ratio)

(M - 36)

5

10

15

55

C P

NH

NH

O

C P

C P

C P

(M - 37)

25 $C_{1} = H_{35} \longrightarrow N \longrightarrow N \longrightarrow C_{\ell}$ $C = N \longrightarrow N \longrightarrow C_{\ell}$ $C = C \longrightarrow C_{\ell}$

(M-38) $C_{12}H_{25}$ O-CHCONH $C_{12}H_{25}$ $C_{12}H_{25}$

The magenta couplers represented by the general formulae (M-I) and (M-2) can be synthesized by the methods disclosed in U.S. Patents 3,725,067, 3,935,015, 4,351,897, 4,540,654 and 4,595,650.

The epoxy compound represented by the general formula (II) is desirably co-emulsified with the yellow coupler of the general formula (I).

Cyan couplers can be used, in addition to the yellow and magenta coupler described above, as couplers in the present invention.

Preferred cyan couplers ares represented by the general formula (C-I).

In the formula, R³¹ represents an alkyl group, an aryl group, an amino group or a heterocyclic group; R³² represents an acylamino group or an alkyl group. R³³ represents a hydrogen atom, a halogen atom, an alkyl group or an alkoxy group. Further, R³³ and R³² may be linked to form a ring.

Z³¹ represents a hydrogen atom or a coupling-off group.

More specifically, in the general formula (C-I), the alkyl group represented by R³¹ preferably represents a linear, branched or cycloalkyl group with 1 to 32 carbon atoms or an aryl group with 6 to 42 carbon atoms. Where R³¹ is an amino group, it includes an alkylamino group or arylamino group and, a phenylamino group which may be substituted is particularly preferred. The alkyl group, aryl group or arylamino group represented by R³¹ may further have a substituent selected from an alkyl group, an aryl group, an alkyl or an aryloxy group, a carboxy group, an alkyl or arylcarbonyl group, an alkyl or aryloxycarbonyl group, an acyloxy group, a sulfamoyl group, a carbamoyl group, a sulfonamido group, an acylamino group, an imido group, a sulfonyl group, a hydroxyl group, a cyano group and a halogen atom. Where R³³ and R³² are linked to form a ring, the ring is preferably a 5- to 7-membered ring, more preferably, an oxyindole ring, a 2-oxobenzoimidaline ring or a carbostyryl ring.

The coupling off group represented by Z³¹ includes a halogen atom, an alkoxy group, an aryloxy group, an acyloxy group, a sulfonyloxy group, an amido group, an alkoxycarbonyloxy group, an aryloxycarbonyloxy group, an aliphatic thio group, an aromatic thio group, a heterocyclic ring thio group, an imido group, and an N-heterocyclic ring. These releasing groups may contain photographically useful groups. Specific examples of photographically useful groups are groups containing a developer restrainer, developer accelerator or chromophoric group (for example, those having azo bonding).

R³¹, R³² or Z³¹ in the general formula (C-I) may form a dimer or higher polymer.

Specific examples of the cyan coupler represented by the general formula (C-I) are shown below, but the present invention is not to be construed as being limited thereto.

35

30

5

40

45

50

(C-1)

$$C_{2} H_{5}$$

$$C_{2} H_{5}$$

$$C_{2} H_{5}$$

$$C_{2} H_{5}$$

$$C_{3} H_{11} (t)$$

(C-2)

C₂ H₅

$$OH \qquad C_{2} H_{5}$$

$$OH \qquad OH \qquad C_{5}H_{11}(t)$$

$$C_{5}H_{11}(t)$$

$$C_{6}H_{11}(t)$$

(C-3)

(C-5)

5

10

(c-6)

C₂ H₅

OH

NHCOC₃ F₇

(t) C₅ H₁₁

$$C_{5}H_{11}$$

(t)

₂₅ (C-7)

(C-8)

C₁₂H₂₅

$$C_{12}H_{25}$$
OCHCONH
$$C_{2}$$

$$C_{2}$$

45

50

(c-9)

$$C_{\bullet} H_{13} \longrightarrow OCHCONH$$

$$C_{\ell} C_{\ell}$$

$$C_{\ell}$$

(c-10) $C_{3}^{H_{7}(i)} \longrightarrow C_{\ell}^{C_{3}H_{7}(i)}$ (t) C₅ H₁₁ C₅ C₅H₁₁(t)

(c-11)

$$C_{\bullet} H_{13} \longrightarrow OCHCONH \longrightarrow HNSO_{2} C_{\bullet} H_{3}$$

$$C_{\bullet} C_{\bullet} C_$$

(C-12)

OCHCONH CP NHCO-
OCHCONH CP NHCO-
OCHCONH CP NHCO-
$$C_{6}H_{13}(t)$$

(C-13)

(C-14)

(C-15)

$$\cdot (C-17)$$

10

15

20

25

35

40

45

 $C_{2} H_{5}$ $N + C_{2}$ $N + C_{5} H_{11}(t)$ $C_{5} H_{11}(t)$

(C-18)

CH₃ CH₃ OH NHCO NHSO₂ C₁₆H₃₂(n)

(C-19)

(C-20)

55

$$(C-22)$$

C₂ H₅ OH NHCONH—S0₂C₃H₇

(t) C₅ H₁₁ (t)

$$C_{5}^{H_{11}}$$
 (t)

(t) C₅ H₁₁ C₅H₁₁ (t)
$$C_{11}$$
 NHCONH—CN

$$(C-24)$$

$$(C-25)$$

(t) C₁ H₁₇
$$C_{4}$$
 H₁₇ C_{6} C_{1} C_{1} C_{1} C_{2} C_{1} C_{2} C_{3} C_{1} C_{2} C_{3} C_{4} C_{2} C_{3} C_{4} C_{5} C_{5}

$$(C-27)$$

C₅H₁₁(t)

$$(C-28)$$

C1 NHCOCHO
$$C_2H_5$$
 $C_5H_{11}(n)$

The image stabilizer that can be used together with the compound according to the present invention may any of known discoloration inhibitor, which includes the compounds as described in the following patent publications:

U.S. Patents 3,432,300, 3,573,045, 3,574,627, 3,700,455, 3,764,337, 3,935,016, 4,254,216, 4,268,593, 4,430,425, 4,465,757, 4,465,865 and 4,518,679; British Patent No. 1347556; British Patent Application 2066975A; JP-A-52-15225, JP-A-53-17729, JP-A-53-20327, JP-A-54-145530, JP-A-55-6321, JP-A-55-21004, JP-A-61-72246, JP-A-61-73152, JP A-61-90155, JP-A-61-90156 and JP-A-61-145554.

Typical examples of the image stabilizer are set forth below, but the present invention is not to be construed as being limited thereto.

.15

(F-1)

$$C_4 H_{\bullet}(t) C_5 H_{11}(t)$$
 $C_4 H_{\bullet}(t) C_5 H_{11}(t)$
 $C_4 H_{\bullet}(t)$

$$(F-2)$$

$$C_4 H_{\bullet}(t)$$

$$C_7 H_7 C_{\bullet}$$

$$C_8 H_7 C_{\bullet}$$

$$C_8$$

(F-3) UV-agent mixture (molar ratio: 1:1:1:1)

$$\begin{array}{c|c} C & C & N & O & H & C_4 & H_{\bullet} & C$$

(F-4)

CH₂C00 — NH

CH₃

CH₃

(F-5)
$$\frac{-(CH_2 - CH)_{\pi}}{|CONH - C(CH_3)_3}$$

(average molecular weight:
400)

٠.

55

50

осн.

(F-11)

(F-11)

$$CH_3$$

OH

 $C-CH_2-C$

(CH₃)₃

CH₃
 CH_3

OH

 CH_3
 CH_3
 CH_3

(F-12)

30

45

C₂ H₅

C₃ H₅

H

OCH₂ CH-C₄ H₇

C₄ H₇ -CHCH₂ O

C₄ H₇ -CHCH₂ O

C₅ H₅

C₆ H₇

C₇ H₇

C₈ H₇

C₈ H₇

OCH₂ CH-C₄ H₇

C₈ H₇

C₈

$$(F-16)$$

The high boiling point organic solvents useful in the present invention are preferably those having a boiling point higher than 160° C under normal pressure and they can include, for example, esters (for example, phosphoric acid esters, phthalic acid esters, fatty acid esters and benzoic acid esters), phenols, aliphatic alcohols, carboxylic acids, ethers, amides (for example, aliphatic amides, benzoic acid amides, sulfonic acid amides and cyclic imides), aliphatic hydrocarbons, halogen compounds and sulfone derivatives. When photographic additives such as couplers are added while being dissolved in such high boiling organic solvents, low boiling organic solvents having a boiling point from 30° C to 160° C such as lower esters, for example, ethyl acetate, butyl acetate or ethyl propionate, secondary butyl alcohol, methyl isobutyl ketone, cyclohexane, β -ethoxyethyl acetate and dimethylformamide may be mixed as required. These mixtures are used, after being emulsified and dispersed in a hydrophilic aqueous colloidal solution, in admixture with a photographic emulsion. In this case, only the low boiling organic solvent can removed by concentration under a reduced pressure or water washing.

The amount of the high boiling organic solvent is within a range from 0 to 20 parts by weight,

preferably, from 0.2 to 3 parts by weight per 1 part by weight of the photographic additives such a coupler.

Preferred examples of the high boiling organic solvent are set forth below, but the present invention is not to be construed as being limited thereto.

$$O = P - \left(O - \left(H\right)\right)^{2}$$

(0-7)

0 = P (0 - ()

(0-8)

$$O = P \left(O \left(\sum_{C H_3} \right)_3 \right)$$

•

(m, p mixture)

₂₀ (0-9)

25

5

10

15

35

50

5	(0-12)	COOCH COOC Hs
. 10	(O-13)	COOCH:
15		
20	(O -14)	COOCH ₂ CHC ₄ H, C ₂ H ₅ COOCH ₂ CHC ₄ H, C ₂ H ₅
25	(O-15)	COOC12H25
30		COOC12H25
35	(O-16)	COOCH ₂ CH ₂ OC ₄ H ₃
40	(0-17)	се-√>-соосн₂ снс₄ н,
45		C2 H ₅

(O-20)

C₅ H₅

$$(t) C_5 H_{11} \longrightarrow -O-CHCONH \longrightarrow C_5 H_{11}(t)$$
C₅ H₁₁(t) COOH

(0-23)
(t)
$$C_s$$
 H_{11} $O + CH_2 + COOH$
 C_s $H_{11}(t)$

 C_{\bullet} (O-24) C_{\bullet} H₁₇CH=CH (CH₂), COOC₄ H,

5

45

50

15

(0-27)

С. н. - снсоосн. — н — сн. ососнс. н. 35

 $C_{2}^{H_{5}}$ $C_{4}^{H_{9}-CHCH_{2}OCO}$ $C_{2}^{H_{5}}$ $C_{2}^{H_{5}}$ $C_{2}^{H_{5}}$ $C_{2}^{H_{5}}$

(0-28)C18H35-CHCOOH CH. COOCH. 5 (0-29)OH 10 OCH, CHCH, OH C 5 H 11(t) 15 (0-30)C₂ H₅ 20 C4 H, CHCH2 OCO (CH2) COOCH2 CHC4 H, C₂ H₅ 25 (0-31)• • • C₂ H₅ 30 (C_z H₅)_z NCO (CH₂)₁ COOCH₂ CHC₄ H₇ 35 (0-32)CH2 COOC4 H, CH3 COO-C-COOC4 H, 40 CH2 COOC4 H,

55

45

(0 - 33)

5

30

: :

(O-34)

$$CnH2n+2$$
 $n=10\sim20$
(paraffin)

CH₃ COCH₂ COOC₁₂H₂₅

(t) C₅ H₁₁
$$C_2$$
 H₅ C_2 H₅ C_2 H₅ C_2 H₅ C_3 H₁₁(t)

(0-38)

55

In the present invention, when at least .one UV absorber is further used, the effect of the present invention can further be improved.

The UV absorber can be added to any desired layer. Preferably, the UV absorber is incorporated into the layer adjacent to the cyan coupler-containing layer. The UV absorber usable in the present invention includes the group of compounds set forth in Research Disclosure, vol 176, No. 17643 (December, 1978) VIII-C and, preferably, benzotriazole derivatives represented by the following general formula (XI).

where R₄₁, R₄₂, R₄₃, R₄₄ and R₄₅, which may be the same or different, each represents a hydrogen atom or a substituent. As the substituent, those substituents for the aliphatic group or aryl group represented by R₁ in the general formula (II) may be used. R₄₄ and R₄₅ may be linked to form an aromatic ring containing a 5- or 6-membered carbocyclic ring. These groups or aromatic rings may further be substituted with another substituent.

The compound, represented by the general formula (XI) above can be used alone or as a mixture of two or more of them. Examples of typical compound for the UV absorbers usable in the present invention are set forth below, but the present invention is not to be consxtrued as being limited thereto. Among the chemical structures, the skelton

can also have a structure

through the resonance structure.

$$(UV-2)$$

30 (UV + 3)

40

5

(UV-6)

CH = C CN COOC₂ H₃

(UV-9)

5

10

(UV-10)

CH₂

$$C_{12}H_{25}$$

$$C_{4}H_{9}(t)$$

$$C_{4}H_{9}(t)$$

(UV-11)

45

50

55


(UV-12)

OH
C₅ H₁₁(t)

(UV-13)

(UV-14)

(UV-15)

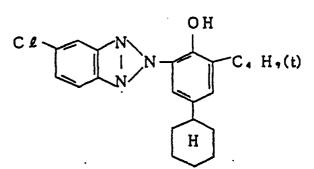

40
$$(UV-20)$$

Cr

N

CAH, (sec)

Synthesis processes for the compounds represented by the general formula (XI) or the examples of other compounds are described in, for example, JP-B-44-29620 (the term JP-B as used herein means an "examined published Japanese Patent Application"), JP-A-50-151149 and JP-A-54-95233, U.S. Patent 3,766,205, EP 0057160 and Research Disclosure, vol. 225, No. 22519 (1983). Further, high molecular weight UV absorbers as described in JP-A-58-111942 and JP-A-58-178351 (British Patent 2118315A), U.S. Patent 4,455,368, JP-A-59-19945 and JP-A-59-23344 (British Patent 2127569A) can also be used and specific examples include UV-6 above. Low molecular and high molecular UV absorbers can be used in combination.

The UV absorber can be emulsified and dispersed in a hydrophilic colloid by the same method as the coupler. Although there are no particular restrictions for the amount of the high boiling organic solvent and

the UV absorber, the high boiling organic solvent is used usually within a range from 0 to 300% based on the weight of the UV absorber. It is preferred to use those compounds which are liquid under ambient temperature alone or in combination.

If the UV absorber of the general formula (XI) is used together with the coupler according to the present invention it is possible to improve the storability, particularly, light fastness of the colored dye image, particularly, cyan image. The UV absorber and the cyan coupler may be co-emulsified.

It is sufficient that the coating amount of the UV absorber is amount sufficient to provide light stability to the cyan dye image, but if it is used in excess, it may result in yellowing in the unexposed area (blank area) of the color photosensitive material and, accordingly, it is usually present within a range preferably from 1×10^{-4} mol/m² to 2×10^{-3} mol/m², particularly, from 5×10^{-4} mol/m² to 1.5×10^{-3} mol/m².

The dye image stabilizer, stain inhibitor or anti-oxidant usable in the present invention are described in the relevant patents cited in Research Disclosure 17643: VII-I-J. Further, the discoloration inhibitor metal complex system is described in Research Disclosure 15162.

For the silver halide emulsion layer of the color photosensitive material according to the present invention, various types of silver halides may be used. For example, they include silver chloride, silver bromide, silver bromodelide or silver iodobromochloride. Silver bromide, silver iodobromide containing 2 to 20 mol% of silver iodide and silver chlorobromide containing from 10 to 50 mol% of silver chloride are preferred. There are no particular restrictions as to the crystal form, crystal structure, grain size, grain size distribution, etc. of silver halide grains, but the use of a monodisperse emulsion with a variation coefficient of less than 15% is preferred. The crystal form of the silver halide may be a regular crystal or twin crystal, hexahedron, octahedron or tetradecahedron, but a hexahedron (cube) or tetradecahedron is preferred. As has been described in Research Disclosure, vol. 225, No. 22534 (1983), tabular grains with a thickness of not more than 0.5 µm, a diameter of at least, 0.6 µm and an average aspect ratio of 5 or greater may be used.

The crystal structure may be uniform or of a composition in which the inner portion and the outer portion are different, or it may be a layered structure, or silver halide grains of different compositions may be joined by an epitaxial bond.

The silver halide emulsion used in the present invention may either be a type for forming latent images mainly on the grain surface or a type for forming latent images mainly on the inside of the grain. In the latter case, a previously unfogged internal latent image type emulsion is useful for forming a direct positive image.

Conventional chemical sensitization, such as sulfur sensitization, can be applied to silver halide emulsion used in the present invention.

The support for use with the present invention includes transparent supports such as polyethylene terephthalate or cellulose triacetate, or reflective supports described below. Reflective supports are preferred and, for example, include barayta paper, polyethylene coated paper, polypropylene type synthesis paper, a transparent support additionally disposed with a reflective layer or used in combination with a reflective material, for example, a glass plate, a polyester film such as one of polyethylene terephthalate, cellulose triacetate or cellulose nitrate, a polyamide film, a polycarbonate film, polystyrene film or a vinyl chloride resin. The supports can properly be selected depending on the purpose.

Generally the photographic material has at least one blue sensitive emulsion layer, at least one green sensitive emulsion layer and at least one red sensitive emulsion layer, and generally, each emulsion layer contains a yellow coupler, a magenta couler, and a cyan coupler, respectively.

The respective blue sensitive, green sensitive and red sensitive emulsions in the present invention are spectrally sensitized by means of methine dye or like other compounds such that they have color sensitivities. The dyes usable herein can include cyanine dyes, merocyanine dyes, complex cyanine dyes, complex merocyanine dyes, holopolar cyanine dyes, hemicyanine dyes, styryl dyes and hemioxonol dyes.

Particularly useful dyes are cyanine dyes, merocyanine dyes and complex merocyanine dyes.

As the color photosensitive material according to the present invention, auxiliary layers, such as a subbing layer, an intermediate layer and a protective layer may be used in addition to the layers described above. In addition, a second UV absorption layer may be disposed between the red sensitive silver halide emulsion layer and the green sensitive silver halide emulsion layer if desired. While the UV absorbers described above are preferably used for the UV absorber layer, other known UV absorbers may also be used.

It is advantageous to use gelatin as the binder or the protective colloid for the photographic emulsion, but other hydrophilic colloids may also be used.

55

For example, there can be used gelatin derivatives, graft polymers of gelatin with other polymers, proteins such as albumin and casein, cellulose derivatives such as hydroxyethylcellulose, carboxymethylcel-

lulose and cellulose sulfate esters, saccharide derivatives such as sodium alginate and starch derivatives, various synthetic hydrophilic high molecular materials such as homo- or copolymers of vinyl alcohol (including partial acetal of polyvinyl alcohol), N-vinylpyrrolidone, acrylic acid, methacrylic acid, acrylic amide, vinyl imidazole and vinyl pyrazole.

Lime-treated gelatin, as well as acid-processed gelatin or enzyme processed gelatin as described in Bull. Soc. Soi. Phot. Japan. No. 16, p 30 (1966) may be used as gelatin and, alternatively, hydrolysis or enzymatic decomposition products of gelatin may be used.

In the photosensitive material according to the present invention, photographic emulsion layers and other hydrophilic colloid layers may contain brighteners such as stilbene type, triazine type, oxazole, or cumarine type. They may be water soluble brighteners or water insoluble brighteners which may be used in the form of a dispersion. Specific examples of fluorescent brighteners are described, for example, in U.S. Patents 2,632,701, 3,269,840, 3,359,102, British Patent 852075 and 1319763, and Research Disclosure, vol. 176, 17643 (December, 1978) on page 24, left column, lines 9 to 36.

In the photosensitive material according to the present invention, when dyes or UV absorbers are contained in the hydrophilic colloid layer, they may be mordanted by a cationic polymer. For instance, those polymers described in British Patent 685475, U.S. Patents 2,675,316, 2,839,401, 2,882,156, 3,048,487, 3,184,309 and 3,445,231, German Patent Application (OLS) No. 1914362 and JP-A-50-47624 and JP-A-50-71332 can be used.

In addition to the foregoing materials, various photographic additives known in this field, for example, stabilizers, anti-foggants, surface active agents, couplers other than those of the present invention, filter dyes, irradiation inhibiting dyes and developing agents may be added as required to the color photosensitive material according to the present invention, and examples thereof are described in Research Disclosure, No. 17643.

Furthermore, fine grain silver halide emulsions having no substantial sensitivity to light (for example, silver chloride, silver bromide and silver bromochloride emulsion with ab average grain size of less than 0.20 µm) may be added to the silver halide emulsion layer or other hydrophilic colloid layer depending on the case.

The color developer usable in the present invention is an aqueous alkaline solution preferably containing an aromatic primary amine color developing agent as the main ingredient. Typical examples of the color developing agent included 4-amino-N,N-diethylaniline, 3-methyl-4-amino-N,N-diethylaniline, 4-amino-N-ethyl-N- β -hydroxyethylaniline, 3-methyl-4-amino-N-ethyl- β -hydroxyethylaniline, 3-methyl-4-amino-N-ethyl-N- β -methoxyethylaniline.

The color developer can include a pH buffer such as an alkali metal sulfite, carbonate, borate and phosphate, a development inhibitor or antifoggant such as a bromide, an iodide and an organic anti-foggant.

Further, if required, the developer may also include a hard water softener, a preservative such as hydroxylamine, ab organic solvent such as benzyl alcohol or diethylene glycol, a development accelerator such as polyethylene glycol, a quaternary ammonium salt and an amine, a color forming coupler, a competitive coupler, a fogging agent such as sodium boron hydride, an auxiliary liquid developer such as 1-phenyl-3-pyrazolidone, a tackifier, a polycarboxylic acid type chelating agent as described in U.S. Patent 4,083,723 and an anti-oxidant as described in German Patent Application (OLS) 2622950.

However, when adding benzyl alcohol to the color developer, it is added preferably in an amount not more than 2.0 ml/liter and, more preferably, not more than 0.5 ml/liter. It is most preferred that the benzyl alcohol be added. The color developing time is preferably from 30 second to 2 minutes 30 second and, more preferably, from 45 second and to 2 minutes.

The photographic emulsion layer after color development is usually bleached. The bleaching may be at the same time as the fixing treatment or independently. The bleaching agent can include, for example, compounds of polyvalent metals such as iron (III), cobalt (III.), chromium (IV) and copper (II), peracids, quinones and nitroso compounds, for instance, ferricyanides, bichromates, organic complex salts of iron (III) or cobalt (III), for example, complex salts of ethylenediamine tetraacetic acid, nitrilo triacetic acid, aminopolycarboxylic acid such as 1,3-diamino-2-propanol tetraacetic acid or organic acids such as citric acid, tartaric acid or maleic acid; persulfates, permanganates and nitrosophenol. Among them, potassium ferricyanide, iron (III) sodium ethylenediamine tetraacetate and iron (III) ammonium ethylenediamine tetraacetate are particularly useful. Iron (III) complex salt of ethylenediamine tetraacetic acid is useful in a separate bleaching solution or bleach fix solution in a single bath.

Water washing may be applied after color development or bleaching fixing treatment. Color development can be conducted at an optional temperature between 18 and 55 °C. Color development is carried out at a temperature preferably not lower than 30 °C and, particularly preferably not lower than 35 °C. The time required for development is within a range from about 3 and one-half minutes to about one minutes, the

shorter time being preferred. Liquid replenishment is preferred for continuous development methods and in an amount generally not more than 330, preferably, not more than 160 ml, and more preferably, not more than 100 ml per one square meter of the material to be treated. Benzyl alcohol in the liquid developer is preferably not more than 5 ml/t.

While the bleach-fixing can be performed at an optional temperature from 18°C to 50°C, a temperature not lower than 30°C is preferred. If 35°C or higher, the processing time can be shortened to less than one minute and the amount of the replenishing liquid can be decreased. The time required for water washing after the color development or bleach-fixing is usually within 3 minutes and the water washing can substantially be eliminated by using a stabilization bath.

The colored dye is deteriorated or discolored by fungi during preservation, in addition to degradation with light, heat or temperature. Since the cyan image suffers from significant fungal degradation, it is preferred to use a fungicide. Specific examples of fungicide include 2-thiazolyl benzoimidazoles as described in JP-A-57-157244. The fungicide may be incorporated in the photosensitive material or may be added externally at the developing step. Alternatively, it may be added in any of the steps if it can be present together with the photosensitive material.

The present inventiobn is illustrated in greater detail with reference to the following examples which are not to be construed as limiting the scope of the present invention. Unless otherwise indicated, all parts, percents and ratios are by weight.

20

10

EXAMPLE 1

A multi-layered color print paper A of the layer structure shown below was prepared on a paper support having polyethylene laminates on both sides thereof. The coating solution was prepared as described below.

Preparation of first layer coating solution

30

27.2 m1 of ethyl acetate, and 7.7 ml of a solvent (Solv-1) were added to and dissolved 10.65 g of yellow coupler (ExY-1) and 8.11 g of yellow coupler (ExY-2) and 4.4 g of color image stabilizer (Cpd-1), and the solution was emulsified and dispersed in 185 ml of a 10% aqueous gelatin solution containing 8 ml of 10% sodium dodecylbenzene sulfonate. Separately, an emulsion was prepared by adding a blue sensitive sensitization dye shown below in an amount of 5.0×10⁻⁴ mol per mol of silver to a monodisperse cubic silver bromochloride emulsion (80.0 mol% of silver bromide, 1.1 μm in grain size and having a 10% variation coefficient). The emulsified dispersion and the emulsion were mixed to prepare a first layer coating liquid having the composition as described below. The coating liquids for the second layer to the seventh layer were prepared in the same manner as the first layer coating solution. 2-Hydroxy-4,6-dichloro-s-triazine sodium salt was used as a gelatin hardener for each of the layers.

The following spectral sensitization dyes were used for the respective layers.

Blue sensitive emulsion layer

45

55

50

(5.0×10⁻⁴ mol per mol of silver halide)

Green sensitive emulsion layer

Ce C2H5

CH=C-CH

(CH2)3 (CH2)2

SO3 © SO3H-N(C2H5)3

 $(4.0 \times 10^{-4} \text{ mol per mol of silver halide})$ and,

20

(CH₂)₄
(CH₂)₄
(CH₂)₄

SO₃
SO₃
SO₃
SO₃
H·N(C₂H₅)₃

 $(7.0 \times 10^{-5} \text{ mol per mol of silver halide})$

Red sensitive emulsion layer

CH₃ CH_3 CH_3 C

(0.9×10⁻⁵ mol per mol of silver halide)

The following compound was added in an amount of 2.6×10^{-3} mol per mol of silver halide to the red sensitive emulsion layer as a supersensitizing dye.

55

50

Further, to the blue sensitive emulsion layer, the green emulsion layer and the red sensitive emulsion layer, 1-(5-methylureidophenyl)-5-mercaptotetrazole was added in an amounts of 4.0×10^{-6} mol, 3.0×10^{-5} mol and 1.0×10^{-5} mol per mol of silver halide, respectively.

Furthermore, to the blue sensitive emulsion layer and the green sensitive emulsion layer, 4-hydroxyl-6methyl-1,3,3a,7-tetraazaindene was added in amounts of 1.2×10⁻² mol and 1.1×10⁻² mol per mol of silver halide, respectively.

For the prevention of irradiation, the following dyes were added to the emulsion layer.

and

35

40

45

50

55

5

15

(Layer structure)

The composition for each of the layers is shown below. The numbers represent the coating amount (g/m²). The amount of silver halide emulsion is expressed as the coating amount calculated as silver.

Support

```
Polyethylene laminated paper
        (Containing white pigment (TiO2) and blue tinted dye (marine blue) in the polyethylene on the side of
    the first layer).
5
    First layer (Blue sensitive layer)
    Silver halide emulsion (Br: 80% average grain side: 1.1 µm, variation coefficient 0.10, cubic)
                                                                                                      0.26
   Gelatin
                1.83
    Yellow coupler (ExY1)
                               0.45
                               0.35
    Yellow coupler (ExY2)
    Solvent (Solv-1)
                        0.35
    Color image stabilizer (Cpd-1)
                                       0.08
15
    Second layer (Color mixing preventive layer)
   Gelatin
                0.99
    Color mixing inhibitor (Cpd-2)
                                      80.0
    Third layer (Green sensitive layer)
    Silver halide emulsion (Br: 80% average grain size: 0.43 µm, variation coefficient 0.10, cubic)
                                                                                                       0.16
               1.79
    Gelatin
    Magenta coupler (ExM1)
   Color image stabilizer (Cpd-1)
                                       0.10
                                       0.20
    Color image stabilizer (Cpd-3)
    Color image stabilizer (Cpd-4)
                                       0.05
    Solvent (Solv-2)
                        0.65
35
    Fourth layer (UV absorption layer)
                1.58
    Gelatin
   UV absorber (UV-1)
                             0.62
    Color mixing inhibitor (Cpd-5)
                                       0.05
    Solvent (Solv-5)
                        0.24
45
    Fifth layer (Red sensitive layer)
     Silver halide emulsion (Br: 70% average grain size: 0.55 µm, variation coefficient 0.13, cubic)
                                                                                                       0.23
     Gelatin
                1.34
50 Cyan coupler (ExC)
                             0.24
     Color mixing inhibitor (Cpd-5)
                                       0.01
     Color mixing inhibitor (Cpd-8)
                                       0.01
     Color image stabilizer (Cpd-6)
                                       0.17
     Color image stabilizer Cpd-7)
                                      0.30
```

55 Solvent (Solv-3)

Solvent (Solv-4)

0.14

0.14

Sixth layer (UV absorption layer)

5	Gelatin 0.53 UV absorber (UV-1) 0.21 Solvent (Solv-5) 0.08	
10	Seventh layer (Protective layer) Gelatin (acid treated) 1.33	
15	Polyvinyl alcohol acryl modified copolymer (modification degree 17%) 0.17 Liquid paraffin 0.03 (Note): The average grain size of the emulsion used above is the average for the ridge length and the variation coefficient is the ratio (s/ \overline{d}) in which (s) represents the statistical standard deviation and (\overline{d}) represents the average-grain size.	
20		
25		
30		
35		
40		
45		
50		

Yellow coupler

ExYl

CH₃

CH₃

CCH₂

CH₃

CCH₂

CC₅H₁₁(t)

CC₅H₁₁(t)

CC₂H₅

ExY2

$$\begin{array}{c|c} CH_3 & C1 \\ CH_3 - C - CO - CH - CONH - C_5H_{11}(t) \\ CH_3 & CH_3 \\ CH_3 & CH_3 \end{array}$$

$$\begin{array}{c|c} C_5H_{11}(t) \\ C_2H_5 \\ CH_3 \\ CH_3 \end{array}$$

ExY3

$$\begin{array}{c} \text{CH}_3 \\ \text{CH}_3 - \text{C-CO-CH-CONH-} \\ \text{CH}_3 \\ \text{CH}_3 \\ \text{OCH}_2 \\$$

55

20

25

30

35

40

45

Magenta coupler

ExMl

5

10

15

20

25

$$\begin{array}{c|c}
C1 \\
NH \\
N \\
O
\end{array}$$

$$C1 \\
C1 \\
C1 \\
C1$$

30

50

Cyan coupler

5

25

30

35

45

50

ExC OH 10

(Cpd-1) Color image stabilizer

15 20

(Cpd-2) Color mixing inhibitor

C₈H₁₇(sec)

(Cpd-3) Color image stabilizer

CH₃ 40 CH₃ ĆH₃

(Cpd-4) Color image stabilizer

 $C_{15}H_{31}-CO \longrightarrow COC_{2}H_{5}$

(Cpd-5) Color mixing inhibitor

(Cpd-6) Color image stabilizer

A 5:8:9 mixture (weight ratio) of

$$C1$$
 N
 N
 N
 $C_4H_9(t)$

$$\begin{array}{c|c}
N & OH \\
N & C_4H_9 (sec)
\end{array}$$

(Cpd-7) Polymer

Average molecular weight: 50,000

(Cpd-8) Color mixing inhibitor

(UV-1) UV absorber

A 2:9:8 mixture (weight ratio) of

$$C1$$
 N
 N
 $C_4H_9(t)$

(Solv-1) solvent

COOC4H

(Solv-2) solvent

10

15

20

25

30

35

50

55

A 2:1 mixture (volume ratio) of

$$O=P$$
 C_2H_5
 $CH_2CHC_4H_9$
 CH_3
 CH_3
 CH_3

(Solv-3) solvent

 $O=P-(O=C_9H_{19}(iso))_3$

(Solv-4) Solvent

(Solv-5) Solvent

 $C_8H_{17}OOC + CH_2 + COOC_8H_{17}$

Furthermore, color print papers (B) to (N) shown in Table 1 were prepared by replacing the yellow coupler used in the first layer with various yellow couplers in an equimolar amount as described for the examples of the coupler in the present invention and also by adding various epoxy compounds according to the present invention.

Table 1

Remarks		Comparison	This invention	=	=	E	=	=	=	Comparison	
Third layer magenta coupler		ExM-1	=	=	=-	(M-1)		(M-15)	(M-16)	(M-36)	
	Solvent (addition amount ratio to coupler)	Solv-1 0.41 (ml/g)	ı	Solv-1 0.21	1	Solv-4 0.10	Solv-5 0.10	Solv-1 0.20	Solv-1 0.20	Solv-1 0.40	
First layer	Epoxy compound (addition amount ratio to coupler)	1	Exemplified compound (II-I) 0.40 (g/g)	" (II-I) 0.20	" (II-5) 0.40	" (11-5) 0.30	" (11-9) 0.30	" (II-12) 0.20	" (II-18) 0.20	•	
	Yellow coupler	ExY-1/ExY-2	=	=		=	=	=	=	(I-3)	
Color print paper		A	В	O	a	Ш	ш	9	I	_	

Table 1 (con't)

5	Color print paper		First layer		Third layer magenta coupler	Remarks
10		Yellow coupler	Epoxy compound (addition amount ratio to coupler)	Solvent (addition amount ratio to coupler)		-
15	K L M N	(I-4) (I-6) (I-6) ExY-3	Exemplified compound (II-12) 0.20 " (II-5) 0.30 " (II-5) 0.30 " (II-5) 0.20	Solv-5 0.20 Solv-5 0.10 Solv-4 0.10 Solv-1 0.21	(M-25) (M-32) (M-32) (M-36)	" " Comparison

The print papers (A) to (N) were subjected to gradation exposure for sensitometry by using a sensitometor (FWH type, manufactured by Fuji Photo Film Co., Ltd.), color temperature at light source: 3,200° K, through each of blue, green and red filters. Exposure in this case was conducted so as to give an exposure amount of 250 CMS with an exposure time of 1/10 sec.

After exposure, the following procedure of color development, bleach-fixing and water washing was carried out.

Temperature

30-34°C

30-34°C

30-34°C

30**-**34°C

70-80°C

38° C

Time

1 min 40 sec

1 min 00 sec

20 sec

20 sec

20 sec

50 sec

_	_	
7	5	
٠	v	

30

(3-vessel countercurrent system from rinsing (3)→(1) was employed)

Processing step

Color development

Bleach-Fix

Rinsing (1)

Rinsing (2)

Rinsing (3)

Drying

35

The composition for each of the processing solutions was as follows.

Color developer

40

800ml Water

Diethylenetriamine pentaacetic acid 1.0 g

Nitrotriacetic acid 1.5 g

Benzyl alcohol 15 ml

10 ml

Diethylene glycol Sodium sulfite 2.0 g

0.5 g

Potassium bromide Potassium carbonate 30 g

N-ethyl-N-(8-methanesulfonamidoethyl)-3-methyl-4-aminoaniline sulfate

50 Hydroxylamine sulfate

Fluorescent brightener (WHITEX 4B, manufactured by Sumitomo Chemical) 1.0 g

made up with water to 1000 ml

pH (25°C)

Bleach-fixing solution Water 400 ml Ammonium thiosulfate (70%) 200 ml Sodium sulfite Iron (III) ammonium ethylenediamine tetraacetate 60 g Disodium ethylenediamine tetraacetate made up with water to 1000 ml pH (25°C) 7.00 10 Rinsing solution 15 Ion exchanged water (calcium, magnesium, each not more than 3 ppm) Tests were conducted for light storability and dark heat storability for each of the samples having a color dye image formed by the above procedures, by the following procedures (a) and (b). (a) Light storability Xenon fade meter 5×104 Lux Irradiated for 10 days (b) Dark heat storability 100°C with no humidification, 5 days The storability of the dye image was represented by the percentage (%) of the density (D) after the test relative to the initial density (D0) = 1.0. The results are shown in Table 2. 40 45

55

Table 2

Υ

Light storability

M

Υ

Color print

paper

В

С

D

E

F

G

Н

Dark heat

storability

Remark

Comparison

This invention

5	

Comparison This invention J Κ L Μ Ν Comparison As is apparent from Table 2, in the color print paper not using the epoxy compound according to the present invention, the light and dark heat storability of the yellow image was remarkably deteriorated, but it

can be seen that the light and dark heat storability of the yellow image was improved by using the epoxy compound according to the present invention. It can be seen that good balance was obtained between yellow and magenta color image discoloration.

In specimen N, the epoxy compound according to the present invention was not effective for light and heat fastness of the yellow image formed from the aryloxy releasing yellow coupler.

Then, print papers O and P were prepared by replacing, in the print papers A and B described above, the emulsions in each of the layers with the following cubic silver bromochloride emulsion containing from 0.4 to 1 mol% of silver bromide, and the spectral sensitization dye used in the blue sensitive layer, green sensitive layer and red sensitive layer, respectively, with the following compounds, respectively.

	Cubic silver bromochloride emulsion		
	Average grain size	Variation coefficient	Silver bromide content
Blue sensitive layer Green sensitive layer Red sensitive layer	0.97 µm 0.39 µm 0.48 µm	0.13 0.12 0.09	0.7 mol% 0.4 mol% 1.0 mol%

Blue sensitive emulsion layer

5 CH CH CH2)3 (CH2)3

10 SO3 \text{S} SO3 \text{H} \cdot N(C2\text{H}_5)3

(added by 7×10^{-4} mol per mol of silver halide)

Green sensitive emulsion layer

15

35

25 C_2H_5 C_2H_5

(added by 4×10^{-4} mol per mol of silver halide)

Red sensitive emulsion layer

40 CH_{3} CH_{3} CH_{3} CH_{2} CH_{3} CH_{3} CH_{2} CH_{3} CH_{3}

(added by 2×10^{-4} mol per mol of silver halide)

After the same gradation exposure as for the specimens (A) and (B) was given to prints O and P, processing by the following color development, bleach-fixing and stabilization steps was applied.

55

Processing step	Temperature	Time
Color development Bleach-Fix Rinsing (1) Rinsing (2) Rinsing (3) Rinsing (4) Drying	35°C 30-36°C 30-37°C 30-37°C 30-37°C 70-85°C	45 sec 45 sec 20 sec 20 sec 20 sec 30 sec 60 sec

(a 4-vessel countercurrent system from rinsing(4)→(1) was employed)

The composition for each of the processing solutions was as follows.

15

5

10

Color development

Water 800 ml

Ethylenediamine tetraacetic acid
 2.0 g

Triethanolamine 8.0 g

Sodium chloride 1.4 g

Potassium carbonate 25 g

N-ethyl-N-(8-methanesulfonamidoethyl)-3-methyl-4-aminoaniline sulfate 5.0 g

25 N,N-diethylhydroxylamine 4.2 g

5,6-dihydroxybenzene-1,2,4-trisulfonic acid 0.3 g

Fluorescent brightener (4,4 -diamino stilbene type) 2.0 g

made up with water to 1000 ml

pH (25°C) 10.10

30

Bleach-fixing solution

35 Water 400 ml

Ammonium thiosulfate (70%) 100 ml

Sodium sulfite 18 g

Iron (III) ammonium ethylenediamine tetraacetate 55 g

Disodium ethylenediamine tetraacetate 3 g

40 Glacial acetic acid 8 g

made up with water to 1000 ml

pH (25°C) 5.5

45

Stabilization solution

Formalin (37%) 0.1 g

Formalin-sulfurous acid adduct 0.7 g

50 5-Chloro-2-methyl-4-isothiazolin-3-one 0.02 g

2-Mthyl-4-isothiazolin-3-one 0.01

Copper sulfate 0.005 g

made up with water to 1000 ml

pH (25°C) 4.0

55

A test was conducted on the color print papers 0 and P, after processing for the light storability and the dark heat storability described above. As a result, substantially the same results as those of A and B, respecively, were obtained.

EXAMPLE 2

A color photosensitive material 100 containing the following first layer to twelveth layer coated in sequence to a paper support laminated on both sides with polyethylene was prepared. The polyethylene on the side of coating the first layer contained titanium white as a white pigment and a slight amount of ultramarine as a blue dye.

10 (Composition for photographic layer)

The ingredient and the coating amount represented by g/m² units are shown below. The coating amount of silver halide is calculated as silver.

15

First layer gelatin layer)

Gelatin 1.30

20

Second layer (anti-halation layer)

Black colloidal silver 0.10

25 Gelatin 0.70

Third layer (low sensitivity red sensitive layer)

30

Silver iodobromochloride EMI (spectrally sensitized with red sensitizing dye (ExS-1, 2, 3) (silver chloride 1 mol%, silver iodide 4 mol%, average grain size, $0.3~\mu m$, size distribution 10%, cubic, core iodine type core shell) 0.06

Silver iodobromide EM2 (spectrally sensitized with red sensitizing dye (ExS-1, 2, 3) (silver iodide 5 mol%, average grain.size 0.45 µm, size distribution 20%, cubic (aspect ratio = 5)) 0.10

Gelatin 1.00

Cyan coupler (ExC-1) 0.14

Cyan coupler (ExC-2) 0.07

Discoloration inhibitor (Cpd-2, 3, 4, 9 in equimolar) 0.12

40 Coupler dispersant (Cpd-5) 0.03

Coupler dispersant (Solv-1, 2, 3) 0.06

45 Fourth layer (high sensitivity red sensitive layer)

Silver iodobromide EM3 (spectrally sensitized with red sensitizing dye (ExS-I,2,3)(silver iodide 6 mol%, average grain size $0.75~\mu m$, size distribution 25%, tabular (aspect ratio = 8, core iodine)) 0.15

Gelatin 1.00

50 Cyan coupler (ExC-1) 0.20

Cyan coupler (ExC-2) 0.10

Discoloration inhibitor (Cpd-2, 3, 4, 9 in equimolar) 0.15

Coupler dispersant (Cpd-5) 0.03

Coupler dispersant (Solv-1, 2, 3 in equivolume) 0.10

Fifth layer (intermediate layer)

Magenta colloidal silver 0.0

Gelatin 1.00

5 Color mixing inhibitor (Cpd-6, 7) 0.08

Color mixing inhibitor solvent (Solv-4, 5) 0.16

Polymer latex (Cpd-8)(plasticizer) 0.10 (solid content)

10

Sixth layer (low sensitivity green sensitive layer)

Silver iodobromochloride EM4 (spectrally sensitized with green sensitizing dye (ExS-3) (silver chloride 1 mol%, silver iodide 2.5 mol%, average grain size 0.28 µm, size distribution 12%, cubic, core iodine type core/shell) 0.04

Silver iodobromide EM5 (spectrally sensitized with green sensitizing dye (ExS-3) (silver iodide 2.8 mol%, average grain size 0.45 μm, size distribution 12%, tabular (aspect ratio = 5))

Gelatin 0.80

Magenta coupler (ExM-1) 0.10

Discoloration inhibitor (Cpd-9) 0.10

Stain inhibitor (Cpd-10) 0.01

Stain inhibitor (Cpd-11) 0.001

Stain inhibitor (Cpd-12) 0.01

Coupler dispersant (Cpd-5) 0.05

25 Coupler dispersant (Solv-4,6) 0.15

Seventh layer (high sensitivity green sensitive layer)

30

Silver iodobromide EM6 (spectrally sensitized with green sensitizing dye (ExS-3) (silver iodide 3.5 mol%, average grain size 0.9 μ m, size distribution 23%, tabular (aspect ratio=g, homogenous iodine type)) 0.10

Gelatin 0.80

35 Magenta coupler (EXM-1) 0.10

Discoloration inhibitor (Cpd-9) 0.10

Stain inhibitor (Cpd-10) 0.01

Stain inhibitor (Cpd-11) 0.001

Stain inhibitor (Cpd-12) 0.01

40 Coupler dispersant (Cpd-5) 0.05

Coupler dispersant (Solv-4, 6) 0.15

45 Eighth layer (yellow filter layer)

Yellow colloidal silver 0.20

Gelatin 1.00

Color mixing inhibitor (Cpd 7) 0.06

50 Color mixing inhibitor solvent (Solv-4, 5) 0.15

Polymer latex (Cpd-8) 0.10

Ninth layer (low sensitivity blue sensitive layer)

Silver bromoiodidochloride EM7 (spectrally sensitized with blue sensitizing dye (ExS-4, 5) (silver chloride 2 mol%, silver iodide 2.5 mol%, average grain size 0.35 µm, size distribution 8%, cubic, core iodine type core shell) 0.07

Silver bromoiodide EM8 (spectrally sensitized with blue sensitizing dye (ExS-4, 5) (silver iodide 2.5 mol%, average grain size $0.45 \,\mu m$, size distribution 16%, tabular (aspect ratio = 6)) 0.10 Gelatin 0.50

Yellow coupler (ExY-1) 0.20

10 Stain inhibitor (Cpd-11) 0.001

Coupler solvent (Solv.-2) 0.05

75 Tenth layer (high sensitive blue sensitive layer)

Silver iodobromide EM9 (spectrally sensitized with blue sensitizing dye (ExS-4, 5) (silver iodide 2.5 mol%, average grain size 1.2 μ m, size distribution 21%, tabular (aspect ratio = 14)) 0.25 Gelatin 1.00

20 Yellow coupler (ExY-1) 0.40

Stain inhibitor (Cpd-11) 0.002

Coupler solvent (Solv-2) 0.10

25 Eleventh layer (UV absorption layer)

Gelatin 1.50

UV absorber (Cpd-1, 3, 13) 1.00

Color mixing inhibitor (Cpd-6, 14) 0.06

Dispersant Cpd-5) 0:05

UV absorber solvent (Solv-1, 2) 0.15

Irradiation inhibition dye (Cpd-15, 16) 0.02

Irradiation inhibition dye (Cpd-17, 18) 0.02

35

Twelfth layer (Protective layer)

Fine grain silver bromochloride (silver chloride 97 mol%, average size 0.2 μm)
 Acryl modified polyvinyl alcohol (modification degree 17%)
 Gelatin 1.50
 Gelatin hardener (H-1)
 0.17

Further, Alkanol XC (Dupont Co.) and sodium alkyl benzene sulfonate were used as emulsification dispersion aids and succinic acid ester and Megafac F-120 (manufactured by Dainippon Ink) were used as coating aids for each of the layers. Cpd-19, 20, 21 were used as stabilizer for the silver halide or colloidal containing layers. In this way, photosensitive material 100 was prepared.

The compounds used in the examples are shown below.

50

 $E \times S - 1$

 $E \times S - 2$

E x S - 3

$$C_2 H_5$$

$$C_1 H_5$$

$$C_2 H_5$$

$$C_1 H_5$$

$$C_2 H_5$$

$$C_2 H_5$$

$$C_3 H_5$$

$$C_4 H_5$$

$$C_4 H_7$$

$$C_4 H_7$$

$$C_4 H_7$$

$$C_5 H_7$$

$$C_7 H_7$$

$$C_8 H_7$$

$$C_8$$

 $E \times S - 4$

25

50

C₂ H₅

$$\begin{array}{c}
C_2 H_5 \\
\hline
O \\
C_2 H_4 SO_3 \Theta
\end{array}$$
C₂ H₅

$$\begin{array}{c}
C_2 H_5 \\
C_2 H_4 SO_3 \Theta
\end{array}$$
C₂ H₅

 $Cpd-1 \qquad Cpd-2$

$$C_4$$
 $H_{\bullet}(t)$
 $+0$
 C_4 $H_{\bullet}(t)$
 C_4 $H_{\bullet}(t)$

Cpd-5

n=400 (average value)

Cpd-6

$$\begin{bmatrix}
C_4 & H_{\bullet}(t) \\
HO & CH_2 \\
C_4 & H_{\bullet}(t)
\end{bmatrix} = \begin{bmatrix}
CH_3 \\
CCH_3 \\
CCH_3
\end{bmatrix}$$

$$CH_3$$

$$CH_3$$

Cpd-9

Cs H11(t)

$$Cpd-12$$

Cpd-15.

C2H, OCO CH-CH=CH—CO2C2H5

ŚO3 K

Cpd-17

Cpd-18

$$Cpd-19$$
 $Cpd-20$

$$\begin{array}{c|c}
CH_3 & & & \\
NNN & & & \\
OH & & & OH
\end{array}$$

Cpd-21

E x C - 1

$$C_{2}$$
 H_{3}
 C_{2} H_{3}
 C_{3} $H_{11}(t)$
 C_{4} H_{4}
 C_{5} $H_{11}(t)$

E x C - 2

C. H₁₃

$$C_{\bullet} H_{13}$$

$$OH$$

$$NHCO$$

$$C_{\bullet}$$

$$C_{\bullet}$$

$$C_{\bullet}$$

$$C_{\bullet}$$

$$C_{\bullet}$$

$$C_{\bullet}$$

 $E \times M - 1$

 $E \times Y - 1$

Solv-1

30

10

15

Di(2-ethylhexyl)phthalate

Solv-2

Trinonyl phosphate

Solv-3

Di(3-methylhexyl)phthalate

Solv-4

Tricresyl phosphate

55

	Solv-5
	Dibutyl phthalate
5	
	Solv-6
10	Trioctyl phosphate
	Solv-7
15	1,2-bis(vinylsulfonylacetamido) ethane
20	Photosensitive materials 101-106 were prepared in the same manner as photosensitive material 100, by changing the yellow coupler and the coupler solvent present in the ninth layer and the tenth layer of photosensitive material 100, and further adding the epoxy compounds of the present invention. The composition is shown in Table 3.
25	
20	
30	
35	
40	
45	
50	

Table 3

Photosensitive	-	Yellow coupler layer (ninth layer, tenth layer)		Remarks
material				
	Yellow coupler	Epoxy compound (addition amount ratio Coupler solvent (addition	Coupler solvent (addition	
		to coupler)	amount ratio to coupler)	
100	ExY-1	t	Solv-2 0.25 (g/g)	Comparison
101	-	Exemplified compound (II-5) 0.25 (g/g)	1	This invention
102	E	" (II-5) 0.15	Solv-2 0.10	=
103	=	" (11-1) 0.15	Solv-5 0.10	=
104	Exemplified coupler (I-6)		Solv-4 0.25	Comparison
105	=	Exemplified compound (II-3) 0.25		This invention
106	=	" (II-3) 0.15	Solv-4 0.10	=

After continuous gradation exposure of these specimens through a sensitometry optical wedge, the processing shown below was applied.

5 (Processing step)

	First development (black-and-white development)	38° C	1 15"
10	Water washing	38°C	1′30″
10	Reverse exposure	at least 100 Lux	at least 1"
	Color development	38°C	2 15
	Water washing	38° C	45″
	Bleach-fixing	38°C	2 00"
15	Water washing	38 °C	2 ¹⁵ ″

(Composition for processing solution)

20

First Developer

Pentasodium nitrilo-N,N,N-trimethylene phosphonate 0.6 g

Pentasodium diethylenetriamine pentaacetate 4.0 g

Potassium sulfite 30.0 g

Potassium thiocyanate 1.2 g

Potassium carbonate 35.0 g

³⁰ Potassium hydroquinone monosulfonate 25.0 g

Diethylene glycol 15.0 ml

1-Phenyl-4-hydroxymethyl-4-methyl-3-pyrazolidone 2.0 g

Potassium bromide 0.5 g

Potassium iodide 5.0 mg

35 Made up with water to 1 liter

(pH 9.70)

40 Liquid color developer

Benzyl alcohol 15.0 ml

Diethylene glycol 12.0 ml

3,6-dithia-1,8-octanediol 0.2 g

Pentasodium nitrilo-N,N,N-trimethylene phosphate 0.5 g

Pentasodium diethylenetriamine pentaacetate 2.0 g

Sodium sulfite 2.0 g

Potassium carbonate 25.0 g

Hydroxylamine sulfate 3.0 g

50 N-ethyl-N-(8-methanesulfonamidoethyl)-3-methyl-4-aminoaniline sulfate 5.0 g

Potassium bromide 0.5 g

Potassium iodide 1.0 mg

Made up with water to 1 liter

(pH 10.40)

Bleach-fixing solution

2-Mercapto-I,3,4-triazole 1.0 g

Disodium ethylenediamine tetraacetate 2 hydrate 5.0 g

Fe(III) ammonium ethylenediamine tetraacetate monohydrate 80.0 g

Sodium sulfite 15.0 g

Sodium thiosulfate (700 g/l solution) 160.0 ml

Glacial acetic acid 5.0 ml

Made up with water to 1 liter

10 (pH 6.50)

The following experiments were conducted on each of the samples after development for light fastness, heat fastness and wet heat fastness. The degree of discoloration was examined for each of the cases where the sample was left at 100°C in a dark place for 6 days, a sample was left at 80°C, 70 %RH in a dark place for 12 days and a sample was irradiated with light using a xenon tester (85,000 lux) for 6 days, and the result represented by the reduction of density relative to the initial density of 1.5, as shown in Table 4.

Table 4

20

Specimen	Dark d	liscoloration	Light discoloration	Remark
	100°C, 6 days (%)	80°C, 70%RH 12 days (%)	Xenon, 6 days (%)	
100	38	35	19	Comparison
101	11	10	13	This Invention
102	13	11	12	17
103	10	11	11	Ħ
104	42	38	23	Comparison
105	12	11	14	This Invention
106	11	11	13	

25

40

30

As is apparent from the result in Table 4, the dark discoloration and optical discoloration of the yellow image was remarkably improved by the epoxy compound according to the present invention.

According to the silver halide color photosensitive material of the present invention, excellent dye images with improved yellow image storability, and with no undesired effects on various photographic properties, can be obtained by combining the yellow coupler of the present invention with the epoxy compound of the present invention.

Among all, light fastness, heat resistance and humidity resistance can be improved in a well-balanced state. In addition, by using the magenta coupler according to the present invention, color images well balanced for storability of the yellow and magenta color images can be obtained.

While the invention has been described in detail and with reference to specific embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made therein without departing from the spirit and scope thereof.


Claims

1. A silver halide color photographic light-sensitive material composed of a support having thereon at least one light-sensitive emulsion layer containing at least one yellow coupler represented by the general formula (I) and a sparingly water soluble epoxy compound represented by the general formula (II):

55

$$\begin{array}{c|c}
CH_3 \\
CH_3 \\
\hline
C \\
CH_3 \\
\hline
CH_3 \\
X_{11}
\end{array}$$
(I)

where R₁₁ represents an N-aryl carbamoyl group and X₁₁ represents a non-metallic atomic group required for forming a 5- or 6-membered ring; and the coupler may form a dimer or a higher polymer;



R₁, R₂, R₃ and R₄, which may be the same or different, each represents a hydrogen atom, an aliphatic group, an aryl group, an aliphatic oxycarbonyl group, an aromatic oxycarbonyl group or a carbamoyl group, provided at least one of R₁, R₂, R₃ and R₄ represents a group other than hydrogen atoms; total number of the carbon atoms contained in R₁, R₂, R₃ and R₄ is from 8 to 60; R₁ and R₂, R₃ and R₄, or R₁ and R₃ may be linked to form a 5- to 7-membered ring; at least one of R₁, R₂, R₃ and R₄ may have at least one epoxy group; and the epoxy compound may form a dimer or a higher polymer.

2. The silver halide color photographic liight-sensitive material as claimed in claim 1, wherein said photographic light-sensitive material contains at least one compound selected from the group consisting of compounds represented by the general formula (M-I) or general formula (M-II) as a magenta coupler

$$R_{22}$$
 R_{27}
 R_{29}
 R

wherein Ar represents an aryl group; R_{21} represents a hydrogen atom, an acyl group, or a sulfonyl group, R_{22} represents a halogen atom or an alkoxy group; R_{23} represents an alkyl group, an aryl group, a halogen atom, an alkoxy group, an aryloxy group, an acylamino group, an imido group, a sulfonamido group, an alkoxycarbonyl group, a carbamoyl group, a sulfamoyl group, an alkylthio group or a sulfonyl group; R_{27} represents an alkyl group, an alkoxy group, an aryloxy group or an acylamino group; R_{29} represents a hydrogen atom, a halogen atom, a hydroxyl group, an alkyl group, an alkoxy group or an aryl group; R_{29} represents an amino group, an acylamino group, a ureido group, an alkoxycarbonylamido group, an imido group, a sulfonamido group, a sulfamoylamino group, an alkoxycarbonyl group, a carbamoyl group, an acyl group, cyano group or an alkylthio group; provided that at least one of R_{27} and R_{29} represents an alkoxy group, ml is an integer of 1 to 4, m2 is an integer of 1 to 4, m3 is 0 or an integer of 1 to 3, m4 is 0 or 1, when m4 is 0, the coupling position is occupied by a hydrogen atom; and the coupler may form a dimer or a higher polymer;

55

5

5

15

25

30

40

45

55

 R_{24} represents a hydrogen atom or a substituent; Z_{21} represents a hydrogen atom or a coupling-off group capable of being released by a reaction with an oxidized product of an aromatic primary amine color developing agent; Z_{22} , Z_{23} and Z_{24} , which may be the same or different, each represents

-N= or -NH-, provided that one of the Z_{24} - Z_{23} bond and the Z_{23} - Z_{22} bond is a double bond and the other is a single bond, when the Z_{23} - Z_{22} bond is a carbon-carbon double bond, it constitutes a part of an aromatic ring; and the coupler may form a dimer or a higher polymer.

3. The silver halide color photographic light-sensitive material as claimed in claim 1, wherein said photographic light-sensitive material contains at least one compound represented by the general formula (C-1) as a cyan coupler:

wherein R³¹ represents an alkyl grup, an aryl group, an amino group or a heterocyclic group; R³² represents an acylamino gorup or an alkyl group; R³³ represents a hydrogen atom, a halogen atom, an alkyl group or an alkoxy group; R³³ and R³² may be linked to form a ring; Z³¹ represents a hydrogen atom or a coupling-off group; a dimer or a higher polymer may be formed at R³¹, R³², or Z³¹.

4. The silver halide color photographic light-sensitive material as claimed in claim 1, wherein said yellow coupler is represented by the general formula (I-A):

wherein X_{12} represents a non-metallic atomic group necessary for forming a 5-membered ring; R_{12} represents an aliphatic group, a heterocyclic group, an aliphatic oxy group, an aromatic oxy group, an acyl group, an ester group, an amido group, a carbamoyl group, a sulfamoyl group, an imido group, a sulfonyl group, an alipahtic or aromatic thio group, a hydroxyl group, a sulfonic acid group, or a halogen atom; and ℓ represents an integer of from 1 to 4.

5. The silver halide color photographic lightsensitive material as claimed in claim 1, wherein the amount of the yellow coupler represented by the general formula (I) is from 1×10^{-2} to 1 mol per mol silver halide in the silver halide emulsion layer.

- 6. The silver halide color photographic light-sensitive material as claimed in claim 1, wherein the amount of the epoxy compound represented by the general formula (II) is from 0.5 to 300% by weight based on the weight of the yellow coupler represented by the general formula (I).
- 7. The silver halide color photographic light-sensitive material as claimed in claim 1, wherein said photographic light-sensitive material comprises at least one blue sensitive emulsion layer, at least one green sensitive emulsion, layer, and at least one red sensitive emulsion layer.
 - 8. The silver halide color photographic light-sensitive material as claimed in claim 7, wherein said blue sensitive emulsion layer contains a yellow coupler, said green sensitive emulsion layer contains a magenta coupler, and said red sensitive emulsion layer contains a cyan coupler.
 - 9. The silver halide color photographic light-sensitive material as claimed in claim 1, wherein the yellow coupler represented by the general formula (I) is incorporated in at least one blue sensitive emulsion layer.
 - 10. The silver halide color photographic light-sensitive material as claimed in clawim 1, wherein the epoxide compound represented by the general formula (II) has water solubility of not more than 1% by weight.