

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 314 579 B2

(12)

NEW EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the opposition decision:
14.01.1998 Bulletin 1998/03

(51) Int Cl.⁶: **G03G 21/00**

(45) Mention of the grant of the patent:
14.07.1993 Bulletin 1993/28

(21) Application number: **88402726.9**

(22) Date of filing: **28.10.1988**

(54) **A cleaning blade for image forming apparatuses**

Reinigungsklinge für Bilderzeugungsgerät

Lame de nettoyage pour appareil de formation d'images

(84) Designated Contracting States:
DE FR GB

(74) Representative: **Orès, Bernard et al**
Cabinet ORES
6, Avenue de Messine
75008 Paris (FR)

(30) Priority: **30.10.1987 JP 277041/87**
30.10.1987 JP 277042/87

(56) References cited:
JP-A-61 226 774 **JP-A-62 208 081**

(43) Date of publication of application:
03.05.1989 Bulletin 1989/18

- (73) Proprietors:
- **SHARP KABUSHIKI KAISHA**
Osaka 545 (JP)
 - **Kao Corporation**
Chuo-Ku Tokyo 103 (JP)
- (72) Inventors:
- **Kinashi, Hiroshi**
Tsuzuki-gun Kyoto (JP)
 - **Kawabata, Itaru**
Kashiwara-shi Osaka (JP)
 - **Yamane, Hidenobu**
Yamatokoriyama-shi Nara-ken (JP)
 - **Tsujimoto, Yoshiharu**
Yamatokoriyama-shi Nara-ken (JP)
 - **Gotoh, Shinya**
Nagagun Wakayama-ken (JP)
 - **Nawa, Masayoshi**
Wakayama-shi Wakayama-ken (JP)

- **PATENT ABSTRACTS OF JAPAN** vol. 10, no. 111
(P-451)(2168), 25th April 1986; & JP-A-60 243 688
(OLYMPUS KOGAKU KOGYO) 03-12-1985
- **PATENT ABSTRACTS OF JAPAN** vol. 4, no. 21
(E-172)(111), 21st February 1980; & JP-A-54 160
246 (TOKYO SHIBAURA DENKI) 18-12-1979
- **PATENT ABSTRACTS OF JAPAN** vol. 8, no. 89
(P-270)(1526), 24st April 1984; & JP-A-59 005 259
(HOKUSHIN KOGYO) 12-01-1984
- **PATENT ABSTRACTS OF JAPAN** vol. 3, no. 5
(E-84)(68), 18th January 1979; & JP-A-53 131 849
(CANON) 17-11-1978
- **PATENT ABSTRACTS OF JAPAN** vol. 10, no. 364
(P-524)(2421), 5th December 1986; & JP-A-61 158
364 (CANON) 18-07-1986
- **Carbon Black Handbook** (25.11.71) p.338, 339
- **Plastic Components-Basics and Application**
(30.01.84) p.260-274
- **Technology of Emulsification and Solubilization**
(20.06.76) p.6-15
- **Surface Active Agent** (20.04.79) p. 24, 25

EP 0 314 579 B2

Description

The present invention relates to a cleaning blade, more particularly, a cleaning blade attached to a cleaning apparatus of an image forming apparatus such as a dry-type electrophotographic copying machine or electrophotographic printer.

Generally, the image formation by an image forming apparatus is obtained by firstly scanning the manuscript with an optical system and exposing a photosensitive drum on which a latent image is formed, and then allowing toner to adhere only to the latent image portion in a developing apparatus. The toner image is transferred to paper which has been fed into the machine and is fixed in a fixing apparatus, and then the paper on which the image formation has been completed is ejected from the apparatus. From the toner remaining on the photosensitive drum after completion of the image transfer, the remaining electric charge is removed by a discharger. Then, the remaining toner is removed from the drum by a cleaning blade in a cleaning apparatus, and the photosensitive drum is ready to continue with the image formation cycle. The toner removed and recovered in the cleaning apparatus is recycled and used again in the developing apparatus.

In the cleaning apparatus of the image forming apparatus as described above, a cleaning blade comprising a rubber elastomer (such as urethane rubber) is widely used now, considering that it lends itself well to small-sized designs, its reliability with which cleaning can be effected and the re-usability of the recovered toner.

On the other hand, in accordance with the tendency in recent years of driving image forming apparatuses at a high speed and to reduce maintenance, various consumptive parts of the apparatuses are required to have longer life and, of course, many proposals to elongate the life of cleaning blades have been presented.

However, the life of cleaning blades is short compared with that of other parts, because it is necessary to increase the pressure of the blades against the photosensitive drum to improve their cleaning ability. The increased pressure on the blades causes excess wear. To prevent the wear, the pressure on the blades has to be decreased, and conversely the decreased pressure results in lowering of the cleaning ability. Thus, it would be the ideal situation to diminish the wear without causing the lowering of the cleaning ability of the blades. On the other hand, it is well known that toner particles serve as a lubricant on the contact surface between the blade and the photosensitive drum which acts naturally to prevent wear. Therefore, the problem can be solved by utilizing the service of this lubricant to its maximum.

At the start of an operation just after exchanging the cleaning blade with a new one, however, adherence of the toner to the surface of the blade edge is still insufficient and the resin powder particles, which have been applied to the new blade to protect its surface, scatter simultaneously with the rotation of the photosensitive drum because of the repulsive force due to frictional electrification and the centrifugal force due to its rotation. Thus, in the interval between the time when a protecting layer of the toner particles or the resin powder particles are not present on the blade surface, tear breaking arises on both terminal portions of the blade edge surface, as shown in Fig. 5, on account of the large frictional force. Therefore, it is important that the above-mentioned resin powder particles are made to adhere to the blade edge surface as long as possible and that the toner particles are made to adhere to the blade edge surface from the beginning. The main reason why the resin powder particles scatter and the toner particles hardly adhere, is due to the fact that the cleaning blade is frictionally electrified as it is pressed onto the photosensitive drum and repulses these particles.

For the purpose of preventing such electrification of the cleaning blades, there have been proposed Japanese Patent Publications Nos. SHO 44-2034, SHO 56-51347, etc., in which cleaning blades are made electroconductive and grounded.

However, the cleaning blades of the above Japanese Patent Publications Nos. SHO 44-2034, SHO 56-51347, etc., have a defect also in that, when they are used in the so-called Carlson process with a selenium series photosensitive drum, an organic photosensitive drum, an amorphous silicon photosensitive drum, or the like, it follows that the surface of the photosensitive drum is grounded in the cleaning step and the electrification on the photosensitive drum becomes difficult in the next step. Also in a method of applying a definite voltage without grounding, there is the problem that it requires another apparatus, i.e., power source parts increasing the apparatus size and complexity. Other cleaning blades having antistatic agents are known from JP-A-60-243 688, JP-A-54-160 246 and JP-A-59-5 259.

JP-A-62-208081 discloses a cleaning blade comprising, for providing conductivity, a coating of an urethane paint comprising carbon black and small amounts of a surface active agent in case the coating is an emulsion paint. JP-A-61-226774 describes a cleaning blade comprising a conductive inner surface; sodium alginate is, inter alia, used as a conductive substance.

The purpose of the present invention is to reduce these inherent defects as mentioned above, by providing a long-life cleaning blade which is free from the wear of the blade edge surface, particularly, from the tear breaking on both terminal portions of the edge surface, while improving the cleaning ability, and without requiring any other apparatuses, such as power source parts.

Thus, according to the present invention, a cleaning blade for an image forming apparatus as claimed in claims 1 and 2 is provided.

According to the cleaning blade of the present invention, the defect as mentioned above is eliminated. That is, in an image forming apparatus provided with a cleaning blade of the present invention, the toner remaining on the photosensitive drum, from which the electric charge remaining after the completion of the image transfer has been discharged, is removed by rotation of the photosensitive drum while it is pressed closely to the cleaning blade. At that time, by virtue of the antistatic agent which is contained in, or adheres onto the surface of the cleaning blade in a prescribed amount, scattering of toner particles adherent to the blade edge surface, that arises because of the repulsion due to electrification of the blade under friction with the photosensitive drum, is reduced and adhesion of the toner to the blade edge surface in sufficient amounts is realized within a very short time. The toner particles which adhere to the blade edge surface serve as a lubricant to prevent the blade from an excessive stress due to friction. Thus, the tear breaking that may arise just after start-up of the use of new blades is prevented.

Fig. 1 is a cross-sectional view of a cleaning apparatus provided with a cleaning blade of an Example of the present invention. Fig. 2 is a graph showing the results of 100,000 sheets printing-resistance test of a cleaning blade of an Example. Fig. 3 is a graph showing the results of 100,000 sheets printing-resistance test of a cleaning blade of another Example. Fig. 4 is a graph showing the results of 100,000 sheets printing-resistance test of a cleaning blade using no antistatic agent. Fig. 5 shows patterns of the tear breaking which arise on both terminal portions of the edge surface of a cleaning blade using no antistatic agent, just after start-up using the blade. Fig. 6 is a partial sectional view of a cleaning blade of an Example of the present invention. Fig. 7 is a graph showing the results of 100,000 sheets printing-resistance test of the cleaning blade of Fig. 6. Fig. 8 is a graph showing the results of 100,000 sheets printing-resistance test of a cleaning blade of another Example.

As rubber elastomers used in the present invention, those comprising a synthetic rubber having good wear-resistance and good ozone-resistance are suitable. Above all, urethane rubbers are the preferred example. The urethane rubbers can be prepared by treating a polyurethane, which is obtained by a polyaddition reaction of a polyether or polyester having a hydroxyl group at both terminals with a diisocyanate compound, with an aromatic diamine or a polyhydric alcohol to cause cross linking.

Cleaning blades are usually prepared by shaping the above rubber elastomers in a prescribed mold into plates. Therefore, the cleaning blades of the present invention can be prepared by compounding an antistatic agent with the starting rubber elastomer on shaping or by applying an antistatic agent to the surface of the rubber elastomer plate after shaping. It is suitable to adjust the rubber hardness (JIS A hardness) of the cleaning blades at 60 - 80° by regulating the amount of the cross linking agent used, in order to maintain wear-resistance and not injure the surface of photosensitive drum.

As antistatic agents used in the present invention, surface active agents are suitable. Any type of surface active agents such as non-ionic, anionic, cationic, amphoteric or electroconductive resinous surface active agents, can be used. From the results of a number of experiments effected in consideration of the molecular weight, HLB (hydrophilic-lipophilic balance), etc., of the surface active agents, it has been found that those surface active agents having a molecular weight of 150 - 650 and a HLB of 5-19 give very good results. More concretely, the following can be mentioned,

as non-ionic surface active agents,

N,N-bis(2-hydroxyethyl)-polyoxyethylenealkylamine,
 polyoxyethylenealkylamine,
 polyoxyethylenealkylamine fatty acid ester,
 glycerine fatty acid ester,
 sorbitan fatty acid ester,
 polyoxyethylenesorbitan fatty acid ester,
 polyoxyethylene fatty alcohol ether,
 polyoxyethylene alkyl phenyl ether,
 polyethyleneglycol fatty acid ester, etc.,

as anionic surface active agents, alkylsulfonate,

alkylbenzenesulfonate,
 alkylsulfate,
 alkylphosphate, etc.,

as cationic surface active agents,

tetraalkylammonium salt,
 trialkylbenzylammonium salt, etc.,

and as amphoteric ones,

alkylbetaine,
 imidazoline type amphoteric surface active agent, etc.

By the way, the above-mentioned HLB is calculated, for example, in the case of polyoxyethylene alkyl ether, according to the formula: $HLB = (\% \text{ of oxyethylene contained})/5$, and, in the case of agents containing anionic groups,

according to the formula: $HLB = 7 + \Sigma (\text{number of hydrophilic groups}) - \Sigma (\text{number of lipophilic groups})$ (Davis' formula) (Proc. 2nd. Intern. Congress of Surface Activity, 1426 (1957)).

With a surface active agent having a molecular weight of more than 3000, the antistatic effect is insufficient, because its molecular arrangement is apt to be adversely altered and, when it is compounded with the rubber elastomer, its bleeding out onto the blade surface is disturbed. On the other hand, with a surface active agent having a molecular weight of less than 150, the antistatic effect is also insufficient because its hydrophilic groups are difficult to be arranged in an outward formation. Therefore, the surface active agent has a molecular weight of 150 - 650 and a HLB of 5 - 19.

When such antistatic agents are compounded with the rubber elastomer, if too little an amount is used in the cleaning blades, it does not give sufficient antistatic effect, and if too large an amount is used, it is also unsuitable because the blade surface becomes sticky and the hardness, wear-resistance, etc., of the blades is decreased by a plasticizing effect. It is suitable to use an antistatic agent in an amount of 1 - 5 parts by weight.

When the antistatic agent is allowed to adhere to the surface of the blades, it is suitable to form a film of about 3 - 5 molecular layers thick on the blade surface. Accordingly, an adherent amount of 20 - 50 mg/m² is used. By the way, the adherence can be attained conveniently by applying a solution of the antistatic agent to the blade surface by dipping or brushing, and then drying.

EXAMPLES

Fig. 1 is a sectional view of a cleaning apparatus provided with a cleaning blade of an Example of the present invention. The cleaning blade 1 is pressed closely to a photosensitive drum 5 and supported by a blade supporter 2. The blade supporter 2 is fixed by a blade-fixing shaft which is not illustrated. At the lower part of the cleaning apparatus 4, a pipe 3 for recovering toner of a conventional type is provided.

After completion of fixing, the toner remaining on the drum 5, from which the remaining electric charge has been removed by a discharger (not illustrated in the figure), is removed by the cleaning blade 1 which is pressed to the rotating photosensitive drum 5. The toner removed is recovered through the pipe for recovery 3 and recycled to a developing apparatus (not illustrated in the figure).

Example 1

A cleaning blade having a rubber hardness of 73° and a thickness of 3 mm was prepared from an urethane rubber used as the rubber elastomer and glycerine fatty acid ester added thereto as the antistatic agent in a weight ratio of 3%.

The urethane rubber used was a commercially available polyester type and a cross linking agent of polyamine series, and the glycerine fatty acid ester used was glycerine monocaprylate having a molecular weight of 220 and a HLB of 5. The addition of the glycerine fatty acid ester was effected by compounding it with the urethane rubber prior to its hardening.

With an image forming apparatus provided with this cleaning blade and an As₂Se₃ photosensitive drum rotating at a peripheral speed of 360 mm/sec, 100,000 sheets printing-resistance test was effected. After every image formation of 3,000, 5,000, 10,000, 50,000 and 100,000 sheets, the wear amount of the blade was determined. The number of the image-formed sheets was plotted on the abscissa axis, and the wear amount of the blade edge surface determined at its both terminal portions (including the tear breaking) on the ordinate axis. The results are shown in Fig. 2. Generally, a wear amount at both terminal portions exceeding about 300 μm causes inferior cleaning on images. In the case of this Example, a very good result was obtained without arising of any wear exceeding 300 μm for the image formation of 100,000 sheets.

Besides the above Example, experiments were carried out using various rubber elastomers and various antistatic agents.

For example, in another Example, an urethane rubber having a rubber hardness of 73° was used as the rubber elastomer and polyoxyethylenealkylamine having a molecular weight of 570 and a HLB of 13.0 was added as the antistatic agent in a weight ratio of 3%. A cleaning blade prepared from the urethane rubber having a thickness of 3 mm was attached to an image forming apparatus provided with an As₂Se₃ photosensitive drum rotating at a peripheral speed of 360 mm/sec, and 100,000 sheets printing-resistance test was effected. The results obtained were good and approximately the same as those of the above-mentioned Example. The results are shown in Fig. 3.

In order to exhibit the effect of the present invention, many experiments were carried out using various rubber elastomers and various antistatic agents, and almost the same results as those shown in Fig. 2 and Fig. 3 were obtained in every case.

Referential Example 1

With a cleaning apparatus provided with a cleaning blade not using any antistatic agent, 100,000 sheets printing-

resistance test was effected with various image forming apparatuses each provided with a different photosensitive drum, and the results obtained are shown in Fig. 4. In order to confirm the severity of the wear just after the start-up use, the wear amount was measured also after the image formation of 1,000 sheets. After image formation of several thousands sheets, a cracking arose already and the reverse wear just after the start of use was confirmed by generation of tear breaking corresponding to a wear amount of 300 μm or more, generation of a wide wear extending to about 400 μm after image formation of 3,000 sheets, and so on. Thus, it became evident that the cleaning blade of the Example of the present invention attained extended wear life.

Example 2

Fig. 6 is a sectional view of a cleaning blade of another Example of the present invention. In this blade, an antistatic layer 1b is formed on the surface of the blade body 1a comprising a rubber elastomer. A urethane rubber having a rubber hardness of 73° and a thickness of 3 mm was used as the rubber elastomer, and an anionic surface active agent of an alkylphosphate type diluted with water and alcohol was applied (0.3 weight %) to its surface and dried to form the antistatic layer 1b. The anionic surface active agent used was distearyl sodium phosphate having a molecular weight of 650 and a HLB of 18.

The cleaning blade of this Example was furnished to an image forming apparatus provided with a selenium series photosensitive drum rotating at a peripheral speed of 360 mm/sec, and 100,000 sheets printing-resistance test was effected. The results obtained are shown in Fig. 7. After every image formation of 3,000, 5,000, 10,000, 50,000 and 100,000 sheets the wear amount of the blade was measured. The number of the image-formed sheets was plotted on the abscissa axis, and the wear amount measured on the blade edge surface at both its terminal portions (including the tear breaking) on the ordinate axis. Generally, a wear amount at both terminal portions exceeding about 300 μm causes inferior cleaning of images on the photosensitive drum. In the case of this Example, however, any wear exceeding 300 μm did not arise up to image formation of 100,000 sheets and a very good result was obtained.

Besides the above Example, experiments were carried out by changing the kinds of rubber elastomers and antistatic agents.

For example, in another Example, an urethane rubber having a rubber hardness of 66° was used as the rubber elastomer and, to the surface of a blade prepared from urethane rubber having a thickness of 3 mm, a betaine type surface active agent (stearyl betaine ; molecular weight 360, HLB 18; 0.3 weight %) diluted with a mixture of water and alcohol was applied and then dried to form the antistatic layer. The cleaning blade thus prepared was attached to an image forming apparatus provided with an amorphous silicon photosensitive drum, and 100,000 sheets printing-resistance test was effected by rotating the photosensor at a peripheral speed of 360 mm/sec. The results are shown in Fig. 8. They were good and approximately the same as the results of the above-mentioned Example.

In order to exhibit the effect of the present invention, many experiments were carried out with various kinds of rubber elastomers and antistatic layers, whereby almost the same results as shown in Fig. 7 and Fig. 8 were obtained in every case.

Example 3

In the same manner as Example 2, urethane rubber cleaning blades having various surface active agents adhering on the surface were prepared, and their surface resistance was determined. The results are shown in the following table, along with Comparative Examples.

	Antistatic agent	HLB	Mw	resistance (Ω)
Example	A Sorbitan fatty acid monoester	6.7	400	10^{10}
	B Polyethyleneglycol fatty acid ester	13.4	600	10^{10}
	C Polyoxyethylene-alkylamine	13.0	570	10^{10}
	D Glycerine fatty acid monoester	5	220	10^{10}
	E Polyoxyethylene alkyl ether	8.8	400	10^{10}
Comparative Example	A Polyoxyethylene alkyl phenyl ether	18.9	3000	10^{14}
	B Polyoxyethylene alkyl ether	7.1	146	10^{14}
	C Sorbitan fatty acid triester	2.1	900	10^{14}

According to the present invention, it is possible to prevent the scattering of resin powder adherent to the conventional cleaning blades comprising a rubber elastomer, that arises just after the start of the use of the blades, and at the same time, to allow the toner particles to adhere quickly to the blade surface. The toner adherent to the blade surface serves as a lubricant immediately and, as a result, prevents the blade surface, especially its edge portions, from undergoing excessive stress due to friction. Thus, the wear on blades that occurs just after the start of their use is largely decreased and so improvement in the cleaning ability and extension of the life of blades are attained.

Claims

1. A cleaning blade for an image forming apparatus comprising a rubber elastomer which contains an antistatic agent in an amount which is effective in preventing electrification, characterised in that said antistatic agent is a surface active agent and has a molecular weight of 150-650 and a HLB (hydrophilic-lipophilic balance) of 5-19, said antistatic agent being contained in the blade in an amount of 1-5 parts by weight.
2. A cleaning blade for an image forming apparatus comprising a rubber elastomer on which adheres on the surface thereof, an antistatic agent in an amount which is effective in preventing electrification, characterised in that said antistatic agent is a surface active agent and has a molecular weight of 150-650 and a HLB (hydrophilic-lipophilic balance) of 5-19, said antistatic agent adhering onto the surface of the blade in an amount of 20-50 mg/m².
3. The cleaning blade of claim 1 or claim 2 in which the surface active agent is a non-ionic, anionic, cationic, amphoteric or electroconductive resinous surface active agent.
4. The cleaning blade of any one of claims 1 to 3 which has the rubber hardness of 60-80° (JIS-hardness A).

Patentansprüche

1. Reinigungsklinge für eine Bilderzeugungsvorrichtung, umfassend ein Kautschukelastomer, welche ein Antistatikmittel in einer zur Verhinderung der elektrischen Aufladung wirksamen Menge enthält, **dadurch gekennzeichnet**, daß das Antistatikmittel ein oberflächenaktives Mittel ist und ein Molekulargewicht von 150 bis 650 sowie einen HLB (hydrophiles-lipophiles Gleichgewicht)-Wert von 5 bis 19 aufweist, wobei das Antistatikmittel in einer Menge

EP 0 314 579 B2

von 1 bis 5 Gew.-Teilen in der Klinge enthalten ist,

2. Reinigungsklinge für eine Bilderzeugungsvorrichtung, umfassend ein Kautschukelastomer, auf deren Oberfläche ein Antistatikmittel in einer zur Verhinderung der elektrischen Aufladung wirksamen Menge haftet, **dadurch gekennzeichnet**, daß das Antistatikmittel ein oberflächenaktives Mittel ist und ein Molekulargewicht von 150 bis 650 und einen HLB (hydrophiles-lipophiles Gleichgewicht]-Wert von 5 bis 19 aufweist, wobei das Antistatikmittel in einer Menge von 20 bis 50 mg/m² auf der Oberfläche der Klinge haftet.
3. Reinigungsklinge nach Anspruch 1 oder 2, bei der das oberflächenaktive Mittel ein nichtionisches, anionisches, kationisches, amphoterer oder elektroleitfähiges harzförmiges oberflächenaktives Mittel ist.
4. Reinigungsklinge nach mindestens einem der Ansprüche 1 bis 3, bei der der Kautschuk eine Härte von 60 bis 80° (JIS-Härte A) aufweist.

Revendications

1. lame de nettoyage pour un appareil de formation d'images comprenant un caoutchouc élastomère qui contient un agent antistatique en une quantité qui est efficace pour empêcher l'électrisation, caractérisée en ce que cet agent antistatique est un agent tensioactif et a un poids moléculaire de 150-650 et un HLB (balance hydrophile-lipophile) de 5-19, lequel agent antistatique est contenu dans la lame en une quantité de 1 à 5 parties en poids.
2. lame de nettoyage pour un appareil de formation d'images comprenant un caoutchouc élastomère sur la surface duquel adhère un agent antistatique en une quantité qui est efficace pour empêcher l'électrisation, caractérisée en ce que cet agent antistatique est un agent tensioactif et a un poids moléculaire de 150-650 et un HLB (balance hydrophile-lipophile) de 5-19, lequel agent adhère à la surface de la lame en une quantité de 20 à 50 mg/m².
3. lame de nettoyage selon la revendication 1 ou la revendication 2, dans laquelle l'agent tensioactif est un agent tensioactif non ionique, anionique, cationique, amphotère ou résineux électroconducteur.
4. lame de nettoyage selon l'une quelconque des revendications 1 à 3, qui a une dureté de caoutchouc de 60 à 80° (dureté A selon la norme JIS).

FIG. 1

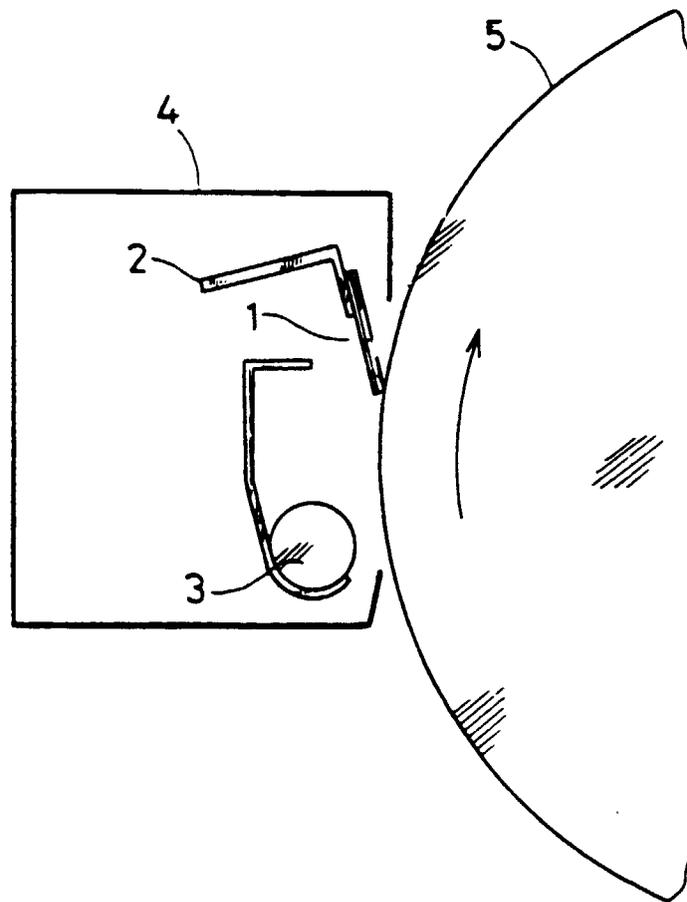


FIG. 2

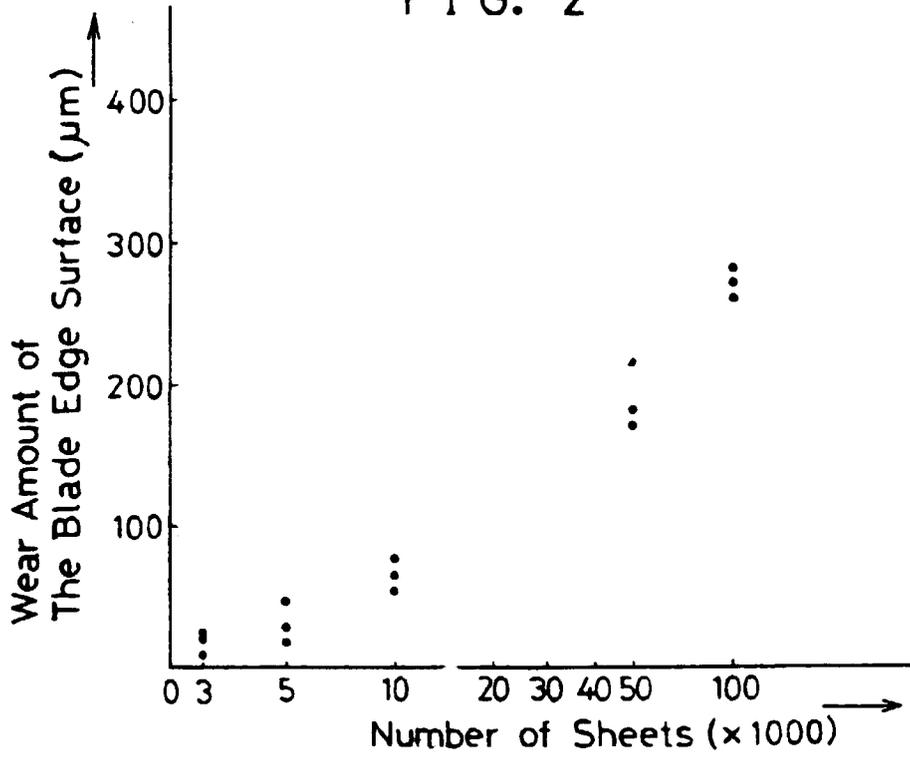


FIG. 3

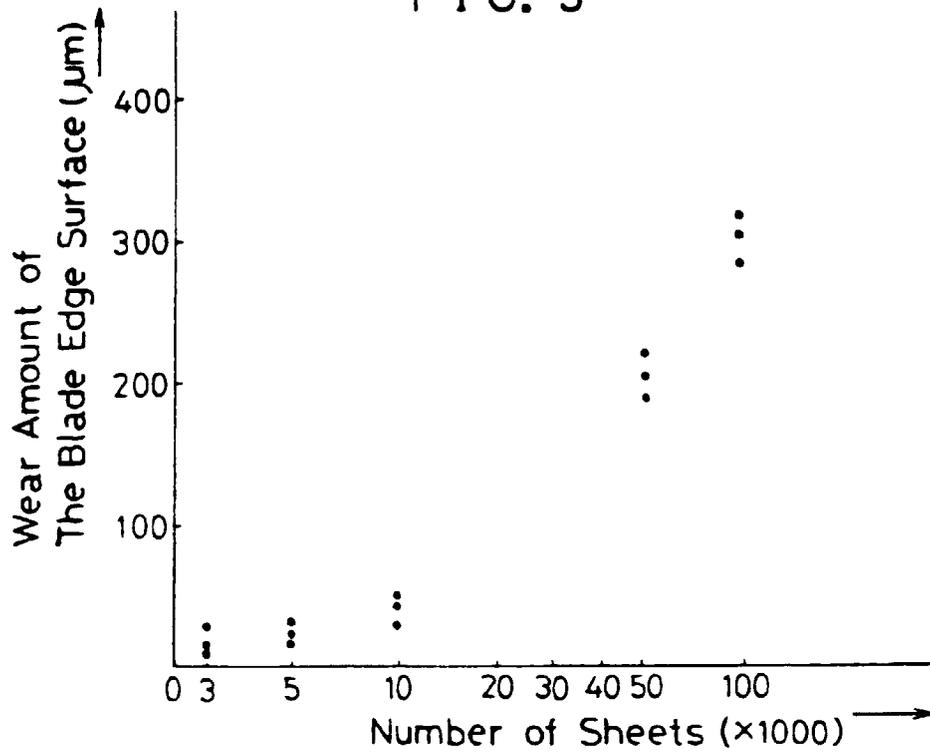


FIG. 4

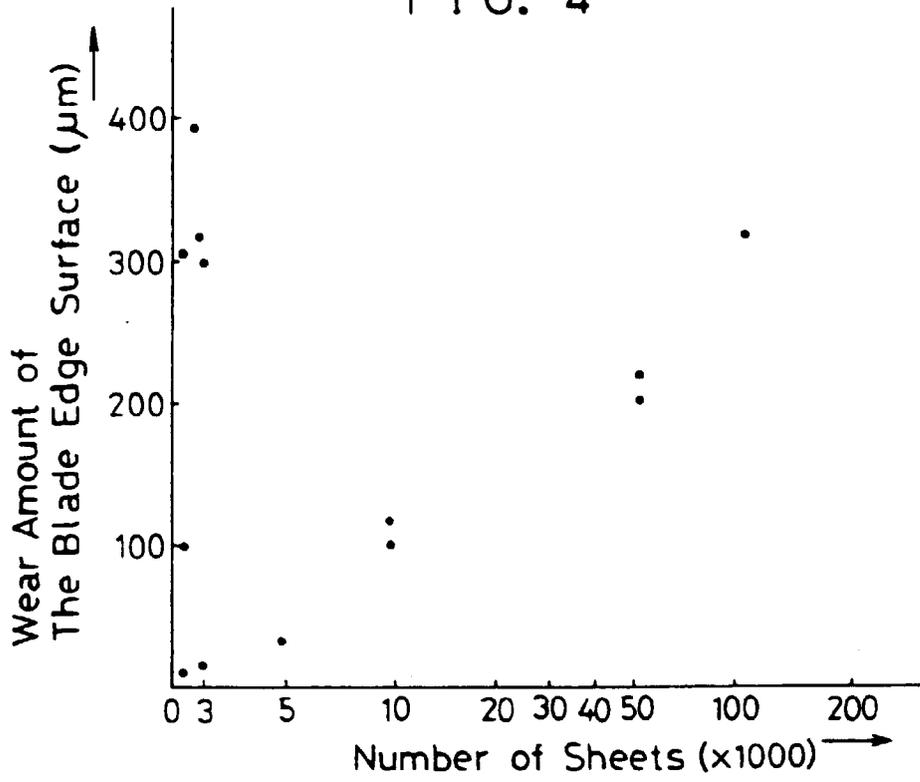


FIG. 5

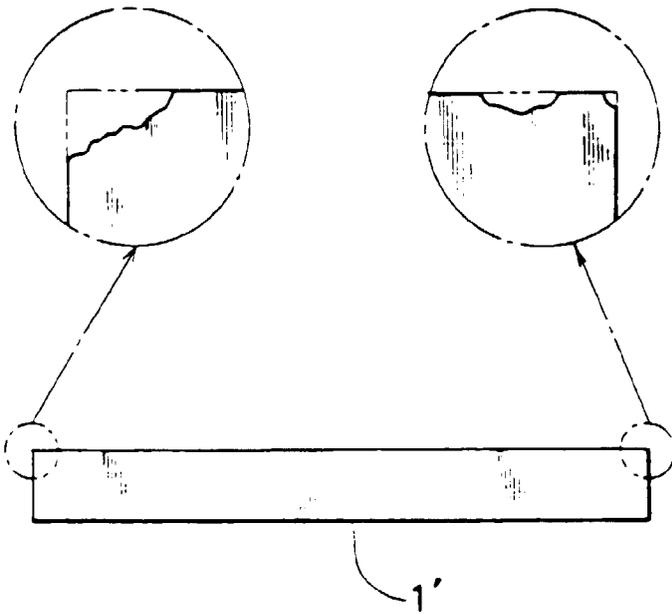


FIG. 6

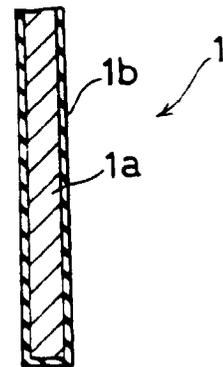


FIG. 7

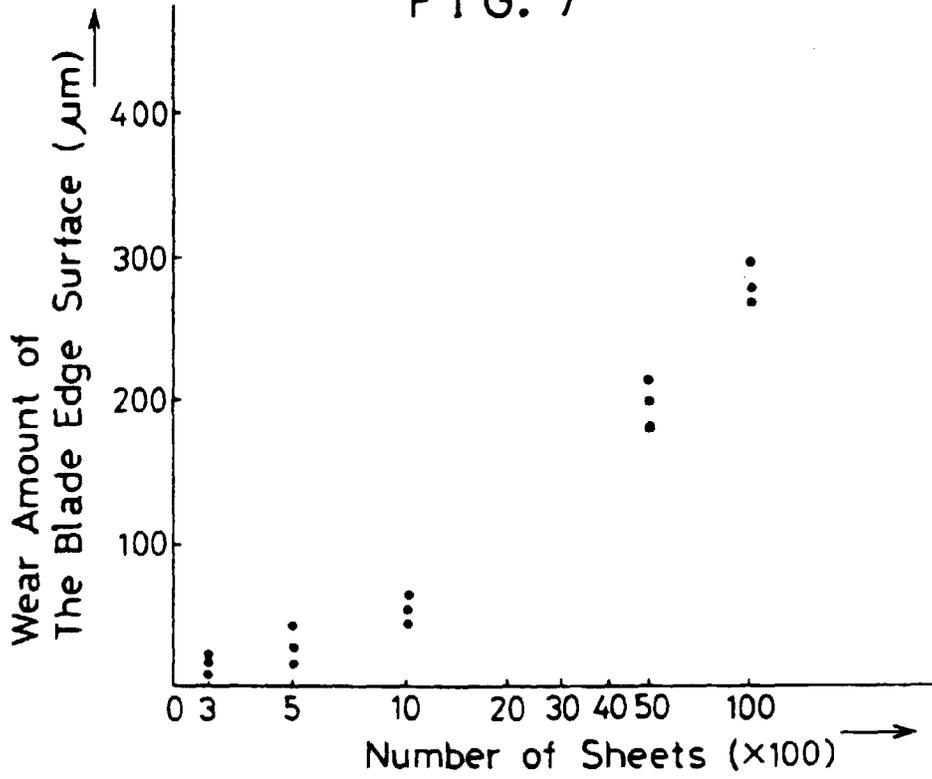


FIG. 8

