

19



Europäisches Patentamt
European Patent Office
Office européen des brevets



11 Publication number:

0 316 770 B1

12

EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification: **13.04.94** 51 Int. Cl.⁵: **H04N 9/79**

21 Application number: **88118755.3**

22 Date of filing: **10.11.88**

54 **System and method for formatting a composite still and moving image defining electronic information signal.**

30 Priority: **13.11.87 US 120592**

43 Date of publication of application:
24.05.89 Bulletin 89/21

45 Publication of the grant of the patent:
13.04.94 Bulletin 94/15

84 Designated Contracting States:
DE FR GB IT NL

56 References cited:
EP-A- 0 202 009
EP-A- 0 253 192
GB-A- 2 148 069

73 Proprietor: **POLAROID CORPORATION**
549 Technology Square
Cambridge, Massachusetts 02139(US)

72 Inventor: **Pape, David D.**
85 Simpson Drive
Framingham, MA 01701(US)

74 Representative: **Koch, Günther, Dipl.-Ing. et al**
Patentanwälte,
Wallach, Koch, Dr. Haibach, Feldkamp,
Postfach 12 11 20
D-80035 München (DE)

EP 0 316 770 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates generally to a system and method for formatting and subsequently deformatting moving and still image information and, more particularly, to a system and method of formatting and deformatting moving image defining electronic information signals interspersed with still image defining electronic information signals.

2. Description of the Prior Art

Electronic video cameras for recording motion pictures on magnetic tape are well known in the art and are in common usage today. Such cameras are designed for home use to record motion pictures on magnetic tape. Such moving picture video cameras do not have the capability of recording still images; and, although playback can be paused to provide a single still frame image, such paused images are generally low quality and do not provide a satisfactory still image of the subject.

Electronic imaging cameras for recording still images have also been proposed. Such cameras can record a plurality of still images on a single magnetic disk or tape in either analog or digital format for subsequent playback on any well-known cathode ray tube viewing device. Such still images which may be recorded in high resolution are of a higher quality than the single still frame images that can be provided by pausing a motion picture video tape to display a single frame. Although such electronic imaging still cameras can provide highly satisfactory still images, such cameras cannot be operated in a continuous video mode to provide moving images.

Most recently, electronic imaging cameras have been proposed which provide the camera operator with the choice of recording either continuous video motion pictures or selected still images as disclosed in US-A-4,691,253 entitled "Electronic Imaging Camera for Recording Either Moving or Still Images", by Bruce R. Silver, issued September 1, 1987. Unless the high resolution still image electronic information signals are recorded on a separate media or track from the moving image electronic information signals, there is provided an interruption of the moving image defining electronic information signals and, hence, the moving image derived therefrom each time a high resolution still image is recorded. Since a plurality of succeeding frames may be required to record a satisfactory high resolution still image, interspersing the succeeding frames of still image data with

the moving image frames results in corresponding interruptions of the moving image during playback. Although these interruptions are generally of short duration, they may nevertheless be objectionable to the viewer of the moving image particularly if a large number of still images have been interspersed with the moving images along the length of the recording media.

GB-A-2 148 069 discloses a video processing circuit receiving a video signal consisting of alternate video fields relating to two different information channels. The two channels are separated by routing each video field to a common field store and to a respective output port. The gaps in each channel at the output port are filled by repeating a field from the store. The store is organised so as to minimise the required storage capacity. This document also discloses both the concepts of transmitting two video signals in an interleaved format, and formatting an output signal from alternate fields of an input and alternate fields from a store.

It is a primary object of this invention to provide a system and method for formatting and deformatting moving images and high resolution still images in a manner whereby the moving images may be replayed continuously without interruptions.

It is a further object of this invention to provide a system and method for formatting high resolution still image defining electronic information signals in interspersed fashion with moving image defining electronic information signals and thereafter deformatting such interspersed high resolution still image and moving image electronic information signals in a manner whereby moving images and still images may be simultaneously displayed without interfering or interrupting effects from each other.

The above technical problem is solved by the combined features of claim 1 as far as the apparatus is concerned and is solved by the combined features of claim 13 as far as the method is concerned.

SUMMARY OF THE INVENTION

A system and method is provided for formatting high resolution still image electronic information signals and moving image electronic information signals of a type which can be provided from an image sensor at standard video frame and field rates for integration with respect to each other. The system comprises means for receiving the moving image electronic information signals from the sensor at the standard video frame and field rate. Means are provided for storing each succeeding frame of the received moving image electronic information signals. Means thereafter encode the received moving image electronic information signals into a standard video format and output the

encoded moving image electronic information signals at the standard video frame and field rate. Control means responsive to the selective actuation thereof operate to cause the encoding and output means to output only alternate fields of the encoded moving image electronic information signals. The control means also operates to output from the storage means select portions of the frame of electronic information signals stored by the storing means subsequent to the selective actuation at intervals corresponding to the intervals between the alternate fields of the encoded moving image electronic information signals. The select portions collectively comprise still image electronic information signals which define a high resolution still image.

A system and method is also provided for deformatting the composite electronic image information signals of the aforementioned type in which moving and still image electronic information signals are alternately recorded in succeeding segments and each of the succeeding moving image segments correspond, respectively, to a first field for each of a plurality of succeeding frames and each of the succeeding still image segments correspond to a succeeding portion of at least one frame of still image defining electronic information signals. The system comprises means for receiving the composite electronic image information signals and separating the moving and still image defining electronic information signals therefrom. Means are provided for storing the separated moving image electronic information signals from each one of the succeeding segments corresponding, respectively, to the first field for each of the plurality of succeeding frames. Means interpolate from each of the stored electronic information signals for each field moving image electronic information signals corresponding to a second field for each of a plurality of succeeding frames. The stored and interpolated moving image electronic information signals collectively define succeeding frames of moving image electronic information signals. Means are provided for storing the portions of the still image electronic information signals from the still image segments to provide a complete frame of still image defining electronic information signals.

DESCRIPTION OF THE DRAWINGS

The novel features that are considered characteristic of the invention are set forth with particularity in the appended claims. The invention itself, however, both as to its organization and its method of operation, together with other objects and advantages thereof will be best understood from the following description of the illustrated embodiment when read in connection with the accompanying drawings wherein:

FIG. 1 is a schematic block diagram of the formatting circuit of this invention;

FIG. 2 is a fragmented plan view of a light sensing array as used in the circuit of FIG. 1;

FIGS. 3A - 3C are fragmentary plan views graphically illustrating the light sensing elements corresponding to the still image defining data of each of a plurality of succeeding still image data frames;

FIG. 4A is a graphical representation of succeeding frames of moving and still image defining data formatted in the manner of this invention;

FIG. 4B is a graphical representation showing succeeding fields and frames of moving image defining data deformatted in the manner of this invention;

FIG. 4C is a graphical representation showing succeeding fields of high resolution still image defining data separated from the formatted signal of FIG. 4A in the manner of this invention;

FIG. 5 is a schematic block diagram showing the deformatting circuit of this invention;

FIG. 6 is a schematic block diagram for an alternate preferred embodiment to the circuit of FIG. 1; and

FIG. 7 is a schematic block diagram for an alternate preferred embodiment to the circuit of FIG. 5.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to FIG. 1, there is shown generally at 10 a schematic block diagram for the video signal formatting circuit of this invention which may be utilized in an electronic imaging camera. A two-dimensional photosensitive area array 12 preferably comprising a high resolution charge-coupled device (CCD) receives image scene light in a well-known manner by way of an objective lens and shutter both of which are not shown. The image sensing array 12 comprises a plurality of image sensing elements or pixels arranged in a two-dimensional area array as best shown in FIG. 2 wherein each image sensing pixel converts the incident image defining scene light rays into a corresponding analog voltage value. Referring to FIG. 2 it can be seen that the image sensing pixels are arranged in columns denoted by the letters and numerals A1, B1, C1, D1, E1, F1 through A189, B189, C189, D189, E189 and F189. Thus, in total there are 1,134 columns or image sensing elements per row. The rows of the image sensing array 12 are denoted, respectively, by the subscripts 1 - 488 thereby showing an image sensing array comprising 1,134 columns by 488 rows of image sensing elements or pixels.

The analog voltage values of the image sensing elements or pixels of the array 12 are serially transferred out of the image sensing array 12 in a conventional manner at standard video frame and field rates by timing clock pulses provided from a timing control 16. The image defining electronic information signals output from the sensing array 12 are subsequently transferred by way of an amplifier 14 to a video signal processing circuit 18 wherein the image defining electronic information signals are amplified and filtered in a well-known manner. The image defining electronic information signals are thereafter transferred by way of a field select control circuit 20 which operates in the manner of this invention to be subsequently described to a luminance/chrominance encoder circuit 22 wherein the image defining electronic information signals are encoded in a standard luminance and chrominance format. The luminance/chrominance encoded electronic information signals are thereafter directed by way of a multiplexing circuit 34 for recording on any conventional media such as video tape, magnetic disk, optical disk, etc. The field select circuit 20 also operates to transfer each frame of the image defining electronic information signals by way of an analog-to-digital converter 24 for storage in a buffer memory 26. Thus, in this manner each succeeding frame of image defining electronic information signals is stored in the buffer memory 26 for reasons which will become apparent from the following discussion.

The video signal formatting circuit 10 of this invention is intended for use in electronic imaging cameras of the type which as previously discussed record both moving and still images. The still images preferably are recorded at a substantially higher resolution than the moving images. Normal operation commences by continuously sensing incident scene light with the image sensing array 12 and serially transferring the image defining electronic information signals from the image sensor 12 in the aforementioned well-known manner at standard video frame and field rates. Since the image defining incident scene light is continuously sensed, the image sensor 12 provides so-called moving image defining electronic information signals which are subsequently amplified by the amplifier 14 and processed by the signal processor 18. The field select control 20 operates to transmit therethrough to the luminance/chrominance encoder 22 each succeeding field of the moving image defining electronic information signals received from the video processor 18. The moving image defining electronic information signals are subsequently encoded to the standard luminance/chrominance format and thereafter transmitted by way of the multiplexer 34 for recording in the conventional manner as previously described.

As will be readily understood, the camera user composes the scene that he is recording by way of a conventional viewfinder (not shown). When the camera user sees a scene that he might like to record as a still image, he can do so by actuating the timing control 16 through a manual actuator 27. Actuation of the timing control in this manner operates to change the field select control circuit 20 to transmit through only alternate fields of the moving image defining electronic information signals to the luminance chrominance encoder 22. At the same time no further frames of electronic information signals are transmitted for storage in the buffer memory 26. The buffer memory 26 retains that frame of electronic information signals stored at the moment immediately following the camera user's actuation of the actuator 28. Thus, the frame of electronic information signals stored at that moment by the buffer memory 26 defines the still image that the camera user desires to record. The frame of still image defining electronic information signals is stored in its full resolution of 1,134 image sensing elements or pixels by 488 image sensing elements or pixels.

The still image defining electronic information signals for such a large number of image sensing elements cannot be transferred at standard field and frame rates without losing a substantial portion of the information due to the limitation in the frequency capabilities of conventional recording devices. Thus, in order to transfer substantially all of the still image defining electronic information signals stored by the buffer memory 26 there is provided a decimator 28 which operates to transfer portions of the still image defining electronic information signals stored by the buffer memory 26 at standard field or frame rates of 1/60th and 1/30th of a second, respectively.

The still image defining electronic information signals retrieved from the buffer memory 26 by the decimator 28 for the first three alternate succeeding fields are shown in FIGS. 3A - 3C, respectively. Thus, the first field of still image defining electronic information signals retrieved from the buffer memory 26 comprises electronic information signals corresponding to the pixels as shown in FIG. 3A. The field of FIG. 3A comprises electronic information signals corresponding to the image sensing elements from every sixth column and every other row of the full resolution frame of still image defining electronic information signals stored by the buffer memory 26. FIG. 3B shows the image sensing elements for which electronic information signals comprising the next succeeding field are transferred by the decimator 28 from the full resolution buffer memory 26. In like manner, FIG. 3C shows the image sensing elements for which electronic information signals for the third succeeding

field are transferred by the decimator 28 from the full resolution buffer memory 26. Since the original full resolution image comprising 1,134 columns of picture sensing elements by 488 rows of picture sensing elements is decimated into fields comprising 1/12th the number of picture sensing elements, the still image defining electronic information signals are transferred at standard video frame and field rates within the frequency limitations of standard recording devices.

The still image defining electronic information signals from the decimator 28 are subsequently converted from their digital format to an analog format by a digital-to-analog converter 32 and thereafter transmitted to the multiplexer 34 to be multiplexed with the moving image defining electronic information signals output from the luminance/chrominance encoder 22.

The multiplexer 34 operates to multiplex alternate fields of the moving image defining electronic information signals with the succeeding frames of still image defining electronic information signals from the digital-to-analog converter 32 to provide an output electronic information signal having a field sequence as shown in FIG. 4A. The first frame 0 comprising the two succeeding fields $F1_v$ and $F2_v$ corresponds to the moving image defining electronic information signals output by the formatting circuit 10 of this invention prior to the manual actuation of the timing control 16 by the camera user to record a still image. Subsequent to the actuation by the camera user to record a still image, the next twelve succeeding frames each comprise a first field corresponding to the moving image defining electronic information signals detected by the image sensor 12 and a second field corresponding to one of the decimated portions of the full resolution still image defining electronic information signals stored in the buffer memory 26 at the instant of actuation. More specifically, the still image defining electronic information signals output in field $F2_{1SP}$ of frame 1 correspond to the image sensing pixels as shown in FIG. 3A. In like manner, the still image defining electronic information signals output in the second field $F2_{2SP}$ of frame 2 correspond to the image sensing elements as shown in FIG. 3B and so on. Thus, each of the second fields $F2_{1SP}$ through $F2_{12SP}$ define a select portion of the full resolution 1,134 pixel by 488 pixel still image. In this manner, the formatting circuit 10 of this invention provides upon selective actuation both moving image defining electronic information signals and high resolution still image defining electronic information signals interspersed in alternate fields wherein the plurality of succeeding alternate still image defining fields collectively define the high resolution still image.

Referring now to FIG. 5, there is shown a schematic block diagram for a deformating circuit 36 for deformating the above-described electronic information signals to provide both continuous moving image defining electronic information signals during the interval at which the high resolution still image defining electronic information signals are recorded while also providing the still image defining electronic information signals. The electronic information signals recorded in the aforementioned manner are sensed in any conventional manner by a sensing head (not shown) and thereafter input by way of terminal 38 to a video processing circuit 40 which processes the electronic information signals in the aforementioned manner. The processed electronic information signals are thereafter converted from an analog format to a digital format by an analog-to-digital converter 42. The digitally formatted electronic information signals are thereafter directed to a frame separator 44 which operates to separate the alternate fields corresponding to the moving image defining electronic information signals and the still image defining electronic information signals.

As will be readily understood, a distinctive marker is preferably imposed on the first field of still image defining electronic information signals as shown at field $F2_{1SP}$ of frame 1 in FIG. 4A for subsequent recognition by the frame separator 44. The distinctive marker may comprise a distinctive set of pixel signals typically generated as the first set of scan lines of the first field of still image defining electronic information signals. In this manner, the frame separator 44 recognizes the interspersion of the still image defining electronic information signals with the moving image defining electronic information signals in the aforementioned format.

The frame separator 44 in response to recognition of the distinctive marker operates to transmit to a low resolution buffer 46 only the first field of each succeeding frame containing the moving image defining electronic information signals. Interpolator 48 thereafter operates to interpolate the moving image defining electronic information signals for the first field of each succeeding frame to derive values for a second field for each succeeding frame. The interpolated values for the second field of each succeeding frame are thereafter multiplexed by a multiplex circuit 50 with the originally sensed image defining electronic information signals to provide a conventional moving image defining electronic information signal as shown in FIG. 4B that may be played on a conventional video monitor 58. As is now readily apparent, the moving image defining electronic information signals may be played back continuously without interruption despite the selective interspersion of still image

defining electronic information signals in the aforementioned manner. Since the second field of each succeeding frame of moving image defining electronic information signals must be interpolated, there is provided a slight decrease in the resolution of the moving image which should generally go unnoticed by the viewer in view of the short period of time during which the still image is recorded.

Upon recognition of the aforementioned distinctive marker, the frame separator 44 also operates to direct the second fields $F2_{1SP}$ - $F2_{12SP}$ of FIG. 4A for combination by an undecimator circuit 54. Thus, in this manner all the electronic information signals of the fields which define the high resolution still image are collectively undecimated and thereafter stored in buffer memory 56. The still image defining electronic information signals are undecimated as shown in FIG. 4C by the undecimator 54 and subsequently stored by the buffer memory 56 to provide a high resolution still image defining electronic image information signal which can be displayed on a high resolution monitor 60 or used to control any conventional high resolution still image hard copier (not shown). Thus, in this manner the deformating circuit 36 can decode the aforementioned moving image defining electronic information signals interspersed with still image defining electronic information signals to provide a continuous uninterrupted moving image defining electronic information signal together with a separate high resolution still image defining electronic information signal. Both the moving and still image electronic information signals may be displayed simultaneously and individually at different monitors.

Referring now to FIG. 6 where like numerals reference previously described components there is shown an alternate preferred embodiment for the encoding circuit of FIG. 1. The CCD 12 preferably comprises various colored filter elements disposed over respective photosensitive elements of the array. The filter elements may be arranged in any well-known geometric pattern over the face of a photosensitive array 12 and may include red, green and blue filters as is well-known in the art. Thus, the CCD 12 provides image defining electronic information signals in three channels corresponding to the red, green and blue color components, respectively. Each of the channels comprises its own respective amplifier 14R, 14G and 14B and its own respective video processor circuit 18R, 18G and 18B. Each color component channel also, in turn, comprises its own analog-to-digital converter 24R, 24G, and 24B; its own respective buffer memory 26R, 26G, and 26B, and its own respective decimator 28R, 28G, and 28B. The decimated color components of the high resolution still image electronic information signals are ultimately converted to an analog format by common digital-to-analog

converter 32. The decimated still image defining electronic information signals are subsequently multiplexed by the multiplexer 50 with the luminance portion of the moving image defining electronic information signals to provide a composite luminance signal which in combination with the chrominance moving image electronic information signal is suitable for recording and playback on a super VHS formatted recorder. The moving image defining luminance and chrominance electronic information signals may also be subsequently encoded into an NTSC format by an encoder circuit 70 and multiplexed by a multiplexer 72 with the decimated still image defining electronic information signals to provide an output signal in NTSC format that is suitable for recording and playback in any conventional VHS formatted recorder.

Referring now to FIG. 7 where like numerals designate previously-described elements, there is shown a schematic block diagram for an alternate preferred embodiment for the deformating circuit of FIG. 5 for deformating the multicolor component signal encoded by the circuit of FIG. 6. The frame separator circuit 44 outputs the still image defining electronic information signals in their respective red, green and blue color components to each of three red, green and blue color component channels. The color component channels, in turn, comprise red, green and blue undecimator circuits 54R, 54G, and 54B, which connect, respectively, to buffer memory circuits 56R, 56G, and 56B. The deformating circuit of FIG. 7 operates in the aforementioned manner with each of the color component channels processing its own respective color. By way of example, the A and D columns of the image sensing array 12 of FIG. 2 may be overlaid with red filters, the B and G columns may be overlaid with green filters and the C and F columns may be overlaid with blue filters. It will be readily understood that other color filter stripe patterns may alternatively be used.

Claims

1. Apparatus for formatting high resolution still image electronic information signals and moving image electronic information signals of a type which can be provided from an image sensor (12) at standard video frame and field rates for integration with respect to each other, said apparatus comprising:
 - means (18) for receiving the moving image electronic information signals from the sensor at the standard video frame and field rate;
 - means (26) for storing electronic information signals; and
 - control means for transmitting each succeeding frame of the received moving image

- electronic information for temporary storage within said storage means, (26) said control means also operating to encode the received moving image electronic information signals into a standard video format and output the encoded moving image electronic information signals at the standard video frame and field rate, said control means responding to the selective actuation thereof by outputting only alternate fields of the encoded moving image electronic information signals, while simultaneously outputting from said storage means (26) select portions of the frame of electronic information signals stored by said storing means (26) following said selective actuation, at intervals corresponding to the intervals between said alternate fields of the encoded moving image electronic information signals, said select portions collectively comprising still image electronic information signals which define a still image.
2. The apparatus of claim 1 wherein said control means includes means (34) for multiplexing said alternate fields of said moving image electronic information signals with said select portions from said stored frame of still image electronic information signals.
3. The apparatus of claim 2 wherein said storage means comprises a buffer memory (26) and said control means comprises a decimator (28) for outputting from said buffer memory (26) select portions of the frame of electronic information signals stored by said buffer memory (26).
4. The apparatus of claim 3 including an analog-to-digital converter (24) for converting each frame of electronic information signals from an analog format to a digital format prior to storage within said buffer memory (26) and a digital-to-analog converter (32) for converting said select portions of the frame of electronic information signals from its digital format back to an analog format.
5. The apparatus of claim 3 wherein said control means includes a luminance/chrominance encoder (22) for encoding the moving image electronic information signals into a standard luminance/chrominance format said multiplier operating to multiplex said luminance formatted portion of the moving image electronic information signals with said decimated portions from said stored frame of still image electronic information signals.
6. The apparatus of claim 5 wherein said control means further includes an NTSC encoder (70) for encoding the moving electronic information signals into a standard NTSC format and a second multiplexer (72) for multiplexing said alternate fields of said NTSC encoded moving image electronic information signals with said decimated portion from said stored frame of still image electronic information signals.
7. The apparatus of claim 2 wherein: the moving image electronic information signals includes at least three color components corresponding, respectively, to one of three different primary colors, said receiving means comprises at least three channels each of which receives a different one of the color components of the moving image electronic information signals, said storing means comprises at least three buffer memories (26B, 26G, 26R) each storing a different one of the color components of the moving image electronic information signals, and said control means operates to output from each of said buffer memories select portions of the frame for the color component of the electronic information signals stored therein.
8. Apparatus for deformatting composite electronic image information signals of the type in which moving image and still image electronic information signals are alternately recorded in succeeding segments, each of said succeeding moving image segments corresponding, respectively, to a first field for each of a plurality of succeeding frames and each of said succeeding still image segments corresponding to a succeeding portion of at least one frame of still image electronic information signals, said apparatus comprising:
 means (18R, G, B) for receiving the composite electronic image information signals and separating the moving image and still image electronic information signals therefrom;
 means (26R, G, B) for storing the separated moving image electronic information signals from each one of the succeeding segments corresponding, respectively, to the first field for each of the plurality of succeeding frames;
 means for interpolating from each of the stored moving image electronic information signals for each field, moving image electronic information signals corresponding to a second field for each of the plurality of succeeding frames, said stored and interpolated moving image electronic information signals collectively defining succeeding frames of moving im-

age electronic information signals; and

means for combining and storing the succeeding portions of the still image electronic information signals from said still image segments to provide a complete frame of still image electronic information signals.

9. The apparatus of claim 8 including means (50) for multiplexing the composite electronic image information signals with the interpolated electronic moving image electronic information signals to provide moving image electronic information signals for both the first and second fields of each succeeding frame.

10. The apparatus of claim 9 wherein said means for storing the separated moving image electronic information signals comprises a low resolution buffer memory (26B, R G) and said means for combining and storing the portions of the still image electronic information signals includes a means for undecimating the portions of the still image electronic information signals, and a high resolution buffer memory.

11. The apparatus of claim 10 including an analog-to-digital converter (24B, G, R) for converting the composite electronic image information signals from an analog format to a digital format.

12. The apparatus of claim 9 wherein: the composite electronic image information signals include at least three color components corresponding, respectively, to one of three different primary colors, said means for interpolating from each of the stored moving image electronic information signals operates to provide interpolated moving image electronic information signals for each color component, and said combining and storing means comprises at least three storage areas each storing a different one of the color components of the still image electronic information signals, said combining and storing means operating to combine the color components to provide the complete color frame of still image electronic information signals.

13. A method for formatting high resolution still image electronic information signals and moving image electronic information signals of a type which can be provided from an image sensor at standard video frame and field rates for integration with respect to each other comprising the steps of:

storing each succeeding frame of the moving image electronic information signal;

transmitting only alternate fields of the moving image electronic information signals;

transmitting select portions of the stored frame of electronic information signals at intervals corresponding to the intervals between the alternate fields of the moving image electronic information signals, said select portions collectively comprising still image electronic information signals which define a still image;

selectively determining when to transmit and multiplex alternate fields of the moving image electronic information signals with the select portions from the stored frame of electronic information signals and prior to said selective determination;

and transmitting all the fields of the moving image electronic image information signals while not transmitting any of the select portions of the stored frames of electronic information signals.

14. The method of claim 13 further including the step of multiplexing the alternate fields of the moving image electronic information signals with the select portions from the stored frame of still image electronic information signals.

15. The method of claim 13 wherein: the moving image electronic information signal includes at least three color components corresponding to one of three different primary colors, said storing step includes storing a different one of the color components of the moving image electronic information signals, and said transmitting step includes transmitting select portions of the frame for each color component of the stored electronic information signals.

16. The method of claim 13 wherein the step of transmitting select portions of the stored frame includes selectively decimating said stored frame.

17. The method of claim 16 including the steps of converting each frame of electronic information signals from an analog format to a digital format prior to storing, and converting said selectively decimated portions of electronic information signals from its digital format back to an analog format.

18. The method of claim 16 including the steps of encoding the moving image electronic information signals into a standard luminance/chrominance format prior to transmittance, said multiplexing step operating to multiplex the luminance formatted portion of the moving image electronic information signals

with the selectively decimated portions from the stored frame of still image electronic information signals.

19. The method of claim 18 including the steps of encoding the moving image electronic information signals into a standard NTSC format and multiplexing the alternate fields of the NTSC formatted moving image electronic information signals with the selectively decimated portion from the stored frame of still image electronic information signals. 5 10
20. A method for decoding composite electronic image information signals of the type in which moving image and still image electronic information signals are alternately recorded in succeeding segments, each of said succeeding moving image segments corresponding, respectively, to a first field for each of a plurality of succeeding frames and each of said succeeding still image segments corresponding to a succeeding portion of at least one frame of still image electronic information signals, said method comprising the steps of: 15 20 25
 - separating the moving and still image electronic information signals from the composite electronic image information signals;
 - storing the separated moving image electronic information signals from each one of the succeeding segments corresponding, respectively, to the first field for each of the plurality of succeeding frames; 30
 - interpolating from each of the stored moving image electronic information signals for each field, moving image electronic information signals corresponding to a second field for each of the plurality of succeeding frames such that the stored and interpolated moving image electronic information signals collectively define succeeding frames of moving image electronic information signals; and 35 40
 - combining and storing the portions of the still image electronic information signals from the still image segments to provide a complete frame of still image electronic information signals. 45
21. The method of claim 20 further comprising the step of multiplexing the composite electronic electronic moving image electronic information signals to provide moving image electronic information signals for both the first and second fields of each succeeding frame. 50 55
22. The method of claim 21 wherein: the composite electronic image information signals include

at least three color components corresponding, respectively, to one of three different primary colors, said interpolation step operates to interpolate moving image electronic information signals for each component, and said combining and storing step operates to store the different color components of the still image electronic information signals and to combine the color components to provide the complete color frame of still image electronic information signals.

23. The method of claim 21 wherein the step of combining and storing the portion of the still image electronic information signals includes undecimating the portions of the still image electronic information signals.
24. The method of claim 24 including the step of converting the composite electronic image information signals from an analog to a digital format prior to said separating step.

Patentansprüche

1. Vorrichtung zur Formatierung von elektronischen Stehbild-Informationssignalen hoher Auflösung und elektronischen Bewegungsbild-Informationssignalen jener Art, die von einem Bildsensor (12) mit genormten Einzelbild- und Bildwechselfrequenzen geliefert werden, zur Integration miteinander, wobei die Vorrichtung folgende Teile umfaßt:
 - Mittel (18) zum Empfang der elektronischen Bewegungsbild-Informationssignale vom Sensor mit genormter Einzelbild- und Bildwechselfrequenz;
 - Mittel (26) zur Speicherung der elektronischen Informationssignale; und
 - Steuermittel zur Übertragung jedes aufeinanderfolgenden Einzelbildes der empfangenen elektronischen Bewegungsbild-Information zur zeitweiligen Speicherung im Speicher (26), wobei die Steuermittel auch eine Codierung der empfangenen elektronischen Bewegungsbild-Informationssignale in ein genormtes Videoformat bewirken und die elektronischen Bewegungsbild-Informationssignale mit genormter Einzelbild- und Bildwechselfrequenz liefern, wobei die Steuermittel auf die selektive Betätigung ansprechen, indem nur abwechselnde Halbbilder der codierten elektronischen Bewegungsbild-Informationssignale ausgegeben werden, während gleichzeitig aus dem Speicher (26) gewählte Abschnitte des Einzelbildes der elektronischen Informationssi-

- gnale ausgegeben werden, die im Speicher (26) gespeichert sind, nachdem die selektive Betätigung erfolgte, und zwar mit Intervallen, die den Intervallen zwischen den abwechselnden Einzelbildern der codierten elektronischen Bewegungsbild-Informationssignale entsprechen, wobei die gewählten Abschnitte kollektiv die elektronischen Stehbild-Informationssignale umfassen, die ein Stehbild definieren.
2. Vorrichtung nach Anspruch 1, bei welcher die Steuermittel Einrichtungen (34) umfassen, um die abwechselnden Halbbilder der elektronischen Bewegungsbild-Informationssignale mit den gewählten Abschnitten der gespeicherten Einzelbilder der elektronischen Stehbild-Informationssignale zu multiplexen.
3. Vorrichtung nach Anspruch 2, bei welcher der Speicher einen Pufferspeicher (26) aufweist und die Steuermittel eine Dezimierstufe (28) besitzen, um aus dem Pufferspeicher (26) selektiv dezimierte Abschnitte des Einzelbildes der elektronischen Informationssignale auszugeben, die im Pufferspeicher (26) gespeichert sind.
4. Vorrichtung nach Anspruch 3, welche einen Analog/Digital-Wandler (24) aufweist, um jedes Einzelbild der elektronischen Informationssignale von einem analogen Format in ein digitales Format umzuwandeln, bevor eine Speicherung im Pufferspeicher (26) erfolgt, während ein Digital/Analog-Wandler (32) die gewählten dezimierten Abschnitte des gespeicherten Einzelbildes der elektronischen Informationssignale vom digitalen Format zurück in ein analoges Format umformt.
5. Vorrichtung nach Anspruch 3, bei welcher die Steuermittel eine Leuchtdichte/Chrominanz-Codierstufe (22) aufweisen, um die elektronischen Bewegungsbild-Informationssignale in ein genormtes Leuchtdichte/Chrominanz-Format zu codieren, wobei ein Multiplexer den Leuchtdichteformatanteil der elektronischen Bewegungsbild-Informationssignale mit den dezimierten Abschnitten des gespeicherten Einzelbildes der elektronischen Stehbild-Informationssignale vermischt.
6. Vorrichtung nach Anspruch 5, bei welcher die Steuermittel außerdem eine NTSC-Codierstufe (70) aufweisen, um die elektronischen Bewegungsbild-Informationssignale in ein genormtes NTSC-Format zu codieren, und ein zweiter
- Multiplexer (72) die abwechselnden Halbbilder der NTSC-codierten elektronischen Bewegungsbild-Informationssignale mit dem dezimierten Abschnitt des gespeicherten Einzelbildes der elektronischen Stehbild-Informationssignale verarbeitet.
7. Vorrichtung nach Anspruch 2, bei welcher die elektronischen Bewegungsbild-Informationssignale wenigstens drei Farbkomponenten aufweisen, die jeweils einer von drei unterschiedlichen Primärfarben entsprechen, wobei der Empfänger wenigstens drei Kanäle aufweist, von denen jeder eine unterschiedliche Farbkomponente der elektronischen Bewegungsbild-Informationssignale empfängt, und welcher wenigstens drei Pufferspeicher (26B, 26G, 26R) umfaßt, von denen jeder eine andere Farbkomponente der elektronischen Bewegungsbild-Informationssignale speichert, und die Steuereinrichtung bewirkt, daß von jedem Pufferspeicher gewählte Abschnitte des Einzelbildes für die Farbkomponente der darin gespeicherten elektronischen Informationssignale ausgegeben werden.
8. Vorrichtung zur Deformatierung zusammengesetzter elektronischer Bildinformationssignale, bei denen elektronische Bewegungsbild- und Stehbild-Informationssignale abwechselnd in aufeinanderfolgenden Segmenten aufgezeichnet werden und jedes der aufeinanderfolgenden Bewegungsbildsegmente jeweils einem ersten Halbbild für jedes von mehreren Einzelbildern entspricht und jedes der aufeinanderfolgenden Stehbildsegmente einem aufeinanderfolgenden Abschnitt wenigstens eines Einzelbildes der elektronischen Stehbild-Informationssignale entspricht, wobei die Vorrichtung folgende Teile umfaßt:
- Mittel (18R, G, B) zum Empfang der zusammengesetzten elektronischen Bildinformationssignale und zur Trennung der elektronischen Bewegungsbild- und Stehbild-Informationssignale daraus;
 - Mittel (26R, G, B) zur Speicherung der getrennten elektronischen Bewegungsbild-Informationssignale von jedem der aufeinanderfolgenden Segmente, entsprechend jeweils dem ersten Halbbild eines jeden der aufeinanderfolgenden Einzelbilder;
 - Mittel, um von jedem gespeicherten elektronischen Bewegungsbild-Informationssignal für jedes Halbbild elektronische Bewegungsbild-Informationssignale zu interpolieren, entsprechend einem zweiten Halbbild für jedes der aufeinanderfolgenden

- den Einzelbilder, wobei die gespeicherten und interpolierten elektronischen Bewegungsbild-Informationssignale kollektiv aufeinanderfolgende Einzelbilder elektronischer Bewegungsbild-Informationssignale definieren; und
- Mittel zur Kombination und Speicherung der aufeinanderfolgenden Abschnitte der elektronischen Stehbild-Informationssignale aus den Stehbildsegmenten, um ein vollständiges Einzelbild der elektronischen Stehbild-Informationssignale zu liefern.
9. Vorrichtung nach Anspruch 8, welche Mittel (50) aufweist, um die zusammengesetzten elektronischen Bildinformationssignale mit den interpolierten elektronischen Bewegungsbild-Informationssignalen zu verarbeiten und um elektronische Bewegungsbild-Informationssignale für das erste und zweite Halbbild eines jeden aufeinanderfolgenden Einzelbildes zu liefern.
10. Vorrichtung nach Anspruch 9, bei welcher die Mittel zum Speichern der getrennten elektronischen Bewegungsbild-Informationssignale einen Pufferspeicher (26B, R, G) geringer Auflösung aufweisen und die Mittel zur Kombination und Speicherung der Abschnitte der elektronischen Stehbild-Informationssignale eine Einrichtung aufweisen, um die Abschnitte der elektronischen Stehbild-Informationssignale rückzudezimieren, und ein Pufferspeicher hoher Auflösung vorgesehen ist.
11. Vorrichtung nach Anspruch 10, welche einen Analog/Digital-Wandler (24B, G, R) aufweist, um die zusammengesetzten elektronischen Bildinformationssignale aus einem Analogformat in ein Digitalformat umzuformen.
12. Vorrichtung nach Anspruch 9, mit den folgenden Merkmalen: die zusammengesetzten elektronischen Bildinformationssignale weisen wenigstens drei Farbkomponenten auf, die jeweils einer von drei unterschiedlichen Primärfarben entsprechen; die Mittel zur Interpolierung von jedem der gespeicherten elektronischen Bewegungsbild-Informationssignale bewirken eine Interpolierung der elektronischen Bewegungsbild-Informationssignale für jede Farbkomponente; die Kombinationsmittel und die Speichermittel umfassen wenigstens drei Speicherbereiche, von denen jeder eine unterschiedliche der Farbkomponenten der elektronischen Stehbild-Informationssignale speichert, wobei die Kombinations- und Speichermittel die Farbkomponenten derart kombinieren, daß das vollständige Farbeinzelbild der elektronischen Stehbild-Informationssignale erlangt wird.
13. Verfahren zur Formatierung elektronischer Stehbild-Informationssignale hoher Auflösung und der elektronischen Bewegungsbild-Informationssignale von jener Bauart, bei der ein Bildsensor mit genormter Videoeinzelbild- und genormter Bildwechselfrequenz zur Integration Anwendung findet, mit den folgenden Schritten:
- es wird jedes aufeinanderfolgende Einzelbild der elektronischen Bewegungsbild-Informationssignale gespeichert;
 - es werden nur abwechselnde Halbbilder der elektronischen Bewegungsbild-Informationssignale übertragen;
 - es werden gewählte Abschnitte des gespeicherten Einzelbildes der elektronischen Informationssignale in Intervallen übertragen, die den Intervallen zwischen abwechselnden Halbbildern der elektronischen Bewegungsbild-Informationssignale entsprechen, wobei die gewählten Abschnitte zusammen die elektronischen Stehbild-Informationssignale bilden, die ein Stehbild definieren;
 - es wird selektiv bestimmt, wann eine Übertragung stattfindet, und es werden abwechselnde Halbbilder der elektronischen Bewegungsbild-Informationssignale mit den gewählten Abschnitten der gespeicherten Einzelbilder der elektronischen Informationssignale verarbeitet, bevor die selektive Bestimmung erfolgt; und
 - es werden all die Halbbilder der elektronischen Bewegungsbild-Informationssignale übertragen, während keine gewählten Abschnitte der gespeicherten Einzelbilder der elektronischen Informationssignale übertragen werden.
14. Verfahren nach Anspruch 13, welches weiter den Schritt aufweist, abwechselnde Halbbilder der elektronischen Bewegungsbild-Informationssignale mit den gewählten Abschnitten der gespeicherten Einzelbilder der elektronischen Stehbild-Informationssignale zu multiplexen.
15. Verfahren nach Anspruch 13, bei welchem das elektronische Bewegungsbild-Informationssignal wenigstens drei Farbkomponenten umfaßt, die jeweils einer von drei unterschiedlichen Primärfarben entspricht, wobei der Speicherschritt eine Speicherung jeweils einer verschiedenen Farbkomponente der elektronischen Be-

- wegungsbild-Informationssignale umfaßt und während des Übertragungsschrittes gewählte Abschnitte des Einzelbildes für jede Farbkomponente der gespeicherten elektronischen Informationssignale übertragen werden. 5
16. Verfahren nach Anspruch 13, bei welchem während des Übertragungsschrittes gewählter Abschnitte des gespeicherten Einzelbildes selektiv das gespeicherte Einzelbild dezimiert wird. 10
17. Verfahren nach Anspruch 16, bei welchem jedes Einzelbild elektronischer Informationssignale von einem analogen Format in ein digitales Format übertragen wird, bevor eine Speicherung erfolgt, und selektiv dezimierte Abschnitte der elektronischen Informationssignale von dem digitalen Format in das analoge Format zurückübertragen werden. 15 20
18. Verfahren nach Anspruch 16, bei welchem die elektronischen Bewegungsbild-Informationssignale in ein genormtes Leuchtdichte/Chrominanz-Format codiert werden, bevor eine Übertragung stattfindet, wobei der Multiplexschritt eine Multiplexbildung des leuchtdichte-formatierten Abschnittes der elektronischen Bewegungsbild-Informationssignale mit den selektiv dezimierten Abschnitten des gespeicherten Einzelbildes der elektronischen Stehbild-Informationssignale bewirkt. 25 30
19. Verfahren nach Anspruch 18, bei dem die elektronischen Bewegungsbild-Informationssignale in ein Standard-NTSC-Format codiert werden und abwechselnde Halbbilder der NTSC-formatierten elektronischen Bewegungsbild-Informationssignale mit dem selektiv dezimierten Abschnitt der gespeicherten Einzelbilder der elektronischen Stehbild-Informationssignale verarbeitet werden. 35 40
20. Verfahren zur Decodierung zusammengesetzter elektronischer Bildinformationssignale, bei dem elektronische Bewegungsbild- und Stehbild-Informationssignale abwechselnd in aufeinanderfolgenden Segmenten aufgezeichnet werden und jedes der aufeinanderfolgenden Bewegungsbildsegmente jeweils einem ersten Halbbild eines jeden aufeinanderfolgenden Einzelbildes entspricht und jedes der aufeinanderfolgenden Stehbildsegmente aufeinanderfolgenden Abschnitten von wenigstens einem Einzelbild der elektronischen Stehbild-Informationssignale entspricht, wobei das Verfahren die folgenden Schritte umfaßt: 45 50 55
- es werden die elektronischen Bewegungsbild- und Stehbild-Informationssignale von den zusammengesetzten elektronischen Bildinformationssignalen abgetrennt;
 - es werden die abgetrennten elektronischen Bewegungsbild-Informationssignale von je einem der aufeinanderfolgenden Segmente gespeichert, entsprechend dem ersten Halbbild für jedes der aufeinanderfolgenden Einzelbilder;
 - es werden aus jedem der elektronischen gespeicherten Bewegungsbild-Informationssignale für jedes Halbbild elektronische Bewegungsbild-Informationssignale interpoliert, entsprechend einem zweiten Halbbild für jedes Einzelbild, derart, daß die gespeicherten und unterpolierten elektronischen Bewegungsbild-Informationssignale kollektiv aufeinanderfolgende Einzelbilder elektronischer Bewegungsbild-Informationssignale definieren; und
 - es werden die Abschnitte der elektronischen Stehbild-Informationssignale von den Stehbildsegmenten kombiniert und gespeichert, um ein vollständiges Einzelbild der elektronischen Stehbild-Informationssignale zu liefern.
21. Verfahren nach Anspruch 20, welches außerdem den Schritt umfaßt, die zusammengesetzten elektronischen Bildinformationssignale mit den interpolierten elektronischen Bewegungsbild-Informationssignalen zu verarbeiten, um elektronische Bewegungsbild-Informationssignale für das erste und zweite Halbbild eines jeden aufeinanderfolgenden Einzelbildes zu liefern.
22. Verfahren nach Anspruch 21, bei welchem die zusammengesetzten elektronischen Bildinformationssignale wenigstens drei Farbkomponenten umfassen, die jeweils einer von drei Primärfarben entsprechen, wobei der Interpolationsschritt eine Interpolation elektronischer Bewegungsbild-Informationssignale für jede Farbkomponente umfaßt und der Kombinations- und Speicherschritt bewirkt, daß die verschiedenen Farbkomponenten der elektronischen Stehbild-Informationssignale gespeichert werden und die Farbkomponenten kombiniert werden, um ein vollständiges Farbeinzelbild der elektronischen Stehbild-Informationssignale zu liefern.
23. Verfahren nach Anspruch 21, bei welchem der Schritt der Kombination und Speicherung des Abschnitts der elektronischen Stehbild-Infoma-

tionssignale eine Rückdezimierung der Abschnitte der elektronischen Stehbild-Informationssignale umfaßt.

24. Verfahren nach Anspruch 23, mit dem Schritt, die zusammengesetzten elektronischen Bildinformationssignale von einem Analogformat in ein Digitalformat umzuformen, bevor der Trennschritt erfolgt.

Revendications

1. Appareil pour mettre en forme des signaux haute résolution d'information électronique d'image fixe et des signaux d'information électronique d'image mobile d'un type qui peut être fourni par un capteur d'image (12) à des vitesses vidéo standard de trame et de demi-trame en vue d'une intégration l'un par rapport à l'autre, ledit appareil comprenant:
 - un moyen (18) pour recevoir les signaux d'information électronique d'image mobile provenant du capteur aux vitesses vidéo standard de trame et de demi-trame;
 - un moyen (26) pour mémoriser des signaux d'information électronique; et
 - un moyen de commande pour transmettre chaque trame successive de l'information électronique d'image mobile reçue en vue d'un stockage temporaire dans ledit moyen de mémorisation (26), ledit moyen de commande opérant également pour coder les signaux d'information électronique d'image mobile reçus en un format vidéo standard et émettre les signaux codés d'information électronique d'image mobile à la vitesse vidéo standard de trame et de demi-trame, ledit moyen de commande répondant à son actionnement sélectif en émettant uniquement des demi-trames alternées des signaux codés d'information électronique d'image mobile tout en émettant simultanément depuis ledit moyen de mémorisation (26) des parties sélectionnées de la trame des signaux d'information électronique mémorisés par ledit moyen de mémorisation (26) après ledit actionnement sélectif, à des intervalles qui correspondent aux intervalles entre lesdites demi-trames alternées des signaux codés d'information électronique d'image mobile, lesdites parties sélectionnées constituant collectivement des signaux d'information électronique d'image fixe qui définissent une image fixe.

2. Appareil selon la revendication 1, dans lequel ledit moyen de commande comprend un moyen (34) pour multiplexer lesdites demi-trames alternées desdits signaux d'information électronique d'image mobile avec lesdites parties sélectionnées provenant de ladite trame mémorisée des signaux d'information électronique d'image fixe.

3. Appareil selon la revendication 2, dans lequel ledit moyen de mémorisation comprend une mémoire tampon (26) et ledit moyen de commande comprend un moyen de réarrangement (28) pour émettre de ladite mémoire tampon (26) des parties sélectivement réarrangées de la trame des signaux d'information électronique mémorisés par ladite mémoire tampon (26).

4. Appareil selon la revendication 3, comprenant un convertisseur analogique/numérique (24) pour convertir chaque trame des signaux d'information électronique d'un format analogique à un format numérique avant mémorisation dans ladite mémoire tampon (26) et un convertisseur numérique/analogique (32) pour reconverter lesdites parties sélectivement réarrangées de la trame mémorisée des signaux d'information électronique de leur format numérique à un format analogique.

5. Appareil selon la revendication 3, dans lequel ledit moyen de commande comprend un codeur de luminance/chrominance (22) pour coder les signaux d'information électronique d'image mobile en un format standard de luminance/chrominance, ledit multiplexeur fonctionnant pour multiplexer ladite partie mise en forme en luminance des signaux d'information électronique d'image mobile avec lesdites parties réarrangées de ladite trame mémorisée des signaux d'information électronique d'image fixe.

6. Appareil selon la revendication 5, dans lequel ledit moyen de commande comprend en outre un codeur NTSC (70) pour coder les signaux d'information électronique d'image mobile en un format standard NTSC et un second multiplexeur (72) pour multiplexer lesdites demi-trames alternées desdits signaux codés NTSC d'information électronique d'image mobile avec ladite partie réarrangée de ladite trame mémorisée des signaux d'information électronique d'image fixe.

7. Appareil selon la revendication 2, dans lequel les signaux d'information électronique d'image

mobile contiennent au moins trois composantes de couleur correspondant respectivement à l'une parmi trois couleurs primaires différentes, ledit moyen de réception comprend au moins trois canaux dont chacun reçoit une composante de couleur différente des signaux d'information électronique d'image mobile, ledit moyen de mémorisation comprend au moins trois mémoires tampon (26B, 26G, 26R) mémorisant chacune une composante de couleur différente des signaux d'information électronique d'image mobile, et ledit moyen de commande fonctionne pour émettre depuis chacune desdites mémoires tampon des parties sélectionnées de la trame pour la composante de couleur des signaux d'information électronique qui y est mémorisée.

8. Appareil pour supprimer la mise en forme de signaux composites d'information d'image électronique du type dans lequel des signaux d'information électronique d'image mobile et d'image fixe sont alternativement enregistrés dans des segments qui se succèdent, chaque segment d'image mobile successif correspondant respectivement à une première demi-trame pour chaque trame d'une pluralité de trames qui se succèdent et chaque segment d'image fixe successif correspondant à une partie successive d'au moins une trame de signaux d'information électronique d'image fixe, ledit appareil comprenant:

- un moyen (18 R, G, B) pour recevoir les signaux composites d'information d'image électronique et en séparer les signaux d'information électronique d'image mobile et d'image fixe,
- un moyen (26 R, G, B) pour mémoriser les signaux séparés d'information électronique d'image mobile provenant de chacun des segments successifs et correspondant respectivement à la première demi-trame pour chaque trame de la pluralité de trames successives,
- un moyen pour interpoler, à partir de chaque signal mémorisé d'information électronique d'image mobile pour chaque demi-trame, des signaux d'information électronique d'image mobile correspondant à une seconde demi-trame pour chacune des trames de la pluralité de trames qui se succèdent, lesdits signaux mémorisés et interpolés d'information électronique d'image mobile définissant collectivement des trames qui se succèdent des signaux d'information électronique d'image mobile, et

- un moyen pour combiner et mémoriser les parties successives des signaux d'information électronique d'image fixe à partir desdits segments d'image fixe pour donner une trame complète de signaux d'information électronique d'image fixe.

9. Appareil selon la revendication 8, incluant un moyen (50) pour multiplexer les signaux composites d'information d'image électronique avec les signaux interpolés d'information électronique d'image mobile afin de donner des signaux d'information électronique d'image mobile à la fois pour les première et seconde demi-trames de chaque trame successive.

10. Appareil selon la revendication 9, dans lequel ledit moyen pour mémoriser les signaux séparés d'information électronique d'image mobile comprend une mémoire tampon (26B, R, G) de faible résolution et ledit moyen pour combiner et mémoriser les parties des signaux d'information électronique d'image fixe comprend un moyen pour rétablir les parties réarrangées des signaux d'information électronique d'image fixe et une mémoire tampon à haute résolution.

11. Appareil selon la revendication 10, comprenant un convertisseur analogique/numérique (24B, G, R) pour convertir les signaux composites d'information d'image électronique d'un format analogique à un format numérique.

12. Appareil selon la revendication 9, dans lequel les signaux composites d'information d'image électronique incluent au moins trois composantes de couleur qui correspondent respectivement à l'une parmi trois couleurs primaires différentes, ledit moyen d'interpolation à partir de chaque signal mémorisé d'information électronique d'image mobile agit pour donner des signaux interpolés d'information électronique d'image mobile pour chaque composante de couleur et ledit moyen de mémorisation et de combinaison comprend au moins trois régions de mémorisation qui mémorisent chacune une composante de couleur différente des signaux d'information électronique d'image fixe, ledit moyen de mémorisation et de combinaison fonctionnant pour combiner les composantes de couleur afin de donner la trame couleur complète des signaux d'information électronique d'image fixe.

13. Procédé pour mettre en forme des signaux haute résolution d'information électronique

d'image fixe et des signaux d'information électronique d'image mobile d'un type qui peut être fourni par un capteur d'image à des vitesses vidéo standard de trame et de demi-trame en vue d'une intégration l'un par rapport à l'autre, comprenant les étapes consistant à:

- mémoriser chaque trame successive du signal d'information électronique d'image mobile;
- transmettre uniquement des demi-trames alternées des signaux d'information électronique d'image mobile;
- transmettre des parties sélectionnées de la trame mémorisée des signaux d'information électronique à des intervalles qui correspondent aux intervalles entre les demi-trames alternées des signaux d'information électronique d'image mobile, lesdites parties sélectionnées constituant collectivement des signaux d'information électronique d'image fixe qui définissent une image fixe;
- déterminer sélectivement quand transmettre et multiplexer des demi-trames alternées des signaux d'information électronique d'image mobile avec les parties sélectionnées dans la trame mémorisée des signaux d'information électronique et avant ladite détermination sélective; et
- transmettre toutes les demi-trames des signaux d'information électronique d'image mobile tout en ne transmettant aucune des parties sélectionnées des trames mémorisées des signaux d'information électronique.

14. Procédé selon la revendication 13, comprenant en outre l'étape qui consiste à multiplexer les demi-trames alternées des signaux d'information électronique d'image mobile avec les parties sélectionnées dans la trame mémorisée des signaux d'information électronique d'image fixe.

15. Procédé selon la revendication 13, dans lequel le signal d'information électronique d'image mobile contient au moins trois composantes de couleur correspondant à l'une parmi trois couleurs primaires différentes, ladite étape de mémorisation inclut une mémorisation d'une composante de couleur différente des signaux d'information électronique d'image mobile et ladite étape de transmission inclut la transmission de parties sélectionnées de la trame pour chaque composante de couleur des signaux d'information électronique mémorisés.

16. Procédé selon la revendication 13, dans lequel l'étape de transmission de parties sélectionnées de la trame mémorisée comprend un réarrangement sélectif de ladite trame mémorisée.

17. Procédé selon la revendication 16, comprenant les étapes qui consistent à convertir chaque trame des signaux d'information électronique d'un format analogique à un format numérique avant la mémorisation et à reconvertir lesdites parties sélectivement réarrangées des signaux d'information électronique de leur format numérique à un format analogique.

18. Procédé selon la revendication 16, comprenant les étapes consistant à coder les signaux d'information électronique d'image mobile en un format standard de luminance/chrominance avant la transmission, ladite étape de multiplexage fonctionnant pour multiplexer la partie en format luminance des signaux d'information électronique d'image mobile avec les parties sélectivement réarrangées de la trame mémorisée des signaux d'information électronique d'image fixe.

19. Procédé selon la revendication 18, comprenant les étapes consistant à coder les signaux d'information électronique d'image mobile en un format NTSC standard et à multiplexer les demi-trames alternées des signaux codés NTSC d'information électronique d'image mobile avec la partie sélectivement réarrangée de la trame mémorisée des signaux d'information électronique d'image fixe.

20. Procédé pour décoder des signaux composites d'information d'image électronique du type dans lequel des signaux d'information électronique d'image fixe et d'image mobile sont alternativement enregistrés dans des segments qui se succèdent, chacun desdits segments d'image mobile qui se succèdent correspondant respectivement à une première demitrame pour chaque trame d'une pluralité de trames qui se succèdent et chaque segment successif d'image fixe correspondant à une partie successive d'au moins une trame des signaux d'information électronique d'image fixe, ledit procédé comprenant les étapes consistant à:

- séparer dans les signaux composites d'information d'image électronique des signaux d'information électronique d'image fixe et d'image mobile,
- mémoriser les signaux séparés d'information électronique d'image mobile provenant de chaque segment successif

correspondant respectivement à la première demi-trame pour chaque trame de la pluralité de trames successives,

- interpoler, à partir de chaque signal d'information électronique d'image mobile mémorisé pour chaque demi-trame, des signaux d'information électronique d'image mobile qui correspondent à une seconde demi-trame pour chaque trame de la pluralité de trames successives de façon à ce que les signaux d'information électronique d'image mobile mémorisés et interpolés définissent collectivement des trames successives des signaux d'information électronique d'image mobile, et 5
- combiner et mémoriser les parties des signaux d'information électronique d'image fixe provenant des segments d'image fixe pour donner une trame complète des signaux d'information électronique d'image fixe. 10 15 20

composites d'information d'image électronique d'un format analogique à un format numérique avant ladite étape de séparation.

- 21.** Procédé selon la revendication 20, comprenant en outre l'étape consistant à multiplexer les signaux composites d'information d'image électronique avec les signaux interpolés d'information électronique d'image mobile électronique pour donner des signaux d'information électronique d'image mobile à la fois pour les première et seconde demi-trames de chaque trame successive. 25 30

- 22.** Procédé selon la revendication 21, dans lequel les signaux composites d'information d'image électronique incluent au moins trois composantes de couleur correspondant respectivement à l'une parmi trois couleurs primaires différentes, ladite étape d'interpolation agit pour interpoler des signaux d'information électronique d'image mobile pour chaque composante, et ladite étape de combinaison et mémorisation agit pour mémoriser les différentes composantes de couleur des signaux d'information électronique d'image fixe et pour combiner les composantes de couleur afin de donner la trame couleur complète des signaux d'information électronique d'image fixe. 35 40 45

- 23.** Procédé selon la revendication 21, dans lequel l'étape consistant à combiner et mémoriser la partie des signaux d'information électronique d'image fixe comprend le fait de rétablir les parties réarrangées des signaux d'information électronique d'image fixe. 50 55

- 24.** Procédé selon la revendication 23, incluant l'étape qui consiste à convertir les signaux

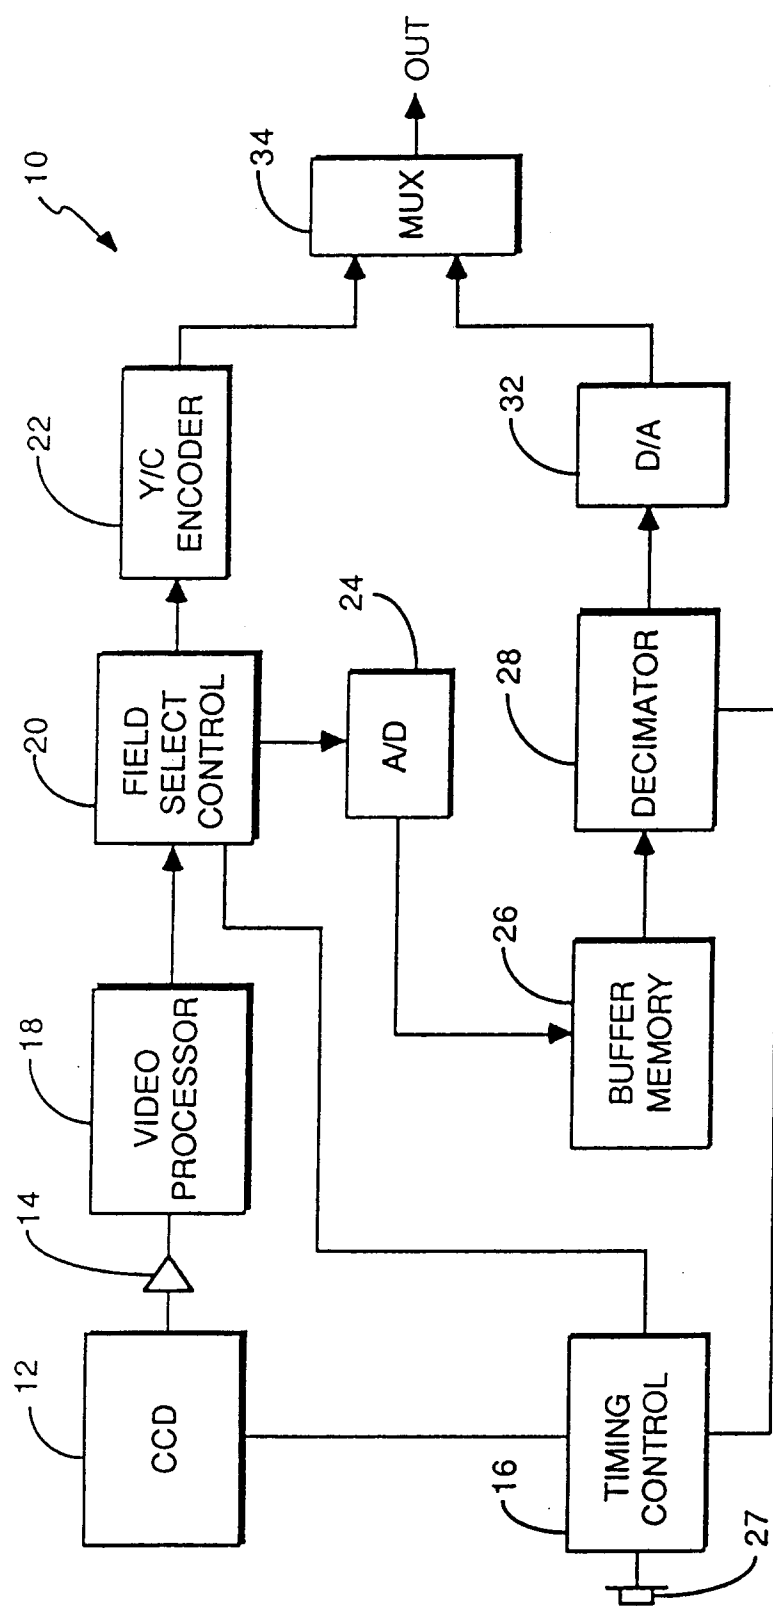


FIG. 1

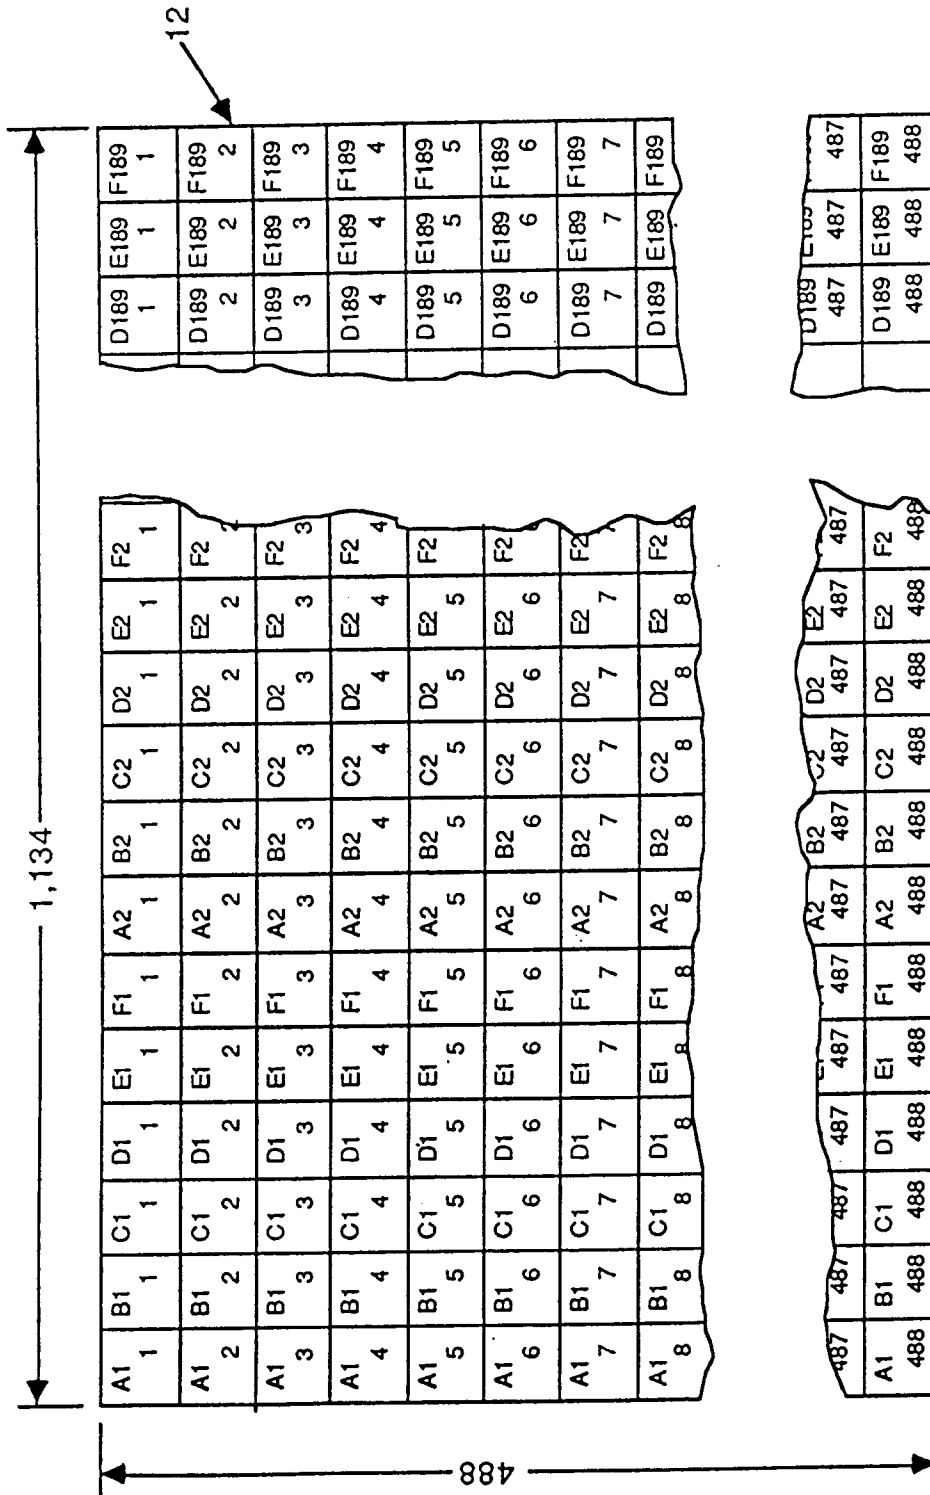


FIG 2


FIG 3A




189						
A1 1	A2 1	A3 1	A4 1	A5 1	A6 1	A189 1
A1 3	A2 3	A3 3	A4 3	A5 3	A6 3	A189 3
A1 5	A2 5	A3 5	A4 5	A5 5	A6 5	A189 5
A1 7	A2 7	A3 7	A4 7	A5 7	A6 7	A189 7
244						
A1 487	A2 487	A3 487	A4 487	A5 487	A6 487	A189 487

FIG 3B

189						
A1 2	A2 2	A3 2	A4 2	A5 2	A6 2	A189 2
A1 4	A2 4	A3 4	A4 4	A5 4	A6 4	A189 4
A1 6	A2 6	A3 6	A4 6	A5 6	A6 6	A189 6
A1 8	A2 8	A3 8	A4 8	A5 8	A6 8	A189 8
244						
A1 488	A2 488	A3 488	A4 488	A5 488	A6 488	A189 488

FIG 3C

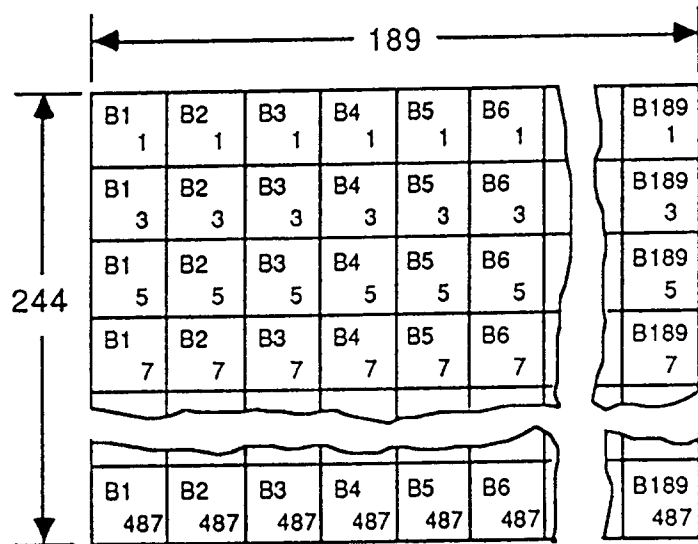

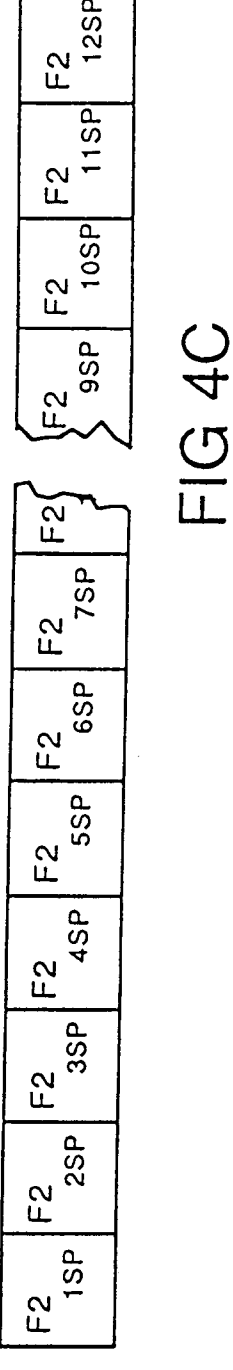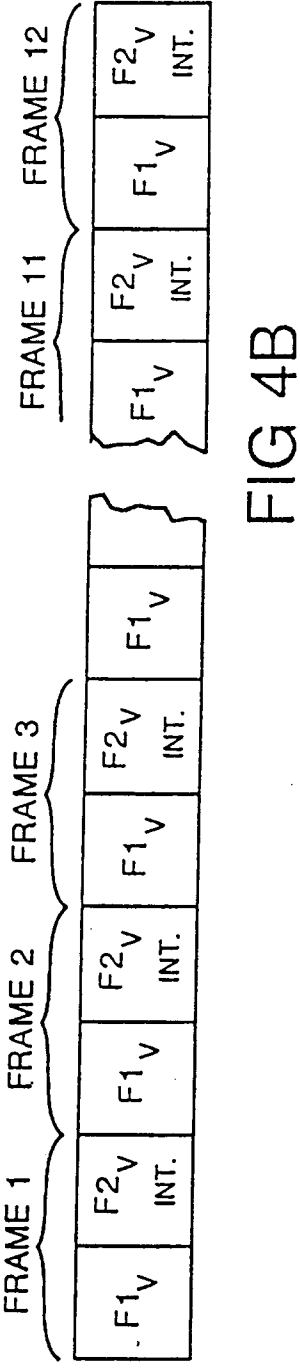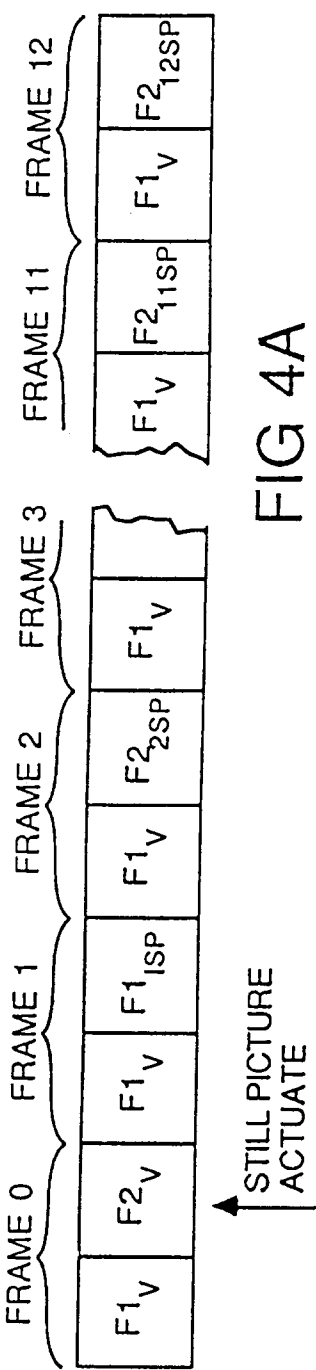

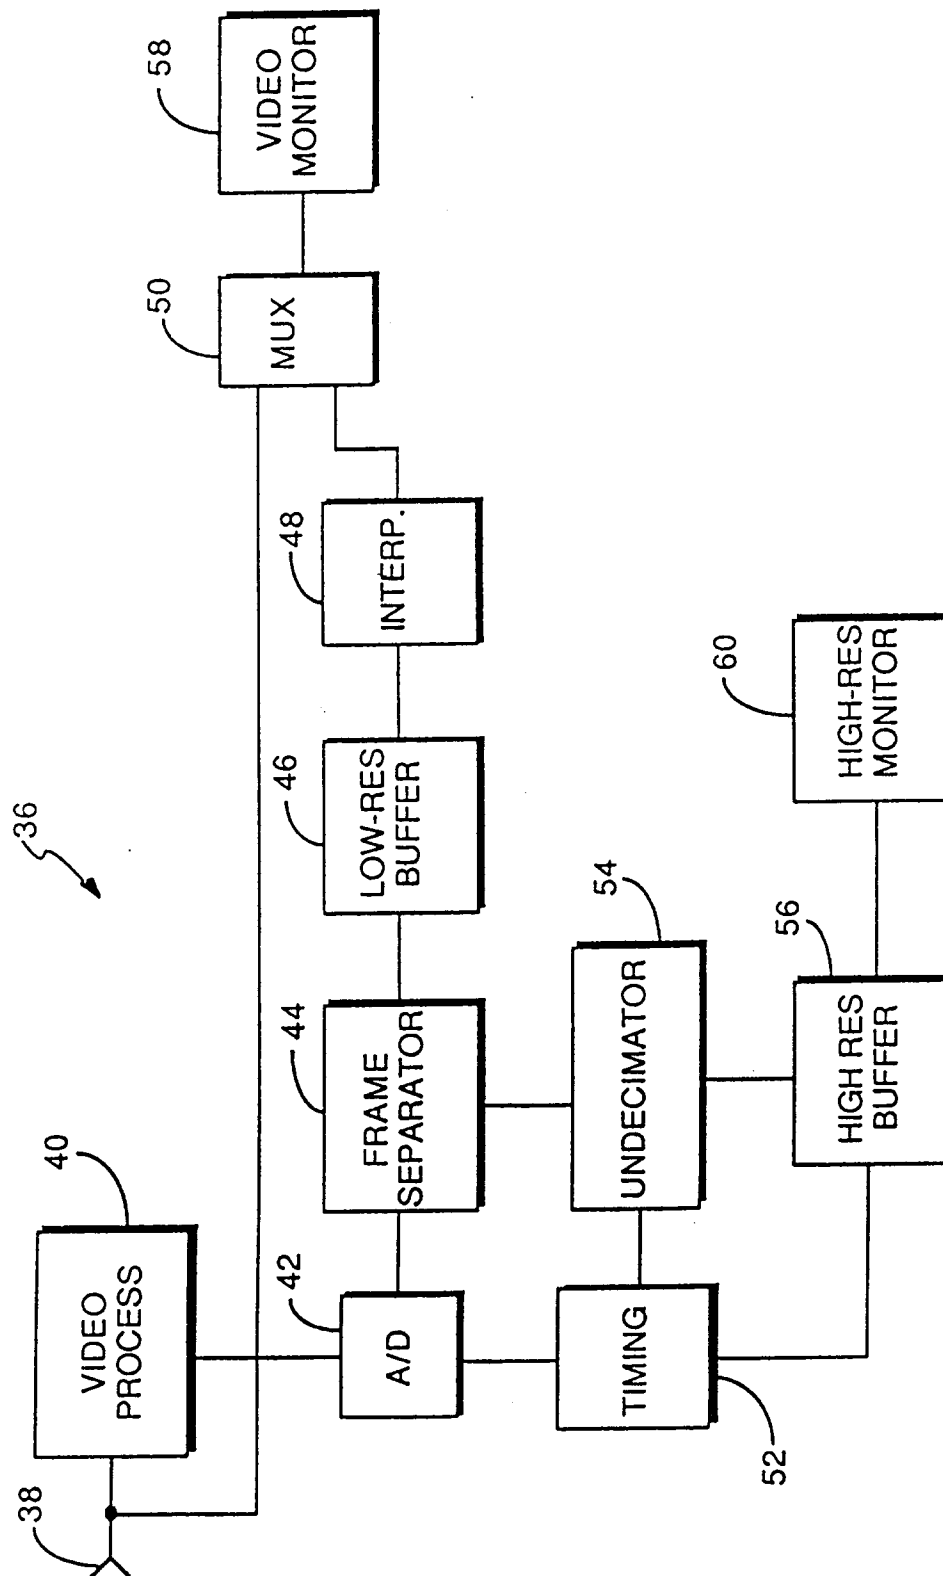


FIG 5

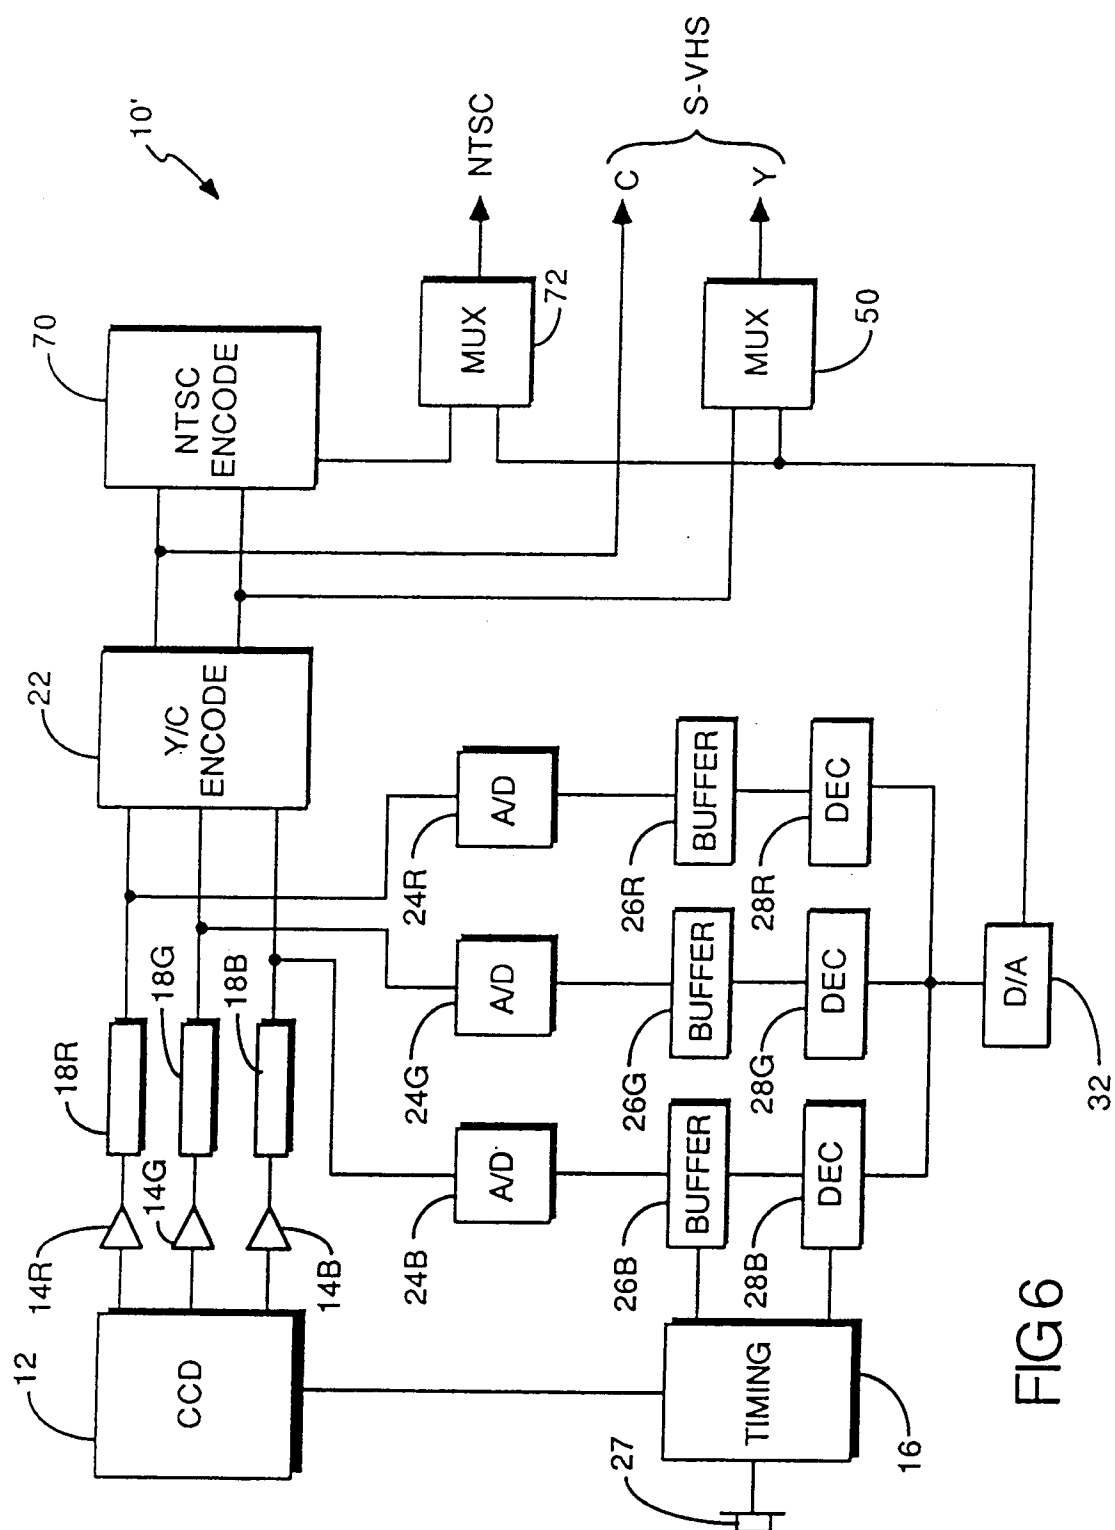


FIG 6

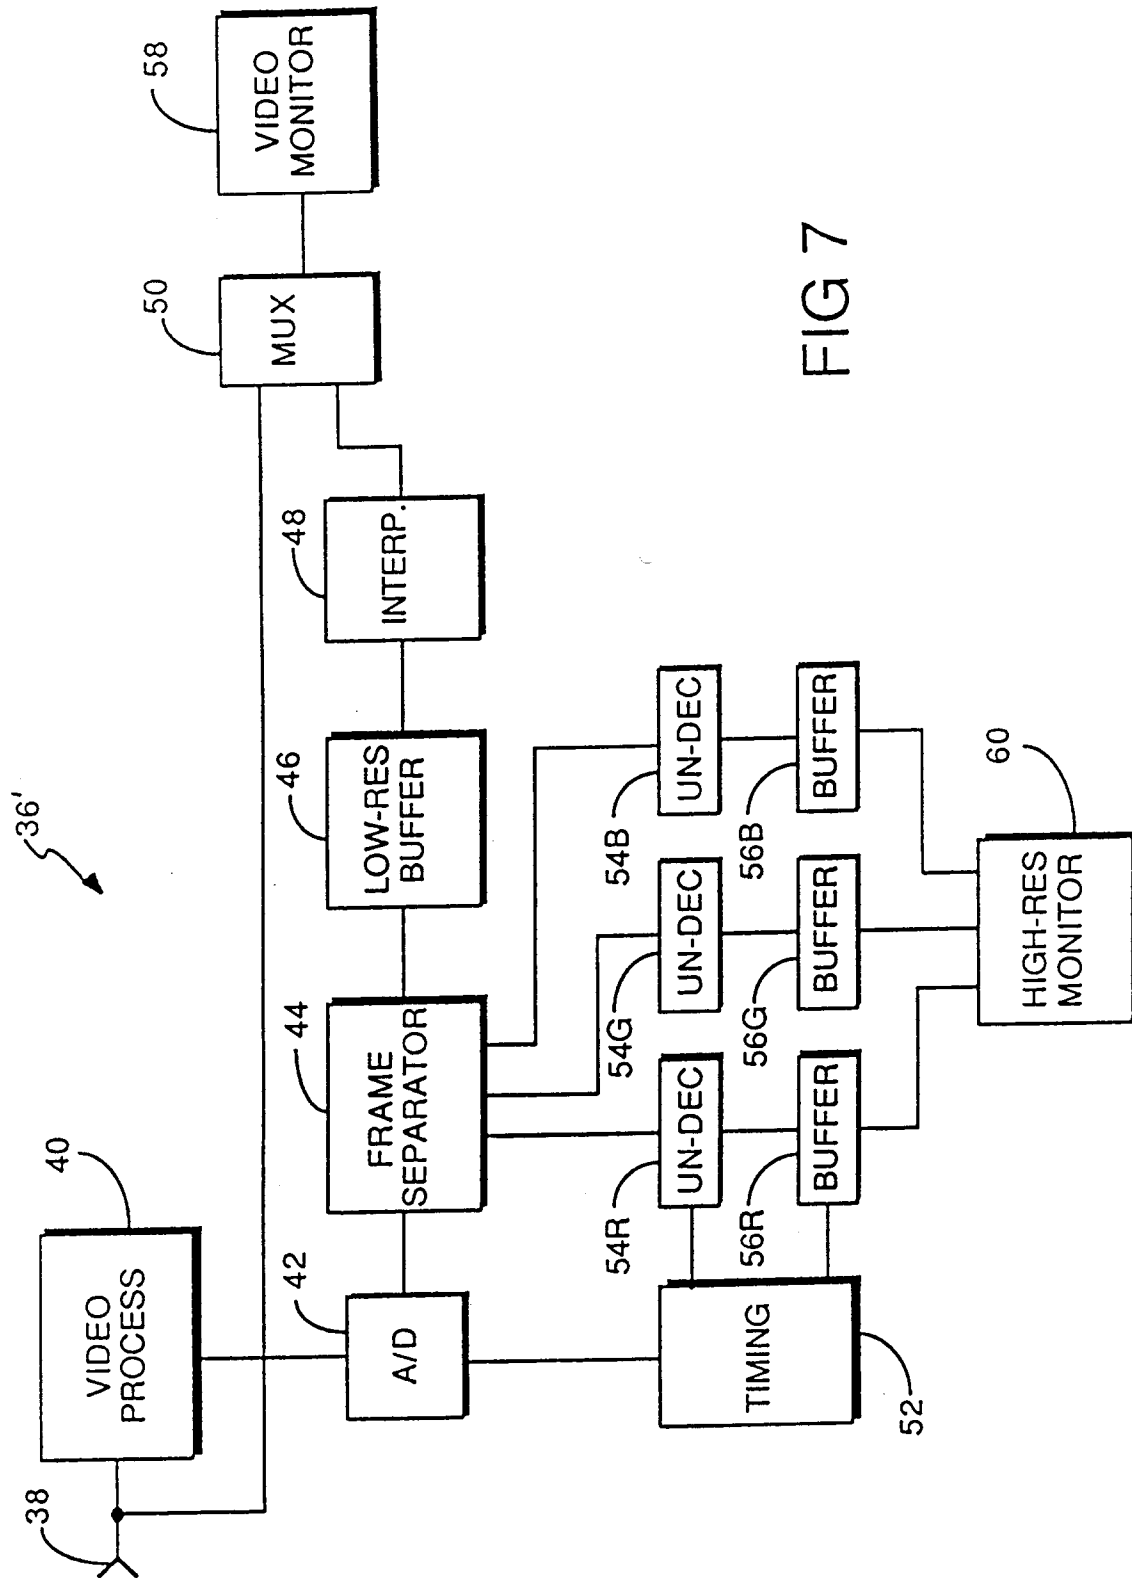


FIG 7