



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number: **0 317 353 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

- (45) Date of publication of patent specification: **13.07.94** (51) Int. Cl.⁵: **C08G 59/64**, C08G 59/62,
C10M 159/12, C10M 133/52,
(21) Application number: **88310940.7** C10M 133/54, C10M 159/16,
C10M 149/12, C10M 129/95,
(22) Date of filing: **18.11.88** C10L 1/18, C10L 1/22,
//(C10M159/12,145:26,129:38,
133:52,133:54,133:56,133:58,
159:16),C10N30:04,C10N40:00,
C10N40:04,C10N40:08,
C10N60:06,C10N60:14

(54) **Use of oil soluble dispersant additives in oleaginous compositions.**

(30) Priority: **19.11.87 US 122832**

(43) Date of publication of application:
24.05.89 Bulletin 89/21

(45) Publication of the grant of the patent:
13.07.94 Bulletin 94/28

(84) Designated Contracting States:
AT BE DE FR GB IT NL

(56) References cited:

EP-A- 0 002 517	EP-A- 0 043 934
EP-A- 0 043 935	EP-A- 0 062 714
EP-A- 0 074 618	EP-A- 0 208 560
US-A- 3 378 503	US-A- 3 386 953
US-A- 4 234 435	US-A- 4 720 350

(73) Proprietor: **EXXON CHEMICAL PATENTS INC.**
200 Park Avenue
Florham Park New Jersey 07932(US)

(72) Inventor: **Lundberg, Robert Dean**
4 Brian Drive
Bridgewater New Jersey 08807(US)
Inventor: **Emert, Jacob**
484 Argyle Road
Brooklyn New York 11218(US)

(74) Representative: **Northover, Robert Frank et al**
Exxon Chemical Limited
Exxon Chemical Technology Centre
PO Box 1
Abingdon Oxfordshire, OX13 6BB (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 317 353 B1

Description

This invention relates to the use in oleaginous compositions such as fuel and lubricating oil compositions of an oil soluble dispersant additive and to such compositions including concentrates containing said additives, and methods for their manufacture and use. The dispersant additives of the instant invention are comprised of the reaction products of (1) nitrogen or ester containing adduct and (2) polyepoxide.

BACKGROUND OF THE INVENTION

Multigrade lubricating oils typically are identified by two numbers such as 10W30, 5W30 etc. The first number in the multigrade designation is associated with a maximum low temperature (e.g. -20 °C.) viscosity requirement for that multigrade oil as measured typically by a cold cranking simulator (CCS) under high shear, while the second number in the multigrade designation is associated with a minimum high temperature (e.g. 100 °C) viscosity requirement. Thus each particular multigrade oil must simultaneously meet both strict low and high temperature viscosity requirements in order to qualify for a given multigrade designation. Such requirements are set e.g., by ASTM specifications. By "low temperature" as used herein is meant temperatures of typically from about -30 ° to about -5 °C. By "high temperature" as used herein is meant temperatures of typically at least about 100 °C.

The minimum high temperature viscosity requirement, e.g., at 100 °C, is intended to prevent the oil from thinning out too much during engine operation which can lead to excessive wear and increased oil consumption. The maximum low temperature viscosity requirement is intended to facilitate engine starting in cold weather and to ensure pumpability, i.e., the cold oil should readily flow or slump into the well for the oil pump, otherwise the engine can be damaged due to insufficient lubrication.

In formulating an oil which efficiently meets both low and high temperature viscosity requirements, the formulator may use a single oil of desired viscosity or a blend of two lubricating oils of different viscosities, in conjunction with manipulating the identity and amount of additives that must be present to achieve the overall target properties of a particular multigrade oil including its viscosity requirements.

The natural viscosity characteristic of a lubricating oil is typically expressed by the neutral number of the oil (e.g. S150N) with a higher neutral number being associated with a higher natural viscosity at a given temperature. In some instances the formulator will find it desirable to blend oils of two different neutral numbers, and hence viscosities, to achieve an oil having a viscosity intermediate between the viscosity of the components of the oil blend. Thus the neutral number designation provides the formulator with a simple way to achieve a desired based oil of predictable viscosity. Unfortunately, merely blending oils of different viscosity characteristics does not enable the formulator to meet the low and high temperature viscosity requirements of multigrade oils. The formulator's primary tool for achieving this goal is an additive conventionally referred to as a viscosity index improver (i.e., V.I. improver).

The V. I. improver is conventionally an oil-soluble long chain polymer. The large size of these polymers enables them to significantly increase kinematic viscosities of base oils even at low concentrations. However, because solutions of high polymers are non-Newtonian they tend to give lower viscosities than expected in a high shear environment due to the alignment of the polymer. Consequently, V.I. improvers impact (i.e., increase) the low temperature (high shear) viscosities (i.e. CCS viscosity) of the base oil to a lesser extent than they do the high temperature (low shear) viscosities.

The aforesaid viscosity requirements for a multigrade oil can therefore be viewed as being increasingly antagonistic at increasingly higher levels of V.I. improver. For example, if a large quantity of V.I. improver is used in order to obtain high viscosity at high temperatures, the oil may now exceed the low temperature requirement. In another example, the formulator may be able to readily meet the requirement for a 10W30 oil but not a 5W30 oil, with a particular ad-pack (additive package) and base oil. Under these circumstances the formulator may attempt to lower the viscosity of the base oil, such as by increasing the proportion of low viscosity oil in a blend, to compensate for the low temperature viscosity increase induced by the V.I. improver, in order to meet the desired low and high temperature viscosity requirements. However, increasing the proportion of low viscosity oils in a blend can in turn lead to a new set of limitations on the formulator, as lower viscosity base oils are considerably less desirable in diesel engine use than the heavier, more viscous oils.

Further complicating the formulator's task is the effect that dispersant additives can have on the viscosity characteristics of multigrade oils. Dispersants are frequently present in quality oils such as multigrade oils, together with the V.I. improver. The primary function of a dispersant is to maintain oil insolubles, resulting from oxidation during use, in suspension in the oil thus preventing sludge flocculation and precipitation. Consequently, the amount of dispersant employed is dictated and controlled by the

effectiveness of the material for achieving its dispersant function. A high quality 10W30 commercial oil might contain from two to four times as much dispersant as V.I. improver (as measured by the respective dispersant and V.I. improver active ingredients). In addition to dispersancy, conventional dispersants can also increase the low and high temperature viscosity characteristics of a base oil simply by virtue of their polymeric nature. In contrast to the V.I. improver, the dispersant molecule is much smaller. Consequently, the dispersant is much less shear sensitive, thereby contributing more to the low temperature CCS viscosity (relative to its contribution to the high temperature viscosity of the base oil) than a V.I. improver. Moreover, the smaller dispersant molecule contributes much less to the high temperature viscosity of the base oil than the V.I. improver. Thus, the magnitude of the low temperature viscosity increase induced by the dispersant can exceed the low temperature viscosity increase induced by the V.I. improver without the benefit of a proportionately greater increase in high temperature viscosity as obtained from a V.I. improver. Consequently, as the dispersant induced low temperature viscosity increase causes the low temperature viscosity of the oil to approach the maximum low temperature viscosity limit, the more difficult it is to introduce a sufficient amount of V.I. improver effective to meet the high temperature viscosity requirement and still meet the low temperature viscosity requirement. The formulator is thereby once again forced to shift to the undesirable expedient of using higher proportions of low viscosity oil to permit addition of the requisite amount of V.I. improver without exceeding the low temperature viscosity limit.

In accordance with the present invention, dispersants are provided which have been found to possess inherent characteristics such that they contribute considerably less to low temperature viscosity increases than dispersants of the prior art while achieving similar high temperature viscosity increases. Moreover, as the concentration of dispersant in the base oil is increased, this beneficial low temperature viscosity effect becomes increasingly more pronounced relative to conventional dispersants. This advantage is especially significant for high quality heavy duty diesel oils which typically require high concentrations of dispersant additive. Furthermore, these improved viscosity properties facilitate the use of V.I. improvers in forming multigrade oils spanning a wider viscosity requirement range, such as 5W30 oils, due to the overall effect of lower viscosity increase at low temperatures while maintaining the desired viscosity at high temperatures as compared to the other dispersants. More significantly, these viscometric properties also permit the use of higher viscosity base stocks with attendant advantages in engine performance. Furthermore, the utilization of the dispersant additives of the instant invention allows a reduction in the amount of V.I. improvers required.

The use of the materials according to this invention is thus an improvement over the use of conventional dispersants because of their effectiveness as dispersants coupled with enhanced low temperature viscometric properties. These materials are particularly useful with V.I. improvers in formulating multigrade oils.

US-A-4,234,435 describes carboxylic acylating agents derived from polyalkenes such as polybutenes and e.g. maleic or fumaric anhydride. These can be further reacted with e.g. polyethylene polyamines to form dispersant additives for lubricating oils and can be post-treated with various reagents including epoxides such as ethylene oxide or propylene oxide.

US-A-4,189,450 describes surface coating binders for cathodic electrocoating formed by reaction of Mannich bases with epoxy resins. The Mannich bases are formed by reaction of polyhydroxy phenols with polybutadiene or polyisoprene or copolymers thereof and polyhydroxyamines. These highly reactive materials crosslink on heating to hard, solvent resistant coatings.

SUMMARY OF THE INVENTION

The present invention provides the use in an oleaginous composition of an oil soluble dispersant additive comprising the reaction products of:

(1) at least one nitrogen or ester containing adduct selected from:

(i) oil soluble amides, imides, esters or mixtures thereof of long chain hydrocarbyl substituted mono- and dicarboxylic acids or their anhydrides,

(ii) long chain hydrocarbon having a polyamine attached directly thereto obtainable by displacing the halogen group of a halogenated long chain hydrocarbon with a polyalkylene polyamine, and

(iii) Mannich condensation product formed by condensing a long chain hydrocarbyl substituted hydroxyaromatic compound with an aldehyde and a polyalkylene amine,

wherein said adduct contains at least one reactive group selected from reactive amino groups and reactive hydroxyl groups, and

wherein said long chain hydrocarbyl substituent in (i), (ii) and (iii) is a polymer comprising at least a major molar amount of a polymerized C₂ to C₁₈ monoolefin, said polymer having a number average

molecular weight of from 500 to 6,000; and

(2) at least one polyepoxide.

The invention also provides oleaginous compositions including fully formulated fuel and lubricating oil compositions and concentrates comprising a major amount of the base oil and a minor amount of an oil soluble dispersant additive as defined above.

DETAILED DESCRIPTION OF THE INVENTION

The dispersants used in accordance with the invention exhibit a high temperature to low temperature viscosity balance or ratio which is more favorable than that of conventional dispersant materials. That is to say the instant dispersant materials possess inherent characteristics such that they contribute less to low temperature viscosity increase than dispersants of the prior art while increasing the contribution to the high temperature viscosity increase. They also exhibit enhanced or improved dispersancy characteristics. This is believed to be due, inter alia, to the presence of hydroxyl groups formed as a result of the ring opening of the oxirane rings in their reaction with the reactive amino groups or hydroxyl groups of the nitrogen or ester containing adducts as described hereinafter.

The molecular weight of the product is increased by the coupling or linking of two or more molecules of the adduct by or through the polyepoxide moieties.

The long chain hydrocarbyl substituted dicarboxylic acid producing material, e.g., acid, anhydride, or ester, used in the invention or produce the nitrogen or ester containing adducts classified as (i) above includes a long chain hydrocarbon substituted typically with an average of at least about 0.7, usefully from about 0.7-2.0 (e.g. 0.9-1.6), preferably about 1.0 to 1.3 (e.g. 1.1 to 1.2) moles, per mole of hydrocarbon, of a C₄ to C₁₀ dicarboxylic acid, anhydride or ester thereof, such as succinic acid, succinic anhydride, dimethyl methylsuccinate, etc., and mixtures thereof (this average being referred to herein as the "functionality" of the long chain hydrocarbyl substituted dicarboxylic acid producing material).

The hydrocarbyl substituted dicarboxylic acid materials, as well as methods for their preparation, are well known in the art and are amply described in the patent literature. They may be obtained, for example, by the Ene reaction between a polyolefin and an alpha-beta unsaturated C₄ to C₁₀ dicarboxylic acid, anhydride or ester thereof, such as fumaric acid, itaconic acid, maleic acid, maleic anhydride, chloromaleic acid, dimethyl fumarate, etc.

The hydrocarbyl substituted dicarboxylic acid materials function as acylating agents for the adducts such as those comprised of a nitrogen containing moiety, e.g., polyamine, to form the acylated nitrogen derivatives of hydrocarbyl substituted dicarboxylic acids, anhydrides, or esters which are subsequently reacted with the polyepoxides to form the dispersants of the present invention.

The olefin polymers for reaction with the unsaturated dicarboxylic acid, anhydride, or ester are polymers comprising at least a major molar amount of C₂ to C₁₈, e.g. C₂ to C₅, monoolefin. Such olefins include ethylene, propylene, butylene, isobutylene, pentene, octene-1, styrene, etc. The polymers can be homopolymers such as polyisobutylene and isobutylene; propylene and isobutylene; etc. Other copolymers include those in which a minor molar amount of the copolymer monomers, e.g., 1 to 10 mole %, is a C₄ to C₁₈ non-conjugated diolefin, e.g., a copolymer of isobutylene and butadiene; or a copolymer of ethylene, propylene and 1,4-hexadiene; etc.

In some cases the olefin polymer may be completely saturated, for example an ethylene-propylene copolymer made by a Ziegler-Natta synthesis using hydrogen as a moderator to control molecular weight.


The olefin polymers have number average molecular weights (M_n) within the range of 500 and 6000, e.g. 700 to 3000, preferably between 800 and 2500. An especially useful starting material for a highly potent dispersant additive made in accordance with this invention is polyisobutylene.

Processes for reacting the olefin polymer with the C₄-C₁₀ unsaturated dicarboxylic acid, anhydride or ester are known in the art. For example, the olefin polymer and the dicarboxylic acid material may be simply heated together as disclosed in U.S. Pat. Nos. 3,361,673 and 3,401,118 to cause a thermal "ene" reaction to take place. Alternatively, the olefin polymer can be first halogenated, for example, chlorinated or brominated to about 1 to 8 wt. %, preferably 3 to 7 wt. % chlorine or bromine, based on the weight of polymer, by passing the chlorine or bromine through the polyolefin at a temperature of 25 to 160 °C, e.g., 120 °C, for about 0.5 to 10, preferably 1 to 7 hours. The halogenated polymer may then be reacted with sufficient unsaturated acid or anhydride at 100 to 250 °C, usually about 180 to 220 °C, for about 0.5 to 10 hours, e.g. 3 to 8 hours, so the product obtained will contain an average of about 0.7 to 2.0 moles, preferably 1.0 to 1.3 moles, e.g., 1.2 moles, of the unsaturated acid per mole of the halogenated polymer. Processes of this general type are taught in U.S. Patents 3,087,436; 3,172,892; 3,272,746 and others.


Alternatively, the olefin polymer and the unsaturated acid material are mixed and heated while adding chlorine to the hot material. Processes of this type are disclosed in U.S. Patents 3,215,707; 3,231,587; 3,912,764; 4,110,349; 4,234,435; and in U.K. 1,440,219.

By the use of halogen, about 65 to 95 wt. % of the polyolefin, e.g. polyisobutylene, will normally react with the dicarboxylic acid material. Upon carrying out a thermal reaction without the use of halogen or a catalyst, then usually only about 50 to 85 wt. % of the polyisobutylene will react. Chlorination helps increase the reactivity. For convenience, all of the aforesaid functionality ratios of dicarboxylic acid producing units to polyolefin, e.g. 1.0 to 2.0, etc. are based upon the total amount of polyolefin, that is, the total of both the reacted and unreacted polyolefin, present in the resulting product formed in the aforesaid reactions.

Amine compounds useful as reactants with the hydrocarbyl substituted dicarboxylic acid material, i.e., acylating agent, are those containing at least two reactive amino groups, i.e., primary and secondary amino groups. They include polyalkylene polyamines, of about 2 to 60 (e.g. 2 to 30), preferably 2 to 40, (e.g. 3 to 20) total carbon atoms and about 1 to 12 (e.g., 2 to 9), preferably 3 to 12, and most preferably 3 to 9 nitrogen atoms in the molecule. These amines may be hydrocarbyl amines or may be hydrocarbyl amines including other groups, e.g. hydroxy groups, alkoxy groups, amide groups, nitriles, imidazoline groups, and the like. Hydroxy amines with 1 to 6 hydroxy groups, preferable 1 to 3 hydroxy groups are particularly useful. Such amines should be capable of reacting with the acid or anhydride groups of the hydrocarbyl substituted dicarboxylic acid moiety and with the oxirane rings of the polyepoxide moiety through the amino functionality or a substituent group reactive functionality. Since tertiary amines are generally unreactive with anhydrides and oxirane rings, it is desirable to have at least two primary and/or secondary amino groups on the amine. It is preferred that the amine contain at least one primary amino group, for reaction with the acylating agent, and at least one secondary amino group, for reaction with the polyepoxide. Preferred amines are aliphatic saturated amines, including those of the general formulae:



wherein R^{IV} , R' , R'' and R''' are independently selected from the group consisting of hydrogen; C_1 to C_{25} straight or branched chain alkyl radicals; C_1 to C_{12} alkoxy C_2 to C_6 alkylene radicals; C_2 to C_{12} hydroxy amino alkylene radicals; and C_1 to C_{12} alkylamino C_2 to C_6 alkylene radicals; and wherein R'' and R''' can additionally comprise a moiety of the formula

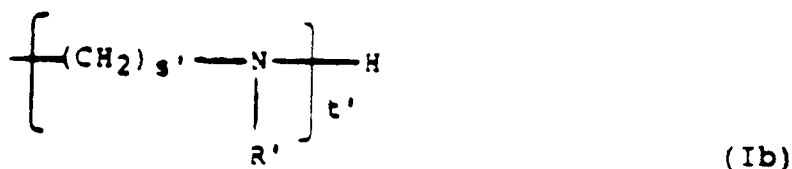


wherein R' is as defined above, and wherein each s and s' can be the same or a different number of from 2 to 6, preferably 2 to 4; and t and t' can be the same or different and are each numbers of typically from 0 to 10, preferably about 2 to 7, most preferably about 3 to 7, with the proviso that $t + t'$ is not greater than 10. To assure a facile reaction it is preferred that R^{IV} , R' , R'' , R''' , (s) , (s') , (t) and (t') be selected in a manner sufficient to provide the compounds of formula I with typically at least two primary and/or secondary amino groups. This can be achieved by selecting at least one of said R^{IV} , R' , R'' , or R''' groups to be hydrogen or by letting (t) in formula Ia be at least one when R''' is H or when the (Ib) moiety possesses a secondary

amino group. The most preferred amines of the above formulas are represented by formula Ia and contain at least two primary amino groups and at least one, and preferably at least three, secondary amino groups.

Non-limiting examples of suitable amine compounds include: 1,2-diaminoethane; 1,3-diaminopropane; 1,4-diaminobutane; 1,6-diaminohexane; polyethylene amines such as diethylene triamine; triethylene tetramine; tetraethylene pentamine; polypropylene amines such as 1,2-propylene diamine; di-(1,2-propylene) triamine; di-(1,3-propylene) triamine; N,N'-dimethyl-1, 3-diaminopropane; N,N'-di-(2-aminoethyl) ethylene diamine; N,N'-di(2-hydroxyethyl)-1,3-propylene diamine; N-dodecyl-1,3propane diamine; tris hydroxymethylaminomethane (THAM); diisopropanol amine; diethanol amine; triethanol amine; mono-, di-, and tri-tallow amines; amino morpholines such as N-(3-aminopropyl) morpholine; and mixtures thereof.

Other useful amine compounds include: alicyclic diamines such as 1,4-di(aminoethyl) cyclohexane, and N-aminoalkyl piperazines of the general formula:

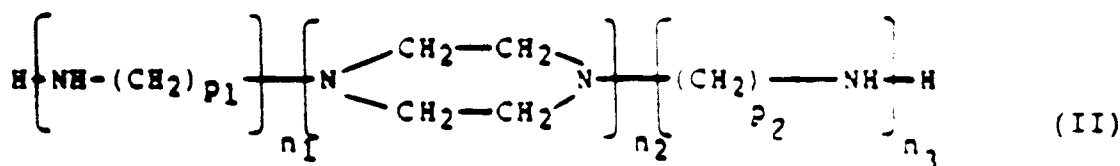


wherein p_1 and p_2 are the same or different and are each integers of from 1 to 4, and n_1 , n_2 and n_3 are the same or different and are each integers of from 1 to 3.

Commercial mixtures of amine compounds may advantageously be used. For example, one process for preparing alkylene amines involves the reaction of an alkylene dihalide (such as ethylene dichloride or propylene dichloride) with ammonia, which results in a complex mixture of alkylene amines wherein pairs of nitrogens are joined by alkylene groups, forming such compounds as diethylene triamine, triethylenetetramine, tetraethylene pentamine and corresponding piperazines. Low cost poly(ethyleneamine) compounds averaging about 5 to 7 nitrogen atoms per molecule are available commercially under trade names such as "Polyamine H", "Polyamine 400", "Dow Polyamine E-100", etc.

Useful amines also include polyoxyalkylene polyamines such as those of the formulae:



where m has a value of about 3 to 70 and preferably 10 to 35; and



where n has a value of about 1 to 40, with the provision that the sum of all the n 's is from about 3 to about 70, and preferably from about 6 to about 35, and R^V is a substituted saturated hydrocarbon radical of up to 10 carbon atoms, wherein the number of substituents on the R^V group is from 3 to 6. The alkylene groups in either formula (III) or (IV) may be straight or branched chains containing about 2 to 7, and preferably about 2 to 4 carbon atoms.

The polyoxyalkylene polyamines of formulas (III) or (IV) above, preferably polyoxyalkylene diamines and polyoxyalkylene triamines, may have number average molecular weights ranging from about 200 to about 4000 and preferably from about 400 to about 2000. The preferred polyoxyalkylene polyamines include the polyoxyethylene and polyoxypropylene diamines and the polyoxypropylene triamines having average molecular weights ranging from about 200 to 2000. The polyoxyalkylene polyamines are commercially available and may be obtained, for example, from the Jefferson Chemical Company, Inc. under the trade name "Jeffamines D-230, D-400, D-1000, D-2000, T-403", etc.

The amine is readily reacted with the dicarboxylic acid material, e.g. alkenyl succinic anhydride, by heating an oil solution containing 5 to 95 wt. % of dicarboxylic acid material to about 100 to 200 °C., preferably 125 to 175 °C., generally for 1 to 10, e.g. 2 to 6 hours until the desired amount of water is removed. The heating is preferably carried out to favor formation of imides or mixtures of imides and amides, rather than amides and salts. Reaction ratios of dicarboxylic acid material to equivalents of amine as well as the other nucleophilic reactants described herein can vary considerably, depending upon the reactants and type of bonds formed. Generally from 0.1 to 1.0, preferably about 0.2 to 0.6, e.g. 0.4 to 0.6, moles of dicarboxylic acid moiety content (e.g. grafted maleic anhydride content) is used, per equivalent of nucleophilic reactant, e.g. amine. For example, about 0.8 mole of a pentamine (having two primary amino groups and 5 equivalents of nitrogen per molecule) is preferably used to convert into a mixture of amides and imides, the product formed by reacting one mole of olefin with sufficient maleic anhydride to add 1.6 moles of succinic anhydride groups per mole of olefin, i.e. preferably the pentamine is used in an amount sufficient to provide about 0.4 mole (that is 1.6/[0.8x5] mole) of succinic anhydride moiety per nitrogen equivalent of the amine.

Tris(hydroxymethyl) amino methane (THAM) can be reacted with the aforesaid acid material to form amides, imides Or ester type additives as taught by U.K. 984,409, or to form oxazoline compounds and borated oxazoline compounds as described, for example, in U.S. 4,102,798; 4,116,876 and 4,113,639.

The adducts may also be esters derived from the aforesaid long chain hydrocarbon substituted dicarboxylic acid material and from hydroxy compounds such as monohydric and polyhydric alcohols or aromatic compounds such as phenols and naphthols, etc. The polyhydric alcohols are the most preferred hydroxy compounds.

Suitable polyol compounds which can be used include aliphatic polyhydric alcohols containing up to about 100 carbon atoms and about 2 to about 10 hydroxyl groups. These alcohols can be quite diverse in structure and chemical composition, for example, they can be substituted or unsubstituted, hindered or unhindered, branched chain or straight chain, etc. as desired. Typical alcohols are alkylene glycols such as ethylene glycol, propylene glycol, trimethylene glycol, butylene glycol, and polyglycol such as diethylene glycol, triethylene glycol, tetraethylene glycol, dipropylene glycol, tripropylene glycol, dibutylene glycol, tributylene glycol, and other alkylene glycols and polyalkylene glycols in which the alkylene radical contains from two to about eight carbon atoms. Other useful polyhydric alcohols include glycerol, monomethyl ether of glycerol, pentaerythritol, dipentaerythritol, tripentaerythritol, 9,10-dihydroxystearic acid, the ethyl ester of 9,10-dihydroxystearic acid, 3-chloro-1, 2-propanediol, 1,2-butanediol, 1,4-butanediol, 2,3-hexanediol, pinacol, tetrahydroxy pentane, erythritol, arabitol, sorbitol, mannitol, 1,2-cyclohexanediol, 1,4-cyclohexanediol, 1,4-(2-hydroxyethyl)-cyclohexane, 1,4-dihydroxy-2-nitrobutane, 1,4-di-(2-hydroxyethyl)-benzene, the carbohydrates such as glucose, rhamnose, mannose, glyceraldehyde, and galactose, and the like, amino alcohols such as di-(2-hydroxyethyl) amine, tri-(3-hydroxypropyl) amine, N,N-di-(hydroxyethyl) ethylenediamine, copolymer of allyl alcohol and styrene, N,N-di-(2-hydroxyethyl) glycine and esters thereof with lower mono- and polyhydric aliphatic alcohols etc.

Included within the group of aliphatic alcohols are those alkane polyols which contain ether groups such as polyethylene oxide repeating units, as well as those polyhydric alcohols containing at least three hydroxyl groups, at least one of which has been esterified with a mono-carboxylic acid having from eight to about 30 carbon atoms such as octanoic acid, oleic acid, stearic acid, linoleic acid, dodecanoic acid, or tall oil acid. Examples of such partially esterified polyhydric alcohols are the mono-oleate of sorbitol, the mono-oleate of glycerol, the mono-stearate of glycerol, the di-stearate of sorbitol, and the di-dodecanoate of erythritol.

A preferred class of ester containing adducts are those prepared from aliphatic alcohols containing up to 20 carbon atoms, and especially those containing three to 15 carbon atoms. This class of alcohols includes glycerol, erythritol, pentaerythritol, dipentaerythritol, tripentaerythritol, gluconic acid, glyceraldehyde, glucose, arabinose, 1,7-heptanediol, 2,4-heptanediol, 1,2,3-hexanetriol, 1,2,4-hexanetriol, 1,2,5-hexanetriol, 2,3,4-hexanetriol, 1,2,3-butanetriol, 1,2,4-butanetriol, quinic acid, 2,2,6,6-tetrakis(hydroxymethyl)-cyclohexanol, 1,10-decanediol, digitalose, and the like. The esters prepared from aliphatic alcohols containing at least three hydroxyl groups and up to fifteen carbon atoms are particularly preferred.

An especially preferred class of polyhydric alcohols for preparing the ester adducts used as starting materials in the present invention are the polyhydric alkanols containing 3 to 15, especially 3 to 6 carbon atoms and having at least 3 hydroxyl groups. Such alcohols are exemplified in the above specifically identified alcohols and are represented by glycerol, erythritol, pentaerythritol, mannitol, sorbitol, 1,2,4 hexanetriol, and tetrahydroxy pentane and the like.

The ester adducts may be di-esters of succinic acids or acidic esters, i.e., partially esterified succinic acids; as well as partially esterified polyhydric alcohols or phenols, i.e., esters having free alcohols or

phenolic hydroxyl radicals. Mixtures of the above illustrated esters likewise are contemplated within the scope of this invention.


The ester adduct may be prepared by one of several known methods as illustrated for example in U.S. Patent 3, 381,022. The ester adduct may also be borated, similar to the nitrogen containing adduct, as described herein.

Hydroxyamines which can be reacted with the aforesaid long chain hydrocarbon substituted dicarboxylic acid material to form adducts include 2-amino-2-methyl-1-propanol, p-(beta-hydroxyethyl)-aniline, 2-amino-1-propanol, 3-amino-1-propanol, 2-amino-2-methyl-1,3-propane-diol, 2-amino-2-ethyl-1,3-propanediol, N-(beta-hydroxypropyl)-N'-(beta-amino-ethyl)piperazine, tris(hydrocymethyl) amino-methane (also known as trimethylolaminomethane), 2-amino-1-butanol, ethanolamine, diethanolamine, triethanolamine, beta-(beta-hydroxyethoxy)-ethylamine and the like. Mixtures of these or similar amines can also be employed. The above description of nucleophilic reactants suitable for reaction with the hydrocarbonyl substituted dicarboxylic acid or anhydride includes amines, alcohols, and compounds of mixed amine and hydroxy containing reactive functional groups, i.e. amino-alcohols.


Also useful as nitrogen containing adducts which are reacted with the polyepoxide to form the improved dispersants of this invention are the adducts of group (ii) above wherein a nitrogen containing polyamine is attached directly to the long chain aliphatic hydrocarbon as shown in U.S. Patents 3,275,554 and 3,565,804 where the halogen group on the halogenated hydrocarbon is displaced with various alkylene polyamines.

Another class of nitrogen containing adducts which are reacted with the polyepoxide to produce the dispersants of this invention are the adducts of group (iii) above which contain Mannich base or Mannich condensation products as they are known in the art. Such Mannich condensation products generally are prepared by condensing about 1 mole of a high molecular weight hydrocarbonyl substituted hydroxy aromatic compound (e.g., having a number average molecular weight of 700 or greater) with about 1 to 2.5 moles of an aldehyde such as formaldehyde or paraformaldehyde and about 0.5 to 2 moles polyalkylene polyamine as disclosed, e.g., in U.S. Patents 3,442,808; 3,649,229 and 3,798,165 (the disclosures which are hereby incorporated by reference in their entirety). Such Mannich condensation products may include a long chain, high molecular weight hydrocarbon on the phenol group or may be reacted with a compound containing such a hydrocarbon, e.g., polyalkenyl succinic anhydride as shown in said aforementioned U.S. Patent 3,442,808.

The hydrocarbonyl substituted hydroxy aromatic compounds used in the preparation of the Mannich base include those compounds having the formula



wherein Ar represents

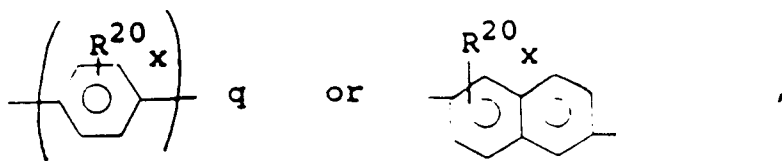

wherein q is 1 or 2, R^{21} is a long chain hydrocarbon, R^{20} is a hydrocarbon or substituted hydrocarbon radical having from 1 to about 3 carbon atoms or a halogen radical such as the bromide or chloride radical y is an integer from 1 to 2, x is an integer from 0 to 2, and z is an integer from 1 to 2.

Illustrative of such Ar groups are phenylene, biphenylene, naphthylene and the like.


The long chain hydrocarbon substituents are olefin polymers comprising at least a major molar amount of C_2 to C_8 , e.g. C_2 to C_5 monoolefin. Such olefins include ethylene, propylene, butylene, pentene, octene-1, styrene, etc. The polymers can be homopolymers such as polyisobutylene, as well as copolymers of two or more of such olefins such as copolymers of: ethylene and propylene; butylene and isobutylene; propylene and isobutylene; etc. Other copolymers include those in which a minor molar amount of the copolymer monomers, e.g. 1 to 10 mole %, is a C_4 to C_{18} non conjugated diolefin, e.g., a copolymer of isobutylene and butadiene; or a copolymer of ethylene, propylene and 1,4-hexadiene.

In some cases, the olefin polymer may be completely saturated, for example an ethylene-propylene copolymer made by a Ziegler-Natta synthesis using hydrogen as a moderator to control molecular weight.

The olefin polymers have a number average molecular weight (M_n) from 500 to about 6,000, more usually between 700 and 5,000. Particularly useful olefin polymers have number average molecular weight within the range of 700 to 3,000, and more preferably within the range of 900 to 2,500 with approximately one terminal double bond per polymer chain. An especially useful starting material for a highly potent dispersant additive made in accordance with this invention is polyisobutylene. The number average molecular weight for such polymers can be determined by several known techniques. A convenient method for such determination is by gel permeation chromatography (GPC) which additionally provides molecular weight distribution information, see W. W. Yau, J. J. Kirkland and D. D. Bly, "Modern Size Exclusion Liquid Chromatography", John Wiley and Sons, New York, 1979.

Processes for substituting the hydroxy aromatic compounds with the olefin polymer are known in the art and may be depicted as follows:

15

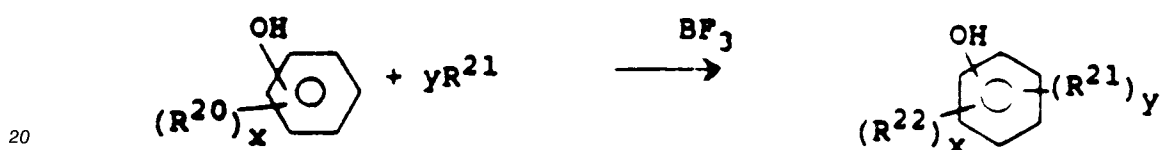

where R^{20} , R^{21} , y and x are as previously defined, and BF_3 is an alkylating catalyst. Processes of this type are described, for example, in U.S. Patents 3,539,633 and 3,649,229, the disclosures of which are incorporated herein by reference.


Representative hydrocarbyl substituted hydroxy aromatic compounds contemplated for use in the present invention include, but are not limited to, 2-polypropylene phenol, 3-polypropylene phenol, 4-polypropylene phenol, 2-polybutylene phenol, 3-polyisobutylene phenol, 4-polyisobutylene phenol, 4-polyisobutylene-2-chlorophenol, 4-polyisobutylene-2-methylphenol, and the like.

Suitable hydrocarbyl-substituted polyhydroxy aromatic compounds include the polyolefin catechols, the polyolefin resorcinols, and the polyolefin hydroquinones, e.g., 4-polyisobutylene-1,2-dihydroxybenzene, 3-polypropylene-1,2-dihydroxybenzene, 5-polyisobutylene-1,3-dihydroxybenzene, 4-polyamylene-1,3-dihydroxybenzene, and the like.

Suitable hydrocarbyl-substituted naphthols include 1-polyisobutylene-5-hydroxynaphthalene, 1-polypropylene-3-hydroxynaphthalene and the like.

The preferred long chain hydrocarbyl substituted hydroxy aromatic compounds to be used in this invention can be illustrated by the formula:

40



wherein R^{22} is hydrocarbyl of from 50 to 300 carbon atoms, and preferably is a polyolefin derived from a C_2 to C_{10} (e.g., C_2 to C_5) mono-alpha-olefin.

The aldehyde material which can be employed in the production of the Mannich base is represented by the formula:

50 R^{23}CHO

in which R^{23} is a hydrogen or an aliphatic hydrocarbon radical having from 1 to 4 carbon atoms. Examples of suitable aldehydes include formaldehyde, paraformaldehyde, acetaldehyde and the like.

In a preferred embodiment of the instant invention the adducts which are reacted with the polyepoxide to form the dispersants of this invention are the nitrogen containing adducts of group (i) above, i.e., those derived from a hydrocarbyl substituted dicarboxylic acid forming material (acids or anhydrides) and reacted with polyamines. These types of adducts are nomenclatured, in the specification and claims, as acylated nitrogen derivatives of hydrocarbyl substituted dicarboxylic acid materials, with the hydrocarbyl substituted

dicarboxylic acid forming material being nomenclatured as an acylating agent or material. Particularly preferred adducts of this type are those derived from polyisobutylene substituted with succinic anhydride groups and reacted with polyethylene amines, e.g. tetraethylene pentamine, pentaethylene hexamine, polyoxyethylene and polyoxypropylene amines, e.g. polyoxypropylene diamine, trimethylolaminoethane and combinations thereof.

Utilizing this preferred group of nitrogen containing adducts the dispersants of the instant invention may be characterized as acylated nitrogen derivatives of hydrocarbyl substituted dicarboxylic materials comprising the reaction products of:

(A) reaction products of (1) a long chain hydrocarbyl substituted dicarboxylic acid producing material, and (2) a polyamine; subsequently reacted with

(B) a polyepoxide.

The polyepoxides are compounds containing at least two oxirane rings, i.e.,



These oxirane rings are connected or joined by hydrocarbon moieties or hydrocarbon moieties containing at least one hetero atom or group. The hydrocarbon moieties generally contain from 1 to about 100 carbon atoms. They include the alkylene, cycloalkylene, alkenylene, arylene, aralkenylene and alkarylene radicals. Typical alkylene radicals are those containing from 1 to about 100 carbon atoms, more typically from 1 to about 50 carbon atoms. The alkylene radicals may be straight chain or branched and may contain from 1 to about 100 carbon atoms, preferably from 1 to about 50 carbon atoms. Typical cycloalkylene radicals are those containing from 4 to about 16 ring carbon atoms. The cycloalkylene radicals may contain alkyl substituents, e.g., C₁ - C₈ alkyl, on one or more ring carbon atoms. Typical arylene radicals are those containing from 6 to 12 ring carbons, e.g., phenylene, naphthylene and biphenylene. Typical alkarylene and aralkylene radicals are these containing from 7 to about 100 carbon atoms, preferably from 7 to about 50 carbon atoms. The hydrocarbon moieties joining the oxirane rings may contain substituent groups thereon. The substituent groups are those which are substantially inert or unreactive at ambient conditions with the oxirane ring. As used in the specification and appended claims the term "substantially inert and unreactive at ambient conditions" is intended to mean that the atom or group is substantially inert to chemical reactions at ambient temperatures and pressure with the oxirane ring so as not to materially interfere in an adverse manner with the preparation and/or functioning of the compositions, additives, compounds, etc. of this invention in the context of its intended use. For example, small amounts of these atoms or groups can undergo minimal reaction with the oxirane ring without preventing the making and using of the invention as described herein. In other words, such reaction, while technically discernable, would not be sufficient to deter the practical worker of ordinary skill in the art from making and using the invention for its intended purposes. Suitable substituent groups include, but are not limited to, alkyl groups, hydroxyl groups, tertiary amino groups, halogens, and the like. When more than one substituent is present they may be the same or different.

It is to be understood that while many substituent groups are substantially inert or unreactive at ambient conditions with the oxirane ring, they will react with the oxirane ring under conditions effective to allow reaction of the oxirane ring with the reactive amino groups of the acylated nitrogen derivatives of hydrocarbyl substituted dicarboxylic materials. Whether these groups are suitable substituent groups which can be present on the polyepoxide depends, in part, upon their reactivity with the oxirane ring. Generally, if they are substantially more reactive with the oxirane ring than the oxirane ring is with the reactive amino group, particularly the secondary amino group, they will tend to materially interfere in an adverse manner with the preparation of the improved dispersants of this invention and are, therefore, unsuitable. If, however, their reactivity with the oxirane ring is less than or generally similar to the reactivity of the oxirane ring with the reactive amino groups, particularly a secondary amino group, they will not materially interfere in an adverse manner with the preparation of the dispersants of the present invention and may be present on the polyepoxide, particularly if the epoxide groups are present in excess relative to the substituent groups. An example of such a reactive but suitable group is the hydroxyl group. An example of an unsuitable substituent group is a primary amino group.


The hydrocarbon moieties containing at least one hetero atom or group are the hydrocarbon moieties described above which contain at least one hetero atom or group in the chain. The hetero atoms or groups are those that are substantially unreactive at ambient conditions with the oxirane rings. When more than one

hetero atom or group is present they may be the same or different. The hetero atoms or groups are separated from the carbon atom of the oxirane ring by at least one intervening carbon atom. These hetero atom or group containing hydrocarbon moieties may contain at least one substituent group on at least one carbon atom. These substituent groups are the same as those described above as being suitable for the hydrocarbon moieties.


Some illustrative non-limiting examples of suitable hetero atoms or groups include:
 oxygen atoms (i.e., -O- or ether linkages in the carbon chain);
 sulfur atoms (i.e. -S- or thioether linkages in the carbon chain);
 carboxy groups (i.e.,




sulfonyl group (i.e.,



ketone group (i.e.,



sulfinyl group (i.e.,




and
 nitro group.

As mentioned hereinafore the polyepoxides of the present invention contain at least two oxirane rings or epoxide moieties. It is critical that the polyepoxide contain at least two oxirane rings in the same molecule. Preferably, these polyepoxides contain no more than about 10 oxirane rings, preferably no more than about 5 oxirane rings. Preferred polyepoxides are the diepoxides, i.e., those containing two oxirane rings.

The polyepoxides useful in the instant invention are well known in the art and are generally commercially available or may readily be prepared by conventional and well known methods.


The polyepoxides include those represented by the general formula

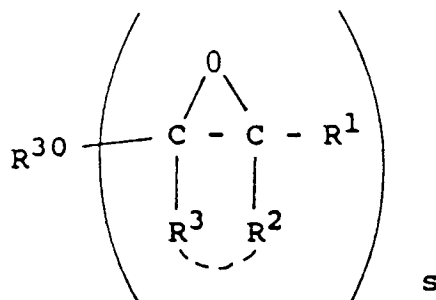

wherein:

R³⁰ is a s valent hydrocarbon radical, a substituted s valent hydrocarbon radical, a s valent hydrocarbon radical containing at least one hetero atom or group, and a substituted s valent hydrocarbon radical containing at least one hetero atom or group; R¹ - R³ are as described herein below; and s is an integer having a value of at least 2, preferably from 2 to about 10, more preferably from 2 to about 5. In this generic formula R³⁰ has the same meaning as R in Formula V below except that it is s valent rather than divalent.

Among the polyepoxides described hereinafore are those represented by the general formula.

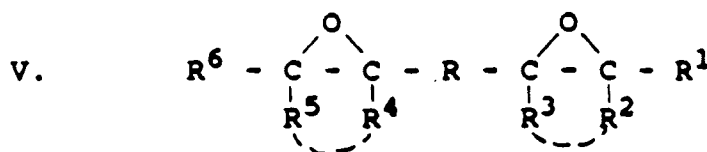

wherein:

R is a divalent hydrocarbon radical, a substituted divalent hydrocarbon radical, a divalent hydrocarbon radical containing at least one hetero atom or group, and a substituted divalent hydrocarbon radical containing at least one hetero atom or group;

R¹ and R⁶ are independently selected from hydrogen, monovalent hydrocarbon radicals, substituted monovalent hydrocarbon radicals, monovalent hydrocarbon radicals containing at least one hetero atom or group, substituted monovalent hydrocarbon radicals containing at least one hetero atom or group, and oxirane containing radicals;

R² and R³ are independently selected from hydrogen, monovalent hydrocarbon radicals, substituted monovalent hydrocarbon radicals, monovalent hydrocarbon radicals containing at least one hetero atom or group, substituted monovalent hydrocarbon radicals containing at least one hetero atom or group, monovalent oxirane containing radicals, divalent hydrocarbon radicals, and substituted divalent hydrocarbon radicals, with the proviso that if R² or R³ is a divalent hydrocarbon radical or substituted divalent hydrocarbon radical then both R² and R³ must be divalent hydrocarbon radicals or substituted divalent hydrocarbon radicals that together with the two carbon atoms of the oxirane ring form a cyclic structure; and

R⁴ and R⁵ are independently selected from hydrogen, monovalent hydrocarbon radicals, substituted monovalent hydrocarbon radicals, monovalent hydrocarbon radicals containing at least one hetero atom or group, substituted monovalent hydrocarbon radicals containing at least one hetero atom or group, monovalent oxirane containing radicals, divalent hydrocarbon radicals, and substituted divalent hydrocarbon radicals, with the proviso that if R⁴ or R⁵ is a divalent hydrocarbon radical or substituted divalent hydrocarbon radical then both R⁴ and R⁵ must be divalent hydrocarbon radicals or substituted divalent hydrocarbon radicals that together with the two carbon atoms of the oxirane ring form a cyclic structure.

The monovalent hydrocarbon radicals represented by R¹ - R⁶ generally contain from 1 to about 100 carbon atoms. These hydrocarbon radicals include alkyl, alkenyl, cycloalkyl, aryl, aralkyl, and alkaryl radicals. The alkyl radicals may contain from 1 to about 100, preferably from 1 to about 50, carbon atoms and may be straight chain or branched. The alkenyl radicals may contain from 2 to about 100 carbons, preferably from 2 to about 50 carbon atoms, and may be straight chain or branched. Preferred cycloalkyl radicals are those containing from about 4 to about 12 ring carbon atoms, e.g., cyclobutyl, cyclopentyl,


cyclohexyl, cycloheptyl, etc. These cycloalkyl radicals may contain substituent groups, preferably alkyl groups, on the ring carbon atoms, e.g., methylcyclohexyl, 1,3-dimethylcyclopentyl, etc. The preferred alkenyl radicals are those containing from 2 to about 30 carbon atoms, e.g., ethenyl, 1-propenyl, 2-propenyl, etc. The preferred aryl radicals are those containing from 6 to about 12 ring carbon atoms, i.e., phenyl, naphthyl, and biphenyl. The preferred aralkyl and alkaryl radicals are those containing from 7 to about 30 carbon atoms, e.g., p-tolyl, 2,6-xylyl, 2,4,6-trimethylphenyl, 2-isopropylphenyl, benzyl, 2-phenylethyl, 4-phenylbutyl, etc.

The substituted monovalent hydrocarbon radicals represented by $R^1 - R^6$ are the monovalent hydrocarbon radicals described hereinafore which contain at least one substituent group thereon. The substituent groups are such that they are substantially unreactive under ambient conditions with the oxirane moieties. When more than one substituent group is present they may be the same or different.

The monovalent hydrocarbon radicals containing at least one hetero atom or group are the monovalent hydrocarbon radicals described hereinafore which contain at least one hetero atom or group in the carbon chain. The hetero atom or group is separated from the carbon of the oxirane ring by at least one intervening carbon atom. When more than one hetero atom or group is present they may be the same or different. The hetero atoms or groups are those that are substantially unreactive under ambient conditions with the oxirane ring. These hetero atoms or groups are those described hereinafore.

The substituted monovalent hydrocarbon radicals containing at least one hetero atom or group are the substituted monovalent hydrocarbon radicals containing at least one hetero atom or group described above which contain at least one substituent group on at least one carbon atom. The substituent groups are those described hereinafore.


The oxirane radicals represented by $R^1 - R^6$ may be represented by the formula




wherein:

R^7 has the same meaning as R^1 , $R^8 - R^9$ have the same meaning as $R^2 - R^3$, and R^{10} has the same meaning as R in Formula V.

The divalent hydrocarbon radicals represented by $R^2 - R^5$ and $R^8 - R^9$ generally are aliphatic acyclic radicals and contain from 1 to about 5 carbon atoms. Preferred divalent hydrocarbon radicals are the alkylene radicals. Preferred alkylene radicals are those that, together with the two carbon atoms of the oxirane ring, form a cyclic structure containing from 4 to about 8 ring carbon atoms. Thus, for example, if R^3 and R^4 are both ethylene radicals the resultant cyclic structure formed with the two carbon atoms of the oxirane ring is a cyclohexylene oxide i.e.,




The divalent substituted hydrocarbon radicals represented by $R^2 - R^5$ and $R^8 - R^9$ are the divalent hydrocarbon radicals described above which contain at least one substituent group on at least one carbon atom. Thus, for example, if R^3 and R^4 are both hydroxy substituted ethylene radicals, the resultant cyclic structure formed with the two carbon atoms of the oxirane ring may be represented by the formula.




The divalent hydrocarbon radicals represented by R and R¹⁰ generally contain from 1 to about 100 carbon atoms, preferably from 1 to about 50 carbon atoms. They may be aliphatic, aromatic or aliphatic-aromatic. If they are aliphatic they may be saturated or unsaturated, acyclic or alicyclic. They include alkylene, cycloalkylene, alkenylene, arylene, aralkylene, and alkarylene radicals. The alkylene radicals may be straight chain or branched. Preferred alkylene radicals are those containing from 1 to about 50 carbon atoms. Preferred alkenylene radicals are those containing from 2 to about 50 carbon atoms. Preferred cycloalkylene radicals are those containing from 4 to about 12 ring carbon atoms. The cycloalkylene radicals may contain substituents, preferably alkyls, on the ring carbon atoms.

It is to be understood that the term "arylene" as used in the specification and the appended claims is not intended to limit the divalent aromatic moiety represented by R and R¹⁰ to benzene. Accordingly, it is to be understood that the divalent aromatic moiety can be a single aromatic nucleus such as a benzene nucleus, a pyridine nucleus, a thiophene nucleus, a 1,2,3,4-tetrahydronaphthalene nucleus, etc., or a polynuclear aromatic moiety. Such polynuclear moieties can be of the fused type; that is, wherein at least one aromatic nucleus is fused at two points to another nucleus such as found in naphthalene, anthracene, the azanaphthalenes, etc. Alternatively, such polynuclear aromatic moieties can be of the linked type wherein at least two nuclei (either mono- or polynuclear) are linked through bridging linkages to each other. Such bridging linkages can be chosen from the group consisting of carbon-to-carbon single bonds, ether linkages, keto linkages, sulfide linkages, polysulfide linkages of 2 to 6 sulfur atoms, sulfinyl linkages, sulfonyl linkages, methylene linkages, alkylene linkages, di-(lower alkyl)-methylene linkages, lower alkylene ether linkages, alkylene keto linkages, lower alkylene sulfur linkages, lower alkylene polysulfide linkages of 2 to 6 carbon atoms, amino linkages, polyamino linkages and mixtures of such divalent bridging linkages.


When the divalent aromatic moiety, Ar, is a linked polynuclear aromatic moiety it can be represented by the general formula



wherein w is an integer of 1 to about 10, preferably 1 to about 8, more preferably 1, 2 or 3; Ar is a divalent aromatic moiety as described above, and each Lng is a bridging linkage individually chosen from the group consisting of carbon-to-carbon single bonds, ether linkages (e.g. -O-), keto linkages (e.g.,



sulfide linkages (e.g., -S-), polysulfide linkages of 2 to 6 sulfur atoms (e.g., -S₂-), sulfinyl linkages (e.g., -S(O)-), sulfonyl linkages (e.g., -S(O)₂-), lower alkylene linkages (e.g., -CH₂ -, -CH₂ - CH₂ -,




etc.), di (lower alkyl) -methylene linkages (e.g., -CR₂-), lower alkylene ether linkages (e.g., -CH₂ - O -, -CH₂ - O - CH₂ -, -CH₂ - CH₂ - O -, -CH₂CH₂OCH₂CH₂ -,




etc.) lower alkylene sulfide linkages (e.g., wherein one or more -O-,s in the lower alkylene ether linkages is replaced with an -S- atom), lower alkylene polysulfide linkages (e.g., wherein one or more -O-'s is replaced with a -S2to -S6- group), with R* being a lower alkyl group.

Illustrative of such linked polynuclear aromatic moieties are those represented by the formula




wherein R12 and R13 are independently selected from hydrogen and alkyl radicals, preferably alkyl radicals containing from 1 to about 20 carbon atoms; R11 is selected from alkylene, alkylidene, cycloalkylene, and cycloalkylidene radicals; and u and u1 are independently selected from integers having a value of from 1 to 4.


The divalent substituted hydrocarbon radicals represented by R and R10 are those divalent hydrocarbon radicals described above which contain at least one substituent group of the type described hereinafore. Thus, for example, if the divalent hydrocarbon radical is a C5 alkylene, the corresponding divalent substitute hydrocarbon radical, e.g., hydroxyl substituted radical, may be




When more than one substituent group is present they may be the same or different.

The divalent hydrocarbon radicals containing at least one hetero atom or group are those divalent hydrocarbon radicals described hereinafore which contains at least one hetero atom or group. These hetero atoms or groups are those described hereinafore. Some illustrative non-limiting examples of divalent hydrocarbon radicals containing at least one hetero atom or group include:







5

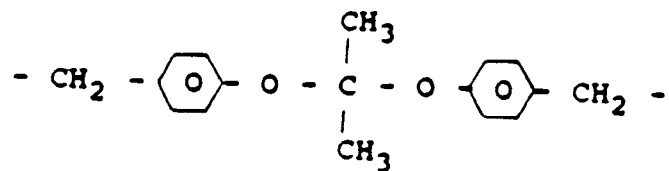


10




15

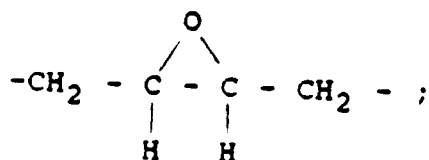


20



25

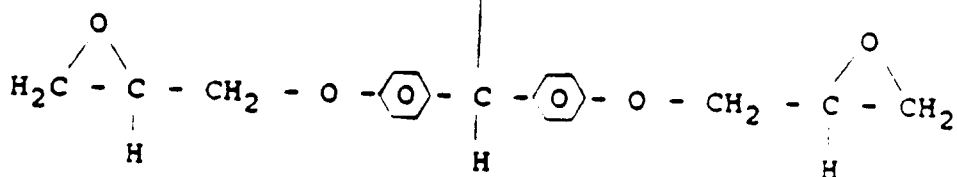

30

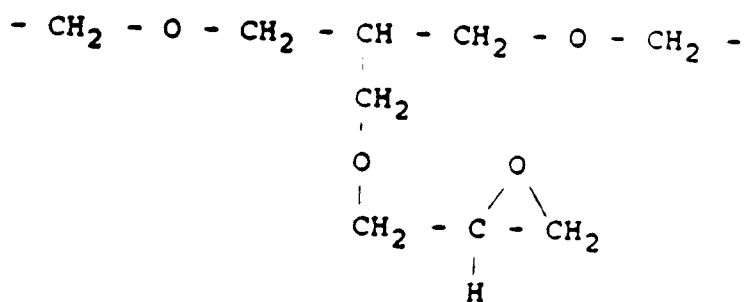

35






40

45


The divalent substituted hydrocarbon radicals containing at least one hetero atom or group are those divalent hydrocarbon radicals containing at least one hetero atom or group described above which contain at least one substituent group of the type described hereinafore. Some illustrative non-limiting examples of divalent substituted hydrocarbon radicals containing at least one hetero atom or group include:

50

55

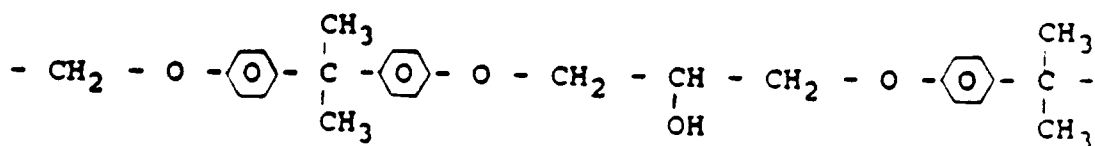

Also included within the scope of the polyepoxides of the instant invention are these represented by the formula

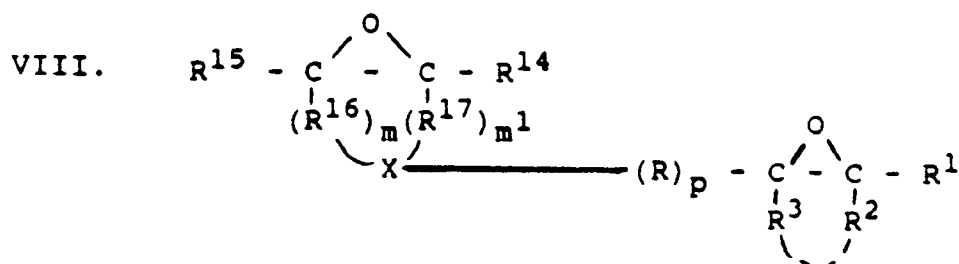


wherein:

R and R¹-R³ are as defined hereinbefore; R¹⁴ and R¹⁵ independently have the same meaning as R¹; X is an aromatic moiety; R¹⁶ and R¹⁷ are independently selected from divalent aliphatic acyclic hydrocarbon radicals and divalent substituted aliphatic acyclic hydrocarbon radicals which together with the two carbon atoms of the oxirane ring and the two adjacent ring carbon atoms of the aromatic moiety X form a cyclic structure:

m and m' are independently zero or one with the proviso that the sum of m plus m' is at least one; and p is zero or one.

The aromatic moieties represented by X are preferably those containing from 6 to 12 ring carbon atoms, e.g., benzene, naphthalene, and biphenyl. The aromatic moieties may contain one or more substituents on one or more ring carbon atoms. These substituents are those which are substantially unreactive at ambient conditions, e.g., temperature and pressure, with the oxirane ring. They include, for example, alkyl, hydroxyl, nitro, and the like.

Also falling within the scope of the polyepoxides of the instant invention are those represented by the formula:

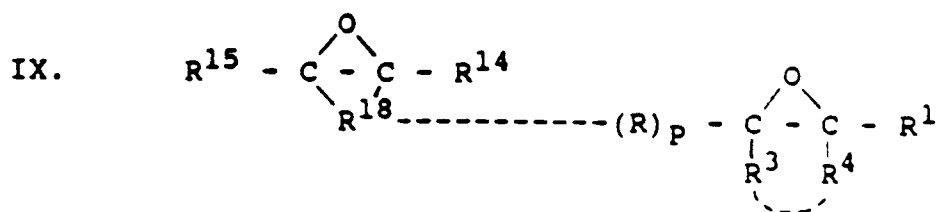

wherein:



R, R¹-R³, R¹⁴-R¹⁵ and p are as defined hereinafore; and R¹⁸ is independently selected from divalent hydrocarbon radicals or a substituted divalent hydrocarbon radicals which together with the two carbon atoms of the oxirane ring forms a cyclic preferably cycloaliphatic, structure.

The divalent hydrocarbon or substituted divalent hydrocarbon radicals represented by R¹⁸ preferably contain from 2 to about 14 carbon atoms so as to form, together with the two carbon atoms of the oxirane ring, a 4 to about 16 membered ring structure, preferably a cycloaliphatic ring. The preferred divalent hydrocarbon radicals are the divalent aliphatic hydrocarbon radicals, preferably the alkylene radicals.


The divalent aliphatic hydrocarbon radicals represented by R¹⁸ may contain one or more substituent groups on one or more ring carbon atoms. The substituents are selected from those that are substantially unreactive under ambient conditions with the oxirane ring, e.g., alkyl, hydroxyl, and the like.

Preferred polyepoxides of the instant invention are those wherein at least two of the oxirane rings, preferably the two terminal or end oxirane rings, are unhindered. By unhindered is meant that the oxirane ring contains one secondary carbon atom, i.e., having two hydrogens bonded thereto, and preferably contains one secondary carbon atom and one tertiary carbon atom, i.e., having one hydrogen bonded thereto. Thus, for example, an unhindered polyepoxide of Formula I is one wherein R¹, R², R⁵, and R⁶ are hydrogen, preferably one wherein R¹-R³ and R⁴-R⁶ are all hydrogen.


Some illustrative non-limiting Examples of the polyepoxides of the instant invention include:

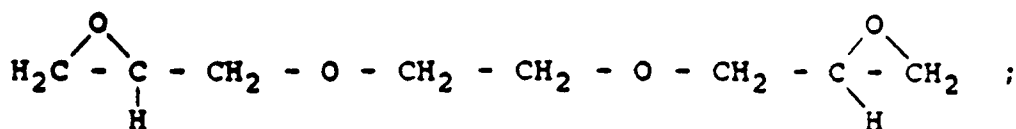


5




10




15




20



25




30

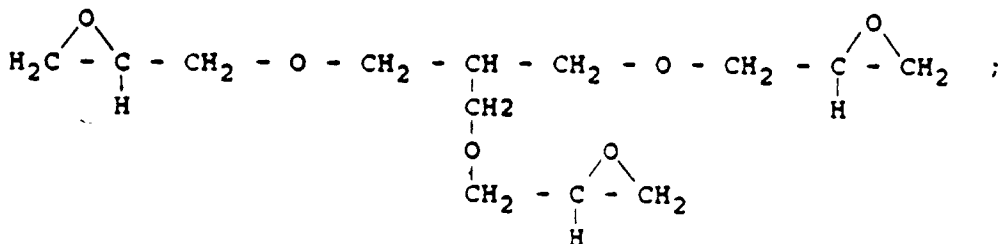


35

40

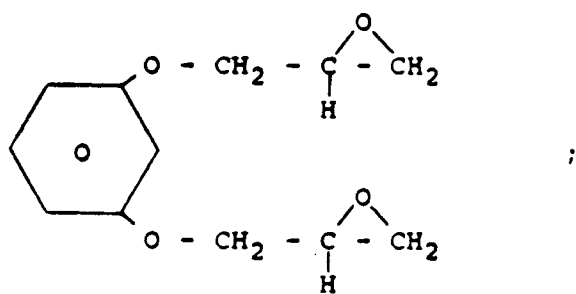

45

50



55



50

55

Preferred polyepoxides are the glycidyl polyethers of polyhydric phenols and polyhydric alcohols, especially the glycidyl polyethers of 2,2-bis(4-hydroxyphenyl) propane having an average molecular weight between about 300 and 3,000 and an epoxide equivalent weight (WPE) between about 140 and 2,000. Especially preferred are the diglycidyl polyethers of 2,2-bis(4-hydroxyphenyl) propane having a WPE
 5 between about 140 and 500 and an average molecular weight of from about 300 to about 900.

Other suitable epoxy compounds include those compounds derived from polyhydric phenols and having at least one vicinal epoxy group wherein the carbon-to-carbon bonds within the six-membered ring are saturated. Such epoxy resins may be obtained by at least two well-known techniques, i.e., by the hydrogenation of glycidyl polyethers of polyhydric phenols or (2) by the reaction of hydrogenated
 10 polyhydric phenols with epichlorohydrin in the presence of a suitable catalyst such as Lewis acids, i.e., boron trihalides and complexes thereof, and subsequent dehydrochlorination in an alkaline medium. The method of preparation forms no part of the present invention and the resulting saturated epoxy resins derived by either method are suitable in the present compositions.

Briefly, the first method comprises the hydrogenation of glycidyl polyethers of polyhydric phenols with
 15 hydrogen in the presence of a catalyst consisting of rhodium and/or ruthenium supported on an inert carrier at a temperature below about 50 °C. This method is thoroughly disclosed and described in U.S. Pat. No. 3,336,241, issued Aug. 15, 1967.


The hydrogenated epoxy compounds prepared by the process disclosed in U.S. Pat. No. 3,336,241 are suitable for use in the present compositions. Accordingly, the relevant disclosure of U.S. Pat. No. 3,336,241
 20 is incorporated herein by reference.

The second method comprises the condensation of a hydrogenated polyphenol with an epihalohydrin, such as epichlorohydrin, in the presence of a suitable catalyst such as BF₃, followed by dehydrohalogenation in the presence of caustic. When the phenol is hydrogenated Bisphenol A, the resulting saturated epoxy compound is sometimes referred to as "diepoxidized hydrogenated Bisphenol A," or more properly
 25 as the diglycidyl ether of 2,2-bis(4-cyclohexanol) propane.

In any event, the term "saturated epoxy resin," as used herein shall be deemed to mean the glycidyl ethers of polyhydric phenols wherein the aromatic ring structure of the phenols have been or are saturated.

Preferred saturated epoxy resins are the hydrogenated resins prepared by the process described in U.S. Pat. No. 3,336,241. More preferred are the hydrogenated glycidyl ethers of 2,2-bis(4-hydroxyphenyl) propane, sometimes called the diglycidyl ethers of 2,2-bis(4-cyclohexanol) propane.
 30

One class of useful epoxy resins are those prepared by condensing epichlorohydrin with bisphenol-A. They include resins represented by the general structural formula

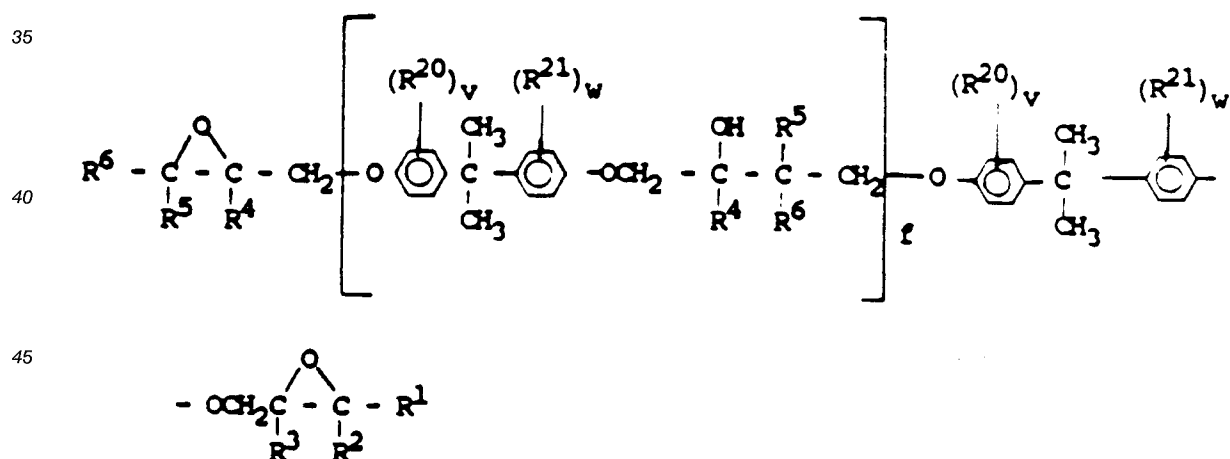

wherein:

R¹-R⁶ are defined hereinafore, and preferably are all hydrogen;

R²⁰ is independently selected from alkyl radicals, preferably alkyl radicals containing from 1 to about 10 carbon atoms, hydroxyl, or halogen radicals;

R²¹ is independently selected from alkyl radicals, preferably alkyl radicals containing from 1 to about 10 carbon atoms, hydroxyl, or halogen radicals;

v is independently selected from integers having a value of from 0 to 4 inclusive;

w is independently selected from integers having a value of from 0 to 4 inclusive; and

f has a value of at least one, and varies according to the molecular weight of the resin, with the upper-limit of f preferably not exceeding about 10, more preferably not exceeding about 5.

Preferred compounds of Formula X are those wherein $R^1 - R^6$ are all hydrogen, and v and w are all zero.

5 An example of commercially available and useful epoxy resins are the EPON resins of Shell Oil Company

As mentioned hereinafore those polyepoxides, including the epoxy resins, wherein the two carbon atoms of the oxirane ring are bonded to three hydrogen atoms, e.g., wherein $R^1 - R^6$ in Formula V are all hydrogen, are preferred. Preferred polyepoxides of this type are those wherein the hydrocarbon moieties bridging the
10 epoxide moieties, e.g., R in Formula V, contain polar groups or atoms. These polar groups or atoms include, but are not limited to, the polar hetero atoms or groups described hereinafore. Particularly preferred polyepoxides are the epoxy resins, especially those devised from polyhydric phenols.

These polyepoxides are reacted with the nitrogen or ester containing adducts selected from the group consisting of (i) oil soluble salts, amides, imides, oxazolines and esters, or mixtures thereof, of long chain
15 hydrocarbon substituted mono and dicarboxylic acids or their anhydrides; (ii) long chain aliphatic hydrocarbon having a polyamine attached directly thereto; and (iii) Mannich condensation products formed by condensing about a molar proportion of long chain hydrocarbon substituted phenol with about 1 to 2.5 moles of formaldehyde and about 0.5 to 2 moles of polyalkylene polyamine, to form the improved dispersants of the present invention. In the case of nitrogen containing adducts these adducts that are
20 further reacted with the polyepoxides in accordance with the present invention contain sufficient unreacted residual reactive amino groups, i.e., primary and/or secondary amino groups, to enable the desired reaction with the polyepoxides to take place. This reaction involves a ring opening of the oxirane ring whereby different molecules of the adduct are joined or coupled by the ring opened oxirane moieties on the same polyepoxide molecule.

25 In a preferred embodiment the nitrogen containing adduct is of group (i). Such an adduct, as discussed hereinafore, may be characterized as an acylated nitrogen derivative of hydrocarbyl substituted dicarboxylic acid producing materials. While the following discussion is directed to this preferred embodiment, it is to be understood that, with minor modifications, it is equally applicable to the other adducts of groups (i)-(iii) which may be used in the instant invention.

30 The polyepoxides of the present invention are reacted with the acylated nitrogen derivatives of hydrocarbyl substituted dicarboxylic acid materials. The acylated nitrogen derivatives that are further reacted with the polyepoxides in accordance with the present invention contain sufficient unreacted residual reactive amino nitrogens, e.g., secondary amino nitrogens, to enable the desired reaction with the polyepoxides to take place. This reaction is between the remaining reactive nitrogens of the acylated
35 nitrogen derivatives and the oxirane rings of the polyepoxide, and involves ring opening of the oxirane rings whereby different molecules of the acylated nitrogen derivatives are joined or coupled by the ring opened oxirane moieties on the same polyepoxide molecule. That is to say different oxirane rings on the same polyepoxide molecule react with amino groups on different molecules of the acylated nitrogen derivatives, thereby coupling or linking these different acylated nitrogen derivative molecules.


40 Reaction may be carried out by adding an amount of polyepoxide to the acylated nitrogen derivative which is effective to link or chain extend at least some of the molecules of the acylated nitrogen derivative, i.e., chain extending effective amount. It will be apparent to those skilled in the art that the amount of polyepoxide utilized will depend upon (i) the number of reactive nitrogen atoms present in the acylated nitrogen derivative, (ii) the number of oxirane rings present in the polyepoxide, (iii) any participation from
45 other functional groups present on the polyepoxide in the reaction and, (iv) the number of such groups which it is desired to react, i.e., the degree of coupling or cross-linking it is desired to obtain.

Generally, however, it is preferred to utilize an amount of polyepoxide such that there are present from about 0.01 to about 5, preferably from about 0.05 to about 2, and more preferably from about 0.1 to about 1 equivalent of epoxide per equivalent of reactive residual amino group in the acylated nitrogen derivative.

50 The temperature at which the reaction is carried out generally ranges from about 50°C. to the decomposition temperature of the mixture, preferably from about 50°C. to about 250°C., and more preferably from about 100°C., to about 200°C. While superatmospheric pressures are not excluded, the reaction generally proceeds at atmospheric pressure. The reaction may be conducted using a mineral oil, e.g., 100 neutral oil as a solvent. An inert organic co-solvent, e.g., xylene or toluene, may also be used. The
55 reaction time generally ranges from about 0.5 - 24 hours.


The products of this embodiment are formed as a result of bonding i.e. formation of a carbon to nitrogen bond, of different oxirane moieties on the same polyepoxide molecule with a reactive amino group, preferably a secondary amino group, on different molecules of the acylated nitrogen derivative. The

product may, for purposes of illustration and exemplification only, be represented by the following formula and reaction scheme:

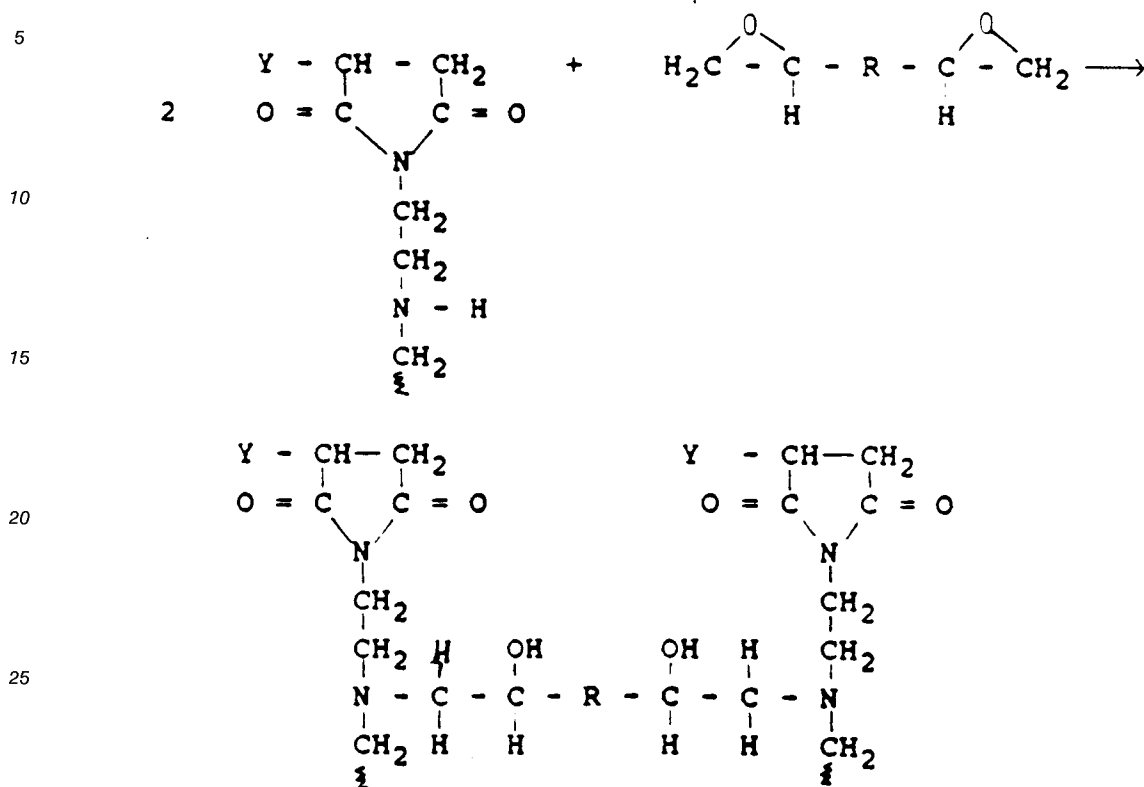

wherein Y is independently selected from olefin polymers containing at least 30 carbon atoms. This type of product is obtained from the reaction of an acylated nitrogen derivative containing only one residual reactive amino group per molecule, e.g., secondary amino group, and a polyepoxide containing only two oxirane rings per molecule. If the acylated nitrogen derivative contains more than one residual reactive amino group per molecule and/or the polyepoxide contains more than two oxirane rings per molecule then the products will be more complex, e.g., a polyepoxide containing three oxirane rings per molecule may join or couple three different acylated nitrogen derivative molecules containing one residual reactive amino group per molecule.

If the acylated nitrogen derivative contains more than one residual reactive amino group per molecule, e.g., two secondary amino groups, and the polyepoxide contains two oxirane rings, then one acylated nitrogen derivative molecule could, depending on the stoichiometry of the reaction, be joined to two other acylated nitrogen derivative molecules by two polyepoxide molecules. This may be illustrated by the following structure:

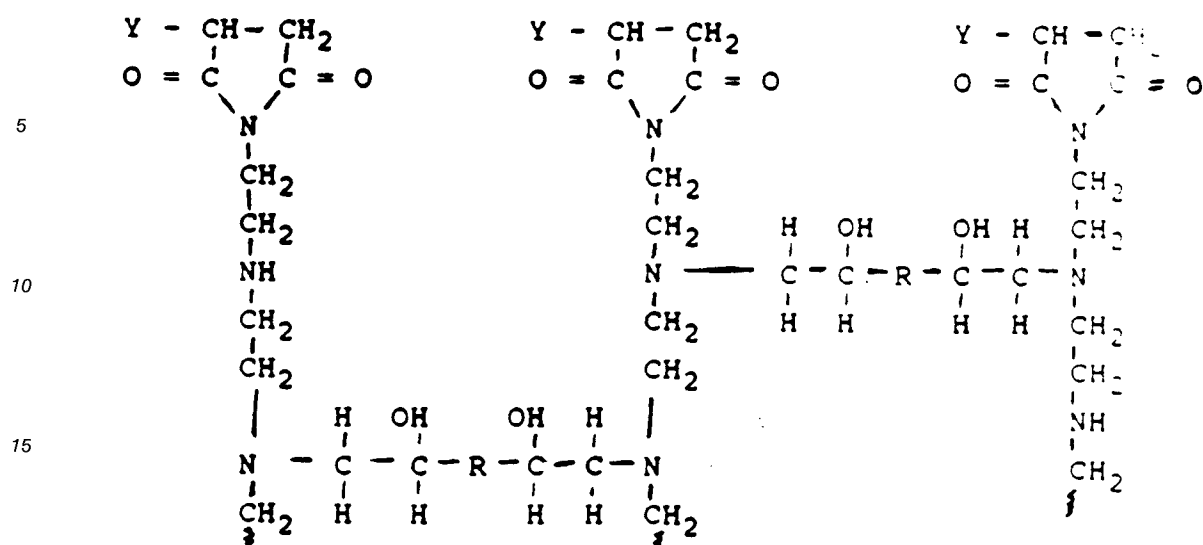

The polyepoxide is, in effect, a chain extender or cross-linking agent serving to join together two or more molecules of acylated nitrogen derivative. The product, since it contains two or more acylated nitrogen derivative molecules bonded together, has a higher molecular weight and may be characterized as an oligomer or even a polymer. The molecular weight of the product will depend, inter alia, upon the number of reactive amino groups per molecule of acylated nitrogen derivative, the number of oxirane rings per molecule of polyepoxide, and the amount of polyepoxide present in the reaction mixture of polyepoxide and acylated nitrogen derivative. For example, if an acylated nitrogen derivative containing only one residual reactive amino group, preferably a secondary amino group, per molecule is reacted with a diepoxide the product will be a dimer of the acylated nitrogen derivative. In such a situation increasing the amount of the diepoxide will generally not result in an increase in the molecular weight of the resultant dimer molecule but will yield more dimer molecules. On the other hand, if an acylated nitrogen derivative containing more than one residual reactive amino group per molecule is reacted with a diepoxide, the molecular weight of the product molecule may be increased in addition to the production of more cross-linked molecules.

Further aspects of the present invention reside in the formation of metal complexes and other post-treatment derivatives, e.g., borated derivatives, of the novel additives prepared in accordance with this invention. Suitable metal complexes may be formed in accordance with known techniques of employing a reactive metal ion species during or after the formation of the present dispersant materials. Complex-forming metal reactants include the nitrates, thiocyanates, halides, carboxylates, phosphates, thio-phosphates, sulfates, and borates of transition metals such as iron, cobalt, nickel, copper, chromium, manganese, molybdenum, tungsten, ruthenium, palladium, platinum, cadmium, lead, silver, mercury, antimony and the like. Prior art disclosures of these complexing reactions may be found in U.S. Patents 3,306,908 and Re. 26,443.

Post-treatment compositions include those formed by reacting the novel additives of the present invention with one or more post-treating reagents, usually selected from the group consisting of boron oxide, boron oxide hydrate, boron halides, boron acids, sulfur, sulfur chlorides, phosphorous sulfides and oxides, carboxylic acid or anhydride acylating agents, epoxides and episulfides and acrylonitriles. The reaction of such post-treating agents with the novel additives of this invention is carried out using procedures known in the art. For example, boration may be accomplished in accordance with the teachings of U.S. Patent 3,254,025 by treating the additive compound of the present invention with a boron oxide, halide, ester or acid. Treatment may be carried out by adding about 1-3 wt. % of the boron compound, preferably boric acid, and heating and stirring the reaction mixture at about 135°C to 165°C for 1 to 5 hours followed by nitrogen stripping and filtration, if desired. Mineral oil or inert organic solvents facilitate the process.

The compositions produced in accordance with the present invention have been found to be particularly useful as fuel and lubricating oil additives.

When the compositions of this invention are used in normally liquid petroleum fuels, such as middle distillates boiling from about 150° to 800°F. including kerosene, diesel fuels, home heating fuel oil, jet fuels, etc., a concentration of the additive in the fuel in the range of typically from 0.001 wt. % to 0.5 wt. %,

preferably 0.005 wt. % to 0.2 wt. %, based on the total weight of the composition, will usually be employed. These additives can contribute fuel stability as well as dispersant activity and/or varnish control behavior to the fuel.

The compounds of this invention find their primary utility, however, in lubricating oil compositions, which
5 employ a base oil in which the additives are dissolved or dispersed. Such base oils may be natural or synthetic.

Thus, base oils suitable for use in preparing the lubricating compositions of the present invention include those conventionally employed as crankcase lubricating oils for spark-ignited and compression-ignited internal combustion engines, such as automobile and truck engines, marine and railroad diesel
10 engines, and the like. Advantageous results are also achieved by employing the additives of the present invention in base oils conventionally employed in and/or adapted for use as power transmitting fluids such as automatic transmission fluids, tractor fluids, universal tractor fluids and hydraulic fluids, heavy duty hydraulic fluids, power steering fluids and the like. Gear lubricants, industrial oils, pump oils and other lubricating oil compositions can also benefit from the incorporation therein of the additives of the present
15 invention.

Thus, the additives of the present invention may be suitably incorporated into synthetic base oils such as alkyl esters of dicarboxylic acids, polyglycols and alcohols; polyalpha-olefins, polybutenes, alkyl benzenes, organic esters of phosphoric acids, polysilicone oils, etc. selected type of lubricating oil composition can be included as desired.

The additives of this invention are oil-soluble, dissolvable in oil with the aid of a suitable solvent, or are stably dispersible materials. Oil-soluble, dissolvable, or stably dispersible as that terminology is used herein does not necessarily indicate that the materials are soluble, dissolvable, miscible, or capable of being suspended in oil in all proportions. It does mean, however, that the additives, for instance, are soluble or stably dispersible in oil to an extent sufficient to exert their intended effect in the environment in which the
25 oil is employed. Moreover, the additional incorporation of other additives may also permit incorporation of higher levels of a particular polymer adduct hereof, if desired.

Accordingly, while any dispersant effective amount of these additives can be incorporated into the fully formulated lubricating oil composition, it is contemplated that such effective amount be sufficient to provide said lube oil composition with an amount of the additive of typically from 0.01 to about 10, e.g., 0.1 to 6.0, and preferably from 0.25 to 3.0 wt. %, based on the weight of said composition.
30

The additives of the present invention can be incorporated into the lubricating oil in any convenient way. Thus, they can be added directly to the oil by dispersing, or dissolving the same in the oil at the desired level of concentration, typically with the aid of a suitable solvent such as toluene, cyclohexane, or tetrahydrofuran. Such blending can occur at room temperature or elevated.

Natural base oils include mineral lubricating oils which may vary widely as to their crude source, e.g., whether paraffinic, naphthenic, mixed, paraffinic-naphthenic, and the like; as well as to their formation, e.g., distillation range, straight run or cracked, hydrofined, solvent extracted and the like.
35

More specifically, the natural lubricating oil base stocks which can be used in the compositions of this invention may be straight mineral lubricating oil or distillates derived from paraffinic, naphthenic, asphaltic, or mixed base crudes, or, if desired, various blends oils may be employed as well as residuals, particularly those from which asphaltic constituents have been removed. The oils may be refined by conventional methods using acid, alkali, and/or clay or other agents such as aluminum chloride, or they may be extracted oils produced, for example, by solvent extraction with solvents of the type of phenol, sulfur dioxide, furfural, dichlorodiethyl ether, nitrobenzene, crotonaldehyde, etc.
40

The lubricating oil base stock conveniently has a viscosity of typically about 2.5 to about 12, and preferably about 2.5 to about 9 cSt. ($\text{m}^2/\text{s} \times 10^6$) at 100 °C.
45

Thus, the additives of the present invention can be employed in a lubricating oil composition which comprises lubricating oil, typically in a major amount, and the additive, typically in a minor amount, which is effective to impart enhanced dispersancy relative to the absence of the additive. Additional conventional
50 additives selected to meet the particular requirements of a temperatures. In this form the additive per se is thus being utilized as a 100% active ingredient form which can be added to the oil or fuel formulation by the purchaser. Alternatively, these additives may be blended with suitable oil-soluble solvent and base oil to form concentrate, which may then be blended with a lubricating oil base stock to obtain the final formulation. Concentrates will typically contain from about 2 to 80 wt. %, by weight of the additive, and preferably from about 5 to 40% by weight of the additive. Concentrates may also comprise for example
55 from 5-70 wt% of oleaginous material (A) and 20-95 wt% of (B), based on the total composition.

The lubricating oil base stock for the additive of the present invention typically is adapted to perform selected function by the incorporation of additives therein to form lubricating oil compositions (i.e.,

formulations).

Representative additives typically present in such formulations include viscosity modifiers, corrosion inhibitors, oxidation inhibitors, friction modifiers, other dispersants, anti-foaming agents, anti-wear agents, pour point depressants, detergents, rust inhibitors and the like.

Viscosity modifiers impart high and low temperature operability to the lubricating oil and permit it to remain shear stable at elevated temperatures and also exhibit acceptable viscosity or fluidity at low temperatures. These viscosity modifiers are generally high molecular weight hydrocarbon polymers including polyesters. The viscosity modifiers may also be derivatized to include other properties or functions, such as the addition of dispersancy properties.

These oil soluble viscosity modifying polymers will generally have weight average molecular weights of from about 10,000 to 1,000,000, preferably 20,000 to 500,000, as determined by gel permeation chromatography or light scattering methods.

Representative examples of suitable viscosity modifiers are any of the types known to the art including polyisobutylene, copolymers of ethylene and propylene, polymethacrylates, methacrylate copolymers, copolymers of an unsaturated dicarboxylic acid and vinyl compound, interpolymers of styrene and acrylic esters, and partially hydrogenated copolymers of styrene/isoprene, styrene/butadiene, and isoprene/butadiene, as well as the partially hydrogenated homopolymers of butadiene and isoprene.

Corrosion inhibitors, also known as anti-corrosive agents, reduce the degradation of the metallic parts contacted by the lubricating oil composition. Illustrative of corrosion inhibitors are phosphosulfurized hydrocarbons and the products obtained by reaction of a phosphosulfurized hydrocarbon with an alkaline earth metal oxide or hydroxide, preferably in the presence of an alkylated phenol or of an alkylphenol thioester, and also preferably in the presence of an alkylated phenol or of an alkylphenol thioester, and also preferably in the presence of carbon dioxide. Phosphosulfurized hydrocarbons are prepared by reacting a suitable hydrocarbon such as a terpene, a heavy petroleum fraction of a C₂ to C₆ olefin polymer such as polyisobutylene, with from 5 to 30 wt. % of a sulfide of phosphorus for 1/2 to 15 hours, at temperature in the range of about 66 to about 316°C. Neutralization of the phosphosulfurized hydrocarbon may be effected in the manner taught in U.S. Patent No. 1,969,324.

Oxidation inhibitors, or antioxidants, reduce the tendency of mineral oils to deteriorate in service which deterioration can be evidenced by the products of oxidation such as sludge and varnish-like deposits on the metal surfaces, and by viscosity growth. Such oxidation inhibitors include alkaline earth metal salts of alkylphenolthioesters having preferably C₅ to C₁₂ alkyl side chains, e.g., calcium nonylphenol sulfide, barium toctylphenyl sulfide, dioctylphenylamine, phenylalphanaphthylamine, phospho-sulfurized or sulfurized hydrocarbons, etc.

Other oxidation inhibitors or antioxidants useful in this invention comprise oil-soluble copper compounds. The copper may be blended into the oil as any suitable oil soluble copper compound. By oil soluble it is meant that the compound is oil soluble under normal blending conditions in the oil or additive package. The copper compound may be in the cuprous or cupric form. The copper may be in the form of the copper dihydrocarbyl thio- or dithio-phosphates. Alternatively, the copper may be added as the copper salt of a synthetic or natural carboxylic acid. Examples of same thus include C₁₀ to C₁₈ fatty acids, such as stearic or palmitic acid, but unsaturated acids such as oleic or branched carboxylic acids such as naphthenic acids of molecular weights of from about 200 to 500, or synthetic carboxylic acids, are preferred, because of the improved handling and solubility properties of the resulting copper carboxylates. Also useful are oil-soluble copper dithiocarbamates of the general formula (R³⁰R³¹, NCSS)zCu (where z is 1 or 2, and R³⁰ and R³¹, are the same or different hydrocarbyl radicals containing from 1 to 18, and preferably 2 to 12, carbon atoms, and including radicals such as alkyl, alkenyl, aryl, aralkyl, alkaryl and cycloaliphatic radicals. Particularly preferred as R³⁰ and R³¹, groups are alkyl groups of from 2 to 8 carbon atoms. Thus, the radicals may, for example, be ethyl, n-propyl, i-propyl, n-butyl, i-butyl, sec-butyl, amyl, n-hexyl, i-hexyl, n-heptyl, n-octyl, decyl, dodecyl, octadecyl, 2-ethylhexyl, phenyl, butylphenyl, cyclohexyl, methylcyclopentyl, propenyl, butenyl, etc. In order to obtain oil solubility, the total number of carbon atoms (i.e., R³⁰ and R³¹,) will generally be about 5 or greater. Copper sulphonates, phenates, and acetylacetonates may also be used.

Exemplary of useful copper compounds are copper Cu^I and/or Cu^{II} salts of alkenyl succinic acids or anhydrides. The salts themselves may be basic, neutral or acidic. They may be formed by reacting (a) polyalkylene succinimides (having polymer groups of Mn of 700 to 5,000) derived from polyalkylene-polyamines, which have at least one free carboxylic acid group, with (b) a reactive metal compound. Suitable reactive metal compounds include those such as cupric or cuprous hydroxides, oxides, acetates, borates, and carbonates or basic copper carbonate.

Examples of these metal salts are Cu salts of polyisobutenyl succinic anhydride, and Cu salts of polyisobutenyl succinic acid. Preferably, the selected metal employed is its divalent form, e.g., Cu + 2. The preferred substrates are polyalkenyl succinic acids in which the alkenyl group has a molecular weight greater than about 700. The alkenyl group desirably has a Mn from about 900 to 1,400, and up to 2,500, with a Mn of about 950 being most preferred. Especially preferred is polyisobutylene succinic anhydride or acid. These materials may desirably be dissolved in a solvent, such as a mineral oil, and heated in the presence of a water solution (or slurry) of the metal bearing material. Heating may take place between 70°C and about 200°C. Temperatures of 100°C to 140°C are entirely adequate. It may be necessary, depending upon the salt produced, not to allow the reaction to remain at a temperature above about 140°C for an extended period of time, e.g., longer than 5 hours, or decomposition of the salt may occur.

The copper antioxidants (e.g., Cu-polyisobutenyl succinic anhydride, Cu-oleate, or mixtures thereof) will be generally employed in an amount of from about 50 to 500 ppm by weight of the metal, in the final lubricating or fuel composition.

Friction modifiers serve to impart the proper friction characteristics to lubricating oil compositions such as automatic transmission fluids.

Representative examples of suitable friction modifiers are found in U.S. Patent No. 3,933,659 which discloses fatty acid esters and amides; U.S. Patent No. 4,176,074 which describes molybdenum complexes of polyisobutenyl succinic anhydride-amino alkanols; U.S. Patent No. 4,105,571 which discloses glycerol esters of dimerized fatty acids; U.S. Patent No. 3,779,928 which discloses alkane phosphonic acid salts; U.S. Patent No. 3,778,375 which discloses reaction products of a phosphonate with an oleamide; U.S. Patent No. 3,852,205 which discloses S-carboxyalkylene hydrocarbyl succinimide, S-carboxyalkylene hydrocarbyl succinamic acid and mixtures thereof; U.S. Patent No. 3,879,306 which discloses N-(hydroxyalkyl) alkenyl succinimic acids or succinimides; U.S. Patent No. 3,932,290 which discloses reaction products of di- (lower alkyl) phosphites and epoxides; and U.S. Patent No. 4,028,258 which discloses the alkylene oxide adduct of phosphosulfurized N-(hydroxyalkyl) alkenyl succinimides. The disclosures of the above references are herein incorporated by reference. The most preferred friction modifiers are succinate esters, or metal salts thereof, of hydrocarbyl substituted succinic acids or anhydrides and thiobis-alkanols such as described in U.S. Patent 4,344,853.

Dispersants maintain oil insolubles, resulting from oxidation during use, in suspension in the fluid thus preventing sludge flocculation and precipitation or deposition on metal parts. Suitable dispersants include high molecular weight alkyl succinimides, the reaction product of oil-soluble polyisobutylene succinic anhydride with ethylene amines such as tetraethylene pentamine and borated salts thereof.

Pour point depressants, otherwise known as lube oil flow improvers, lower the temperature at which the fluid will flow or can be poured. Such additives are well known. Typically of those additives which usefully optimize the low temperature fluidity of the fluid are C8-C18 dialkylfumarate vinyl acetate copolymers, polymethacrylates, and wax naphthalene. Foam control can be provided by an antifoamant of the polysiloxane type, e.g., silicone oil and polydimethyl siloxane.

Anti-wear agents, as their name implies, reduce wear of metal parts. Representatives of conventional antiwear agents are zinc dialkyldithiophosphate and zinc diaryldithiophosphate.

Detergents and metal rust inhibitors include the metal salts of sulphonic acids, alkyl phenols, sulfurized alkyl phenols, alkyl salicylates, naphthenates and other oil soluble mono- and di-carboxylic acids. Highly basic (viz. overbased) metal sales, such as highly basic alkaline earth metal sulfonates (especially Ca and Mg salts) are frequently used as detergents. Representative examples of such materials, and their methods of preparation, are found in co-pending Serial No. 32,066, filed March 27, 1987, the disclosure of which is hereby incorporated by reference.

Some of these numerous additives can provide a multiplicity of effects, e.g., a dispersant-oxidation inhibitor. This approach is well known and need not be further elaborated herein.

Compositions when containing these conventional additives are typically blended into the base oil in amounts which are effective to provide their normal attendant function. Representative effective amounts of such additives are illustrated as follows:

Additive	Wt.% a.i. (Broad)	Wt. % a.i. (Preferred)
Viscosity Modifier	0.01-12	0.01-4
Corrosion Inhibitor	0.01-5	0.01-1.5
Oxidation Inhibitor	0.01-5	0.01-1.5
Dispersant	0.1-20	0.1-8
Pour Point Depressant	0.01-5	0.01-1.5
Anti-Foaming Agents	0.001-3	0.001-0.15
Anti-Wear Agents	0.001-5	0.001-1.5
Friction Modifiers	0.01-5	0.01-1.5
	Wt.% a.i. (Broad)	Wt.% a.i. (Preferred)
Detergents/Rust Inhibitors	0.01-10	0.01-3
Mineral Oil Base	Balance	Balance

When other additives are employed it may be desirable, although not necessary, to prepare additive concentrates comprising concentrated solutions or dispersions of the dispersant (in concentrate amounts hereinabove described), together with one or more of said other additives (said concentrate when constituting an additive mixture being referred to herein as an additive package) whereby several additives can be added simultaneously to the base oil to form the lubricating oil composition. Dissolution of the additive concentrate into the lubricating oil may be facilitated by solvents and by mixing accompanied with mild heating, but this is not essential. The concentrate or additive-package will typically be formulated to contain the dispersant additive and optional additional additives in proper amounts to provide the desired concentration in the final formulation when the additive-package is combined with a predetermined amount of base lubricant. Thus, the products of the present invention can be added to small amounts of base oil or other compatible solvents along with other desirable additives to form additive-packages containing active ingredients in collective amounts of typically from about 2.5 to about 90%, and preferably from about 5 to about 75%, and most preferably from about 8 to about 50% by weight additives in the appropriate proportions with the remainder being base oil.

All of said weight percents expressed herein are based on active ingredient (a.i.) content of the additive, and/or upon the total weight of any additive-package, or formulation which will be the sum of the a.i. weight of each additive plus the weight of total oil or diluent.

This invention will be further understood by reference to the following examples, wherein all parts are parts by weight and all molecular weights are number weight average molecular weights as noted, and which include preferred embodiments of the invention.

The following examples illustrate the preparation of the oil soluble dispersants of the instant invention.

EXAMPLE 1

A mixture of 300 grams of S150N mineral oil solution containing about 50 wt % of polyisobutenyl succinic anhydride-polyamine adduct (having a ratio of about 1.2 succinic anhydride moieties per polyisobutylene molecule of about 2,200 M_n , the polyamine being a polyethylene polyamine having from about 5 to 7 nitrogens), said oil solution containing about 1 wt. % nitrogen and having a viscosity at 100 ° C of 960 centistokes ($m^2/s \times 10^6$), and 17.42 grams (0.1 mol) of ethylene glycol diglycidyl ether is heated, under a nitrogen blanket, at 150 ° C for 5 hours. The reaction mixture is stripped by heating at 150 ° C with nitrogen blowing for one hour. The residue is a S150N mineral oil solution of the dispersant, said oil solution having a viscosity at 100 ° C of 5437 centistokes ($m^2/s \times 10^6$).

EXAMPLE 2

The procedure of Example 1 is repeated except that the 17.42 grams of ethylene glycol diglycidyl ether of Example 1 are replaced with 20.2 grams (0.1 mol) of 1,4-butanediol diglycidyl ether. The residue is a S150N mineral oil solution of the dispersant, said oil solution having a viscosity at 100 ° C of 5664 centistokes ($m^2/s \times 10^6$).

EXAMPLE 3

The procedure of Example 1 is repeated except that the 17.42 grams of ethylene glycol diglycidyl ether of Example 1 are replaced with 14.2 grams (0.1 mol) of 1,2,7,8-diepoxyoctane. The residue is a S150N mineral oil solution of the dispersant, said oil solution having a viscosity at 100° C of 3588 centistokes ($\text{m}^2/\text{s} \times 10^6$).

EXAMPLE 4

A mixture of 300 grams of S150N mineral oil solution containing about 50 wt. % polyisobutenyl succinic anhydride-polyamine adduct (having a ratio of about 1.3 succinic anhydride moieties per polyisobutylene molecule of 1300 M_n , the polyamine being a polyethylene polyamine having from about 5 to 7 nitrogens), said oil solution containing about 1.5 wt. % nitrogen and having a viscosity at 100° C of 350 centistokes ($\text{m}^2/\text{s} \times 10^6$), and 20 grams of ethylene glycol diglycidyl ether is heated, under a nitrogen blanket, at 150° C for 5 hours. The reaction mixture is stripped by heating at 150° C with nitrogen blowing for one hour. The residue is a S150N solvent neutral mineral oil solution of the dispersant, said oil solution having a viscosity at 100° C of 1745 centistokes ($\text{m}^2/\text{s} \times 10^6$).

EXAMPLE 5

A mixture of 500 grams of S150N mineral oil solution containing about 50 wt. % of polyisobutenyl succinic anhydride-polyamine adduct (having a ratio of about 1.1 succinic anhydride moieties per polyisobutylene molecule of about 2,200 M_n , the polyamine being a polyethylene polyamine containing from about 5 to 7 nitrogens), said oil solution containing about 1 wt. % nitrogen and having a viscosity at 100° C of 729 centistokes, and 10 grams of EPON Resin 828 (an epoxy resin available from Shell Oil Company which is a diglycidyl polyether of 2,2-bis(4-hydroxyphenyl) propane having an average molecular weight of about 380 and a weight per epoxy of about 180-195) is heated under nitrogen at 150° C for 5 hours. To this reaction mixture are added 125 grams of S150N mineral oil. This mixture is blended until substantially homogeneous. This resultant solution is a S150N mineral oil solution of the dispersant, said oil solution having a viscosity at 100° C of 395.1 centistokes ($\text{m}^2/\text{s} \times 10^6$).

EXAMPLE 6

The procedure of Example 5 is repeated except that 15 grams of the EPON Resin 828 are utilized. The resultant S150N oil solution of the dispersant has a viscosity at 100° C of 513.0 centistokes ($\text{m}^2/\text{s} \times 10^6$).

EXAMPLE 7

The procedure of Example 5 is repeated except that 20 grams of the EPON Resin 828 are utilized. The resultant S150N oil solution of the dispersant has a viscosity at 100° C of 707.1 centistokes ($\text{m}^2/\text{s} \times 10^6$).

EXAMPLE 8

The procedure of Example 5 is repeated except that 25 grams of the EPON Resin 828 are utilized. The resultant S150N oil solution of the dispersant has a viscosity at 100° C of 1015 centistokes ($\text{m}^2/\text{s} \times 10^6$).

Various aforescribed polyisobutenyl succinic anhydride-polyamine adduct reactants, which are the precursors of the instant dispersants, as well as various dispersants of the instant invention described above are tested to determine their sludge inhibition (via the SIB test) and varnish inhibition (via the VIB test) properties, as described below, and the results are set forth in Tables I - II.

The SIB test has been found, after a large number of evaluations, to be an excellent test for assessing the dispersing power of lubricating oil dispersant additives.

The medium chosen for the SIB test was a used crankcase mineral lubricating oil composition having an original viscosity of about 325 SUS (0.07 Pas) at 38° C that had been used in a taxicab that was driven generally for short trips only, thereby causing a buildup of a high concentration of sludge precursors. The oil that was used contained only a refined base mineral lubricating oil, a viscosity index improver, a pour point depressant and zinc dialkyldithiophosphate anti-wear additive. The oil contained no sludge dispersant. A quantity of such used oil was acquired by draining and refilling the taxicab crankcase at 1000-2000 mile intervals.

The SIB test is conducted in the following manner: the aforesaid used crankcase oil, which is milky brown in color, is freed of sludge by centrifuging for one hour at about 39,000 gravities (gs.) (3.8×10^5 m/s²). The resulting clear bright red supernatant oil is then decanted from the insoluble sludge particles thereby separated out. However, the supernatant oil still contains oil-soluble sludge precursors which on heating under the conditions employed by this test will tend to form additional oil-insoluble deposits of sludge. The sludge inhibiting properties of the additives being tested are determined by adding to portions of the supernatant used oil, a small amount, such as 0.5, 1 or 2 weight percent, of the particular additive being tested. Ten grams of each blend being tested are placed in a stainless steel centrifuge tube and are heated at 135 °C for 16 hours in the presence of air. Following the heating, the tube containing the oil being tested is cooled and then centrifuged for about 30 minutes at room temperature at about 39,000 gs (3.8×10^5 m/s²). Any deposits of new sludge that form in this step are separated from the oil by decanting the supernatant oil and then carefully washing the sludge deposits with 25 ml of heptane to remove all remaining oil from the sludge and further centrifuging. The weight of the new solid sludge that has been formed in the test, in milligrams, is determined by drying the residue and weighing it. The results are reported as amount of precipitated sludge in comparison with the precipitated sludge of a blank not containing any additional additive, which blank is normalized to a rating of 10. The less new sludge precipitated in the presence of the additive, the lower the SIB value and the more effective is the additive as a sludge dispersant. In other words, if the additive gives half as much precipitated sludge as the blank, then it would be rated 5.0 since the blank will be normalized to 10.

The VIB test was used to determine varnish inhibition. Here, each test sample consisted of 10 grams of lubricating oil containing a small amount of the additive being tested. The test oil to which the additive is admixed is of the same type as used in the above-described SIB test. Each ten gram sample was heat soaked overnight at about 140 °C and thereafter centrifuged to remove the sludge. The supernatant fluid of each sample was subjected to heat cycling from about 150 °C to room temperature over a period of 3.5 hours at a frequency of about 2 cycles per minute. During the heating phase, gas which was a mixture of about 0.7 volume percent SO₂, 1.4 volume percent NO and balance air was bubbled through the test samples. During the cooling phase, water vapor was bubbled through the test samples. At the end of the test period, which testing cycle can be repeated as necessary to determine the inhibiting effect of any additive, the wall surface of the test flasks in which the samples were contained are visually evaluated as to the varnish inhibition. The amount of varnish imposed on the walls is rated to values of from 1 to 11 with the higher number being the greater amount of varnish, in comparison with a blank with no additive that was rated 11.

10.00 grams of SIB test oil were mixed with varying amounts of the products of the Examples as described in Tables I - II below and tested in the aforescribed SIB and VIB tests. The amounts of additives listed in Tables I - II are not the neat active ingredient but are solutions of the various polyisobutenyl succinic anhydride-polyamine adducts or dispersants of the instant invention in S150N mineral oil as described in the corresponding Examples. Thus, for example, the amount of the polyisobutenyl succinic anhydride-polyamine adduct of Example 1 added to the lubricating oil refers not to the neat polyisobutenyl succinic anhydride-polyamine adduct but to the S150N neutral mineral oil solution containing about 50 wt. % of polyisobutenyl succinic anhydride-polyamine adduct on an active ingredient basis.

Table I

Additive	Wt. % (gms) of Oil Solution of additive	SIB	VIB
PIBSA-PAM adduct of Example 4	0.5	3.37	5
Dispersant of Example 4	0.5	1.68	3

Table II

Additive	Wt. % (gms) of Oil Solution of additive	SIB	VIB
PIBSA-PAM adduct of Example 5	0.03	5.44	7
PIBSA-PAM adduct of Example 5	0.04	3.25	6
Dispersant of Example 5	0.03	4.69	8
Dispersant of Example 5	0.04	3.38	5
Additive	Wt. % (gms) of Oil Solution of additive	SIB	VIB
Dispersant of Example 6	0.03	4.25	8
Dispersant of Example 6	0.04	2.5	6
Dispersant of Example 8	0.03	4.13	6
Dispersant of Example 8	0.04	0.56	4

In Tables I and II the "PIBSA-PAM adduct of Example 4" and the "PIBSA-PAM adduct of Example 5" fall outside the scope of the present invention and are presented for comparative purposes only.

Furthermore, in Table II while the oil solution of the comparative "PIBSA-PAM adduct of Example 5" contains about 50 wt. % of active ingredient, i.e., polyisobutenyl succinic anhydride-polyamine adduct, the oil solutions of the dispersants, i.e., the reaction product of a polyepoxide and the polyisobutenyl succinic anhydride-polyamine adduct, of Examples 5, 6 and 8 are about 25% more dilute because of the added mineral oil.

Examples 9 and 10 further illustrate the dispersants of the present invention.

EXAMPLE 9

A mixture of 500 grams of S150N mineral oil solution containing about 50 wt. % polyisobutenyl succinic anhydride polyamine adduct (having a ratio of about 1.3 succinic anhydride moieties per polyisobutylene molecule of 1,300 M_n , the polyamine being a polyethylene polyamine having from about 5 to 7 nitrogens), said oil solution containing about 1.5 wt. % nitrogen and having a viscosity at 100° C of 350 centistokes, and 30 grams of EPON Resin 828 is heated, under a nitrogen blanket, at 120° C for one hour. The resultant oil solution contains the dispersant product.

EXAMPLE 10

A mixture of 500 grams of S150N mineral oil solution containing about 50 wt. % of polyisobutenyl succinic anhydride-polyamine adduct (having a ratio of about 1.2 succinic anhydride moieties per polyisobutenyl molecule of about 2,200 M_n , the polyamine being a polyethylene polyamine having from about 5 to 7 nitrogens), said oil solution containing about 1 wt. % nitrogen and having a viscosity at 100° C of 960 centistokes, and 30 grams of EPON Resin 828 is heated, under a nitrogen blanket, at 120° C for one hour. The resultant oil solution contains the dispersant product.

COMPARATIVE EXAMPLE 11

A fully formulated 10W40 crankcase motor oil is prepared containing 3.6 wt. % of the oil solution of the polyisobutenyl succinic anhydride-polyamine adduct of Example 10, together with a base oil containing an overbased sulfonate detergent, a zinc dialkyl dithiophosphate, an antioxidant, and 11.8 wt. % of an ethylene propylene copolymer viscosity index improver. This motor oil composition is tested for its viscosity characteristics at 100° C in centistokes ($m^2/s \times 10^6$), and for cold cranking properties in a Cold Cranking Simulator (CCS) according to ASTM-D-2607-72 method at -20° C for viscosity in centipoise ($Pas \times 10^3$). The results are summarized in Table III.

EXAMPLE 12

A fully formulated 10W40 crankcase motor oil is prepared substantially in accordance with the procedure of Example 11 except that the 3.6 wt.% of the oil solution of the polyisobutenyl succinic anhydride-polyamine adduct of Example 10 is replaced with 3.6 wt. % of the oil solution of the dispersant product of Example 10 and it contains 11 wt. % of the viscosity index improving ethylene-propylene

copolymer. The mineral lubricating oil in the base oil is 66.7 wt. % S150N oil and 11 wt. % S100N oil.

This motor oil composition is tested for its viscosity characteristics as in Comparative Example 11 and the results are summarized in Table III.

Table III

Formulation	KV at 100 ° C $\text{m}^2/\text{s} \times 10^6$ (cSt)	CCS at -20 ° C $\text{Pas} \times 10^3$ (cP)
Comparative Example 11	14.5	3193
Example 12	21.9	3068

It is evident from the data in Table III that despite substantial increases in kinematic viscosity of the formulation of the instant invention (Example 12) relative to that of Comparative Example 11 CCS viscosity dropped slightly. Example 12 embodies a formulation within the scope of the instant invention while Comparative Example 11 embodies a formulation falling outside the scope of the instant invention. Comparative Example 11 is presented for comparative purposes only.

The following Example 13 illustrates a borated dispersant of the instant invention.

EXAMPLE 13

A mixture of 2500 grams of S150N mineral oil solution containing about 50 wt. % of polyisobutenyl succinic anhydride-polyamine adduct (having a ratio of about 1.2 succinic anhydride moieties per polyisobutylene molecule of about 2,200 M_n , the polyamine being a polyethylene polyamine having from about 5 to 7 nitrogen atoms;) said oil solution containing about 1 wt. % nitrogen and having a viscosity at 100 ° C of 960 centistokes, 150 grams of EPON 828 resin, and 625 grams of S150N mineral oil is heated, under a nitrogen blanket, at 120 ° C for 7 hours. At the end of this 7 hour heating period an additional 375 grams of S150N mineral oil is added to the reaction mixture and the reaction mixture is heated to 163 ° C. Into this reaction mixture are charged, over a 2-hour period and under a nitrogen sparge, 37.7 grams of boric acid crystals. The reaction mixture is then stripped for 2 hours at 163 ° C at a rate of approximately 1000 cc/min. and filtered. The resultant oil solution contains 44.6 wt. % active ingredients, i.e., borated dispersant product, has a kinematic viscosity at 100 ° C of 2772 centistokes ($\text{m}^2/\text{s} \times 10^6$), and contains 0.724 wt. % nitrogen and 0.201 wt. % boron.

EXAMPLE 14

A fully formulated 10W40 crankcase motor oil is prepared containing 5 wt. % of the oil solution of the borated dispersant product of Example 13, together with a base oil containing an overbased sulfonate detergent, a zinc dialkyl dithiophosphate, an antioxidant, and 7.5 wt. % of an ethylene-propylene copolymer viscosity index improver. The mineral lubricating oil in the base oil is S140N oil.

This lubricating oil composition is tested for its viscosity characteristics as in comparative Example 11 and the results are summarized in Table IV. This lubricating oil composition is also tested in a Caterpillar 1-H2 test, but for 120 hours rather than the full 480 hour test described in ASTM Document for Single Cylinder Engine Test for Crankcase Lubricants, Caterpillar 1-H2 Test Method, Part 1, STP 509A. This test evaluates the ability of diesel lubricants to curtail accumulation of deposits on the piston while operating in high severity diesel engines. The results are summarized in Table V.

COMPARATIVE EXAMPLE 15

A fully formulated 10W40 crankcase oil is prepared substantially in accordance with the procedure of Example 14 except that the 5 wt. % of the oil solution of the borated dispersant product of Example 13 is replaced with 5 wt. % of an oil solution (containing about 50 wt. % active ingredients) of a conventional borated dispersant (a borated polyisobutenyl succinic anhydride-polyamine adduct having a ratio of about 1.2 succinic anhydride moieties per polyisobutylene molecule of about 2,200 M_n , the polyamine being a polyethylene polyamine having from about 5 to 7 nitrogens), and it contains 10.4 wt. % of the ethylene-propylene copolymer, viscosity index improver, and the mineral lubricating oil in the base oil is S130N oil.

This lubricating oil composition is tested for its viscosity characteristics as in Comparative Example 11 and in a Caterpillar 1-H2 test and the results are summarized in Tables IV and V respectively.

TABLE IV

Example No.	Kv at 100 °C m ² /s x 10 ⁶ (cSt)	CCS at -20 °C Pas x 10 ³ (CP)
Example 14	14.00	3152
Comparative Example 15	13.89	3225

TABLE V

Caterpillar 1-H2 Test - 120 Hours 10W40 Lubricants		
	Example 14	Comparative Example 15
Weighed Total Demerits	75.7	150.4
Top Groove Fill	35	49

It is evident from the data in Table IV that despite an increase in kinematic viscosity of the lube oil formulation containing the dispersant of the instant invention (Example 14) relative to that of a lube oil formulation containing a conventional prior art dispersant (Comparative Example 15), CCS viscosity dropped slightly. This was achieved with the lube oil formulation of Example 14 containing less viscosity index improver (7.5 wt. %) and a higher viscosity oil (S140N) relative to the lube oil formulation of Comparative Example 15 (10.4 wt. % VI improver and S130N oil).

The data in Table V shows that the dispersant of the present invention was superior in Top Groove Fill and Weighed Total Demerits, i.e., deposits, compared with the known conventional dispersant of Comparative Example 15.

It is to be understood that the examples present in the foregoing specification are merely illustrative of this invention and are not intended to limit it in any manner.

Claims

- The use in an oleaginous composition of an oil soluble dispersant additive comprising the reaction products of:
 - at least one nitrogen or ester containing adduct selected from:
 - oil soluble amides, imides, esters or mixtures thereof of long chain hydrocarbyl substituted mono- and dicarboxylic acids or their anhydrides,
 - long chain hydrocarbon having a polyamine attached directly thereto obtainable by displacing the halogen group of a halogenated long chain hydrocarbon with a alkylene polyamine, and
 - Mannich condensation product formed by condensing a long chain hydrocarbyl substituted hydroxyaromatic compound with an aldehyde and a polyalkylene amine,
 wherein said adduct contains at least one reactive group selected from reactive amino groups and reactive hydroxyl groups, and
 wherein said long chain hydrocarbyl substituent in (i), (ii) and (iii) is a polymer comprising at least a major molar amount of a polymerised C₂ to C₁₈ monoolefin, said polymer having a number average molecular weight of from 500 to 6,000; and
 - at least one polyepoxide.
- The use according to claim 1 wherein (1)(i) is an ester of a polyhydric alkanol containing from 3 to 15 carbon atoms and at least 3 hydroxyl groups.
- The use according to claim 1 wherein (1)(i) is an acylated nitrogen derivative of long chain hydrocarbyl substituted dicarboxylic acid material containing at least one reactive amino group.
- The use according to claim 3 wherein said reactive amino is a secondary group.
- The use according to claim 3 or claim 4, wherein (1) (i) is comprised of the reaction products of (a) at least one polyamine containing at least two reactive amino groups selected from primary amino groups and secondary amino groups, and (b) at least one long chain hydrocarbyl substituted dicarboxylic

acylating material.

6. The use according to claim 5 wherein (1)(i)(b) is a hydrocarbyl substituted C₄ to C₁₀ monounsaturated dicarboxylic acid producing material formed by reacting at least one olefin polymer of C₂ to C₈ monoolefin and a C₄ to C₁₀ alpha-beta monounsaturated acid producing material.
7. The use according to claim 6 wherein said C₄ to C₁₀ monounsaturated acid producing material is maleic anhydride.
8. The use according to claim 6 wherein the hydrocarbyl substituted dicarboxylic acylating material is a polyalkenyl succinic anhydride.
9. The use according to claim 8, in which the polyalkenyl group is a polybutenyl or polyisobutenyl group or a mixture thereof.
10. The use according to claim 8 or claim 9, wherein the polyalkenyl substituted succinic anhydride has a functionality of from 0.7 to 2.0.
11. The use according to any of claims 8, 9 or claim 10 wherein said hydrocarbyl has a number average molecular weight of 800 to 2,500.
12. The use according to any of claims 1 to 11 wherein said polyepoxide contains at least two oxirane rings joined by hydrocarbon moieties, substituted hydrocarbon moieties, hydrocarbon moieties containing at least one hetero atom or groups, or substituted hydrocarbon moieties containing at least one hetero atom or group.
13. The use according to claim 12 wherein said hydrocarbon moieties are selected from alkylene, cycloalkylene, alkenylene, arylene, aralkenylene, and alkarylene radicals.
14. The use according to claim 12 or claim 13 wherein the substituent groups present on the hydrocarbon moieties and the hetero atoms or groups present in the hydrocarbon chain are substantially inert or unreactive at ambient conditions with the oxirane rings of the polyepoxide.
15. The use according to claim 12 wherein said polyepoxide contains at least two oxirane rings wherein one oxirane ring carbon atom is bonded to two hydrogen atoms.
16. The use according to claim 15 wherein the second oxirane ring carbon atom is bonded to a hydrogen atom.
17. An oleaginous composition comprising:
 - (A) major amount of an oleaginous material selected from the group consisting of fuels and lubricating oil; and
 - (B) a minor amount of an oil soluble dispersant additive as defined in any of claims 1 to 16.
18. The composition according to claim 17 which is an additive concentrate comprising from 5 to 70 wt. % of oleaginous material (A) and 20 to 95 wt. % of (B), based on the total composition.

Patentansprüche

1. Verwendung eines öllöslichen Dispergiermitteladditivs in einer öligen Zusammensetzung, wobei das Additiv die Reaktionsprodukte von:
 - (1) mindestens einem Stickstoff oder Ester enthaltenden Addukt ausgewählt aus:
 - (i) öllöslichen Amiden, Imiden, Estern oder Mischungen derselben von mit langkettigem Kohlenwasserstoff substituiertem Mono- und Dicarbonsäuren oder deren Anhydriden,
 - (ii) langkettigem Kohlenwasserstoff mit direkt daran gebundenem Polyamin, der erhältlich ist durch Austausch der Halogengruppe eines halogenierten langkettigen Kohlenwasserstoffs durch ein Polyalkylenpolyamin, und

- (iii) Mannichkondensationsprodukt, das durch Kondensation einer mit langkettigem Kohlenwasserstoff substituierten hydroxyaromatischen Verbindung mit einem Aldehyd und einem Polyalkylenamin gebildet worden ist,
wobei das Addukt mindestens eine reaktive Gruppe ausgewählt aus reaktiven Aminogruppen und reaktiven Hydroxylgruppen enthält und
der langkettige Kohlenwasserstoffsubstituent (i), (ii) und (iii) ein Polymer ist, das mindestens eine größere molare Menge eines polymerisierten C₂- bis C₁₈-Monoolefins umfaßt und ein durchschnittliches zahlenmäßiges Molekulargewicht von 500 bis 6 000 aufweist, und
(2) mindestens einem Polyepoxid umfaßt.
2. Verwendung nach Anspruch 1, bei der (1) (i) ein Ester eines mehrwertigen Alkanols ist, das 3 bis 15 Kohlenstoffatome und mindestens 3 Hydroxylgruppen enthält.
 3. Verwendung nach Anspruch 1, bei der (1) (i) ein acyliertes Stickstoffderivat von mit langkettigem Kohlenwasserstoff substituiertem Dicarbonsäurematerial ist, das mindestens eine reaktive Aminogruppe enthält.
 4. Verwendung nach Anspruch 3, bei der die reaktive Aminogruppe eine sekundäre Gruppe ist.
 5. Verwendung nach Anspruch 3 oder Anspruch 4, bei der (1) (i) das Reaktionsprodukt von (a) mindestens einem Polyamin, das mindestens zwei reaktive Aminogruppen ausgewählt aus primären Aminogruppen und sekundären Aminogruppen enthält, und (b) mindestens einem mit langkettigem Kohlenwasserstoff substituierten Dicarbonsäureacylierungsmaterial umfaßt.
 6. Verwendung nach Anspruch 5, bei der (1) (i) (b) ein mit Kohlenwasserstoff substituierte monoungesättigte C₄- bis C₁₀-Dicarbonsäure produzierendes Material ist, das durch Umsetzung mindestens eines Olefinpolymers aus C₂- bis C₈-Monoolefin mit einem α - β -monoungesättigte C₄- bis C₁₀-Säure produzierenden Material gebildet wird.
 7. Verwendung nach Anspruch 6, bei dem das monoungesättigte C₄- bis C₁₀-Säure produzierende Material Maleinsäureanhydrid ist.
 8. Verwendung nach Anspruch 6, bei der das mit Kohlenwasserstoff substituierte Dicarbonsäureacylierungsmaterial ein Polyalkenylbernsteinsäureanhydrid ist.
 9. Verwendung nach Anspruch 8, bei der die Polyalkenylgruppe eine Polybutenyl- oder Polyisobutenylgruppe oder eine Mischung derselben ist.
 10. Verwendung nach einem der Ansprüche 8, 9 oder 10, bei der das Polyalkenyl substituierte Bernstein-säureanhydrid eine Funktionalität von 0,7 bis 2,0 aufweist.
 11. Verwendung nach Anspruch 10, bei der der Kohlenwasserstoff ein durchschnittliches zahlenmäßiges Molekulargewicht von 800 bis 2 500 aufweist.
 12. Verwendung nach einem der Ansprüche 1 bis 11, bei der das Polyepoxid mindestens zwei Oxiranringe enthält, die durch Kohlenwasserstoffreste, substituierte Kohlenwasserstoffreste, Kohlenwasserstoffreste, die mindestens ein Heteroatom oder eine Heterogruppe enthalten, oder substituierte Kohlenwasserstoffreste, die mindestens ein Heteroatom oder eine Heterogruppe enthalten, verbunden sind.
 13. Verwendung nach Anspruch 12, bei der die Kohlenwasserstoffreste ausgewählt sind aus Alkylen-, Cycloalkylen-, Alkenylen-, Arylen-, Alkarylen- und Aralkenylenresten.
 14. Verwendung nach Anspruch 12 oder Anspruch 13, bei der die an den Kohlenwasserstoffresten vorhandenen Substituentengruppen und die in der Kohlenwasserstoffkette vorhandenen Heteroatome oder Heterogruppen unter Umgebungsbedingungen gegenüber den Oxiranringen des Polyepoxids im wesentlichen inert oder unreaktiv sind.

15. Utilisation selon la revendication 12, dans laquelle le polyépoxyde contient au moins deux cycles oxirane, dans lequel un atome de carbone du cycle oxirane est lié à deux atomes d'hydrogène.

16. Utilisation selon la revendication 15, dans laquelle le deuxième atome de carbone du cycle oxirane est lié à un atome d'hydrogène.

17. Composition, comprenant :

(A) une plus grande quantité d'un matériau huileux choisi parmi les combustibles et les huiles lubrifiantes, et

(B) une plus petite quantité d'un additif dispersant soluble dans les huiles, tel que défini dans l'une des revendications 1 à 16.

18. Composition selon la revendication 17, dans laquelle l'additif est une solution aqueuse, dans laquelle la composition comprend de 5 à 70 % en poids de matériau (A) et de 20 à 95 % en poids de (B).

Revendications

1. Utilisation, dans une composition oléagineuse, d'un additif dispersant soluble dans les huiles, comprenant les produits de réaction :

(1) d'au moins un produit d'addition contenant de l'azote ou un ester, choisi entre :

(i) des amides, imides, esters ou mélanges de ces composés, solubles dans les huiles, d'acides mono- et dicarboxyliques à substituant hydrocarbyle à longue chaîne ou de leurs anhydrides,

(ii) un hydrocarbure à longue chaîne auquel est attachée directement une polyamine, pouvant être obtenu par déplacement du groupe halogéné d'un hydrocarbure halogéné à longue chaîne avec une polyamine, et

(iii) un produit de condensation de Mannich formé par condensation d'un composé hydroxyaromatique à substituant hydrocarbyle à longue chaîne avec un aldéhyde et une polyalkylène-amine, ce produit d'addition contenant au moins un groupe réactif choisi entre des groupes amino réactifs et des groupes hydroxyle réactifs, et

le substituant hydrocarbyle à longue chaîne présent dans (i), (ii) et (iii) étant un polymère comprenant au moins une quantité molaire dominante d'une monooléfine en C_2 à C_{18} polymérisée, ce polymère ayant une moyenne numérique du poids moléculaire de 500 à 6000 ; et

(2) d'au moins un polyépoxyde.

2. Utilisation selon la revendication 1, dans laquelle (1)(i) est un ester d'un alcool polyhydroxylique contenant 3 à 15 atomes de carbone et au moins 3 groupes hydroxyle.

3. Utilisation selon la revendication 1, dans laquelle (1)(i) est un dérivé azoté acylé d'une matière acide dicarboxylique à substituant hydrocarbyle à longue chaîne contenant au moins un groupe amino réactif.

4. Utilisation selon la revendication 3, dans laquelle le groupe amino réactif est un groupe secondaire.

5. Utilisation selon la revendication 3 ou la revendication 4, dans laquelle (1)(i) est constitué des produits de réaction (a) d'au moins une polyamine contenant au moins deux groupes amino réactifs choisis entre des groupes amino primaires et des groupes amino secondaires et (b) d'au moins une matière acylante dicarboxylique à substituant hydrocarbyle à longue chaîne.

6. Utilisation selon la revendication 5, dans laquelle (1)(i)(b) est une matière produisant un acide dicarboxylique mono-insaturé en C_4 à C_{10} à substituant hydrocarbyle formée par réaction d'au moins un polymère oléfinique de monooléfine en C_2 à C_8 et d'une matière produisant un acide à mono-insaturation alpha, bêta en C_4 à C_{10} .

7. Utilisation selon la revendication 6, dans laquelle la matière produisant un acide mono-insaturé en C_4 à C_{10} est l'anhydride maléique.

8. Utilisation selon la revendication 6, dans laquelle la matière acylante dicarboxylique à substituant hydrocarbyle est un anhydride polyalcénylsuccinique.

9. Utilisation suivant la revendication 8, dans laquelle le groupe polyalcényle est un groupe polybutényle ou polyisobutényle ou un mélange des deux.
- 5 10. Utilisation suivant la revendication 8 ou la revendication 9, dans laquelle l'anhydride succinique à substituant polyalcényle a une fonctionnalité de 0,7 à 2,0.
11. Utilisation suivant l'une quelconque des revendications 8, 9 ou 10, dans laquelle le groupe hydrocarbyle a une moyenne numérique du poids moléculaire de 800 à 2500.
- 10 12. Utilisation suivant l'une quelconque des revendications 1 à 11, dans laquelle le polyépoxyde contient au moins deux noyaux d'oxirane réunis par des groupements hydrocarbonés, des groupements hydrocarbonés substitués, des groupements hydrocarbonés contenant au moins un hétéroatome ou un groupe hétéroatomique, ou des groupements hydrocarbonés substitués contenant au moins un hétéroatome ou un groupe hétéroatomique.
- 15 13. Utilisation suivant la revendication 12, dans laquelle les groupements hydrocarbonés sont choisis entre des radicaux alkylène, cycloalkylène, alcénylène, arylène, aralcénylène et alkarylène.
- 20 14. Utilisation suivant la revendication 12 ou la revendication 13, dans laquelle les groupes substitués présents sur les groupements hydrocarbonés et les hétéroatomes ou les groupes hétéroatomiques présents dans la chaîne hydrocarbonée sont principalement inertes ou non réactifs dans les conditions ambiantes vis-à-vis des noyaux d'oxirane du polyépoxyde.
- 25 15. Utilisation suivant la revendication 12, dans laquelle le polyépoxyde contient au moins deux noyaux d'oxirane, où un atome de carbone de noyau d'oxirane est lié à deux atomes d'hydrogène.
16. Utilisation suivant la revendication 15, dans laquelle le second atome de carbone du noyau d'oxirane est lié à un atome d'hydrogène.
- 30 17. Composition oléagineuse, comprenant :
(A) une quantité dominante d'une matière oléagineuse choisie dans le groupe comprenant des combustibles et une huile lubrifiante ; et
(B) une quantité secondaire d'un additif dispersant soluble dans les huiles tel que défini dans l'une quelconque des revendications 1 à 16.
- 35 18. Composition suivant la revendication 17, qui est un concentré d'additif comprenant 5 à 70 % en poids de matière oléagineuse (A) et 20 à 95 % en poids de (B) sur la base de la composition totale.

40

45

50

55