

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 321 214
A1**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 88311831.7

(51) Int. Cl.⁴: H01R 43/01

(22) Date of filing: 14.12.88

(30) Priority: 15.12.87 US 132310


(43) Date of publication of application:
21.06.89 Bulletin 89/25(84) Designated Contracting States:
DE FR GB IT NL(71) Applicant: AMP INCORPORATED
441 Friendship Road
Harrisburg, PA 17105(US)

(72) Inventor: Brown, Christopher Kingsley
302 North 17th Street
Camp Hill Pennsylvania 17011(US)
Inventor: Moyer, Carl Lawrence
2407 Fairview Avenue
Mt. Penn Pennsylvania 19606(US)
Inventor: Shipe, Joanne Eileen
6186 Spring Knoll Drive
Harrisburg Pennsylvania 17111(US)
Inventor: Walter, Herman David
441 Valley Street
Marysville Pennsylvania 17053(US)

(74) Representative: Gray, Robin Oliver et al
BARON & WARREN 18 South End Kensington
London W8 5BU(GB)

(54) Cable harness manufacturing and electrical testing system.

(57) Method and apparatus for the simultaneous manufacturing and testing of a cable harness assembly having one, or a plurality of spaced apart connectors, of the insulation displacement type, terminated to a planar multi-conductor cable (104). The system can be programmed to cut or shear the cable (104) immediately after a test thereof fails to verify an appropriately terminated connector or continuity in the cable (104), or after the cable harness assembly length is reached. By such a system, a minimum of cable (104) is lost to scrap due to the failed electrical testing thereof.

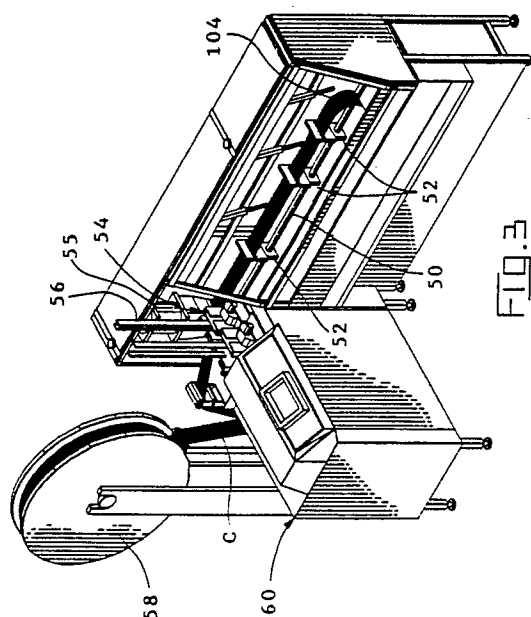

EP 0 321 214 A1

CABLE HARNESS MANUFACTURING AND ELECTRICAL TESTING SYSTEM

This invention is directed to apparatus and the method for applying one or more connector assemblies with insulation displacement terminals to planar multi-conductor cable, while simultaneously testing such terminals and cable for short and/or open circuits, and continuity within said cable.

The present invention relates to a system for producing a cable harness assembly, and to the electrical testing thereof. Cable harness assembly apparatus for applying connectors having insulation displacement terminals (IDC) to planar, multi-conductor cable are well known. U.S. Patent No. 4,570,326 to Meyer et al teaches such cable harness assembly apparatus. The apparatus thereof is of the type comprising a workstation with a press having a termination ram and a plurality of connector receiving fixtures including a lead fixture which receives the connector to which the cable is first terminated. The fixtures are mounted to a frame at predetermined intervals, where preassembled connectors of the type disclosed in U.S. Patent Nos. 4,359,257 to Lopinski et al and 4,410,229 to Stephenson, are placed in such fixtures, and the cable is threaded through the connectors before advancing the frame through the workstation, stopping the fixtures sequentially thereat to terminate the cable to the connectors. One disadvantage of such apparatus is that it is cumbersome and not well suited for automation.

A system more suitable for automation is taught in U.S. Patent No. 4,682,391 to Hall, Jr. et al. The system thereof includes a plurality of stop means to control the connector fixtures into and out of the workstation in which the connector terminations occur. The various stop means are interlocked with different operations, i.e. connector termination, cable shearing, etc. Thus, such system is more readily adapted to automation.

U.S. Patent No. 4,110,880 to Peppler et al represents an early effort to apply electrical testing in conjunction with harness making. As more clearly illustrated in the sequential steps of assembly of Figures 5A through 5I of the patent, a measured length of flat flexible cable is terminated at its respective ends and tested for shorts and continuity between the two end connectors. If a positive readout is obtained, covers are applied to the end connectors to produce a completed cable harness assembly.

Such testing system reveals a number of obvious disadvantages. For example, as a result of the step of first preparing measured lengths of cable, such entire length is lost if a short is detected during testing. Thus, this system can be

costly from a material standpoint. Further, the operation to test a single cable assembly can be quite time consuming. The sequence of steps shows considerable back and forth movement. Briefly, the first end connector is crimped by means of a press, then tested. The second end connector is then moved under such press for crimping and testing. If positive readouts are obtained, the first end is then returned to the press for application of a cover to the crimped connector. Such is repeated for the second connector. In an age of high speed automation, such a system is unacceptable.

The present invention provides for an efficient system for terminating and testing planar multi-conductor cable, which is fast, automated, and versatile. The advantages of such a system will become apparent in the description which follows, particularly when read in conjunction with the accompanying drawings. This invention is directed to apparatus, and to the method of using same, to manufacture and test a cable harness assembly in which at least one of an insulation displacement type connector is terminated to a planar multi-conductor cable. The manufacturing and testing hereof are coordinated such that said cable is cut after the leading connector has been terminated and prior to the final connector termination, if a plurality of connectors are used in the harness assembly, or after the testing thereof fails to verify an appropriately terminated connector, or continuity, such as between terminated connectors, whichever situation shall first occur. By this system, a minimum of cable is used prior to a negative test. This is in contrast to prior art systems in which a full length of cable is cut before testing thereof is conducted.

The invention will now be described by way of example with reference to the accompanying drawings, in which:

FIGURE 1 is a perspective view of a cable harness assembly produced by the method of this invention on the apparatus hereof;

FIGURE 2 is a perspective view of a preferred preassembled connector used in the practice of this invention to produce the cable harness assembly illustrated in Figure 1;

FIGURE 3 is a perspective view of the entire harness assembly and testing apparatus according to the present invention;

FIGURE 4 is a vertical transverse sectional view illustrating the connector loading station;

FIGURE 5 is a similar view to Figure 4, but enlarged to show further details of the connector loading station;

FIGURE 6 is a sectional view of the shear unit of this invention, showing the feeding of a cable therethrough;

FIGURE 7 is an end view and partial section of a connector module, containing the tooling inserts and a representative connector;

FIGURE 8 is a side elevation, partially in section, of an auxiliary cable support;

FIGURES 9A through 9H are a series of simplified schematic drawings illustrating the sequence of operation used in the practice of this invention; and

FIGURE 10 is a block level schematic of the electrical circuitry of the present invention, including a preferred programming sequence.

The present invention is directed to a system for the simultaneous manufacturing and testing of a cable harness assembly. More particularly, in its preferred embodiment such invention relates to the production of assembled electrical connectors on a planar multi-conductor cable where a series of insulation displacement connectors are attached at spaced intervals along such cable in daisy chain fashion. An exemplary assembly according to this invention is illustrated in Figure 1. The assembly 10, which for a typical application may be about twelve inches in length, preferably contains end connectors 12,14, and optionally one or more intermediate connectors 16,16', the construction of which is essentially identical.

In the operation of this invention, a preassembled connector, as shown in Figure 2, is preferably used. Such connector is more fully described in U.S. Patent No. 4,410,229, the disclosure of which is incorporated herein by reference. Briefly, such connector comprises a cover 18 and a housing portion or base 20, both of which are formed of rigid insulative material, such as plastic. The base has a plurality of terminals 22 mounted in terminal passages 24 extending through and communicating with the bottom surface 26. It is through such terminal passages, via bottom surface 26, that an electrical probe, to be discussed hereinafter, is brought into electrical engagement with the connector. However, the operability of this invention does not rely on this specific structure for the connector. As illustrated by the connectors 14,16 of Figure 1, the surfaces 40,42 may be characterized by a rectangularly shaped opening 44,46 into which a printed circuit board simulated probe may be inserted to verify an appropriately terminated connector.

Returning now to the embodiment illustrated in Figure 2, the cover 18 contains a like number of terminal receiving passages 28 as the base 20, each aligned to receive a respective terminal 22. In the manner of the base 20, such passages 28

extend through and communicate with the upper surface 30. The mating surface 32 of the cover 18 is scalloped 34 to receive and align the planar multi-conductor cable inserted through the opening 36. When such cable is properly aligned, termination of the cable, such as by firmly pressing the base 20 towards and against said cover 18, will cause the terminals 22 to pierce the insulation about the respective cable conductors thereby bringing each such terminal into electrical contact with its respective conductor.

A preferred apparatus to produce the cable harness assembly illustrated in Figure 1, is shown in Figure 3. Such apparatus includes a guide rail 50, extending transversely of the apparatus, a plurality of connector carrying carriages 52 movable along said rail, a work station 54, which includes among other features connector feeding units or columns 56, and a dereeler 58 for supplying planar multi-conductor cable C to the apparatus. Other features of the work station 54, such as the connector termination press and shear, will be described later.

The left portion or short leg 60 of the apparatus of Figure 3 is that part of the structure which supports the connector feed units or columns 56 on its top and houses the electrical controls.

Considering further the details of the work-station 54, as illustrated in Figure 4 and 5, it will be observed that one feature thereof is the loading of connectors for termination to the cable. The connector feeding system consists of four columns 56, each servicing one connector for the cable harness assembly. The number of columns 54 represent the maximum number of connectors for each such assembly. The connectors, stacked broad side down, are gravity fed down each column 56 to an escapement 62 at the base thereof. Such escapement 62 allows selection of the bottom connector which is pushed, such as by ram 64, over the edge 66 of the platform 68 so that the connector rotates 90 degrees (see Figure 5) and drops into the load guide 70. With the connectors, either cover up or cover down, as determined in advance for the specific cable harness assembly, a loading ram may be activated to push all connectors simultaneously into the corresponding connector module. This will all become clearer with the further discussion of such module. However, one of the features of this invention is the capability to abort the assembly process where an improperly terminated connector or open circuit is detected. Accordingly, it may not be necessary to load connectors in each module following such abortion or premature termination of operation. For such a situation, the apparatus hereof is characterized by the further capability of the selective activation of each pusher ram 64 to push the desired connector into the load

guide 70. Thereafter, such loading ram may be activated to load the empty module(s).

In automatic operations, such as the system of this invention, it is often desirable to be able to verify that various components are aligned as desired. Accordingly, photosensors may be used, one for each column 54, to verify that the connectors have dropped into the load guides to thereafter be driven by a loading ram into the connector modules and seated against locating surfaces in such modules.

The dereeler 58, shown in Figure 3, is essentially conventional in that its primary purpose is to provide an endless supply of cable C to the apparatus hereof. To achieve this result, the dereeler 58 operates in association with a pair of fixed pulleys, and a weighted dancer pulley which travels vertically between said pair to provide a loop of cable C. In operation, as the cable C is pulled into the apparatus, the dancer pulley is lifted toward said fixed pulleys. At some point or elevation, the dancer pulley activates a switch which turns on the motor of the dereeler 58. The dereeler feeds cable until the loop is full again, i.e. dancer pulley has descended to some lower point or position, and activates a turnoff switch.

The shear unit 72, another component of the work station, is shown in Figure 6. Such unit includes platform guides 74 for the cable C, driven roller 76, in cooperation with the idler roller 78, where such cooperation may be defined as a pinch roller feeder, for threading the cable between shear blades 80 and through the aligned connectors downstream of the blades 80. The driven roller 76 continues the feed thereof until the cable end is properly located in the leading connector 14. A sensor may be used to verify the completion of this stroke.

A final component of the work station 54 is the press 55 for terminating connectors shown in Figure 3. The press, conventional in construction and operation, actually consists of two presses, only one of which is operated for any given connector termination. As noted previously, the apparatus of this invention is designed to produce cable harness assemblies with connectors in one of two orientations, namely, cover up or cover down. The converse of this is housing down or housing up, respectively. Thus, for termination of a connector, only the press on the housing side of the connector is actuated and the other press acts as a back up.

The press 55 may be operated by an air cylinder, which drives a ram. Means, such as adjustable collars on a shaft, may be incorporated to limit or control the closing height of the ram, a height determined in advance to properly terminate the selected type and size of connector.

A connector module 90, which accepts and

supports tooling inserts 92 within a carriage, is shown in section in Figure 7. Each module 90 can be adapted with a variety of inserts to accept a comparable variety of connectors. The module 90 consists of two housing portions 94,96 joined by a slide 98 so that they form a C-shaped cavity to accept the connector inserts 92. The inserts 92 locate the connector 100 relative to the centerline and first position of the cable. The modules 90 can be mounted to the carriage to orient the connector cover up (housing down) or cover down (housing up). In Figure 7, the connector is oriented in a cover up position. The housing side, i.e. bottom, has provisions for mounting probes 102 for electrical checking. During the press stroke, from the connector housing side, the probes for the electrical testing thereof are inserted into the connector and locked in position. Insofar as the leading connector is concerned, this connector-probe relationship remains until there is a failure in the testing thereof, or a full workable cable harness assembly is produced.

While the electrical circuitry will be described in more detail later, it will be noted that a multi-conductor flexible cable 104 (Figure 3) is attached to the housing side of the leading connector in the lead carriage. Such cable is in electrical contact with the probes therein.

The apparatus of this invention is capable of utilizing a plurality of carriages, the function of which is to support, locate and transport a connector module 90 along the rail 50. The number of such carriages equals the maximum number of connectors, four in this exemplary showing, applied to the cable harness assembly. The carriages are mounted on the horizontal rail 50. The first or leading connector is attached to a timing belt which is driven by a stepping motor, the construction of which are well known. The intermediate and trailing connector carriages, if used, are free to slide along such rail 50.

For the start of the operation it may be convenient to consider the press location as the starting point. This is the location at which the first termination and testing is accomplished. To insure that the carriage mounted connectors are properly aligned for termination, a carriage advance gate is provided to sequentially advance such carriages into alignment with the upper and lower press. Such system includes two pins independently driven by air cylinders to allow advancing one carriage at a time to the press location.

As noted earlier, the present invention includes apparatus for making cable harness assemblies, in which the cable length may be varied significantly. In those situations where a long cable assembly is being produced, it may be necessary to provide support for the cable assembly during the manu-

facture thereof. Reference is hereby made to Figure 8 which shows an auxiliary cable support 110 for use in conjunction with the apparatus of this invention. Specifically, the support 110 is used to provide drag or support for a long cable as it is sheared, to prevent cable sag that could mislocate the cable end in the last or trailing connector. The support 110 may consist of a clamp 112 mounted on a track cable cylinder 114 parallel to the tooling modules. When a long cable is to be sheared, the clamp 112 is pivoted 116 into position with the cable between the jaws of the clamp 112, and the clamp closes (phantom position) to hold the cable. A stepper motor then moves the cable into position for the termination of the next or trailing connector. After such termination, the clamp 112 opens and pivots out of position to expose the cable.

It should be understood that other types of auxiliary cable supports may be used to provide the same support or drag as the pivotal clamp described above. For example, the jaws of a clamp may move in a direction perpendicular to the cable to capture same between such jaws. When the cable harness assembly is complete, the jaws may be relaxed and withdrawn therefrom to free the cable.

The sequence depicted in Figures 9A to 9H schematically illustrate the steps of manufacturing and testing a cable harness assembly according to a preferred practice of this invention.

In preparing for the manufacture thereof, all connectors required for one cable assembly, if multiple connectors are used, are selected and aligned beside each other in the sequence that they will have in the cable assembly. For this exemplary illustration, Figure 9A shows four such sequenced connectors in a position just prior to them rotating 90 degrees and being deposited for transfer into the connector modules. Figure 9B shows the rotated and aligned connectors.

The connectors are then inserted into their respective modules by means of the inserter 71. As shown in Figure 9C, the cable is then fed from the dereeler through the module aligned connectors until the leading end of the cable is properly located for termination in the leading connector, i.e. the connector farthest from the cable source.

The first or leading connector is terminated, Figure 9D. An electrical check is then performed for short or open circuits. Failure of this test will abort the assembly. That is, the cable is sheared or cut off and transported to a reject location. If the test is positive, i.e. no short or open circuit, the cable is advanced downstream, such as by moving the leading terminated connector, a predetermined distance. It will be understood that such distance represents the distance or length of cable between the leading connector and first intermediate con-

connector, or the end thereof for a single connector harness. As noted previously, the apparatus hereof is preferably designed to produce a cable harness assembly containing multiple connectors, i.e. one at each end, and optionally one or more intermediate connectors. However, for certain applications, only a single connector may be desired. For such a case, it is still possible to test the cable for continuity. At such downstream location, the cable is sheared. At the moment of shearing, the electrically conductive shear blade may be used as the ground connection for the continuity testing.

Returning now to the preferred multiple connector assembly, at the above noted downstream location, the first intermediate connector is terminated to the cable. A second electrical check is performed for short or open circuits, along with a check for electrical continuity between the terminated connectors. Failure of either of such electrical checks will abort the assembly as described above. This operation is repeated for each additional intermediate connector.

The final steps for the manufacture and testing of the cable harness assembly are depicted in Figures 9E and 9F. Figure 9E, for example, additionally shows the use of the auxiliary cable support to eliminate cable sag during the final termination step. With such support in position, for example, the cable is sheared and advanced into the trailing connector where such connector is terminated (Figure 9F) to the cable. A final electrical check is performed for short and open circuits, along with a final continuity check. The auxiliary cable support is then pivoted out of a supporting position to free the cable. In the situation of multiple connectors, only the leading module, with the electrical probes inserted into the terminated connector, is securely latched during the cable harness assembly operation. The remaining modules used in the assembly operation are spring loaded. Thus, to free the cable harness assembly from the apparatus, it is only necessary to withdraw such probes and unlatch the leading module. By means to be described hereinafter, it is now possible to move the harness assembly. In any case, at this juncture, the cable has been fully terminated, tested, and ready for transport to the accept/reject station.

In Figure 9G there is illustrated an ejection unit comprising a number of eject arms 120 that are adapted to sweep the assembled cable out of the modules at the end of the assembly cycle. That is, the connectors of the cable harness assembly are seated in their respective modules and are now free to slip or slide out through the opening thereof used in loading the modules. The arms are adjustable along a shaft/crank assembly 122 which is mounted above the carriage path. A bin, not illus-

trated, with a cylinder actuated door provides a suitable means for separating acceptable assemblies from rejected ones. After such ejection, the connector modules return to the work station area, as shown in Figure 9H, to begin the cycle again. Figure 10, at the right side thereof, is a simplified schematic of the electrical circuitry for the testing apparatus of this invention. Additionally, a preferred programming sequence is presented describing the operation of this invention.

Briefly, the microprocessor 130 is the control unit for the apparatus hereof. By virtue of the sequence instructions contained within a program in the microprocessor 130, instructions are transmitted to the various test probes through the output opto 132, which as used herein may comprise a signal converter, such as a transducer to convert an electrical signal to an optical signal or visa versa. Through the input opto 134, signals are transmitted to the microprocessor 130 as to the results which are being read. If such results are negative, the harness assembly process is aborted, and the assembly operation is initiated from the beginning. If the results are positive, the operation continues to the next step in the sequence.

It should be apparent from the schematic of Figure 10 that additional probes may be readily incorporated into the system of this invention. Alternatively, if only a single connector is used, the second probe would represent the continuity testing at the shear station, as discussed previously.

Claims

1. Electrical connector terminating and testing apparatus for planar multi-conductor cable, where a cable section (10) of predetermined length is terminated by at least one preassembled connector (12,14,16), where said connector consists of a housing portion (20) containing a plurality of insulation displacement terminals (22), and a cover member (18) in sliding engagement with said housing portion (20), where a first position thereof is defined by an opening (36) between said cover (18) and said housing portion (20) for receiving said cable (104), and a second position is defined by a cable terminating condition, said apparatus including a connector crimp terminating station (54) having a plurality of aligned connector supports (90,92), means (74) for guiding a cable (104) through connectors (12,14,16) which are positioned within said supports (90,92), press means (55) to effect termination of said connector (12,14,16) to said cable (104) from said first position to said second position, and means (72) for shearing said cable (104), said apparatus characterized by:
electrical testing means (102,132,134), including a

test probe (102), which is used to form an electrical continuity test circuit to determine electrical continuity for short circuits or open circuits within a terminal connector, between adjacent terminal connectors or between an end terminated connector and said cable shearing means; and

a microprocessor control unit (130), to monitor the movement of the cable (104), connector terminations (22), and said electrical testing means (102,132,134) for a positive or negative signal, where said microprocessor control unit (130) operates to guide the cable (104) through said preassembled connector (12,14,16) in said connector supports (90,92), and activates said shearing means (72) upon receiving a negative test signal.

2. The electrical connector terminating and testing apparatus according to claim 1 further characterized by means (50,52) for terminating a plurality of preassembled connectors (12,14,16) to said planar multi-conductor cable (104).

3. The electrical connector terminating and testing apparatus according to claim 2 further characterized by an arrangement (56) for gravity feeding of said connectors (12,14,16) to said connector supports (90,92).

4. The electrical connector terminating and testing apparatus according to claim 1 further characterized in that said connector supports (90,92) may comprise spring loaded modules (94,96,98) in which a connector (12,14,16) for termination to said cable may be positioned within each said module (94,96,98).

5. The electrical connector terminating and testing apparatus according to claim 4 further characterized in that each said module (94,96,98) is C-shaped and means (71) is included for inserting a connector (12,14,16) therein, and means (120,122) for removing a cable terminated connector therefrom.

6. The electrical connector terminating and testing apparatus according to claim 5 further characterized in that said means (120,122) for removing said cable terminated connector comprises a plurality of pivotal members (120,122) positioned to slide said connectors out of the opening of said C-shaped module.

7. The electrical connector terminating and testing apparatus according to claim 1 further characterized by means (110) to support said cable during the manufacture thereof.

8. The electrical connector terminating and testing apparatus according to claim 7 further characterized in that said cable support means (110) includes a pair of jaws (112) adapted to clamp said cable, and means (114,116) to move said jaws into and out of a cable clamping position.

9. A method for the simultaneous manufacturing and electrical testing of a cable harness assembly having a harness length and at least a first connector (12), of the insulation displacement type, terminated to a planar multi-conductor cable (104), including the steps of

a. feeding said cable (104) past a cable shearing station (72) and through said first connector (12),
b. terminating said first connector (12) to said cable (104),

c. testing said first connector (12) and cable (104) to verify an appropriately terminated connector, the method characterized in that:

d. if an additional connector (14,16) is needed, proceed to step e, otherwise:

(1) advance said first connector (12) and cable (104) a distance downstream from said shearing station (72), equivalent to said harness length, unless such advance has already taken place,

(2) shear said cable (104) at said shearing station (72) while simultaneously testing the sheared cable (104) to verify continuity between said first connector (12) and the cable end resulting from the shearing thereof,

(3) proceed to step a;

e. if more than one additional connector (14,16) is needed, proceed to step f, otherwise:

(1) advance said first connector (12) and cable (104) a distance downstream from said shearing station (72) equivalent to said harness length,

(2) shear said cable (104),

(3) terminate a last connector (14) to said cable (104),

(4) test said last connector (14) and cable (104) to verify an appropriately terminated connector (14),

(5) proceed to step a;

f. advance said first connector (12) and cable (104) a predetermined distance downstream from said shearing station (72),

g. terminate an additional connector (16) to said cable (72),

h. test said additional connector (16) and cable (104) to verify an appropriately terminated connector (16),


i. proceed to step e;


wherein after each said testing step, if the test fails to verify an appropriately terminated connector (12,14,16) or continuity throughout the cable (104), said cable shearing station (72) is immediately activated to cut said cable (104) in the event the cable (104) has not previously been cut, whereafter the cut failed cable harness portion is discarded.


10. The method according to claim 9 further characterized in that a plurality of said connectors (12,14,16) are applied to said cable (104).

11. The method according to claim 10 further characterized in that there is at least one intermediate connector (16) applied to said cable (104).

12. The method according to claim 9 further characterized by including the step of feeding said connectors (12,14,16) to a position just downstream from said shearing station (72).

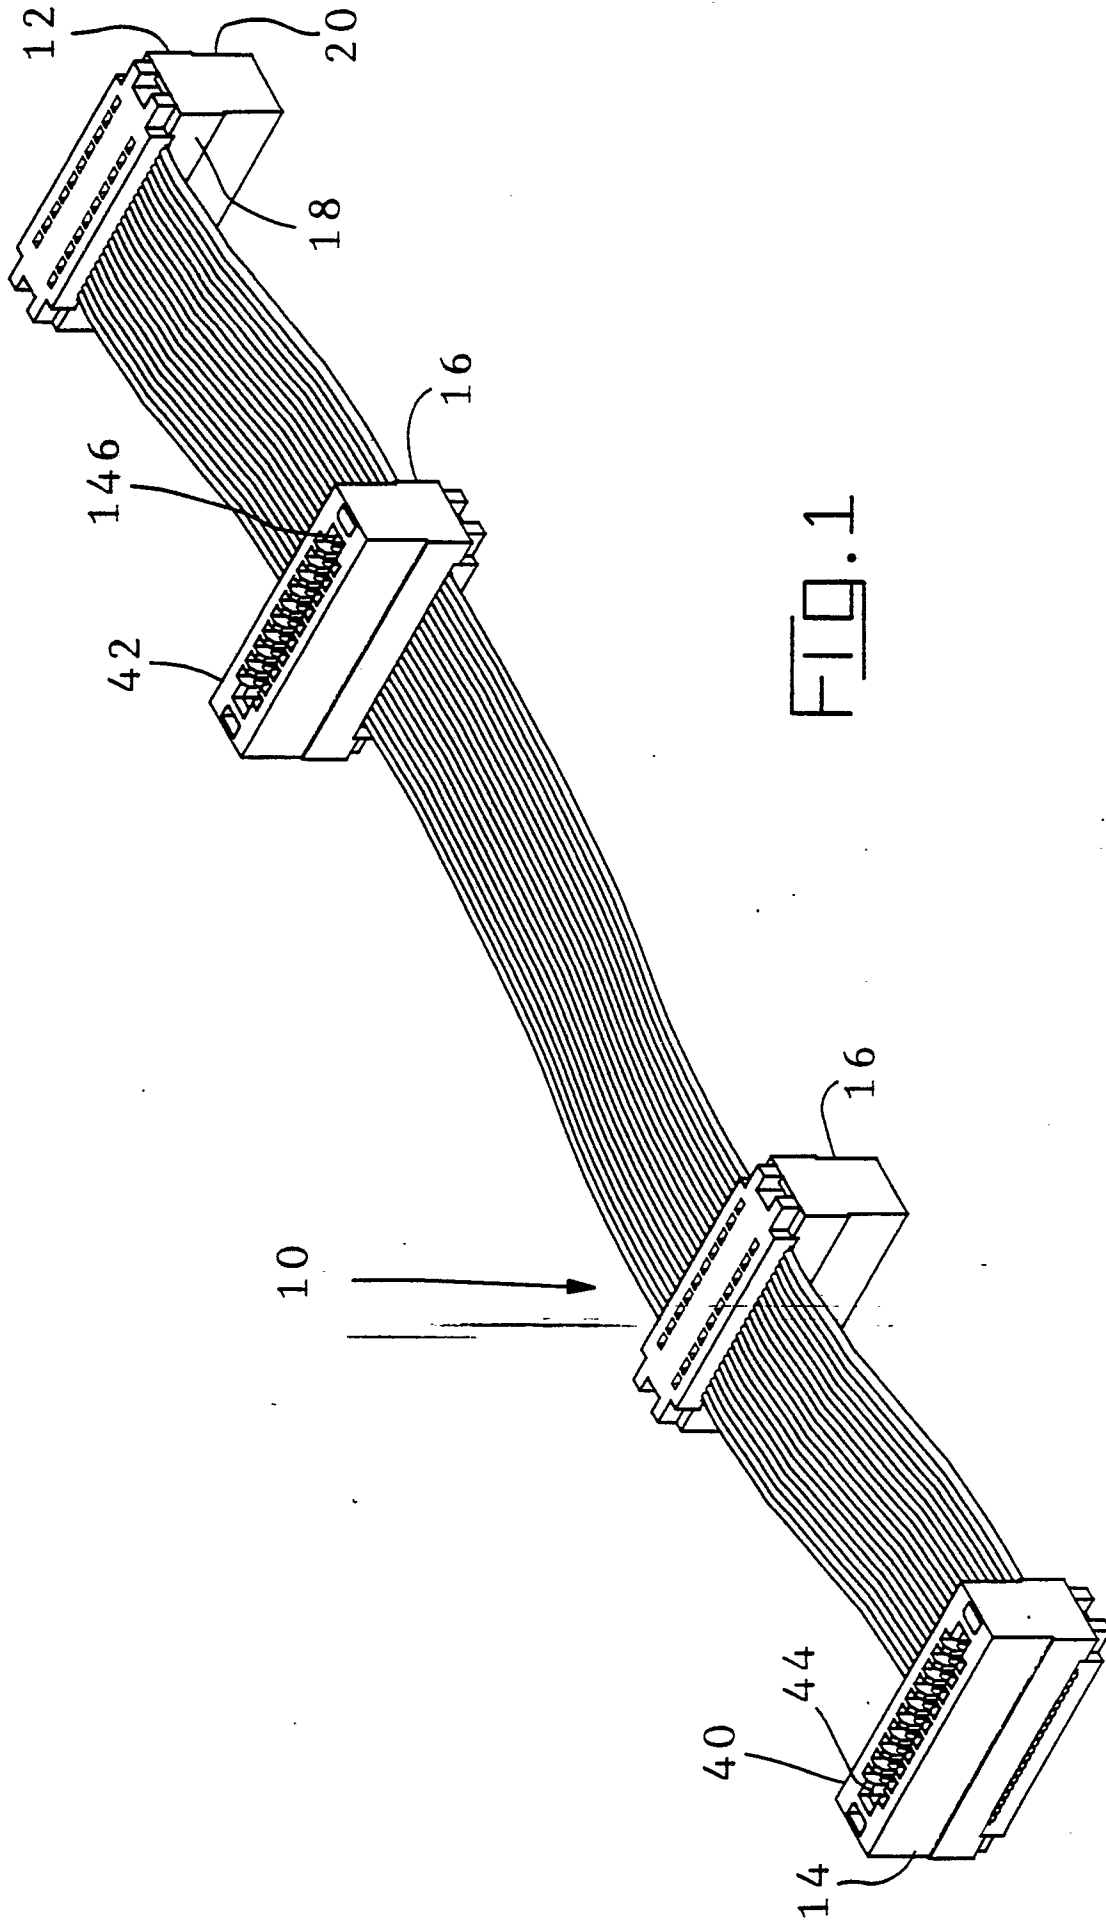

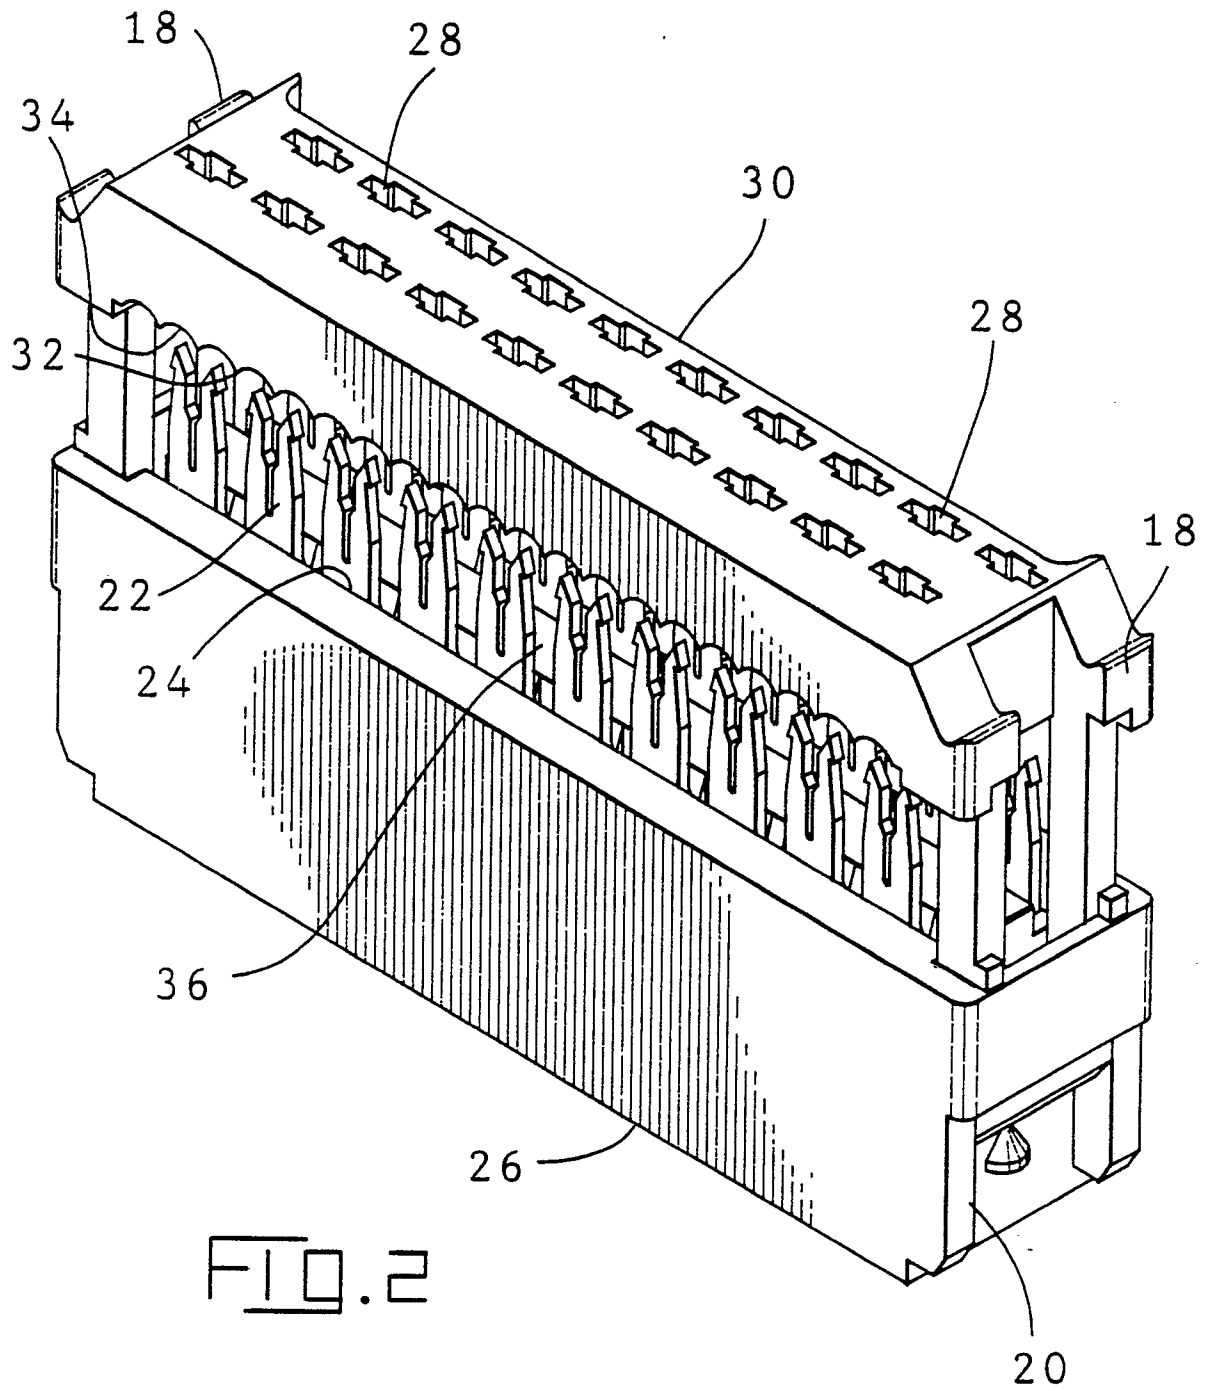

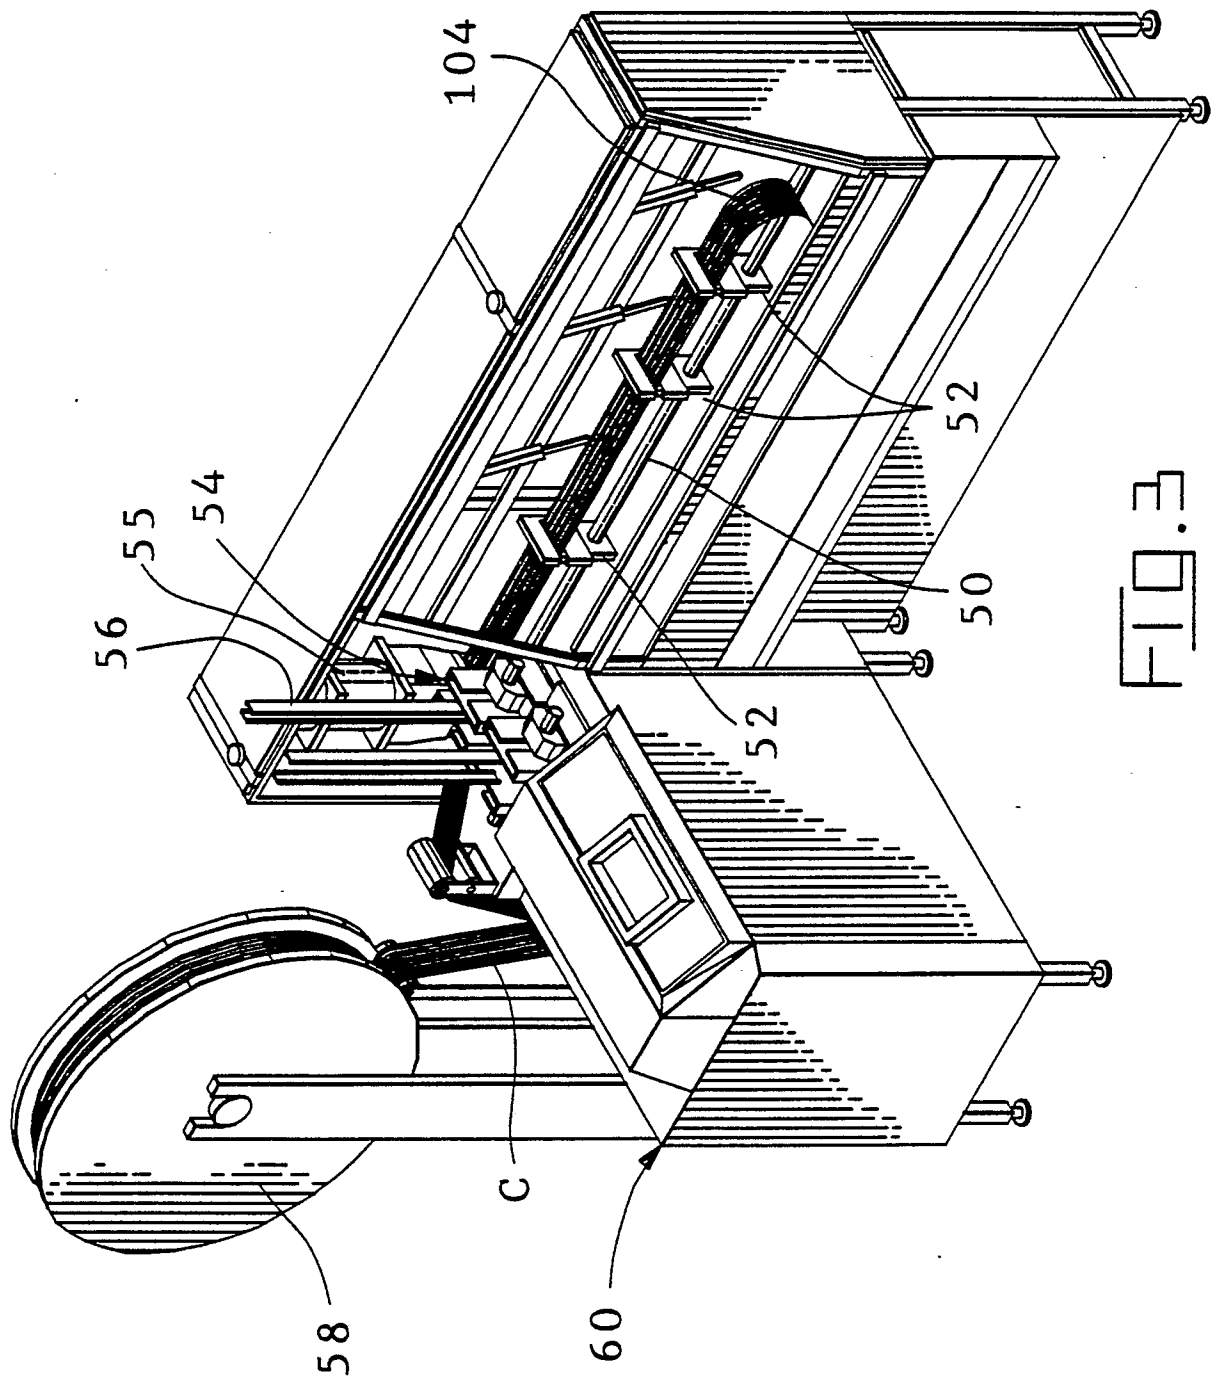

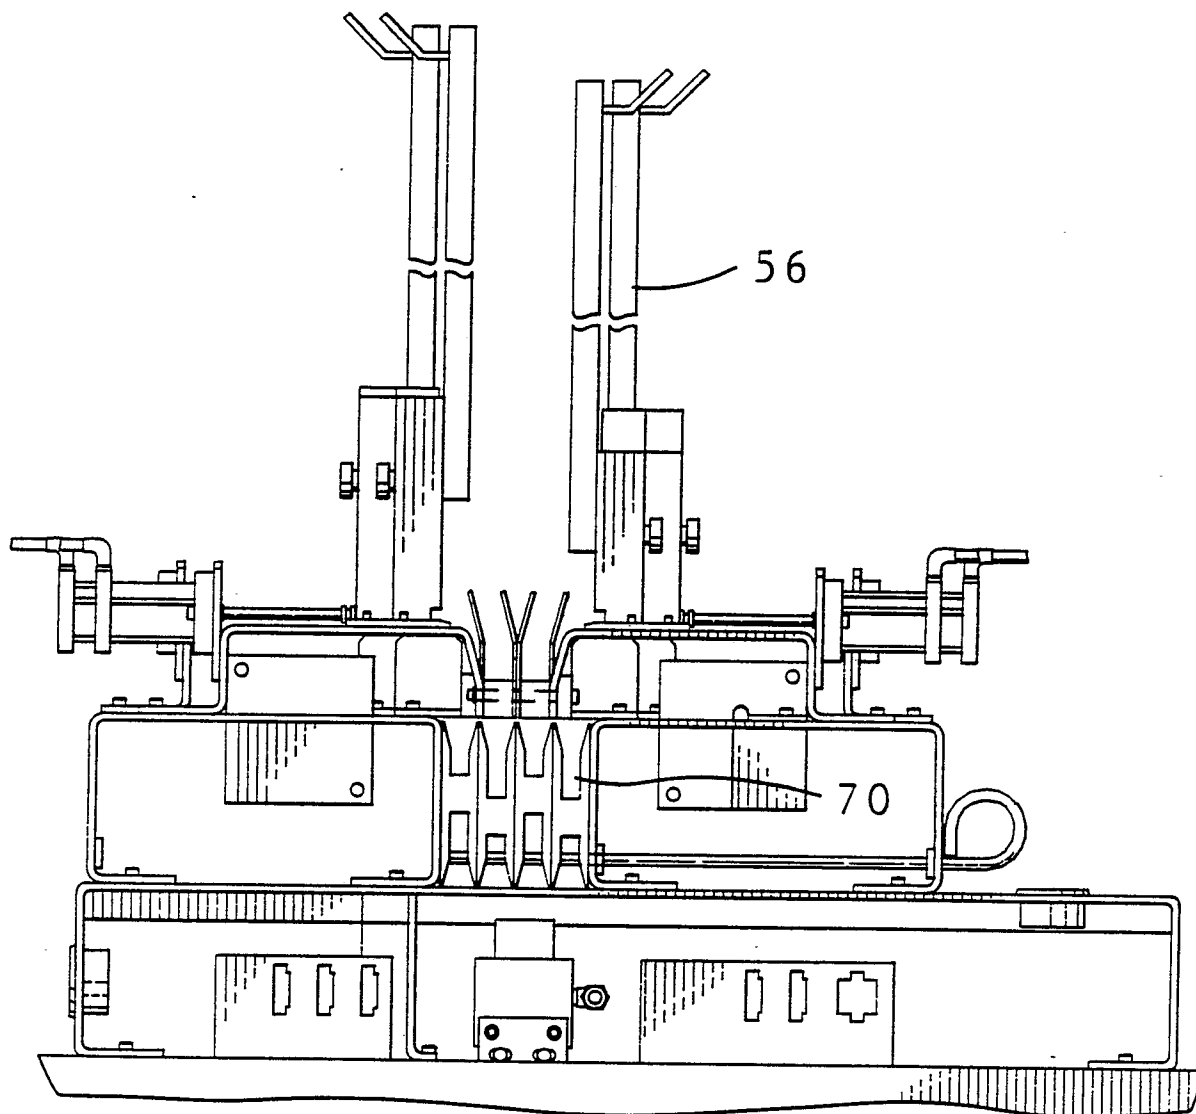


FIG. 4

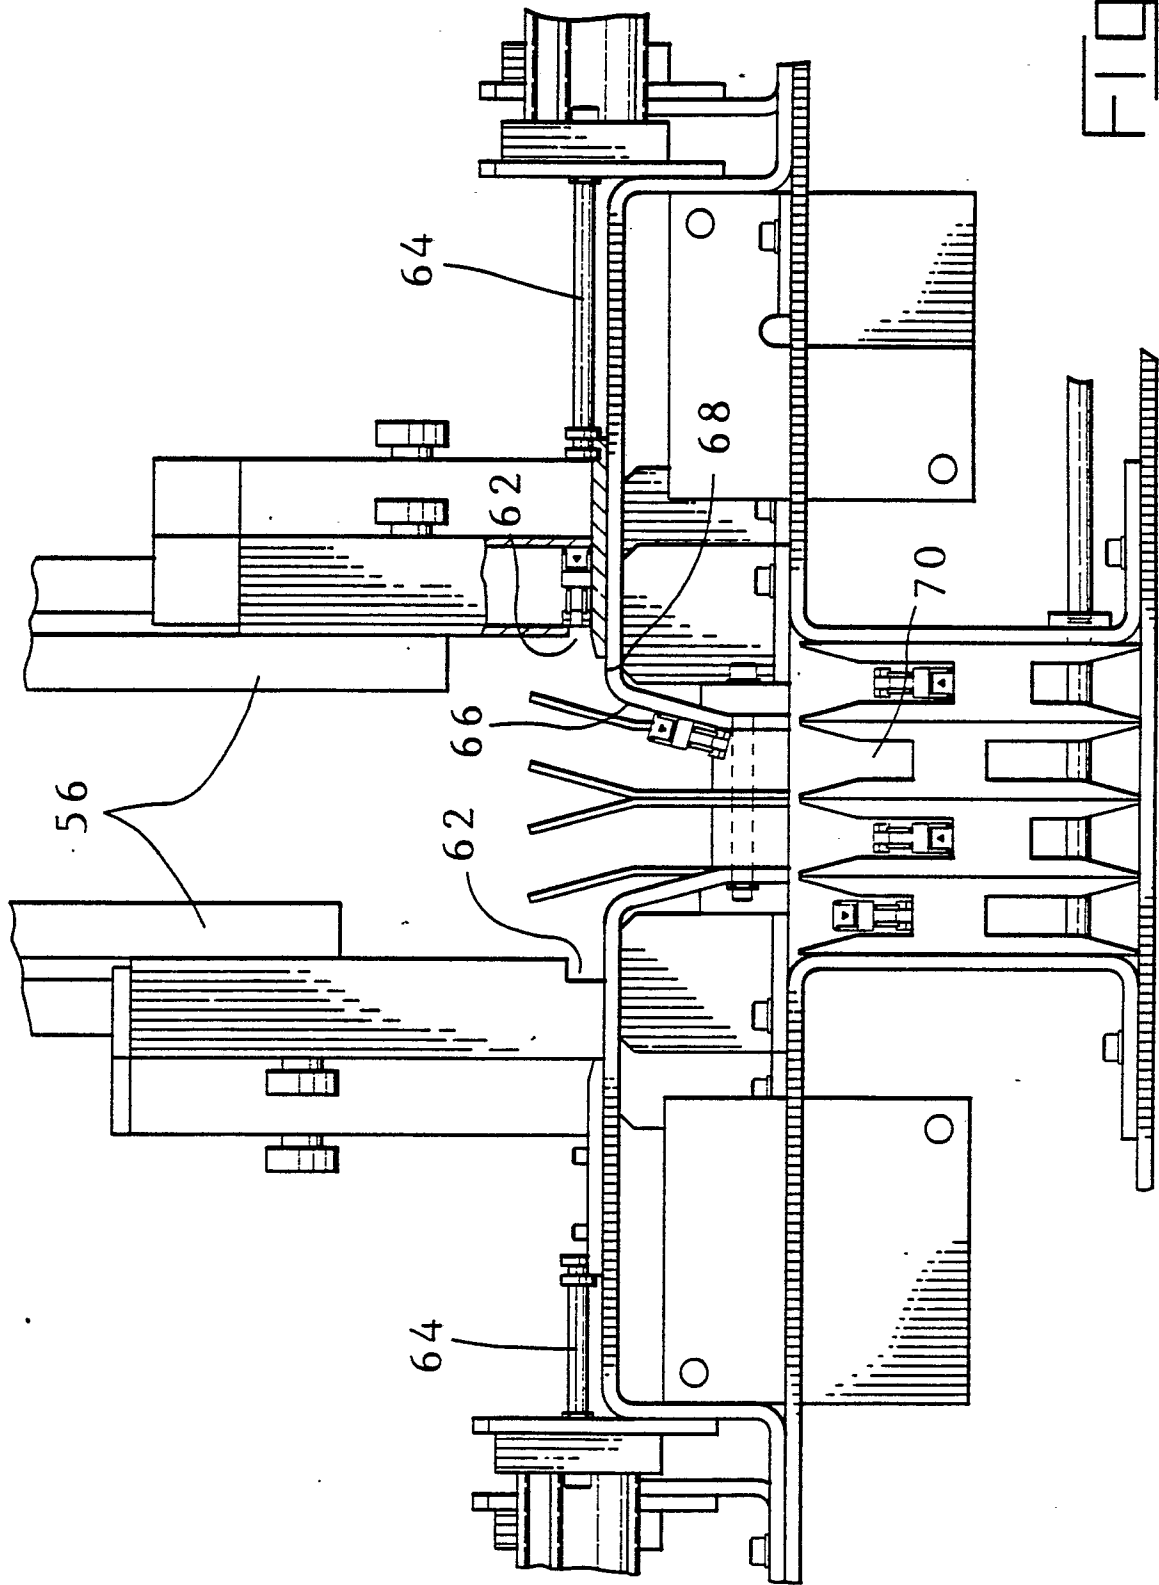


FIG. 5

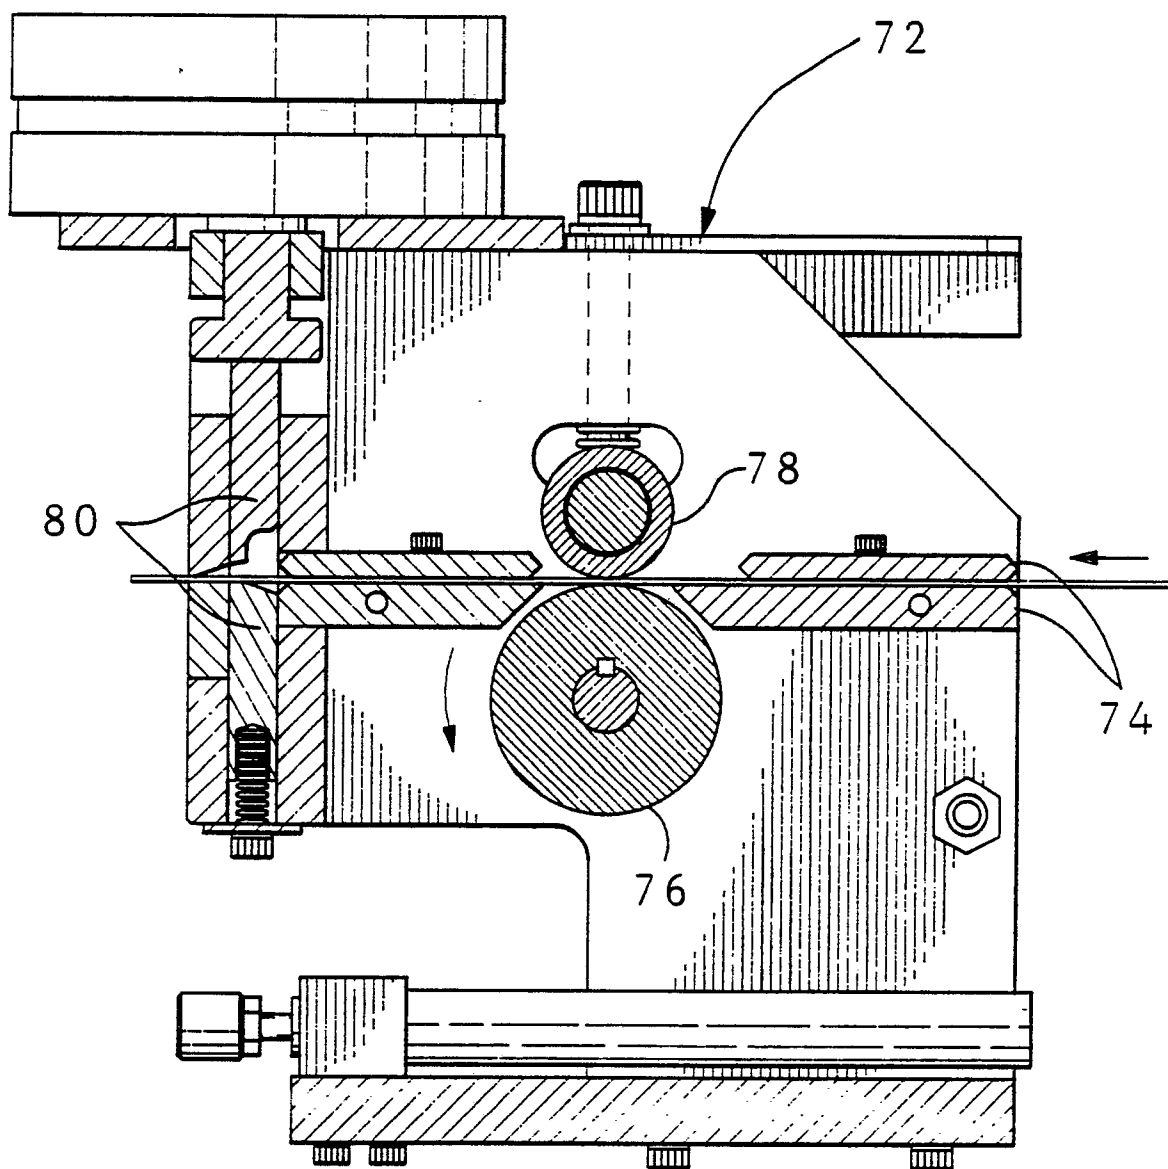


FIG. 6

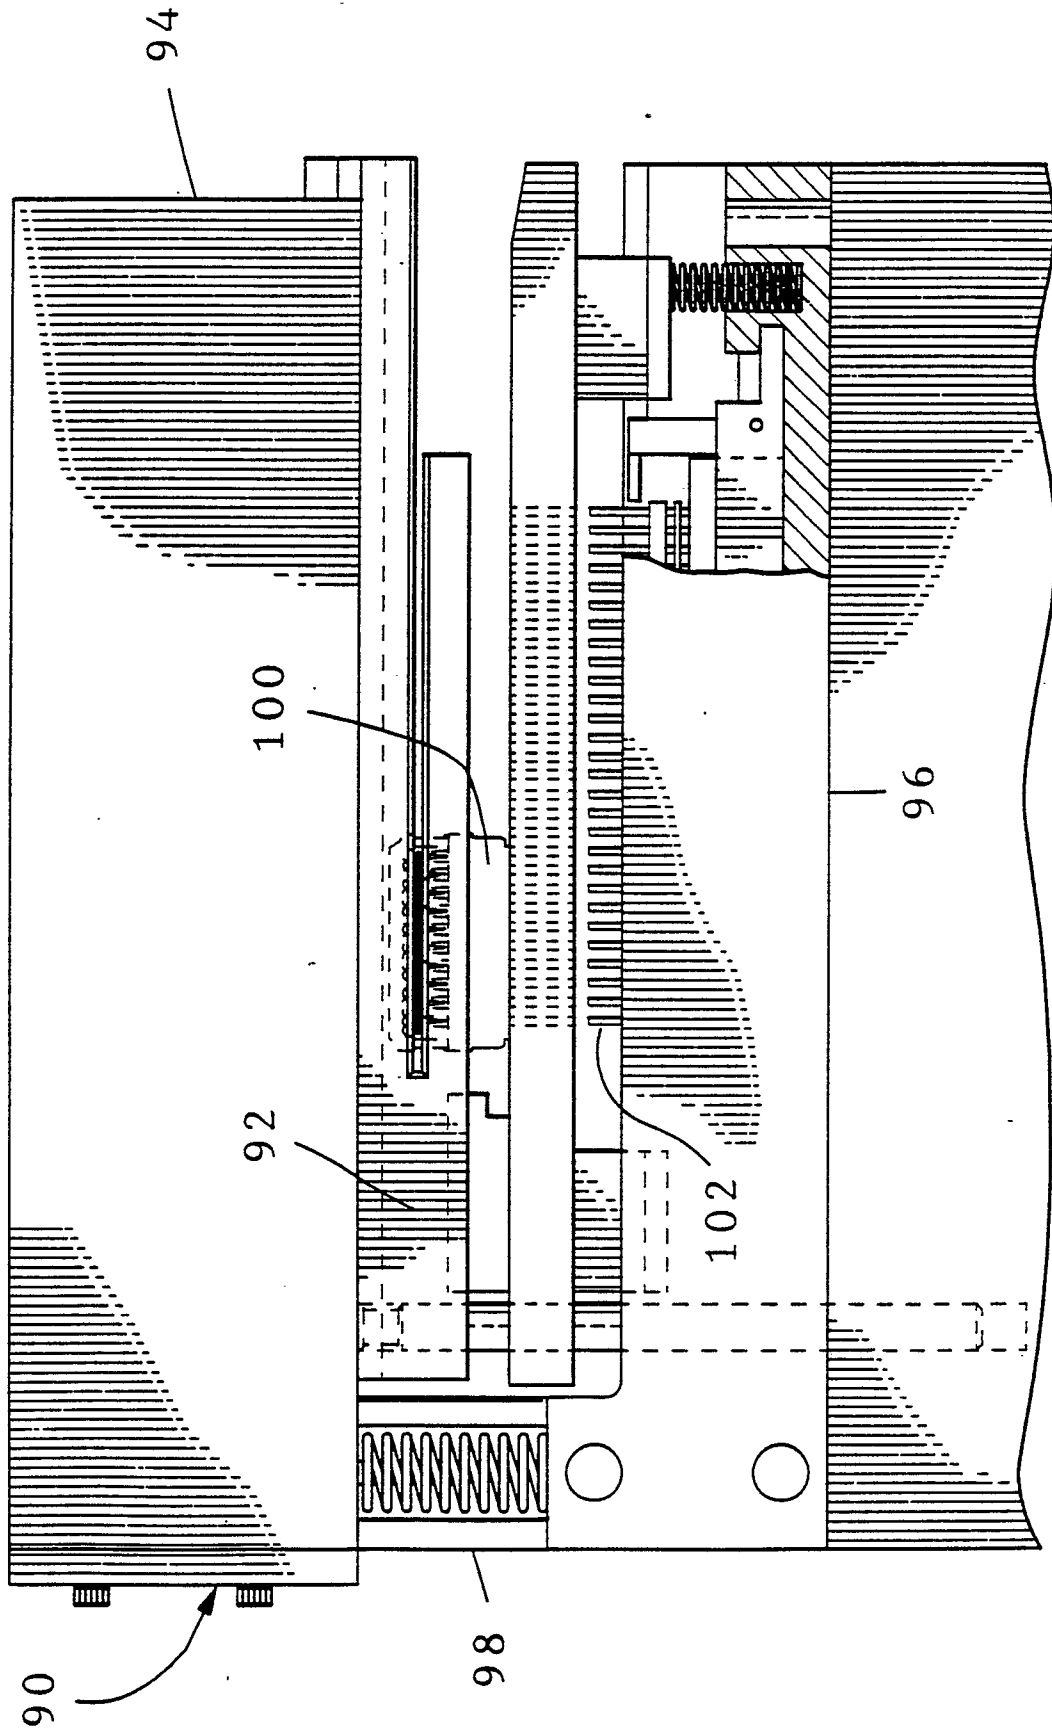
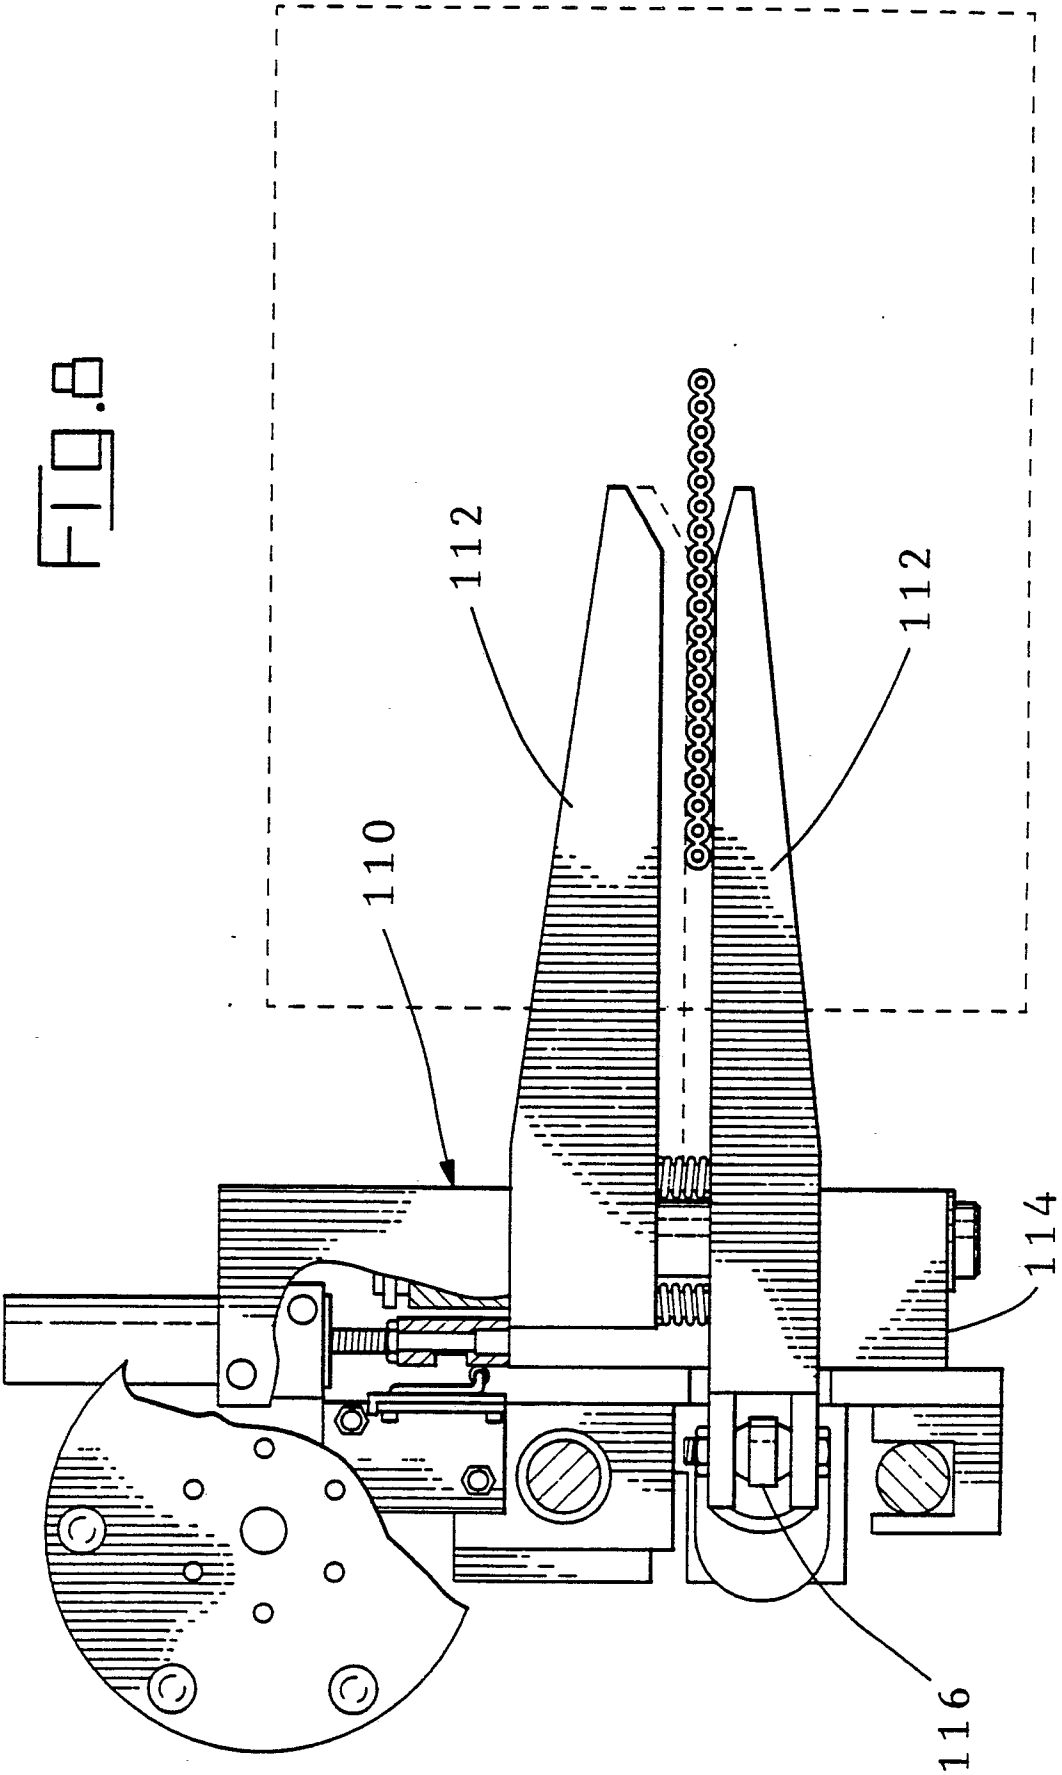


FIG. 7

FIG. 8



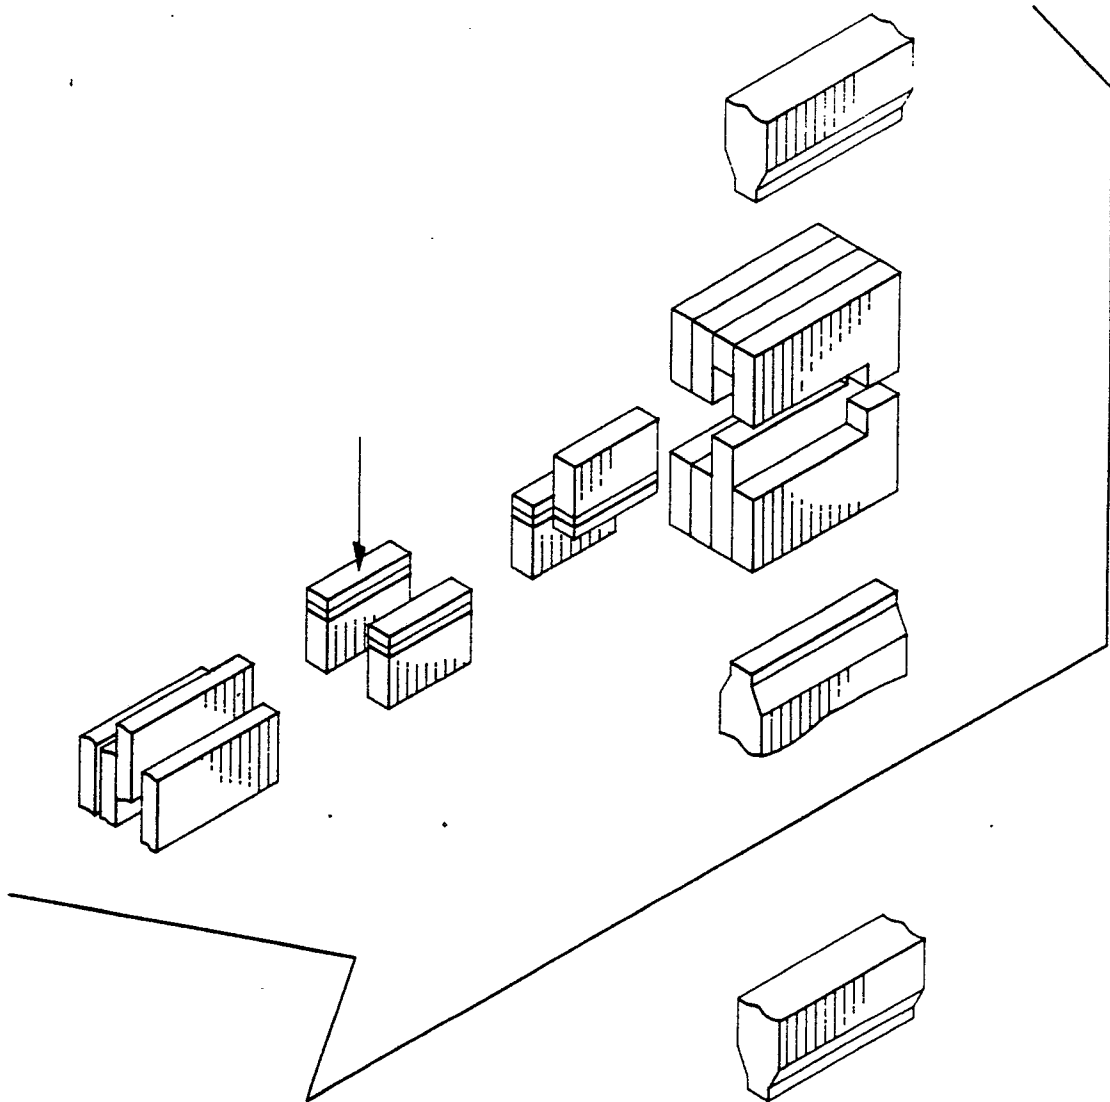


FIG. 9A

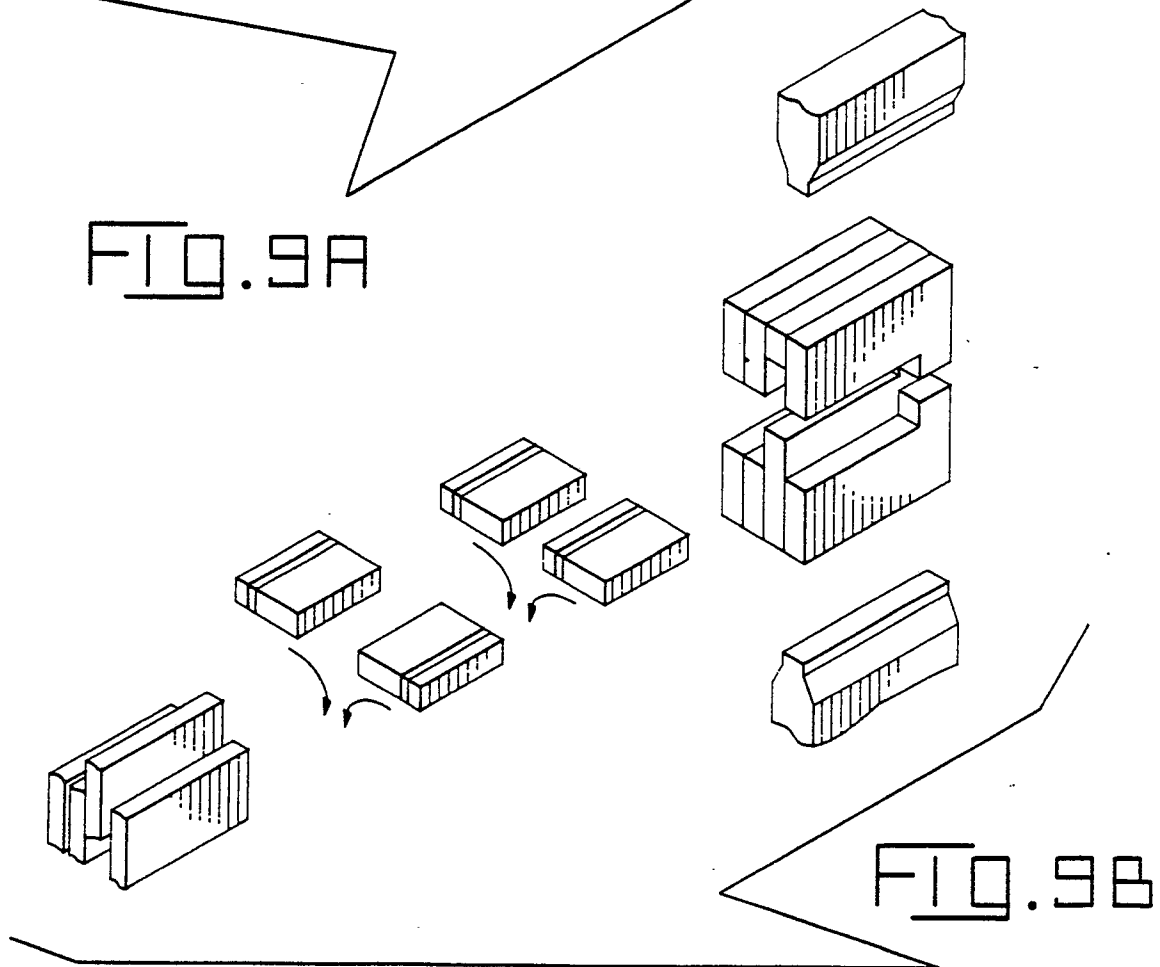


FIG. 9B

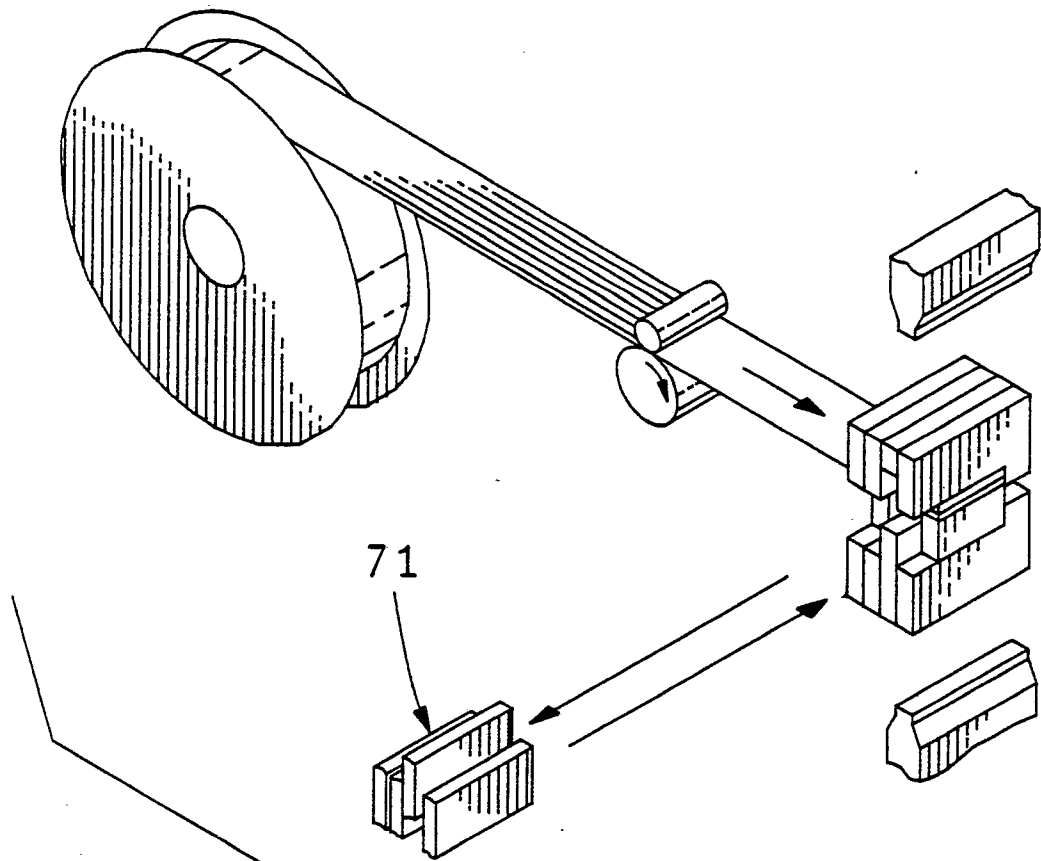


FIG. 9C






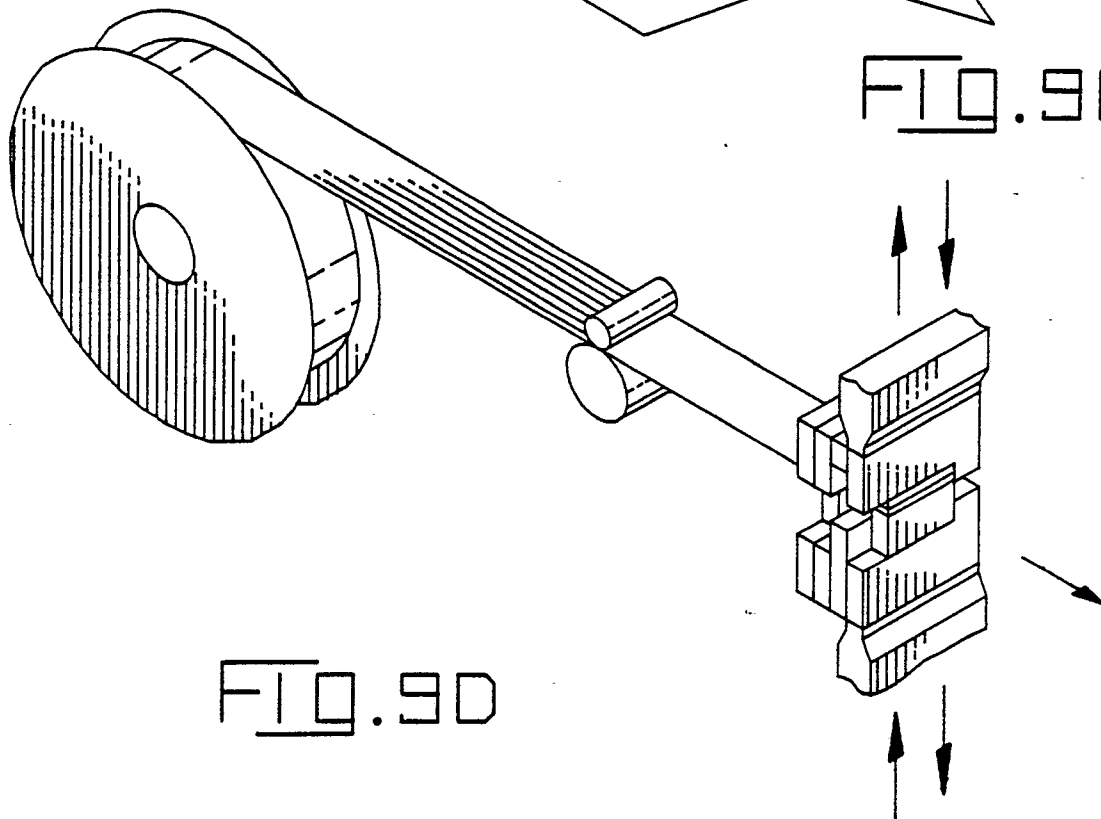


FIG. 9D

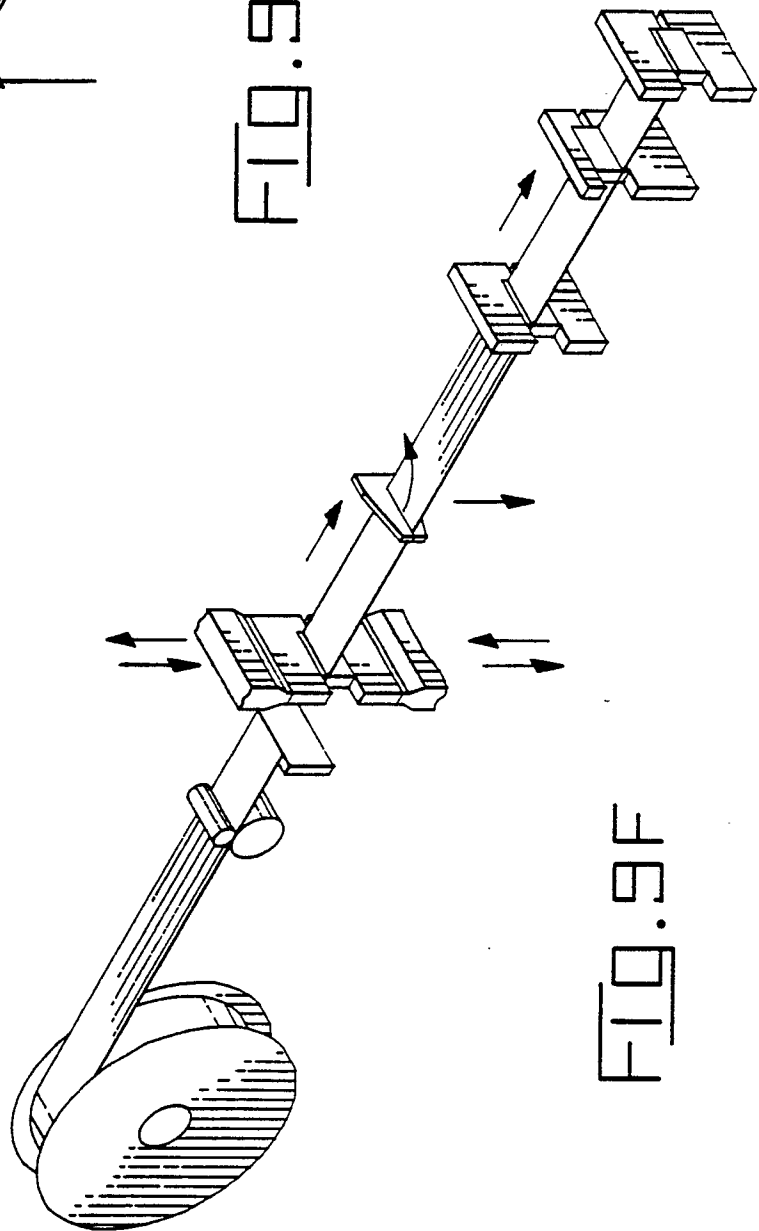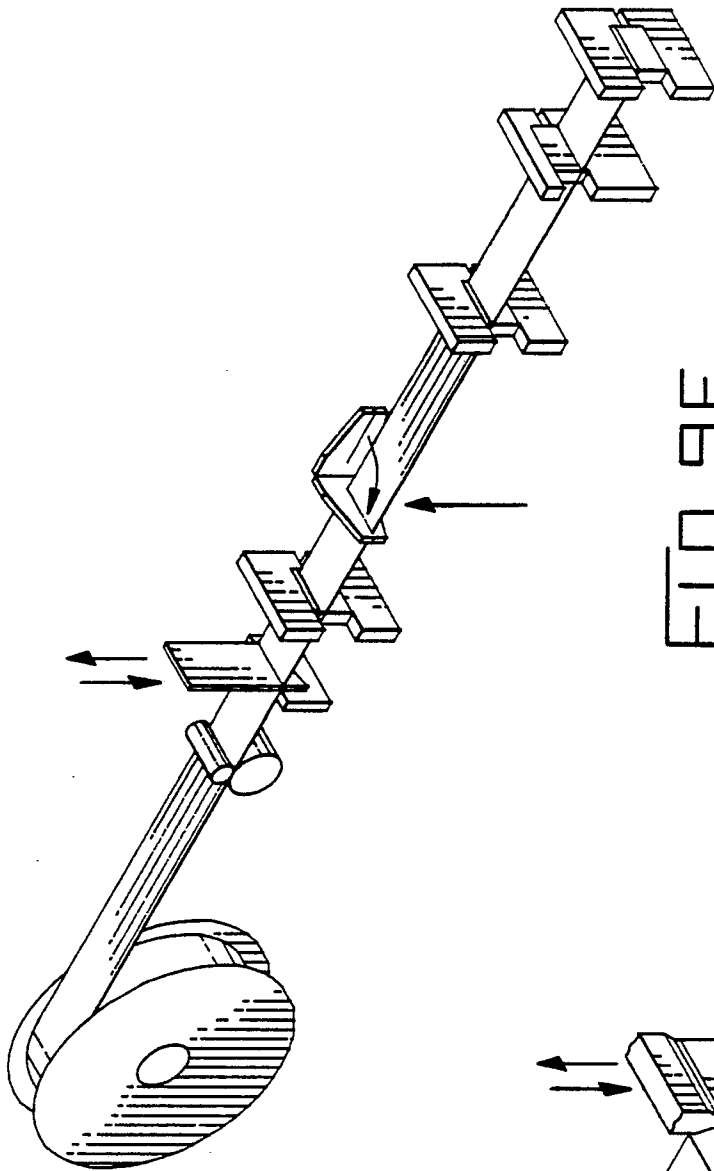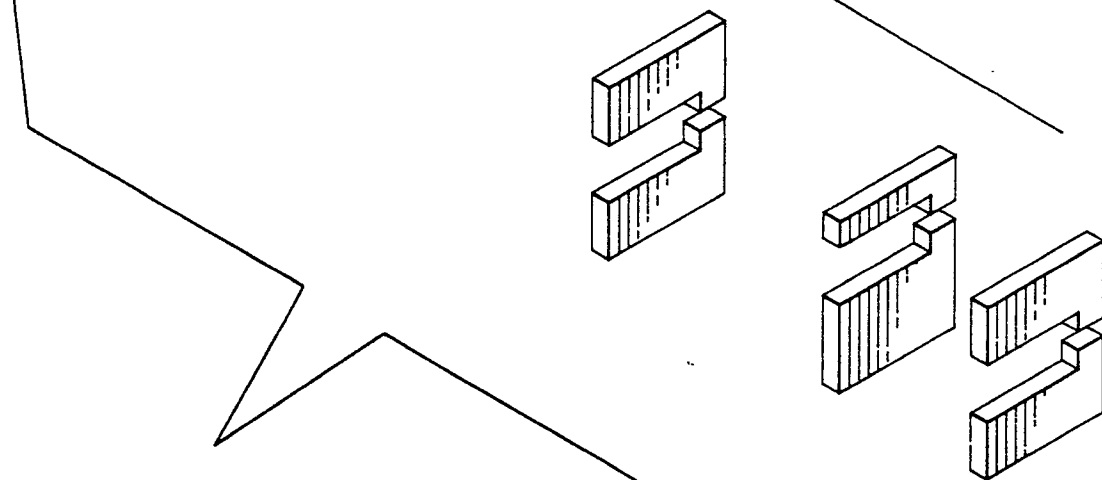

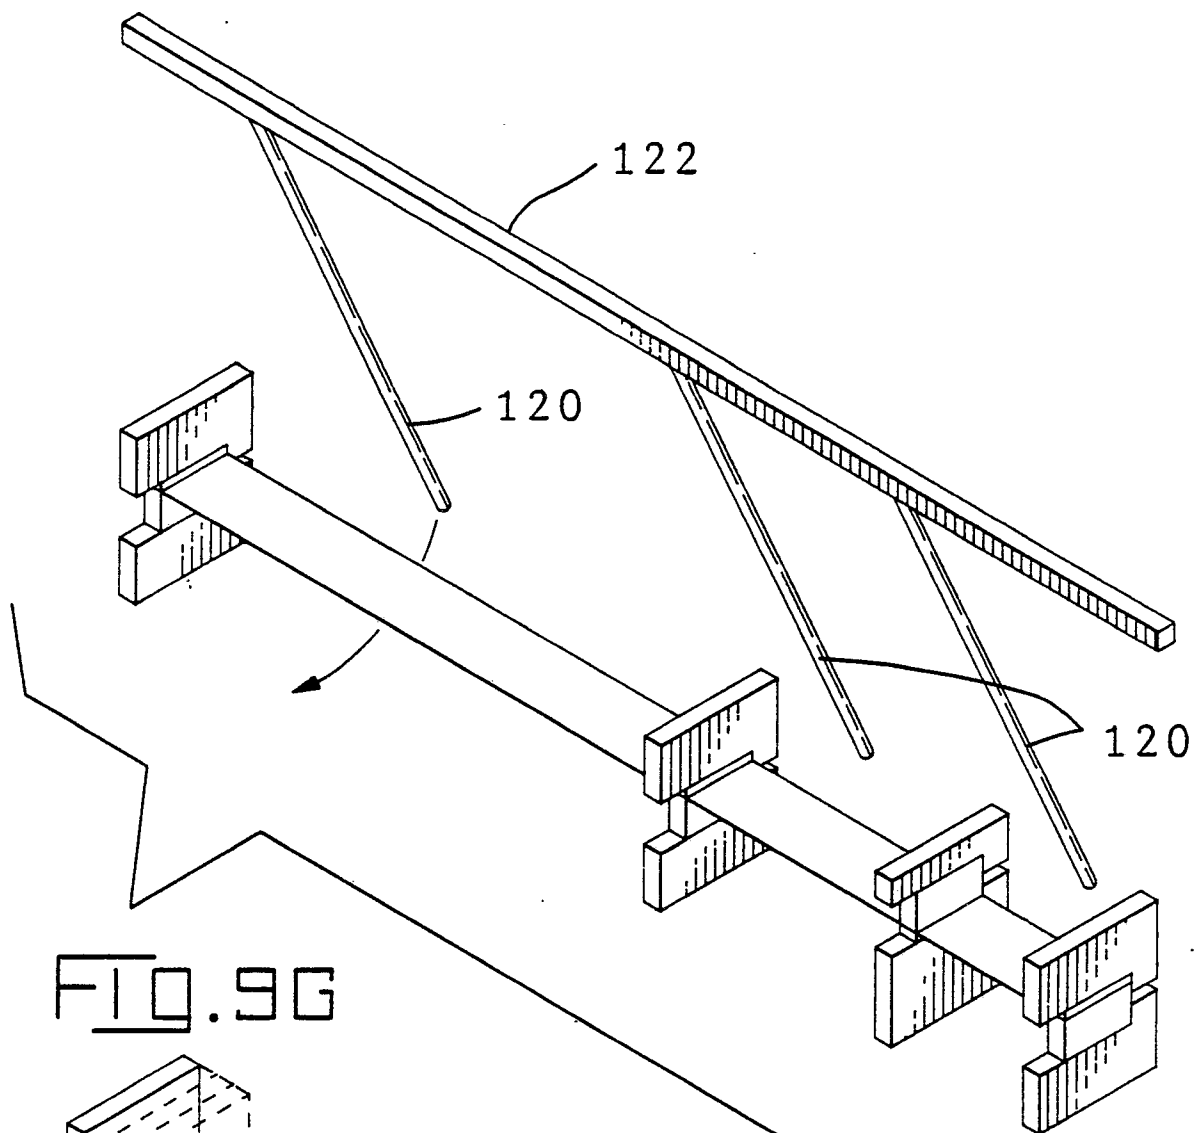

**PREFERRED PROGRAMMING SEQUENCE
(3 CONNECTOR HARNESS ASSEMBLY)**

FEED CABLE TO 1ST CONNECTOR
TERMINATE 1ST CONNECTOR

RELEASE PRESS

CHECK FOR SHORTS

IF SHORTED, SHEAR CABLE AND EJECT
IF NOT, FEED CABLE TO 2ND CONNECTOR

TERMINATE 2ND CONNECTOR

CHECK CONTINUITY BETWEEN CONNECTORS

RELEASE PRESS

CHECK FOR SHORTS

IF SHORTED OR OPENED, SHEAR CABLE AND EJECT
IF NOT, SHEAR CABLE, FEED CABLE TO 3RD CONNECTOR

TERMINATE 3RD CONNECTOR

CHECK CONTINUITY BETWEEN 1ST AND 3RD CONNECTOR

RELEASE PRESS

CHECK FOR SHORTS

IF SHORTED OR OPENED, EJECT

IF NOT, ACCEPT

REPEAT ASSEMBLY OPERATION

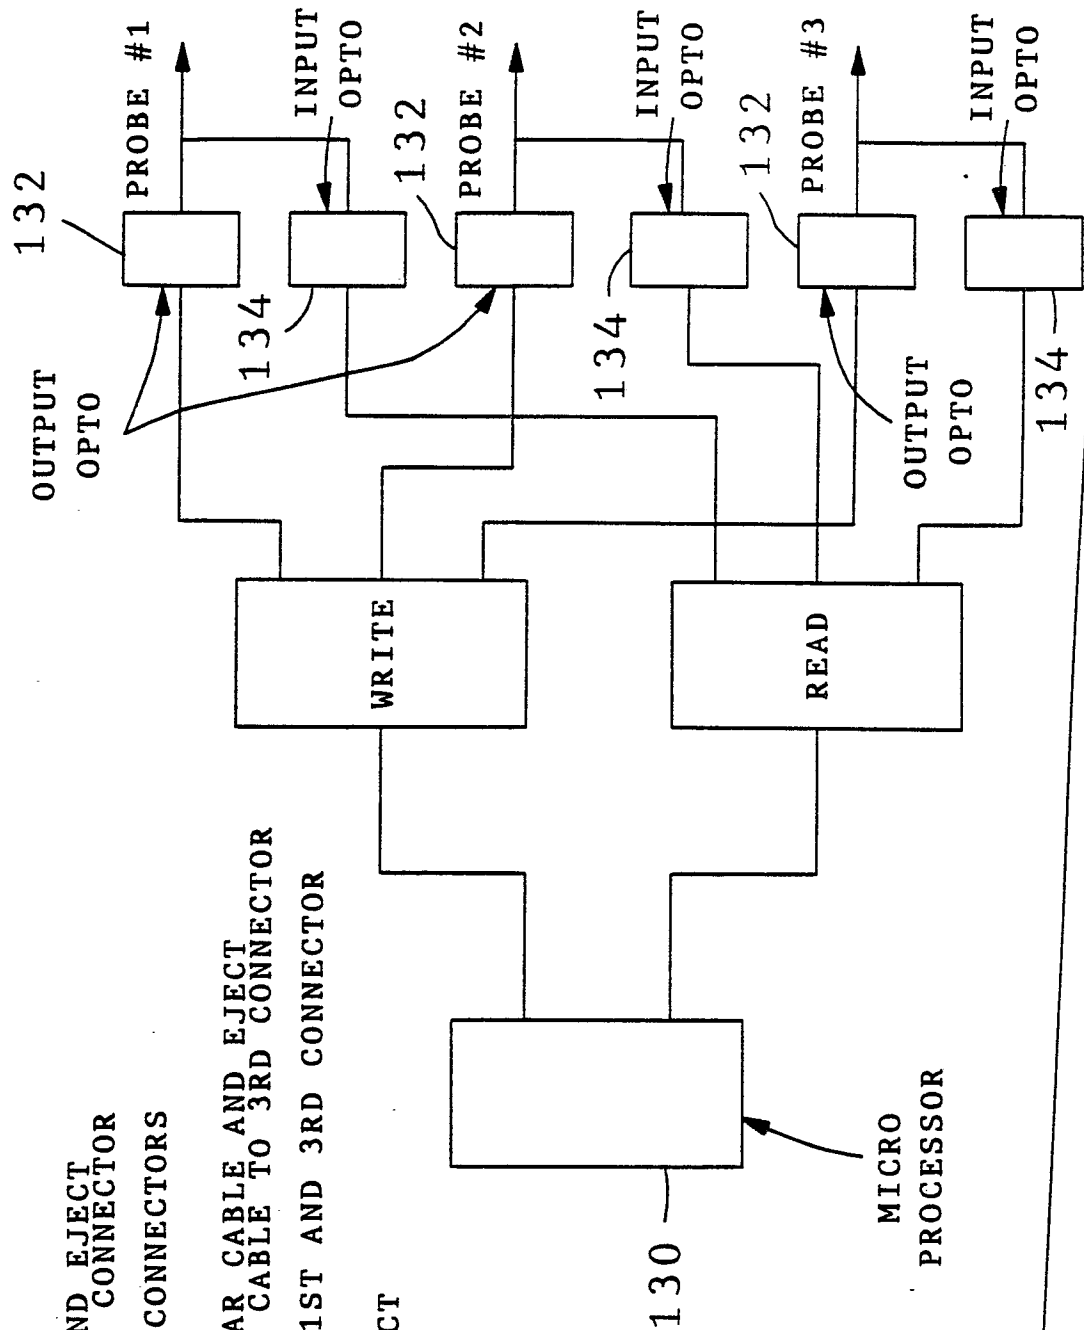


FIG. 10



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 88 31 1831

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
A	EP-A-212801 (MOLEX) * column 1, line 34 - column 7, line 41; figures 1-5 *	1, 2, 7, 9	H01R43/01

A	WO-A-8700355 (AMP) * page 2, line 5 - page 2, line 12 * * page 6, line 22 - page 6, line 30; figures 4-11 *	1, 3, 6-9, 12	

A	TECNICAL DIGEST WESTERN ELECTRIC no. 69, 30 January 1983, NEW YORK page 9 - 10; E. M. HUTCHINS; "APPARATUS FOR TESTING MODULAR ADAPTERS" * page 9 - 10; figures 1, 2 *	1, 2, 9	

A	EP-A-164570 (SUMITOMO WIRING SYSTEMS) * page 2, line 2 - page 4, line 15; figure 3 *	1, 9	

D,A	US-A-4285118 (PEPPLER ET AL.) * column 1, line 39 - column 2, line 18; figures 1-11 *	1, 2, 7, 9, 11	

			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
			H01R43/00 G01R31/00 H05K
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 15 MARCH 1989	Examiner TAPPEINER R.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	