

19



Europäisches Patentamt
European Patent Office
Office européen des brevets

11 Publication number:

0 329 051
A2

12

EUROPEAN PATENT APPLICATION

21 Application number: **89102437.4**

51 Int. Cl.4: **G03C 7/42**

22 Date of filing: **13.02.89**

30 Priority: **13.02.88 JP 31120/88**
19.02.88 JP 36549/88
20.06.88 JP 151796/88

43 Date of publication of application:
23.08.89 Bulletin 89/34

54 Designated Contracting States:
BE CH DE FR GB IT LI NL

71 Applicant: **Fuji Photo Film Co., Ltd.**
210 Nakanuma Minamiashigara-shi
Kanagawa-ken(JP)

72 Inventor: **Fujita, Yoshihiro**
c/o FUJI PHOTO FILM CO., LTD. No 210,
Nakanuma

Minami Ashigara-shi Kanagawa(JP)

Inventor: **Ueda, Shinji**

c/o FUJI PHOTO FILM CO., LTD. No 210,
Nakanuma

Minami Ashigara-shi Kanagawa(JP)

Inventor: **Abe, Akira**

c/o FUJI PHOTO FILM CO., LTD. No 210,
Nakanuma

Minami Ashigara-shi Kanagawa(JP)

Inventor: **Nakamura, Shigeru**

c/o FUJI PHOTO FILM CO., LTD. No 210,
Nakanuma

Minami Ashigara-shi Kanagawa(JP)

Inventor: **Ishikawa, Takatoshi,**

c/o Fuji Photo Film Co. Ltd., No. 210,
Nakanuma,

Minami Ashigara-shi, Kanagawa,(JP)


74 Representative: **Patentanwälte Grünecker,**
Kinkeldey, Stockmair & Partner
Maximilianstrasse 58
D-8000 München 22(DE)

EP 0 329 051 A2

54 **Method for processing silver halide color photographic materials.**

57 Disclosed is a method of processing a silver halide color photographic material where an imagewise exposed silver halide color photographic material is, after color-developed, processed with a bleaching solution contains (1,3-diamino-propanetetraacetato)iron (III) complex and that, when the material is processed with the said processing solution having a fixing ability, a jet stream of the said processing solution is run against the emulsion surface of the said photographic material. By the method, rapid desilvering is possible, and the material processed is not stained.

Fig. 1

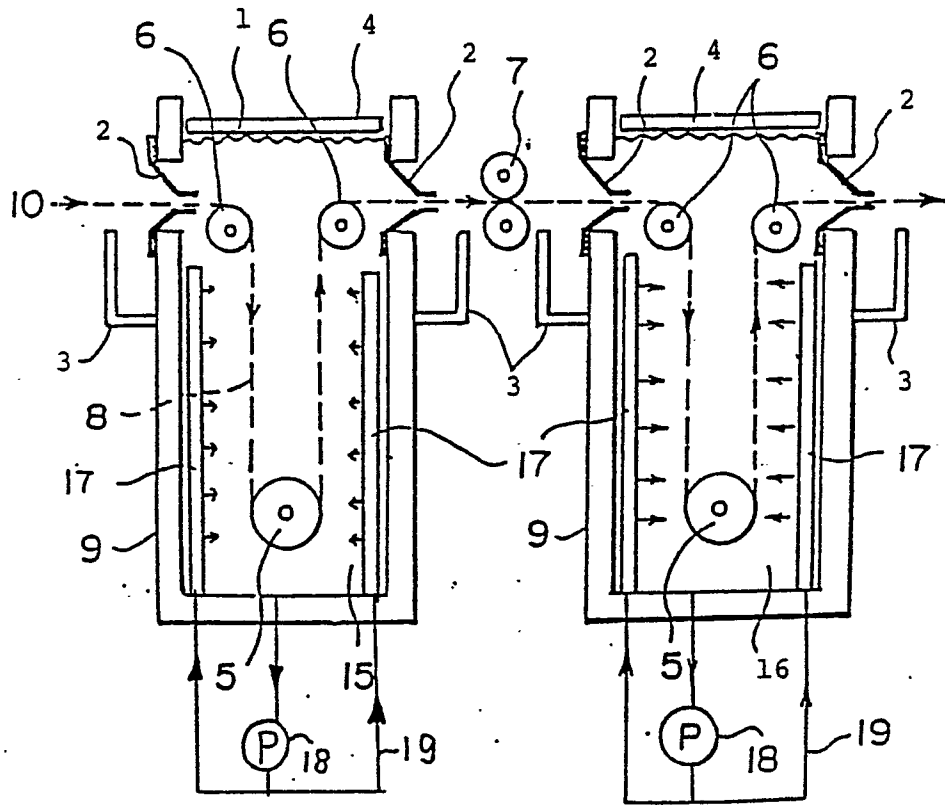

METHOD FOR PROCESSING SILVER HALIDE COLOR PHOTOGRAPHIC MATERIALSFIELD OF THE INVENTION

5 The present invention relates to a method for processing an exposed silver halide color photographic material (the term "silver halide color photographic material" is hereinafter abbreviated to "color photographic material") and, in particular, it relates to a method for processing an exposed color photographic material where sufficient desilvering can be effected in a short period of time to give improved photographic properties to the processed material.

10

BACKGROUND OF THE INVENTION

15 The basic procedure for processing color photographic material includes, in general, a color-development step and a desilvering step. In the color-development step, the exposed silver halide in a color photographic material is reduced with a color-developing agent to yield silver, while the oxidized color-developing agent is reacted with a coupler to give a color image. In the desilvering step, the silver formed in the previous color-developing step is oxidized by the action of an oxidizing agent (which is generally called a "bleaching agent") and then dissolved by the action of a complexing agent for silver ions (which is generally called a "fixing agent"). After the desilvering step, the thus processed color photographic material may have a color image only.

The desilvering step is conducted either in a two-bath system using a bleaching agent-containing bleaching bath and a fixing agent-containing fixing bath or in a one-bath system using a bleach-fixing bath containing both bleaching agent and fixing agent.

25 A practical development procedure includes various auxiliary steps, in addition to the above-mentioned basic steps, for the purpose of maintaining the photographic and physical quality of the images formed and of improving the storage stability of the images formed. For instance, such auxiliary steps are conducted using a film-hardening bath, a stopping bath, an image-stabilizing bath and a rinsing bath.

30 In accordance with the method of the present invention, the term "processing bath having a fixing ability" indicates both the fixing bath and bleach-fixing bath. As the fixing agent for the bath having a fixing ability, thiosulfates which are excellent in fixing capacity and are advantageous in view of their cost are generally used.

35 On the other hand, in the bleaching step, ferric complexes (for example, aminopolycarboxylic acid iron (III) complexes, especially (ethylenediaminetetraacetato) iron (III) complex) are essentially used in view of the requirements of rapid and simplified processing and of prevention of environmental pollution.

40 However, ferric complexes are relatively poor in oxidizability and are insufficient in bleaching power. Accordingly, when they are used for bleaching or bleach-fixing a low-sensitivity silver halide color photographic material containing essentially a silver chlorobromide emulsion, the intended object can generally be attained. However, when they are used for processing a high-sensitivity silver halide color photographic material, which essentially contains a silver chlorobromide emulsion or a silver iodobromide emulsion and which has been color-sensitized, especially a picture-taking color reversal photographic material or picture-taking color negative photographic material which contains a silver-rich emulsion, the bleaching capacity is not satisfactory; desilvering is insufficient and a long time is required for bleaching.

45 As a means of avoiding these deficiencies, a method of using a bleaching agent combination of (1, 3-diaminopropanetetraacetato) iron (III) complex and (ethylenediaminetetraacetato) iron (III) complex and having an excellent bleaching power is known, as described in JP-A-62-222252 (the term "JP-A" as used herein means an "unexamined published Japanese patent application").

50 However, it has been found that when a color photographic material is processed with a processing solution having a fixing ability and containing a thiosulfate, immediately after being processed with a bleaching solution containing the (1, 3-diaminopropanetetraacetato) iron (III) complex, the fixation is retarded and cannot be completed within a determined period of time. Such retardation of fixation is a "fixation insufficiency", which is undesirable.

In a case that aminopolycarboxylic acid which produces a compound, such as (1,3-diaminopropanetetraacetato)iron (III) complex, having a low stability constant in binding to iron (III) is used, the compound causes a remarkable bleaching fog on a photosensitive material and in sufficiency in recoloration

of cyan dye, although it has a high bleaching ability.

In addition to such retardation of fixation, another serious problem is that the surface of the photographic material processed is stained.

In order to overcome such problems, Fuji Film Processing Manual, CN-16 Processing (October, 1985) has proposed a method where a photographic material is, after processing, fully rinsed or washed with water to remove the components of the bleaching solution from the photographic material processed. Although this method is effective to some degree, this interferes with rapid processing and additionally the number of the necessary processing bath must be increased. Accordingly, such a method is not suitable for use in a mini-laboratory system where rapid processability, small installation space and low processing cost are required.

SUMMARY OF THE INVENTION

Accordingly, a first object of the present invention is to provide a rapid desilvering method for processing color photographic materials.

A second object of the present invention is to provide an excellent and rapid desilvering method for processing color photographic materials where the material processed is not stained.

The third object of the present invention is to provide a rapid desilvering method for processing color photographic materials where the material processed has no bleaching fog and high sufficiency in recoloration.

It has now been found that these and other objects are attained by a method for processing a silver halide color photographic material by the steps of (a) developing an imagewise exposed silver halide color photographic material composed of a support having thereon at least one light-sensitive silver halide emulsion layer; (b) processing the developed color photographic material with a bleaching solution containing (1,3-diaminopropanetetraacetato)iron (III) complex and (c) containing the emulsion surface of the material from step (b) with a jet stream of a solution having a fixing ability.

BRIEF DESCRIPTION OF THE DRAWING

Fig. 1 shows a partial sectional view of one embodiment of an automatic developing apparatus for the method of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The cause of the retardation of fixation in processing of a color photographic material with a processing solution having a fixing ability, after the material is bleached with a bleaching solution containing (1,3-diaminopropanetetraacetato) iron (III) complex, as well as the cause of staining of the surface of the photographic material thus processed is not completely known, but without limiting the present invention in any way by theory, is considered to be as follows. Specifically, when a photographic material containing 1,3-diaminopropanetetraacetato) iron (III) complex (hereinafter referred to as "1,3-DPTA*Fe (III)" having a high oxidizing power in the emulsion layer is introduced into the processing solution having a fixing ability and containing a thiosulfate, the 1,3-DPTA*Fe(III) oxidizes the thiosulfate iron in the emulsion layer or near the surface thereof to give a sulfur compound, and the thus-formed sulfur compound strongly adheres to the silver halide in the material to retard the fixation procedure. Further, the sulfur compound, penetrated into the gelatin layer or adhered to the surface near the layer, causes the stains in the material.

In accordance with the method of the present invention, a jet stream of a processing solution having a fixing ability is directed against the photographic material containing 1,3-DPTA*Fe(III), when the photographic material being processed is dipped in the processing solution having a fixing ability, whereby the diffusing of the 1,3-DPTA*Fe(III) from the emulsion layer of the material is noticeably accelerated, to thereby prevent the formation of the sulfur compound in the layer.

Accordingly, the application of the jet stream of the processing solution having a fixing ability to the emulsion layer of the photographic material being processed is preferably conducted as soon as possible

after the material has been dipped in the processing solution having a fixing ability.

In accordance with the method of the present invention, the photographic material color-developed is processed in a processing solution having a fixing ability, while a jet stream of the processing solution having a fixing ability is directed against the emulsion surface of the material being processed. The jet stream of the processing solution having a fixing ability may be provided by pumping the solution having a fixing ability onto the emulsion surface of the photographic material being processed from nozzles provided in a position facing the emulsion surface of the material, a distance between the nozzle and the emulsion surface being preferably short, more preferably from 0.2 cm to 1.5 cm. The device providing the jet stream may have from 10 to 200 nozzles, and the device having more nozzles are better. Each nozzle has a size of from 1 mm to 10 mm, and preferably from 1 mm to 5 mm in a diameter and a shape of square, round, hexagon, etc., with no limitation as to the shape of nozzles. More specifically, the method described in JP-A-62-183460, from page 3, right-lower column to page 4, right-lower column (example of the invention) may be employed, in which a solution is transferred under pressure by the action of a pump is jetted out from slits or nozzles provided facing the emulsion surface of the photographic material being processed. The speed of the jet stream ("flow velocity"), when it is directed against the emulsion surface, is preferred to be as high as possible within the range where the jet stream does not interfere with the conveyance of the photographic material, being processed in an automatic developing machine, and specifically, the flow velocity at the nozzle is preferred to fall within the range of from about 0.3 m/sec. to about 3 m/sec, and more preferred from about 2 m/sec. to about 3 m/sec.

In one apparatus useful in the method of the invention, illustrated in Fig. 1, the arrows from the jet stream pipe (13) indicate the jet stream of a fixing solution to be jetted from the nozzles provided in the jet stream pipe. The fixing solution (12) is introduced into the jet stream pipe (13) via the circulation pipe (15) under suction by the pump (14). At the position (4), the emulsion surface of the photographic material being processed faces downwards. In the fixing bath (12), the emulsion surface faces the jet stream pipe.

In accordance with the method of the present invention, it is preferred that the photographic material being processed is introduced into a bath of the solution having a fixing ability and the jet stream of the solution having a fixing ability is directed against the emulsion surface of the material within 15 seconds, more preferably within 10 seconds, after its introduction into the bath.

This time is the time from the contact of a certain point of the photographic material being processed with the processing solution having a fixing ability to the contact of the same point with a vertical jet stream of the processing solution.

The acceleration of the fixation by the application of the jet stream of the processing solution having a fixing ability, in accordance with the method of the present invention, prevents the retardation of fixation because of the 1, 3-DPTA·Fe(III) contained in the emulsion layer of the material being processed, and is basically different from the effect which would be attained in a different system using a bleaching agent of conventional (ethylenediaminetetraacetato) iron (III) complex only. In addition, in accordance with the method of the present invention, another surprising effect of preventing stains in the photographic material processed can be attained.

The present invention is now explained in greater detail.

In the bath having a fixing ability for using in the present invention, a thiosulfate is generally used as the fixing agent. For instance, these include sodium thiosulfate, ammonium thiosulfate and potassium thiosulfate, and use of ammonium thiosulfate is most preferred. The amount of the fixing agent to be added to the bath is preferably from 50 g to 500 g, more preferably from 100 g to 300 g, per liter of the solution having a fixing ability.

In addition, the bath may further contain thiocyanates, thioureas or thioethers, if desired.

The fixing solution for using in the present invention preferably contains an organic phosphonic acid type chelating agent for the purpose of improving the stability of the solution.

Most preferably, 1-hydroxyethylidene-1, 1-diphosphonic acid or N,N,N',N'-ethylenediaminetetraphosphonic acid is used for the purpose.

The amount of the organic phosphonic acid type chelating agent is preferably from 0.005 to 0.5 mol, more preferably from 0.05 to 0.10 mol, per liter of the solution having a fixing ability.

The processing solution having a fixing ability for use in the present invention can contain, as a preservative, sulfites such as sodium sulfite, potassium sulfite or ammonium sulfite, as well as sulfinic acids, hydroxylamine, hydrazines or aldehyde compound-bisulfite adducts such as acetaldehyde-sodium bisulfite. Further, it may also contain various brightening agents, de-foaming agents, and surfactants as well as organic solvents such as polyvinyl pyrrolidone or methanol.

When the bath having a fixing ability for use in the present invention is a bleach-fixing solution, the bath preferably contains the various (aminopolycarboxylato) iron (III) complexes described above as a bleaching

agent. The following compounds are most preferred, but the present invention is not to be construed as being limited thereto:

- (1, 2-Propylenediaminetetraacetato) iron (III) complex
- (1, 3-Propylenediaminetetraacetato) iron (III) complex
- 5 (Ethylenediaminetetraacetato) iron (III) complex
- (Cyclohexanediaminetetraacetato) iron (III) complex
- (Diethylenetriaminepentaacetato) iron (III) complex

The amount of the bleaching agent is preferably from 0.1 mol/liter to 0.5 mol/liter. The bleaching agent may be introduced into the bleach-fixing solution as a result of the introduction of the overflow solution from the previous bleaching bath.

The bath having a fixing ability for use in the present invention has a pH of from 4.0 to 9.0, preferably from 5.0 to 8.0. The amount of the replenisher for the bath is from 300 ml to 3000 ml, preferably from 300 ml to 1000 ml, per m² of the photographic material being processed.

The combined processing time of the photographic material in the bleaching bath and the bath having a fixing ability, in accordance with the method of the present invention, is from 1 minute to 4 minutes, preferably from 1 minute and 30 seconds to 3 minutes. The processing temperature is from 25 °C to 50 °C, preferably from 35 °C to 40 °C.

Next, the bleaching solution for use in the present invention will be explained in greater detail.

The bleaching solution for use in the present invention contains (1, 3-diaminopropanetetraacetato) *iron (III) complex. This complex may be in the form of an alkali metal salt such as a sodium or potassium salt, but the complex is preferably in the form of an ammonium salt, since the bleaching rate of the salt is excellent and it prevents the increase of the yellow density in the non-exposed areas of the photographic material processed. The amount of the 1,3-DPTA*Fe (III) is from 0.05 mol to one mol, preferably from 0.1 mol to 0.5 mol, per liter of the bleaching solution.

In the method of the present invention, any other (aminopolycarboxylato) iron (III) complexes can be incorporated into the bleaching solution together with the 1,3-DPTA*Fe (III), if desired. Especially preferred are ferric complexes of the following compound group (A), although the present invention is not to be construed as being limited thereto:

30

Compound Group (A):

- (A-1) Ethylenediaminetetraacetic acid
- (A-2) Diethylenetriaminepentaacetic acid
- 35 (A-3) Cyclohexanediaminetetraacetic acid
- (A-4) 1,2-Propylenediaminetetraacetic acid

When these additional complexes are added to the solution, the molar proportion of the additional complex is 3 mols or less inclusive of 0 mol) per one mol of 1,3-DPTA*Fe (III), in view of the high bleaching power and the small bleaching fog, and more preferably from 0.1 to 3 mols, especially preferably from 0.1 to 1.5 mols, per mol of 1,3-DPTA*Fe (III).

Also in the step of processing the photographic material with the bleaching solution, it is preferred that a jet stream of the bleaching solution is directed against the photographic material being processed within 15 seconds after introduction of the material into the bleaching solution, in the same manner as in the processing step with the processing solution having a fixing ability, to promote acceleration of bleaching, prevention of bleaching fog, prevention of insufficiency in recoloration of cyan dye and acceleration of fixation. In particular, the time is especially preferably within 10 seconds. The effect is especially remarkable when the pH value of the bleaching solution is 5.5 or less.

The bleaching solution for use in the method of the present invention preferably has a pH value of from 5.5 to 2.0, more preferably from 5.0 to 3.0, most preferably from 4.5 to 3.5, for the purpose of attaining sufficient desilvering and of preventing bleached fog. When the pH value of the bleaching solution is 5.5 or less, the bleaching rate is extremely improved and the bleaching fog may noticeably be prevented. However, if the pH value is too low, the ferric complex in the bleaching solution precipitates.

The pH value of conventional bleaching solutions is 5.5 or more, since a lower pH value of the solution would generally cause insufficiency in recoloration of cyan dye. Surprisingly, no insufficiency in recoloration of cyan dye occurs in the method of the present invention, even when the pH value of the bleaching solution used is lowered, but rapid bleaching can be effected under such low pH condition.

In accordance with the present invention, when the color photographic material is, after color-

development, processed with the bleaching solution, it is particularly preferred that the material to be processed is directly introduced into the bleaching solution, without the material being processed with any other intermediate processing solutions (such as a rinsing solution), from the viewpoint of acceleration of the processing.

5 The crossover time from the color-developer to the bleaching solution, i.e., the time from removing the photographic material being processed from the color-developer to its introduction into the bleaching solution, is desirably 10 seconds or less, preferably 5 seconds or less, especially preferably 3 seconds or less, whereby the bleaching fog or staining of the surface of the photographic material processed may effectively be prevented.

10 When a photographic material film is processed with an automatic developing machine in accordance with the method of the present invention, various methods may be used to shorten the crossover time. For instance, the transfer speed of the film between the processing tanks can be elevated (in general, the linear velocity is elevated), or the conveyance of the film between the processing solution tanks is effected at a position lower than the liquid level of the first tank or at the position falling within the range of from 0 to
15 several centimeters from the liquid surface of this tank, whereupon a dead space is preferred to be provided between the tanks for the purpose of intermixing of the processing solutions of the respective tanks. Any of these methods can be employed in practice of the present invention.

In the case of a small-sized automatic developing machine (a "mini-laboratory"), the linear velocity in the processing procedure is generally lower than that for a large-sized machine, and the apparatus is
20 required to be small and inexpensive, but it is difficult to shorten the crossover time within 10 seconds, for example 3 seconds or less.

In the case where the crossover time is not extremely shortened, for example, from 5 to 10 seconds or so, the bromide ion concentration in the bleaching solution is preferably from 1.2 mols/liter (or 118 g/liter as NH_4Br) to 3.0 mols/liter, more preferably 1.5 to 2.8 mols/liter and most preferably 1.7 to 2.5 mols/liter
25 whereby the yellow density increase is substantially reduced to zero (0).

In addition, the other problem of staining of the film processed may also be prevented by elevation of the bromide ion concentration in the bleaching solution. For instance, the bromide ion concentration is preferably from 1.2 mols/liter (or 118 g/liter as NH_4Br) to 3.0 mols/liter, more preferably 1.5 (147 g/liter as NH_4Br) to 2.8 mols/liter and most preferably 1.7 to 2.5 mols/liter. When the said concentration is 1.7
30 mols/liter or 167 g/liter as NH_4Br) or more, staining of the film processed may completely be prevented.

In accordance with the method of the present invention, shortening of the crossover time from the bleaching solution to the processing solution having a fixing ability to 10 seconds or less is preferred, since insufficiency in recoloration of cyan dye can be prevented under such conditions. It is more preferred that the crossover time is shortened as much as possible (i.e., to 5 seconds or less, especially to 3 seconds or less) from the viewpoint of the rapid processing of the method of the invention. Under such conditions of
35 shortened crossover time, the effect of the present invention is remarkable. The above method may be used as the present crossover procedure.

The bleaching solution for use in the method of the present invention may additionally contain various kinds of bleaching accelerators. Preferred bleaching accelerators include various mercapto compounds as
40 described in U.S. Patent 3,893, 858, British Patent 1,138, 842 and JP-A-53-141623; disulfido bond-containing compounds as described in JP-A-53-95630; thiazolidine derivatives as described in JP-B-53-9854 (the term "JP-B" as used herein means an "examined Japanese patent publication"); isothiurea derivatives as described in JP-A-53-94927; thiourea derivatives as described in JP-B-45-8506 and 49-26586; thioamide compounds as described in JP-A-49-42349; and dithiocarbamic acid salts as described in
45 JP-A-55-26506.

In addition, the compounds of formulae (I), (II), (III), (IV), (V), (VI), (VII) and (VIII) disclosed in JP-A-62-222252, pages 4 to 11 are especially preferred for their excellent bleaching capacity. The effect of these compounds is particularly noticeable, when they are used in combination with the jet stream of the bleaching solution applied to the photographic material being processed.



50 The amount of the compounds of formulae (I) to (VIII) to be added is preferably from about 1×10^{-4} to about 1×10^{-1} mol/l, more preferably from about 3×10^{-4} to about 1×10^{-2} mol/l and most preferably from about 1×10^{-3} to about 8×10^{-3} mol/l

The following compounds are preferred but the present invention is not to be construed as being limited thereto.


55

I-1

5




10



II-1


15



20

II-2


25

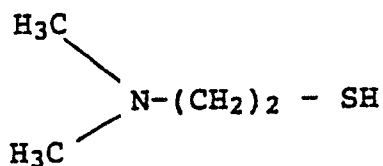

30

III-1


35

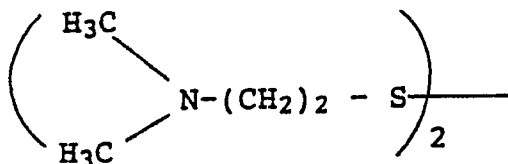

40

IV-1


45

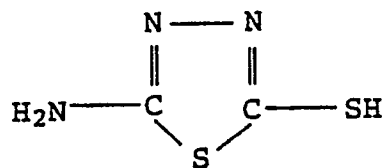

50


55

IV-2

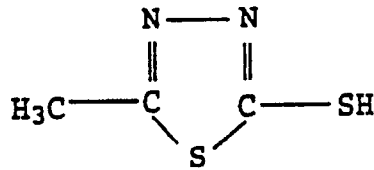

5


V-1



10

15

V-2

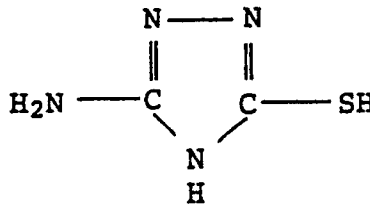

20

25

The bleaching solution for use in the method of the present invention may further contain, in addition to the bleaching agent and the above compounds, any conventional additives which are generally known to be incorporated into conventional bleaching solutions, for example, one or more inorganic acids, organic acids and salts thereof having a pH buffering capacity, such as nitrates (e.g., sodium nitrate, ammonium nitrate), boric acid, sodium metaborate, acetic acid, sodium acetate, sodium carbonate, potassium carbonate, phosphorous acid, phosphoric acid, sodium phosphate, citric acid, sodium citrate or tartaric acid.

30

In the method of the present invention, the replenishing amount of the fixing solution is from 50 ml to 2000 ml, preferably from 100 ml to 1000 ml, per m² of the photographic material being processed.

35

The method of the present invention can be carried out in an automatic developing machine, which will be explained in detail hereunder. In the automatic developing machine to be used for the method of the present invention, stirring of the processing solution having a fixing ability is preferably increased as much as possible, whereby the time required for desilvering may be shortened. Specific ways of increasing stirring in the step include a method of applying a jet stream of a processing solution to the emulsion surface of the photographic material being processed, as described in JP-A-62-183460 mentioned before; a method of using a rotating means to elevate the stirring effect in a processing solution, as described in JP-A-62-183461; a method of moving the photographic material being processed while the emulsion surface of the material is contacted with a wiper blade provided in the inside of the processing bath so that the processing solution near the the emulsion surface is made turbulent to thereby elevate the stirring of the bath; and a method of increasing the circulating flow of the total processing solution. Such means are preferably used for increasing the stirring of the fixing solution and bleach-fixing solution as well as bleaching solution. The increase of the stirring of the processing solution is considered to accelerate the introduction of the bleaching agent and the fixing agent into the emulsion layer of the photographic material being processed, and as a result, to elevate the desilvering rate in the processing step.

40

45

The stirring accelerating means is more effective when a bleaching accelerator is used, whereby the bleaching accelerating effect can noticeably be enhanced and the fixation retardation or insufficiency may be eliminated because of the bleaching accelerator.

50

The automatic developing machine to be used for the method of the present invention is preferred to have a means of conveying the photographic material being processed, as described in JP-A-60-191257, 60-191248 and 60-191259. As described in the JP-A-60-191257, the conveyance means is effective for noticeably reducing the carryover of the processing solution from the prior bath to the later bath and therefore is also effective for preventing deterioration of the processing solution used. This is especially meaningful for shortening the processing time in the respective processing steps and for reducing the

55

amount of the replenisher for the respective processing steps.

The color developer for use in the method of the present invention contains known aromatic primary amine color developing agents. Preferred examples of the color developing agents for use in the present invention are p-phenylenediamine derivatives. Specific examples of such derivatives are mentioned below, which, however, are not to be construed as limiting the scope of the present invention.

- D- 1: N,N-diethyl-p-phenylenediamine
- D- 2: 2-Amino-5-diethylaminotoluene
- D- 3: 2-Amino-t-(N-ethyl-N-laurylamino)toluene
- D- 4: 4-[N-ethyl-N-(β -hydroxyethyl)amino]aniline
- D- 5: 2-Methyl-4-[N-ethyl-N-(β -hydroxyethyl)amino]aniline
- D- 6: 4-Amino-3-methyl-N-ethyl-N-[β -(methanesulfonamido)-ethyl]aniline
- D- 7: N-(2-amino-5-diethylaminophenylethyl)methanesulfonamide
- D- 8: N,N-dimethyl-p-phenylenediamine
- D- 9: 4-Amino-3-methyl-N-ethyl-N-methoxyethylaniline
- D-10: 4-Amino-3-methyl-N-ethyl-N- β -ethoxyethylaniline
- D-11: 4-Amino-3-methyl-n-ethyl-n- β -butoxyethylaniline

Among these p-phenylenediamine derivatives, (D-5) is especially preferred.

The p-phenylenediamine derivatives may also be in the form of salts such as sulfates, hydrochlorides, sulfites or p-toluenesulfonates. The amount of the aromatic primary amine developing agent contained in the color developer is preferably from about 0.1 g to about 20 g, more preferably from about 0.5 g to about 10 g or so, per liter of the developer.

The color developer for use in the present invention can further contain, if desired, sulfites, such as sodium sulfite, potassium sulfite, sodium bisulfite, potassium bisulfite, sodium metasulfite or potassium metasulfite, as well as carbonyl-sulfite adducts, as a preservative.

The preferred amount of the preservative to be added to the color developer is from 0.5 g to 10 g, more preferably from 1 g to 5 g, per liter of the developer.

As compounds capable of directly preserving the color developing agents, various hydroxylamines, the hydroxamic acids described in JP-A-63-43138, the hydrazines and hydrazides described in JP-A-63-146041, the phenols described in JP-A-63-44657 and 63-58443, the α -hydroxyketones and α -aminoketones described in JP-A-63-44656 and/or various saccharides described in JP-A-63-36244 are preferably added to the color developer. Further, in combination with these compounds, the monoamines described in JP-A-63-4235, 63-24254, 63-21647, 63-146040, 63-27841 and 63-25654, the diamines described in JP-A-63-30845, 63-146040 and 63-43139, the polyamines described in JP-A-63-21647 and 63-26655, the polyamines described in JP-A-63-44655, the nitroxy radicals described in JP-A-63-44655, the nitroxy radicals described in JP-A-63-53551, the alcohols described in JP-A-63-43140 and 63-53549, the oximes described in JP-A-63-56654, and the tertiary amines described in EP-248450A may preferably be used.

As other preservatives, various metals described in JP-A-57-44148 and 57-53749, the salicylic acids described in JP-A-59-180588, the alkanolamines described in JP-A-54-3532, the polyethyleneimines described in JP-A-56-94349, and the aromatic polyhydroxy compounds described in U.S. Patent 3, 746, 544 may optionally be incorporated into the color developer for use in the present invention. In particular, incorporation of aromatic polyhydroxy compounds as a preservative is preferred.

The color developer for use in the present invention preferably has a pH value of from 9 to 12, more preferably from 9 to 11.0, and the color developer can contain various known developer components in addition to the above-mentioned ingredients.

In order to maintain this pH value, the color developer preferably contains various buffers.

Specific examples of useful buffers include sodium carbonate, potassium carbonate, sodium bicarbonate, potassium bicarbonate, trisodium phosphate, tripotassium phosphate, disodium phosphate, dipotassium phosphate, sodium borate, potassium borate, sodium tetraborate (borax), potassium tetraborate, sodium o-hydroxybenzoate (sodium salicylate), potassium o-hydroxybenzoate, sodium 5-sulfo-2-hydroxybenzoate (potassium 5-sulfosalicylate). However, these compounds are not intended to restrict the scope of the present invention.

The amount of the buffer to be added to the color developer is preferably 0.1 mol/liter or more, and is especially preferably from 0.1 mol/liter to 0.4 mol/liter.

In addition, the color developer may also contain various chelating agents as an agent for preventing precipitation of calcium or magnesium or for the purpose of improving the stability of the color developer.

As the chelating agents organic acid compounds are preferred, in particular e.g., aminopolycarboxylic

acids, organic phosphonic acids and phosphonocarboxylic acids. Specific examples of the acid compounds include nitrilotriacetic acid, diethylene-triaminepentaacetic acid, ethylenediaminetetraacetic acid, N,N,N-trimethylenephosphonic acid, ethylenediamine-N,N,N',N'-tetramethylenephosphonic acid, transcyclohexanediaminetetraacetic acid, 1,2-diaminopropanetetraacetic acid, hydroxyethylimino-diacetic acid, glycol ether diaminetetraacetic acid, ethylenediamino-orthohydroxyphenylacetic acid, 2-phosphonobutane-1,2,4-tricarboxylic acid, 1-hydroxyethylidene-1, 1-diphosphonic acid and N,N-bis(2-hydroxybenzyl)-ethylenedimaine-N,N'-diacetic acid. These examples are not limitative. These chelating agents may be used alone or in the form of a mixture of two or more of them, if desired.

The amount of the chelating agent to be added to the color developer is any that is sufficient for sequestering the metal ion in the color developer. For instance, the amount may be from 0.1 g to 10 g or so per liter of the developer.

The color developer may contain any optional development accelerator, if desired. However, it is preferred that the color developer for use in the present invention is substantially free from benzyl alcohol, in view of the prevention of environmental pollution, the easiness of the preparation of the developer solution and the prevention of fog. The term "substantially free from benzyl alcohol" means that the content of benzyl alcohol in the developer is 2 ml or less per liter of the developer, and preferably the developer contains no benzyl alcohol.

Other development accelerators which can be added to the color developer for use in the present invention, include, for example, the thioether compounds described in JP-B-37-16088, 37-5978, 38-7826, 44-12380 and 45-9019 and U.S. Patent 3,813,247, the p-phenylenediamine compounds described in JP-A-52-49829 and 50-15554, the quaternary ammonium salts described in JP-A-50-137726, JP-B-44-30074 and JP-A-56-156826 and 52-43429, the amine compounds described in U.S. Patents 2,494,903, 3,128,182, 4,230,796 and 3,253,919, JP-B-41-11431, U.S. Patents 2,482,546, 2,596,926 and 3,582,346, the polyalkyleneoxides described in JP-B-37-16088 and 42-25201, U.S. Patent 3,18,183, JP-B-41-11431 and 42-23883 and U.S. Patent 3,532,501 and well as other 1-phenyl-3-pyrazolidones and imidazoles.

In accordance with the present invention, any optional anti-foggant can be added to the color developer, if desired. As the anti-foggant can be used alkali metal halides such as sodium chloride, potassium bromide or potassium iodide, as well as organic anti-foggants. As specific examples of organic anti-foggants which may be used in the present invention, there are nitrogen-containing heterocyclic compounds such as benzotriazole, 6-nitrobenzimidazole, 5-nitroisindazole, 5-methylbenzotriazole, 5-nitrobenzotriazole, 5-chlorobenzotriazole, 2-thiazolyl-benzimidazole, 2-thiozolylmethyl-benzimidazole, indazole, hydroxyazaindolindine and adenine.

The color developer for use in the present invention preferably contains a brightening agent. As the brightening agent are preferred 4,4'-diamino-2, 2'-disulfostylbene compounds. The amount of the brightening agent to be added to the color developer is up to 5 g/liter, preferably from 0.1 to 4 g/liter.

In addition, various kinds of surfactants can be added to the color developer, if desired, including alkylsulfonic acids, arylsulfonic acids, aliphatic carboxylic acids, and aromatic carboxylic acids.

The processing temperature of the color developer of the present invention is from 20 to 50 °C, preferably from 30 to 45 °C. The processing time is from 20 seconds to 5 minutes, preferably from 30 seconds to 3 minutes. The amount of the replenisher is preferably small and is, for example, from 100 to 1500 ml, preferably from 100 to 800 ml, more preferably from 100 to 400 ml, per m² of the photographic material processed.

The color development may be effected in a multi-bath system containing two or more baths, where a replenisher for color developer is introduced into the first bath or into the last bath so that the development time may be shortened and the amount of the replenisher may be reduced.

The processing method of the present invention can be applied to color reversal processing. In such color reversal processing, a first black-and-white developer which is generally used in conventional reversal processing of general color photographic materials or a common black-and-white developer which is generally used for processing of conventional black-and-white developer can be incorporated into the developer.

Examples of typical additives, include a developing agent such as 1-phenyl-3-pyrazolidone, Metol or hydroquinone, a preservative such as sulfites, an alkali accelerator such as sodium hydroxide, sodium carbonate or potassium carbonate, an inorganic or organic inhibitor such as potassium bromide, 2-methylbenzimidazole or methylbenzothiazole, a water softener such as polyphosphates, and a development accelerator such as a trace amount of iodides or mercapto compounds.

The processing method of the present invention includes the processing steps of color development, bleaching, bleach-fixation and fixation. After the bleach-fixation or fixation step, the photographic material processed is generally subjected to a processing step of rinsing in water or stabilization. After being

processed in the bath having a fixing ability, the material may simply and directly be subjected to stabilization, without substantial rinsing in water.

Known additives may be added to the rinsing water used in the rinsing step, if desired. For instance, a water softener such as inorganic phosphoric acids, aminopolycarboxylic acids or organic phosphoric acids; a bactericide or fungicide for preventing propagation of various bacteria, fungi and algae (such as isothiazolines, organic chlorine-containing bactericides, benzotriazoles); as well as a surfactant for preventing drying load or unevenness may be added to the rinsing water. In addition, the compounds described in L.E. West, "Water Quality Criteria" Phot. Sci. and Eng., Vol. 9, No. 6, pages 34 to 359, (1965) may also be used for the purpose.

As the stabilizing solution used in the stabilization step, a processing solution for stabilizing the color images formed is used. For instance, a solution having a buffering capacity for a pH value of from 3 to 6, as well as a solution containing an aldehyde (such as formalin) can be used. The stabilizing solution may contain, if desired, an ammonium compound, a metal compound such as Bi or Al compound, a brightening agent, a chelating agent (such as 1-hydroxy-ethylidene-1, 1-diphosphonic acid), a bactericide, a fungicide, a film hardening agent and a surfactant.

For the rinsing step or stabilization step, a multistage countercurrent system is preferred. The number of the stages is preferably from 2 to 4 stages. The amount of the replenisher to the step is from 1 to 50 times, preferably from 2 to 30 times, more preferably from 2 to 15 times, the carryover amount from the previous bath, per unit area of the photographic material being processed.

As the water used in the rinsing step or stabilization step, city water, water deionized by treatment with an ion-exchange resin to have a Ca or Mg concentration of 5 mg/liter or less, and water as sterilizing by treatment with a halogen or ultraviolet sterilizing lamp is preferred.

When the method of the present invention is carried out continuously by the use of an automatic developing machine, the processing solution is often concentrated by evaporation during processing. In particular, when the amount of the photographic material to be processed is small or when the open area of the processing solution is large, such concentration of the processing solution is noticeable. In order to compensate the thus-concentrated processing solution, a proper amount of water or replenisher is preferably added to the processing solution.

The overflow from the rinsing bath or stabilization bath may preferably be re-circulated to the previous bath having a fixing ability, whereby the amount of the drainage from the method may advantageously be reduced.

The silver halide incorporated into the photographic emulsion layer of the photographic material to be processed by the method of the present invention is silver chloride, silver bromide, silver chlorobromide, silver iodochloride, silver chloriodobromide or silver iodobromide. It is preferred that the silver halide is that containing silver iodide in an amount of 30 mol% or less, preferably about 1 mol% to about 25 mol%. More preferably, the silver halide is silver iodobromide, silver iodochloride or silver iodochlorobromide containing about 30 mol% or less silver iodide. Especially preferably, it is silver iodobromide containing silver iodide in an amount of from about 1 mol to about 25 mol%.

The silver halide grains in the photographic emulsion may have a regular crystal form such as a cubic, octahedral or tetradecahedral crystal form, or an irregular crystal form such as a spherical or tabular crystal form, or a crystal form having a crystal defect such as a twin plane, or further a composite form of these crystal forms.

Regarding the grain size of the silver halide grains, the grains may be fine grains having a grain size of about 0.2 μm or less or may be large-sized grains having a projected area diameter of up to about 10 μm . The emulsion of the grains may be either a polydispersed emulsion or a monodispersed emulsion.

As one embodiment of the silver halide emulsion for use in the present invention, an emulsion with a distribution where the maximum grain size of the grains in the grain group of up to 30% by number as counted from the smallest grains in the emulsion is 0.3 μm or less, especially preferably 0.17 μm or less, as the sphere-corresponding diameter may be used, which is illustrated in European Patent 285,176. Such emulsion is excellent in high sharpness, small color turbidity and broad exposure latitude.

The silver halide photographic emulsions to be used in the present invention can be prepared, for example, by the methods described in Research Disclosure (RD), Item 17643 (December 1978), pages 22 to 23, "I. Emulsion Preparation and Types"; RD Item 18716 (November 1979), page 648; P. Glafkides, Chemie et Physique Photographique (Paul Montel, 1967); and G.F. Duffin, Photographic Emulsion Chemistry (Focal Press, 1966); and V.L. Zelikman et al., Making and Coating Photographic Emulsion (Focal Press, 1964).

In addition, the monodispersed emulsions described in U.S. Patents 3,574,628 and 3,655,394 and British Patent 1,413,748 are also preferably used.

Further tabular grains having an aspect ratio of about 5 or more may also be used. Such tabular grains may easily be prepared by the methods described, for example, in Guttoff, Photographic Science and Engineering, Vol. 14, pages 278 to 257 (1970), U.S. Patents 4,434,226, 4,414,310, 4,433,043 and 4,439,520 and british Patent 2,112,157.

5 The crystal structure of the silver halide grains may be uniform throughout the whole grain, or the inside part and the outside part of one grain may have different halogen compositions, or one grain may have a layered structure. Further, silver halides of different compositions may be jointed by epitaxial junction or a silver halide may also be jointed with other compounds than silver halides, such as silver rhodanide or lead oxide, to form silver halide grains with a function struchture.

10 A mixture of grains of various crystal forms may also be used in the present invention.

The silver halide emulsion for use in the present invention is, in general, physically ripened, chemically ripened and spectrally sensitized. Additives for the ripening step or sensitizing step are described in Research Disclosure, Items 17643 and 18716, and the relevant parts are summarized in the following Table.

15 Known photographic additives which can be used in the present invention are also described in these two Research Disclosures, and the relevant parts are also summarized in the same Table.

Kinds of Additives		RD 17643	RD 18716
1.	Chemical Sensitizer	p. 23	p. 648, right column
2.	Sensitivity-enhancer		"
3.	Spectral Sensitizer Super Color Sensitizer	pp. 23-24	from p. 648, right column to p. 649, right column
4.	Brightening Agent	p. 24	
5.	Anti-foggant Stabilizer	pp. 24-25	p. 649, right column
6.	Light Absorbent Filter Dye UV Absorbent	pp. 25-26	from p. 649, right column to p. 650, left column
7.	Stain Inhibitor	p. 25, right column	p. 650, from left to right column
8.	Color Image Stabilizer	p. 25	
9.	Hardening Agent	p. 26	p. 651, left column
10.	Binder	p. 26	"
11.	Plasticizer Lubricant	p. 27	p. 650, right column
12.	Coating Aid Surfactant	pp. 26-27	"
13.	Antistatic Agent	p. 27	"

Various color couplers may be incorporated into the color photographic materials to be processed by the method of the present invention. Specific examples of couplers usable in the materials are described in the patent publications referred to in Research Disclosure (RD) item 17643, VII-C to G.

40 As yellow couplers, for example, the compounds described in U.S. Patents 3,933,501, 4,022,620, 4,326,024 and 4,401, 752, JP-B-58-10739, British Patents 1,425,020 and 1,476,760 are preferred.

45 As magenta couplers, 5-pyrazolone and pyrazoloazole compounds are preferred. For example, the compounds described in U.S. Patents 4,310,619 and 4,351,894, European Patent 73,636, U.S. Patents 3,061,432, and 3,725,067, Research Disclosure Item 24,220 (June, 1984), JP-A-60-33552, Research Disclosure Item 24,230 (June, 1984), JP-A 60-43659 and U.S. Patents 4,500,630 and 4,540,654 are especially preferred.


50 As cyan couplers, phenol couplers and naphthol couplers can be used. For example, the compounds described in U.S. Patents 4,052,212, 4,146,396, 4,228,233, 4,296,200, 2,369,9292, 2,801,171, 2,772,162, 2,895,826, 3,772,002, 3,758,308, 4,334,011 and 4,327,137, West German Patent Application (OLS) No. 3,329,729, European Patent 121,365A, U.S. Patents 3,446,622, 4,333,999, 4,451,559 and 4,427,767 and European Patent 161, 626A are preferred.

Especially preferred cyan couplers are 5-amidonaphthol type cyan couplers described in European Patent 161,626A, JP-A-60-237448, 61-143640 and 61-145557, JP-A-62-123157, 62-123158, 62-269958 and 63-258446 and Japanese Patent Application No. 63-36542.

55 Specific examples of such couplers include the following compounds but the present invention is not to be construed as being limited thereto.

C-1


5

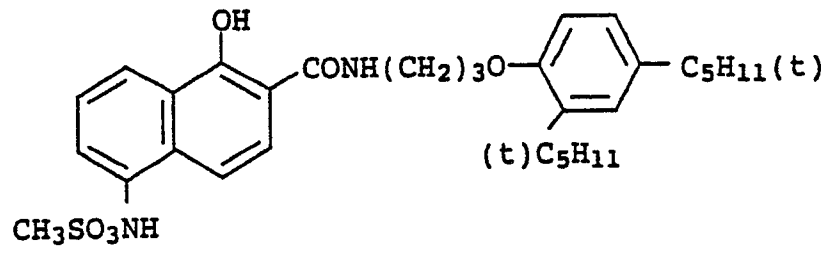

10

C-2


15

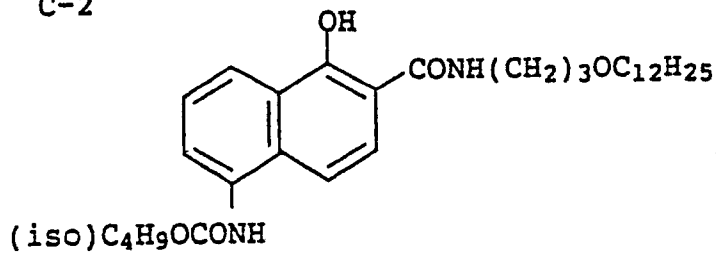

20

C-3


25

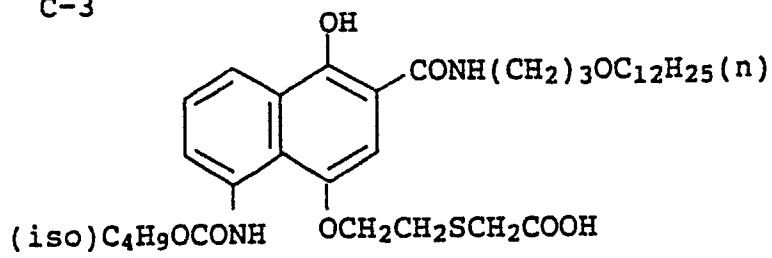

30

C-4

35

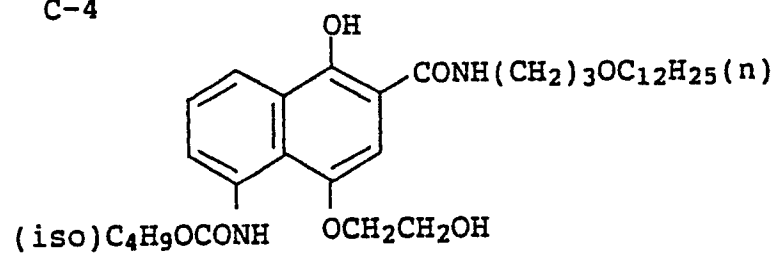

40

45


50

55

C-5

5


10

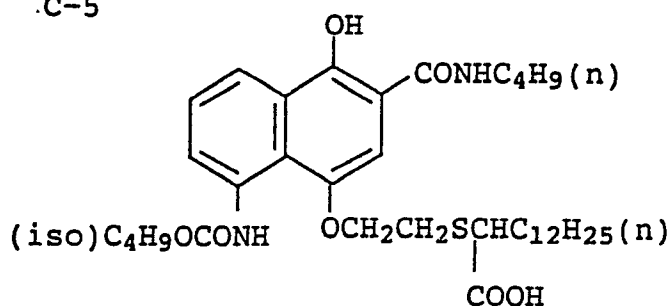

C-6

15


20

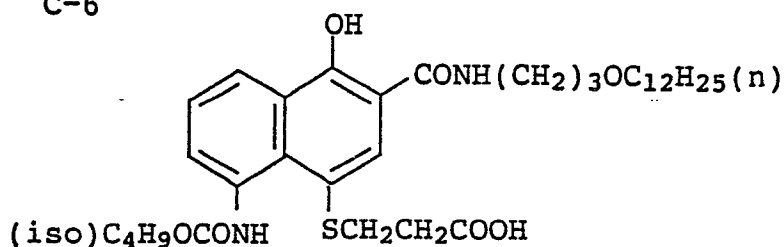

C-7

25

30

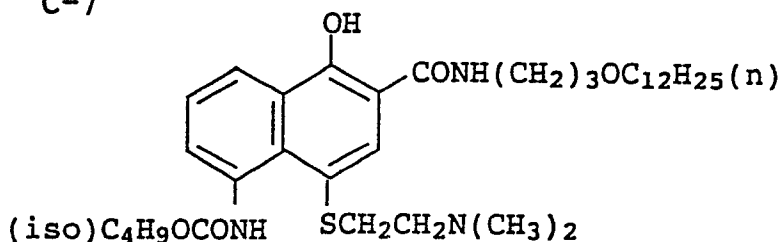

As colored couplers for correcting the unnecessary absorption of the colored dyes, the compounds described in Research Disclosure Item 17643, VII-G, U.S. Patent 4,163,670, JP-B-57-39413, U.S. Patents 4,004,929 and 4,138,258 and British Patent 1,146,368 are preferred.

As couplers capable of forming colored dyes having a suitable diffusibility, the compounds described in U.S. Patent 4,366,237, British Patent 2,125,570, European Patent 96,570 and West German Patent Application (OLS) No. 3,234,533 are preferred.

Specific examples of polymerized dye-forming couplers which may be used in the present invention are described in U.S. Patents 3,451,820, 4,080,211 and 4,367,282 and British Patent 2,102,173.

Couplers capable of releasing a photographically useful group by coupling may also be preferably used in the present invention. As DIR couplers capable of releasing a development inhibitor, the compounds described in the patent publications referred to in the RD Item 17,643, VII-F as well as those described in JP-A-57-151944, 57-154234 and 60-184248 and U.S. Patent 4,248,962 are preferred.

As couplers capable of imagewise releasing a nucleating agent or a development accelerator in development, the compounds described in British Patents 2,097,140 and 2,131,188 and JP-A-59-157638 and 59-170840 are preferred.

In addition, couplers which can be used in the photographic material for the present invention, include the competing couplers described in U.S. Patent 4,130,427, the polyequivalent couplers described in U.S. Patent 4,130,427, the polyequivalent couplers described in U.S. Patent 4,283,472, 4,338,393 and 4,310,618, the DIR redox compound-releasing couplers described in JP-A-60-185950, and the couplers capable of releasing a dye, which may be recolored after release, described in European Patent 173,302A.

The couplers for use in the present invention can be incorporated into the photographic materials by various known dispersing methods.

For instance, a water-in-oil dispersing method may be employed, and examples of high boiling point solvent to be used in the same method are described in U.S. Patent 2,322,027.


A method of using a polymer as a coupler-dispersing medium may also be employed, which is

described in JP-B-48-30494, U.S. Patent 3,619,195, West German Patent 1,957,467 and JP-B-51-59835.

A latex-dispersing method may further be employed, and the steps of the method, the effect of the method and examples of dipping latexes to be used in the method are described in U.S. Patent 4,199,363, West German Patent Application (OLS) Nos. 2,541,274 and 2,541,230.

5 The photographic materials to be processed by the method of the present invention may contain a compound which may release a compound by reaction with the oxidation product of a developing agent, whereupon the thus-released compound further reacts with the oxidation product of another molecule of the developing agent to thereby release a development inhibitor. Examples of the compound of the type are described in European Patent 285,176.

10 Specifically, such compounds include the following compounds, but the present invention is not to be construed as being limited thereto:

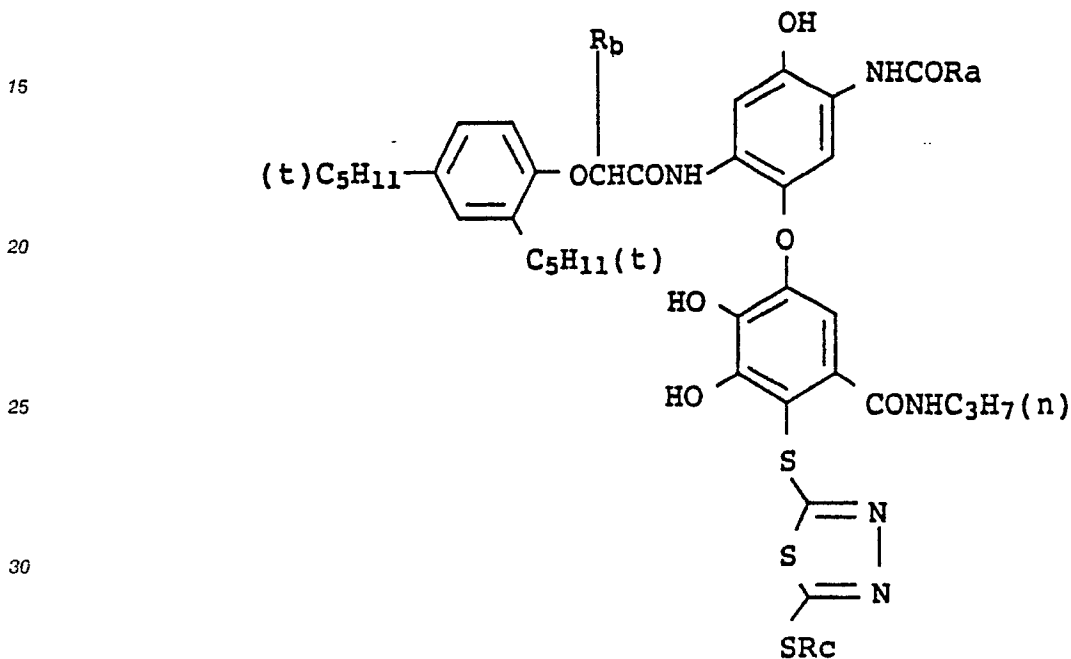

35


D-1	$R_a = C_3F_7(n)$	$R_b = H$	$R_c = -CH_2CH_2CO_2CH_3$
D-2	$R_a = C_3F_7(n)$	$R_b = -C_2H_5$	$R_c = -CH_2CH_2CO_2CH_3$
D-3	$R_a = C_3F_7(n)$	$R_b = H$	$R_c = - \begin{array}{c} \text{C} \text{ H C} \text{ O}_2\text{CH}_3 \\ \\ \text{C} \text{ H}_3 \end{array}$
D-4	$R_a = C_3F_7(n)$	$R_b = -C_2H_5$	$R_c = - \begin{array}{c} \text{C} \text{ H C} \text{ O}_2\text{CH}_3 \\ \\ \text{C} \text{ H}_3 \end{array}$
D-5	$R_a = C_3F_7(n)$	$R_b = H$	$R_c = -CH_2CO_2CH_3$
D-6	$R_a = C_3F_7(n)$	$R_b = -C_4H_9(n)$	$R_c = -CH_2CO_2CH_3$
D-7	$R_a = (t)C_4F_9$	$R_b = H$	$R_c = -CH_2CH_2CO_2CH_3$

40

45

50

55

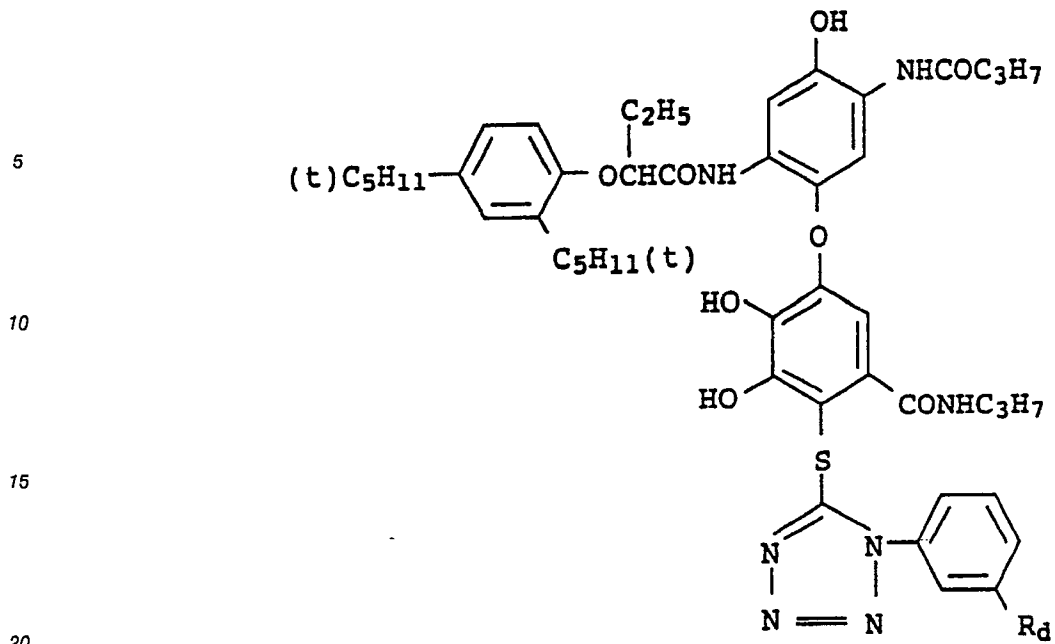

25

D-8 $R_d = H$
 D-9 $R_d = COOC_2H_5$

Incorporation of 5-amidohydroquinone derivatives (described in European Patent 284,082) into the photographic materials for the present invention is preferred, as these derivatives are excellent in high color reproducibility, small sensitivity fluctuation in running procedure, small insufficiency in recoloration and fine graininess.

30 Specific examples of such derivatives include the following compounds, but the present invention is not to be construed as being limited thereto:

35


40

45


50

55


E-1

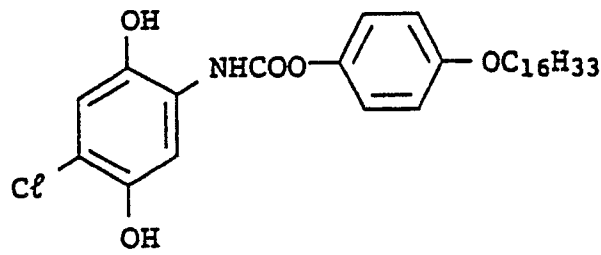


E-2

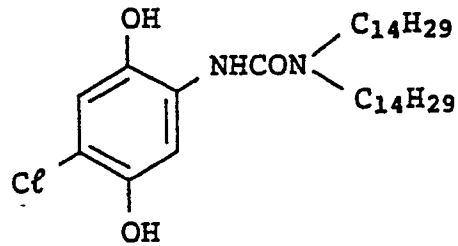


E-3

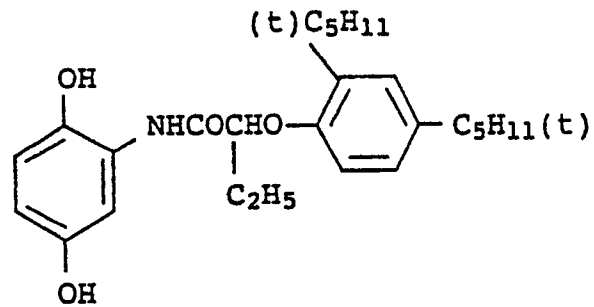

E-4

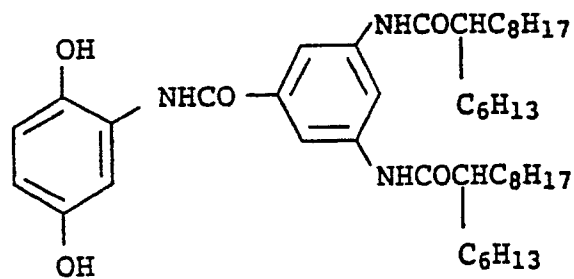

E-5

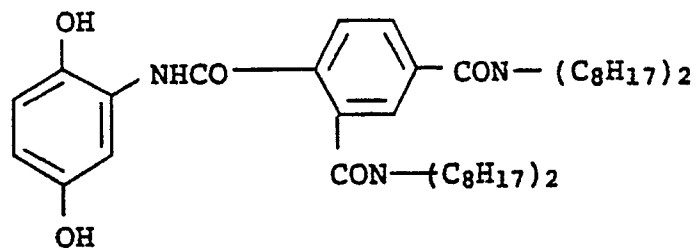

Supports which may suitably be used for the photographic materials to be processed by the method of the present invention may be those described, for example, in the RD Item 17643, page 28 and Item 18716, from page 647, right-hand column to page 648, left-hand column.

The following examples are provided to illustrate specific embodiments of the present invention in greater detail, but are not to be construed as limiting the scope of the present invention. Unless otherwise indicated all parts, ratios and percentages are by weight.

EXAMPLE 1

5 A multilayer color photographic material (Sample A) was prepared by forming the layers having the compositions shown below on a subbed cellulose triacetate film support.

The compositions of the layers were as follows. The amount coated was represented by the unit of g/m² as silver, for silver halide and colloidal silver. It was represented by the unit of g/m² for couplers, additives and gelatin. It was represented by the number of mols per mol of the silver halide in the same layer, for sensitizing dyes.

10

First Layer: Anti-halation Layer

	Black Colloidal Silver	0.2
15	Gelatin	1.3
	ExM-9	0.06

20

25

30

35

40

45

50

55

	UV-1	0.03
5	UV-2	0.06
	UV-3	0.06
	Solv-1	0.15
10	Solv-2	0.15
	Solv-3	0.05

Second Layer: Interlayer

15	Gelatin	1.0
	UV-1	0.03
20	ExC-4	0.02
	ExF-1	0.004
25	Solv-1	0.1
	Solv-2	0.1

Third Layer: Low-sensitive Red-sensitive Emulsion Layer

30	Silver Iodobromide Emulsion	
	(AgI 4 mol%; uniform AgI type; sphere-	
35	corresponding diameter 0.5 μm ; variation	
	coefficient of sphere-corresponding diameter 20 %;	
	tabular grains; ratio of diameter/thickness 3.0)	
40		1.2 as Ag
	Silver Iodobromide Emulsion	
45	(AgI 3 mol%; uniform AgI type; sphere-	
	corresponding diameter 0.3 μm ; variation	
	coefficient of sphere-corresponding diameter 15 %;	
50	shperical grains; ratio of diameter/thickness 1.0)	
		0.6 as Ag

55

	Gelatin	1.0
	ExS-1	4 x 10 ⁻⁴
5	ExS-2	4 x 10 ⁻⁵
	ExC-1	0.05
10	ExC-2	0.50
	ExC-3	0.03
	ExC-4	0.12
15	ExC-5	0.01

Fourth Layer: High-sensitive Red-sensitive Emulsion Layer

20 Silver Iodobromide Emulsion
 (AgI 6 mol%; uniform AgI-rich core type grains
 with core/shell ratio of 1/1; sphere-corresponding
 25 diameter 0.7 μm; variation coefficient of sphere-
 corresponding diameter 15 %; tabular grains; ratio
 30 of diameter/thickness 5.0)

		0.7 as Ag
	Gelatin	1.0
35	ExS-1	3 x 10 ⁻⁴
	ExS-2	2.3 x 10 ⁻⁵
40	ExC-6	0.11
	ExC-7	0.05
	ExC-4	0.05
45	Solv-1	0.05
	Solv-3	0.05

50 Fifth Layer: Interlayer

	Gelatin	0.5
--	---------	-----

55

Cpd-1	0.1
Solv-1	0.05

5 Sixth layer: Low-sensitive Green-sensitive Emulsion Layer

Silver Iodobromide Emulsion

10 (AgI 4 mol%; AgI-rich shell type grains with
core/shell ratio of 1/1; sphere-corresponding
15 diameter 0.5 μm ; variation coefficient of sphere-
corresponding diameter 15 %; tabular grains; ratio
of diameter/thickness 4.0) 0.35 as Ag

20 Silver Iodobromide Emulsion

(AgI 3 mol%; uniform AgI type; sphere-
25 corresponding diameter 0.3 μm ; variation
coefficient of sphere-corresponding diameter 25 %;
spherical grains; ratio of diameter/thickness 1.0)

30 0.20 as Ag

Gelatin 1.0

ExS-3 5×10^{-4}

35 ExS-4 3×10^{-4}

ExS-5 1×10^{-4}

40 ExM-8 0.4

ExM-9 0.07

ExM-10 0.02

45 ExY-14 0.03

Solv-1 0.3

50 Solv-4 0.05

Seventh Layer: High-sensitive Green-sensitive Emulsion
Layer

5	Silver Iodobromide Emulsion	
	(AgI 4 mol%; AgI-rich core type grains with	
10	core/shell ratio of 1/3; sphere-corresponding	
	diameter 0.7 μm ; variation coefficient of sphere-	
	corresponding diameter 20 %; tabular grains; ratio	
15	of diameter/thickness 5.0)	0.8 as Ag
	Gelatin	0.5
20	ExS-3	5×10^{-4}
	ExS-4	3×10^{-4}
	ExS-5	1×10^{-4}
25	ExM-8	0.1
	ExM-9	0.02
30	ExY-11	0.03
	ExC-2	0.03
	ExM-14	0.01
35	Solv-1	0.2
	Solv-4	0.01

40 Eighth Layer: Interlayer

	Gelatin	0.5
	Cpd-1	0.05
45	Solv-1	0.02

Nineth Layer: Donor Layer for Interlayer Effect to Red-
sensitive Layer

50 Silver Iodobromide Emulsion

55

5 (AgI 2 mol%; AgI-rich core type grains with
 core/shell ratio of 2/1; sphere-corresponding
 diameter 1.0 μm ; variation coefficient of sphere-
 corresponding diameter 15 %; tabular grains; ratio
 10 of diameter/thickness 6.0) 0.35 as Ag

Silver Iodobromide Emulsion

15 (AgI 2 mol%; AgI-rich core type grains with
 core/shell ratio of 1/1; sphere-corresponding
 diameter 0.4 μm ; variation coefficient of sphere-
 corresponding diameter 20 %; tabular grains; ratio
 20 of diameter/thickness 6.0) 0.20 as Ag

Gelatin 0.5

25 ExS-3 8×10^{-4}

ExY-13 0.11

30 ExM-12 0.03

ExM-14 0.10

35 Solv-1 0.2

Tenth Layer: Yellow Filter Layer

Yellow Colloidal Silver 0.05

40 Gelatin 0.5

Cpd-2 0.13

45 Solv-1 0.13

Cpd-1 0.10

Eleventh Layer: Low-sensitive Green-sensitive Emulsion
 Layer

Silver Iodobromide Emulsion

55

(AgI 4.5 mol%; uniform AgI type; sphere-
 corresponding diameter 0.7 μm ; variation
 coefficient of sphere-corresponding diameter 15 %;
 tabular grains; ratio of diameter/thickness 7.0)

0.3 as Ag

Silver Iodobromide Emulsion

(AgI 3 mol%; uniform AgI type; sphere-
 corresponding diameter 0.3 μm ; variation
 coefficient of sphere-corresponding diameter 25 %;
 tabular grains; ratio of diameter/thickness 7.0)

0.15 as Ag

Gelatin

0.5

ExS-6

2×10^{-4}

ExC-16

0.05

ExC-2

0.10

ExC-3

0.02

ExY-13

0.07

ExY-15

1.0

Solv-1

0.20

Twelfth Layer: High-sensitive Blue-sensitive Emulsion
 Layer

Silver Iodobromide Emulsion


(AgI 10 mol%; AgI-rich core type grains; sphere-
 corresponding diameter 1.0 μm ; variation
 coefficient of sphere-corresponding diameter 25 %;

	multi-layered twin tabular grains; ratio of	
	diameter/thickness 2.0)	0.5 as Ag
5	Gelatin	0.5
	ExS-6	1×10^{-4}
10	ExY-15	0.20
	ExY-13	0.01
	Solv-1	0.10
15	<u>Thirteenth Layer:</u> First Protective Layer	
	Gelatin	0.8
20	UV-4	0.1
	UV-5	0.15
	Solv-1	0.01
25	Solv-2	0.01
	<u>Fourteenth Layer:</u> Second Protective Layer	
30	Fine Silver Bromide Grain Emulsion	
	(AgI 2 mol%; uniform AgI type; sphere-	
35	corresponding diameter 0.07 μm)	0.5
	Gelatin	0.45
	Polymethyl Methacrylate Grains	
40	(diameter 1.5 μm)	0.2
	H-1	0.4
	Cpd-5	0.5
45	Cpd-6	0.5


In addition to the above-mentioned components, the respective layers contained a stabilizer Cpd-3 (0.04 g/m²) and a surfactant Cpd-4 (0.02 g/m²) as coating aids.

The compounds used were as follows:


UV-1

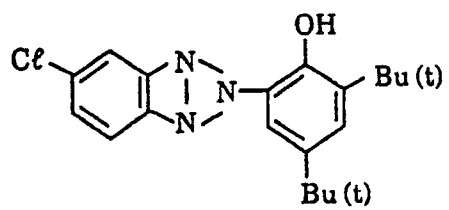

UV-2



UV-3

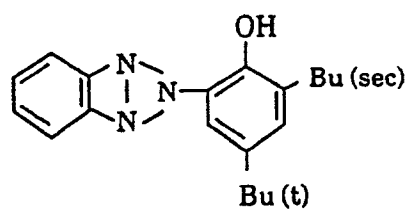

5

10

15

20

25

30

35


40

45


50

55

UV-4

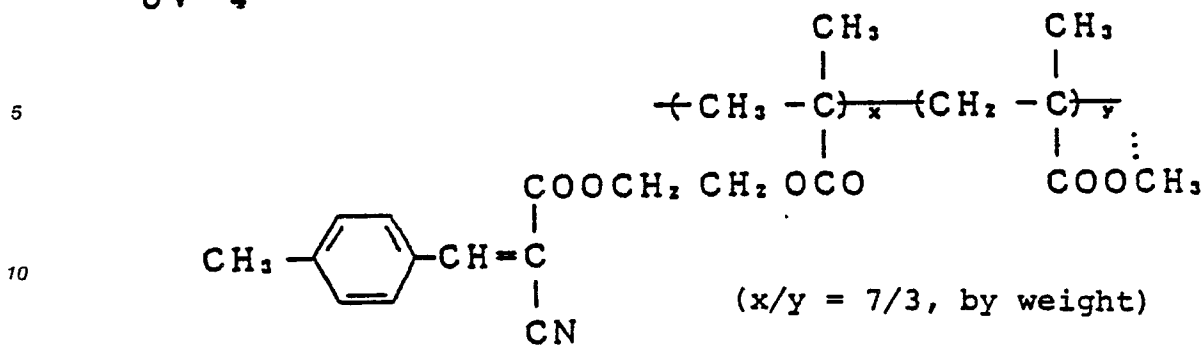

UV-5

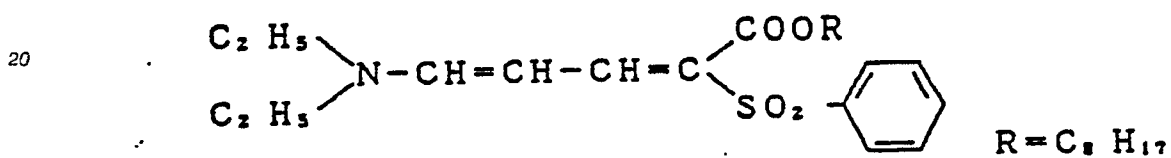


Solv-1 Tricresyl Phosphate

Solv-2 Dibutyl Phthalate

Solv-3



Solv-4

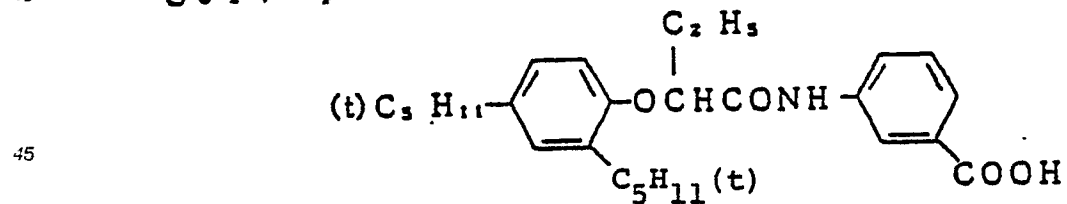


50

55

Cpd-1


5

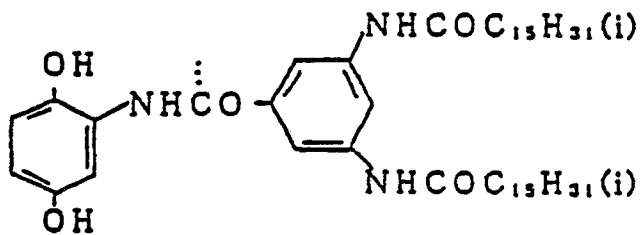

10

Cpd-2


15

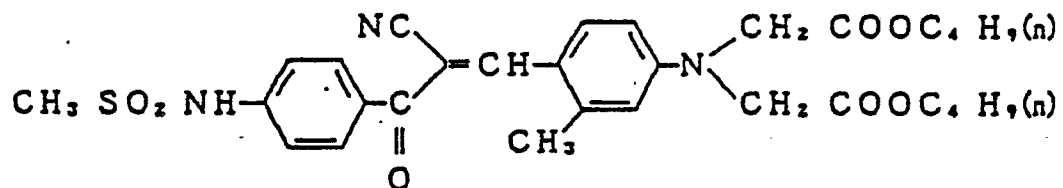

20


Cpd-3

25




30

Cpd-4




Cpd-5

35



40

Cpd-6




45


50

55


ExC-1

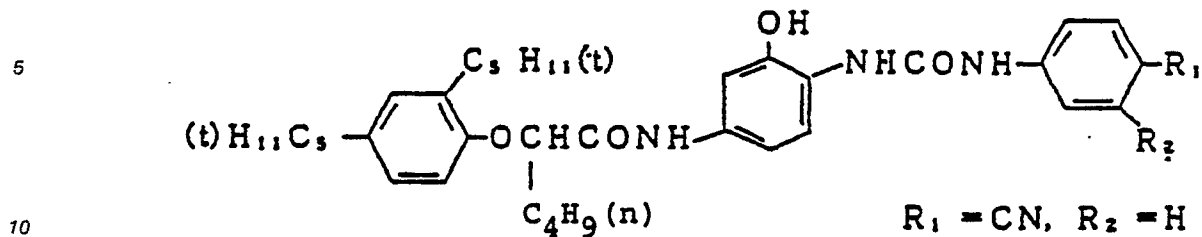

ExC-2

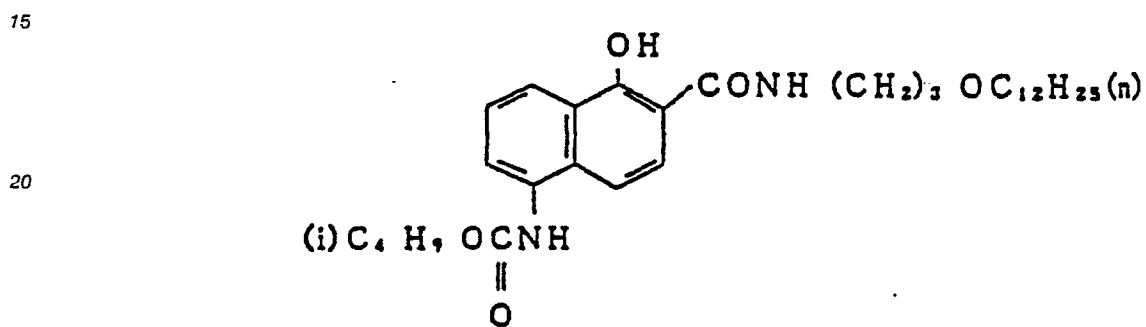


ExC-3

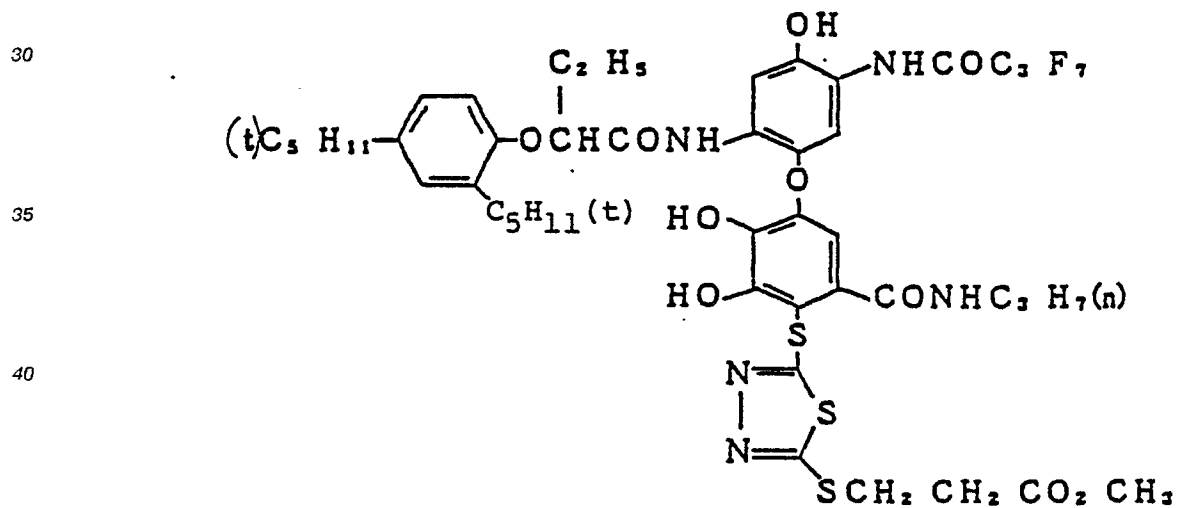


50

55


Ex C-4

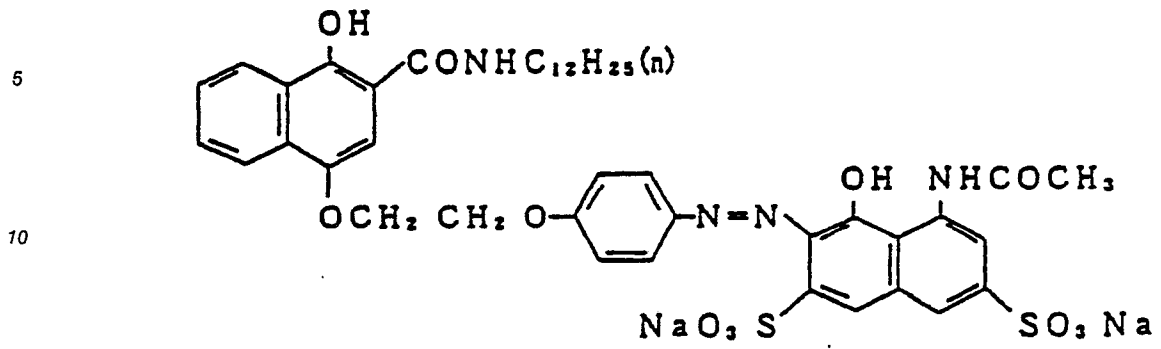


Ex C-5

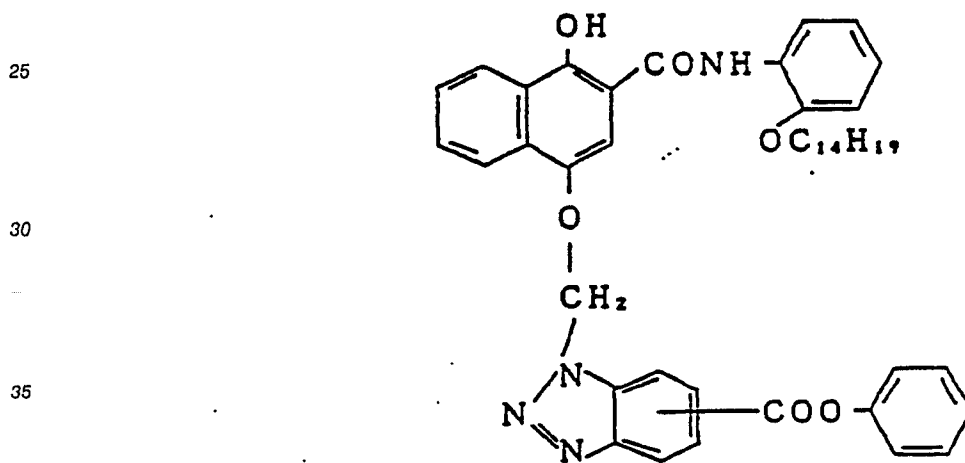


ExC-6

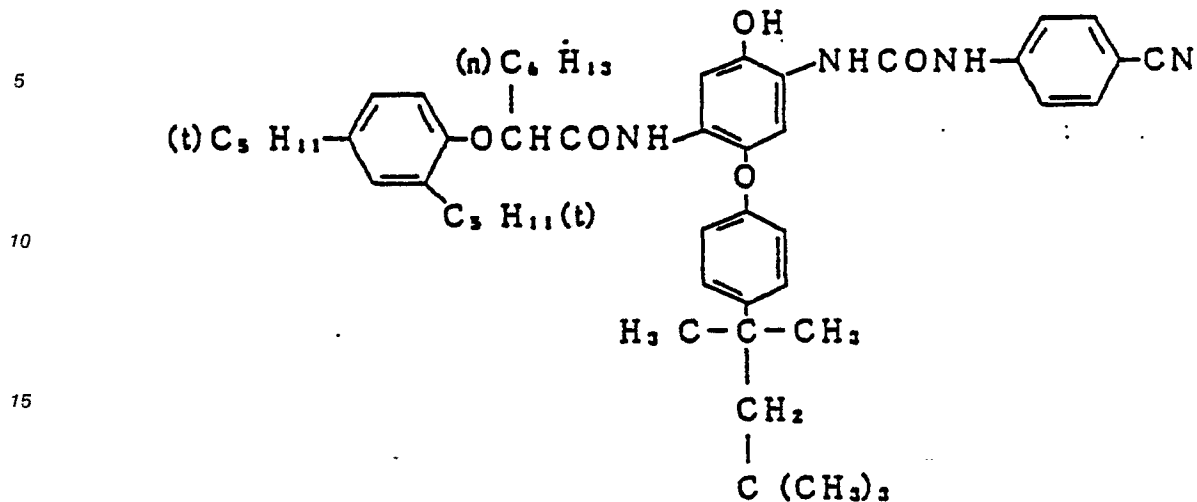

ExC-7

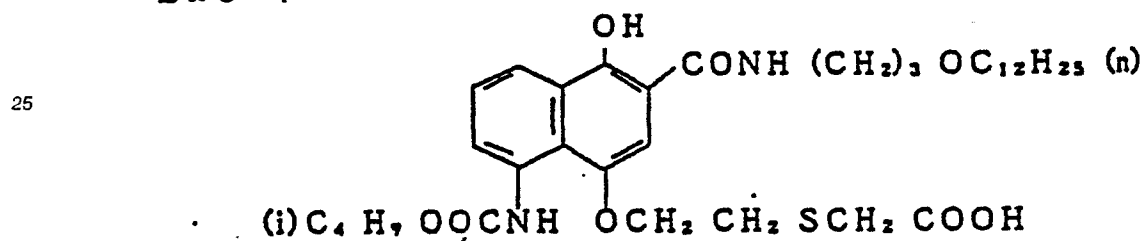


ExM-8

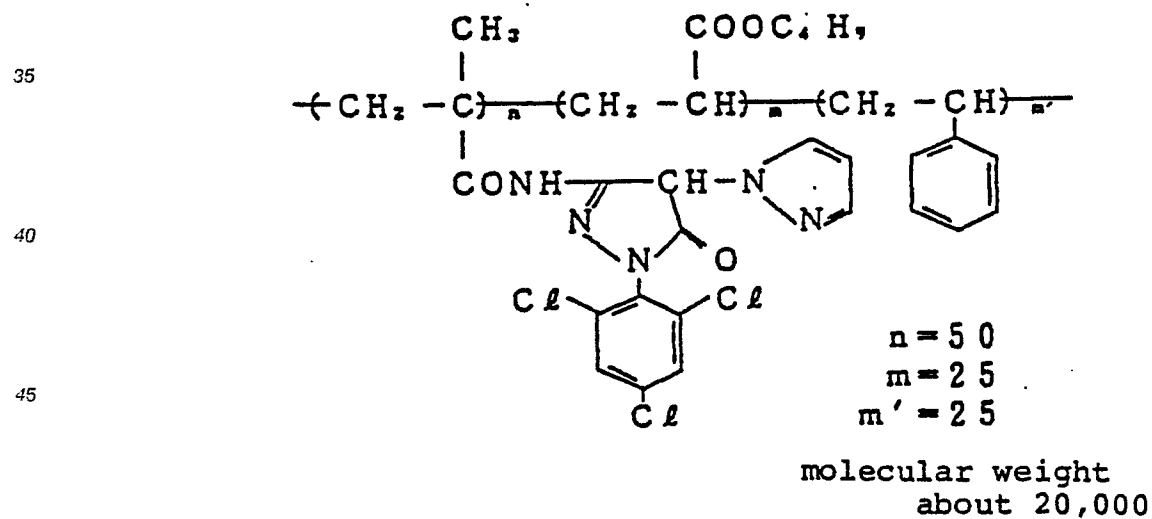


ExM-9

5
10
15
20
25
30
35
40
45
50
55

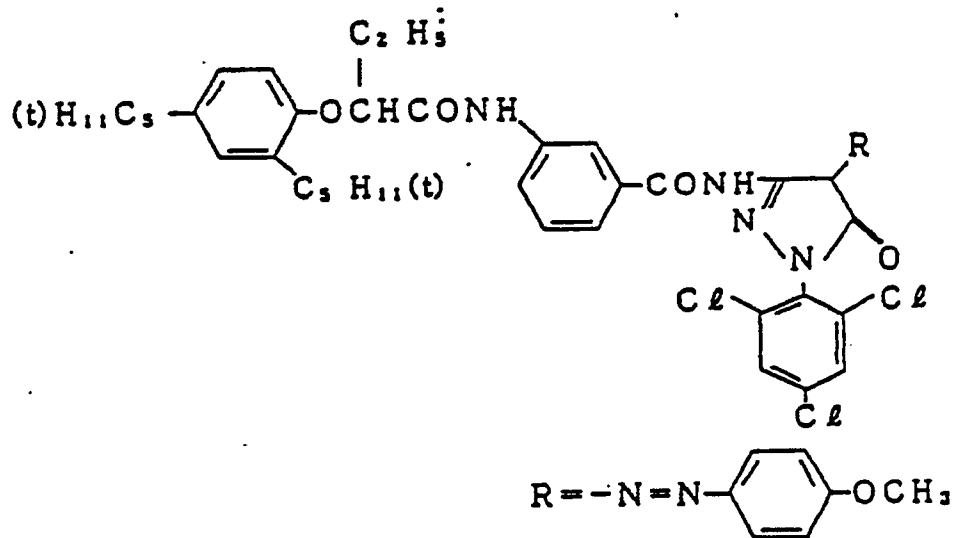

ExM-10

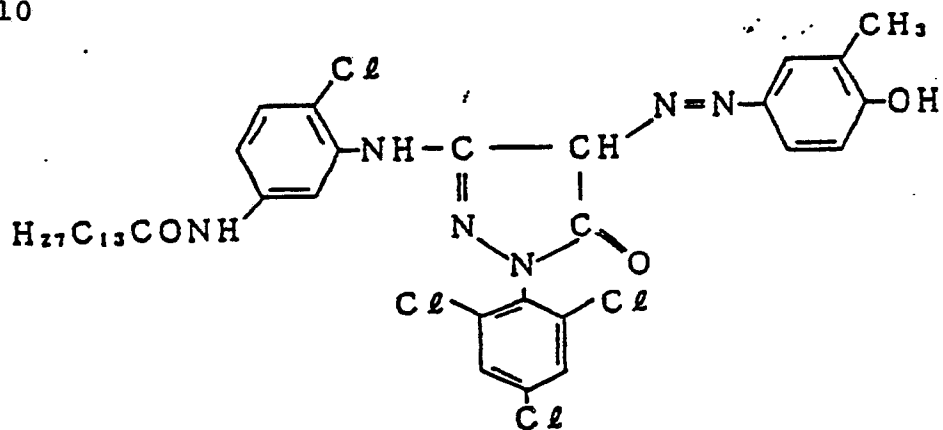


ExM-14

5

10

15

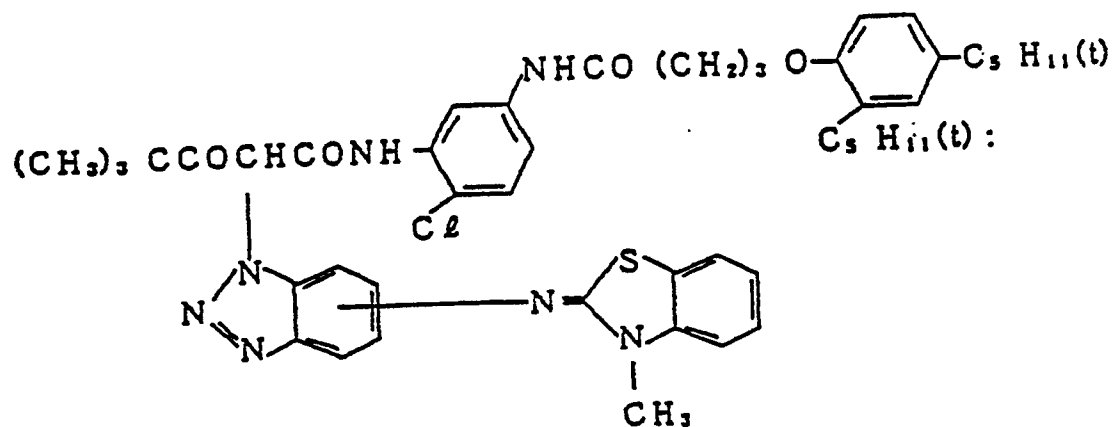


20

ExM-12

25

30

35

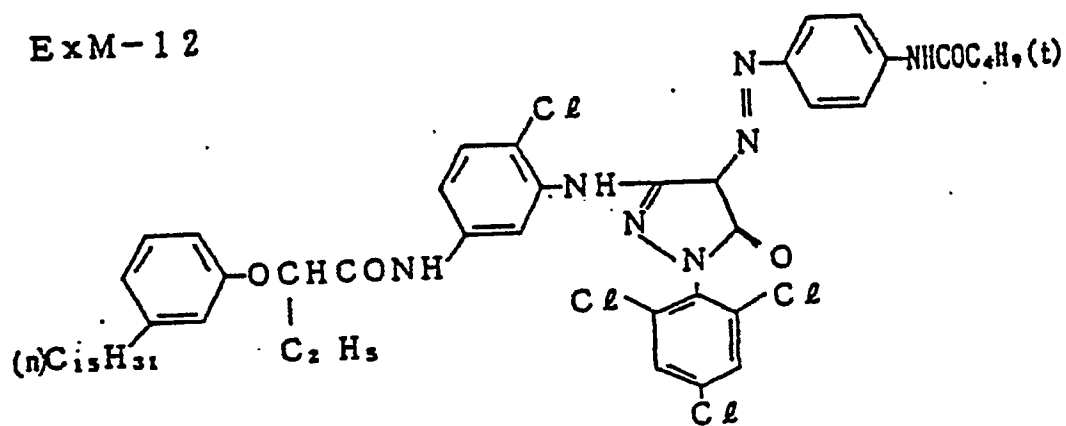


40

45


50

55


ExY-13

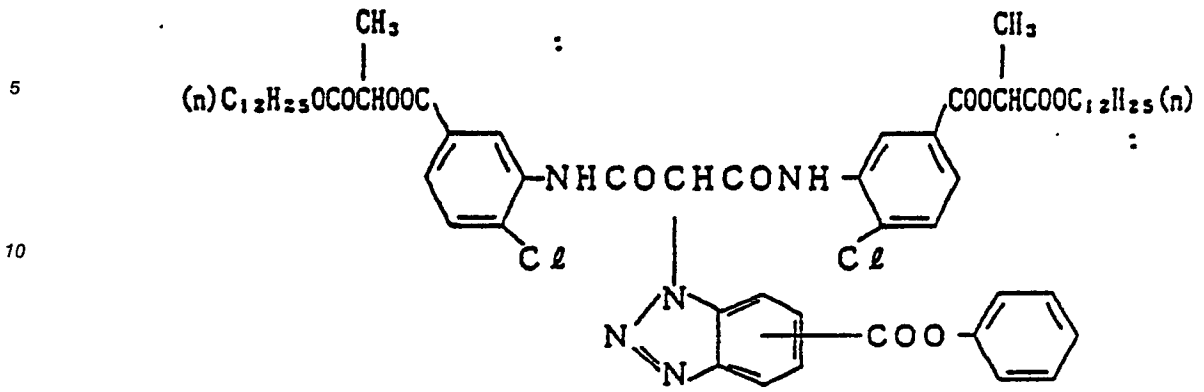



ExY-14

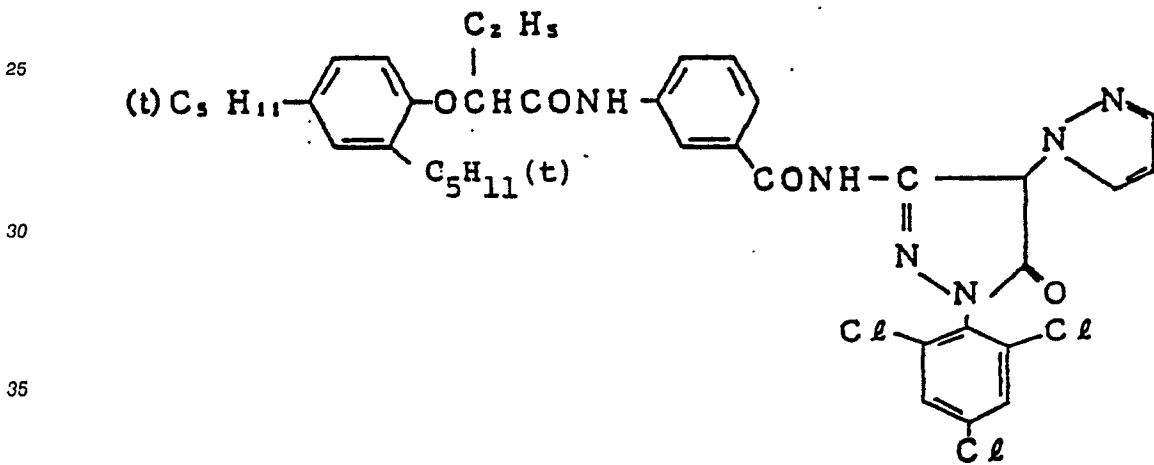


ExY-15

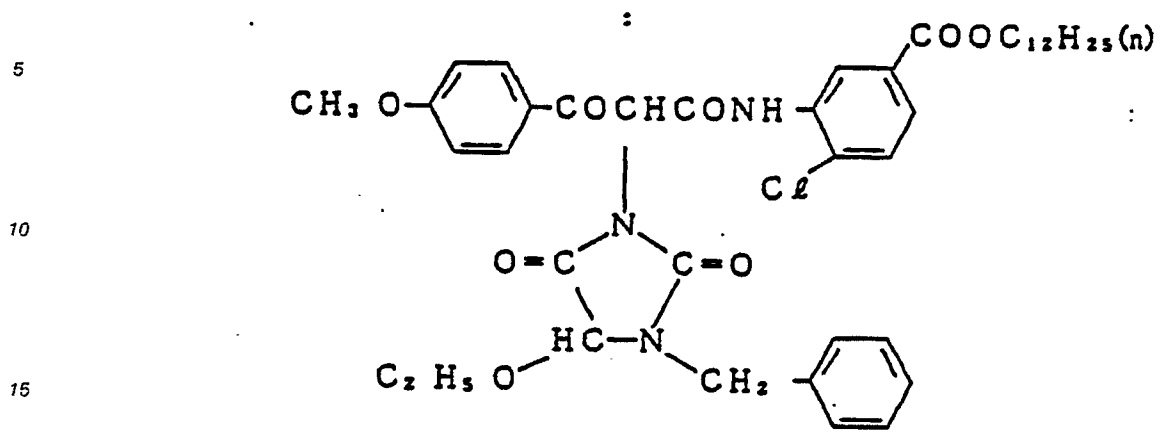


ExC-16

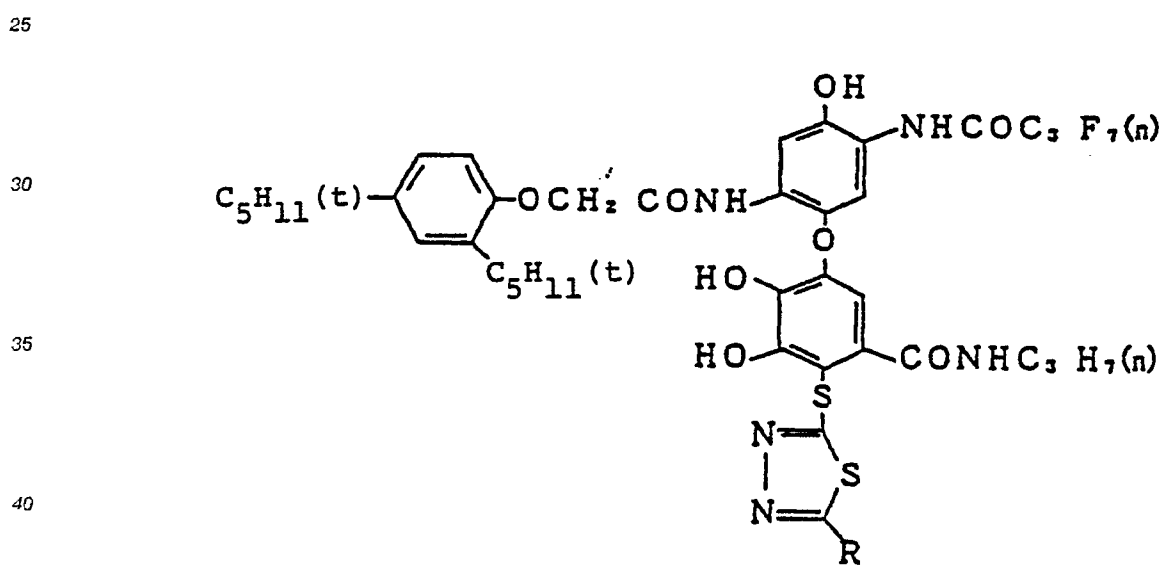


ExS-1

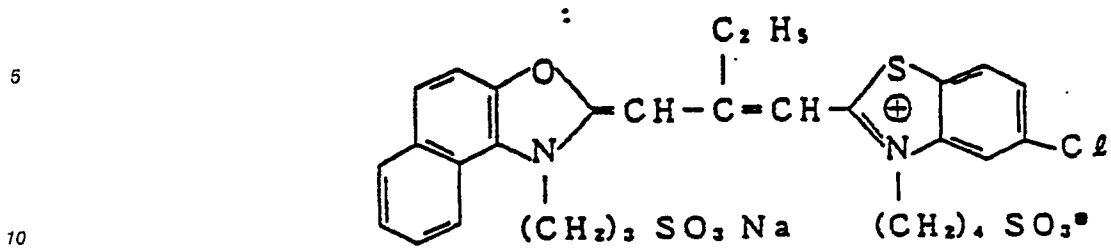


ExS-2

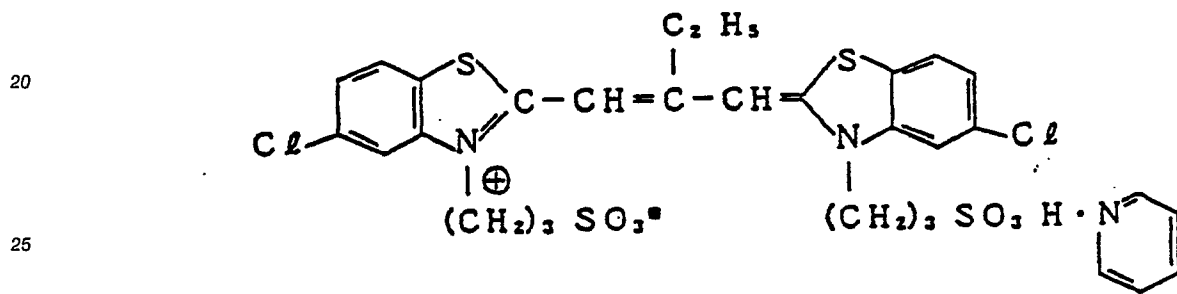


ExS-3

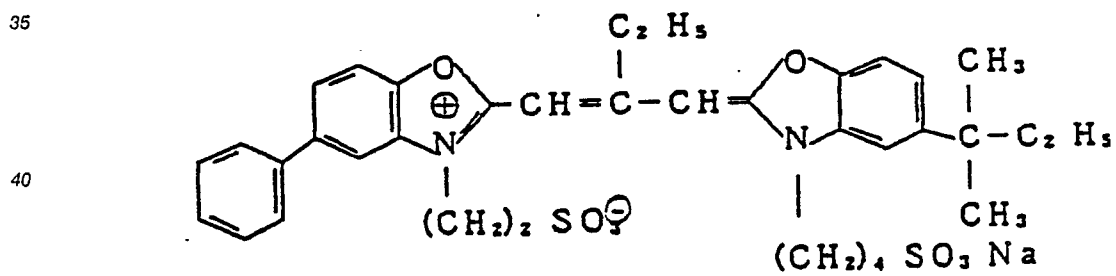


Ex S-4

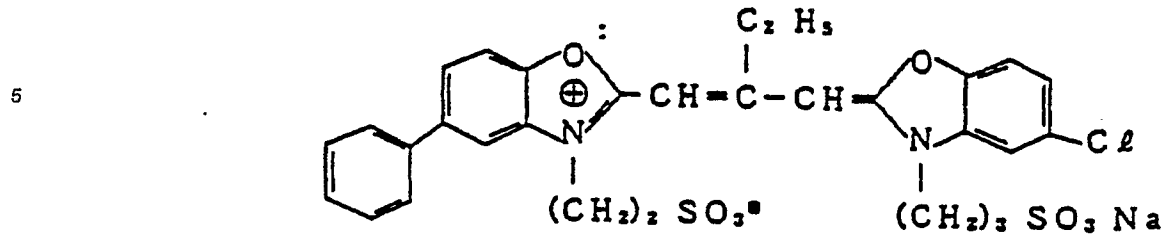


Ex S-5

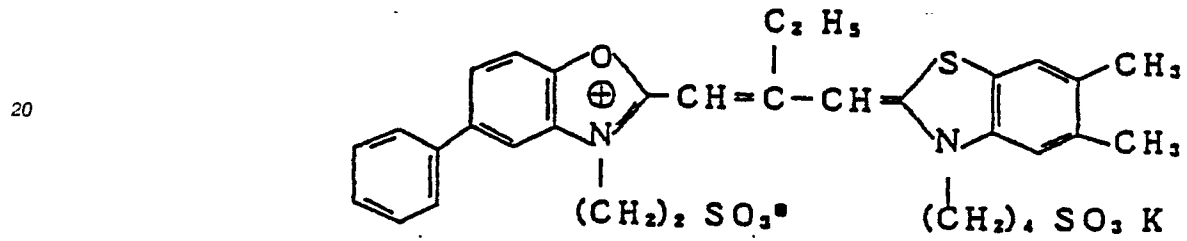


Ex S-6

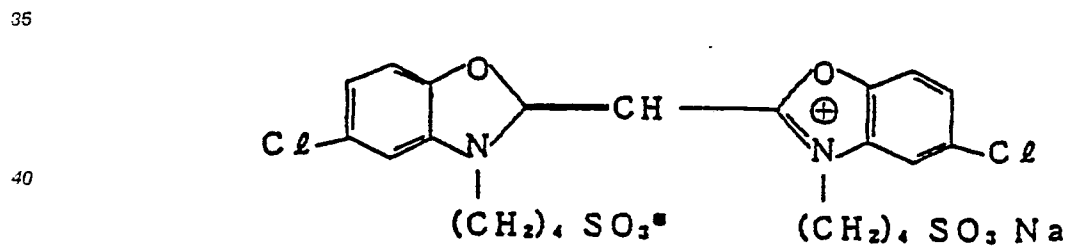

H-1



10 ExF-1

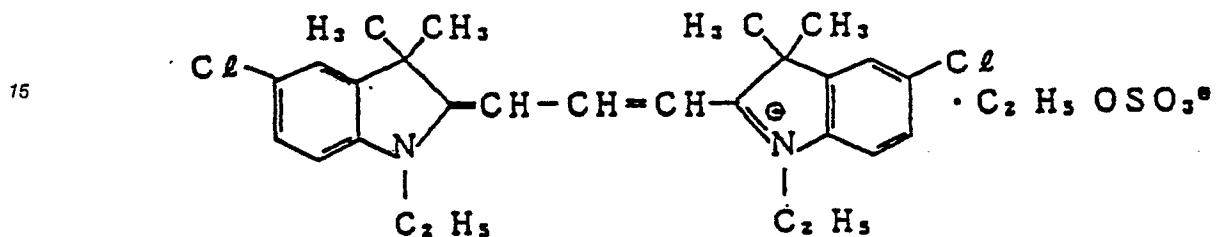

25 The thus-prepared multilayer color photographic material sample was exposed to light at 10 CMS at a color temperature of 4800° K and then processed in an automatic developing machine shown in Fig. 1 (processing speed is 40 cm/min.) in accordance with the procedure mentioned below (Table 1), whereupon the (aminopolycarboxylato)iron(III) complex (compounds (1) and (2)) in the bleaching solution and the pH value of the solution were varied as indicated below (Tables 2-1, 2-2).

Table 1

30

Processing Steps (temperature 38° C)		
Steps	Processing Time	Tank Capacity
Color Development	3 min 00 sec	8 liters
Bleaching	30 sec	8 liters
Fixation	1 min 30 sec	8 liters
Stabilization (1)	15 sec	4 liters
Stabilization (2)	15 sec	4 liters
Stabilization (3)	15 sec	4 liters

35

40

The thus processed sample was dried at 65° C for 45 seconds. The crossover time between the respective steps was 5 seconds, and the processing time shown in Table 1 above includes the crossover time.

45 The compositions of the processing solutions used in the respective steps were as follows.

Color Developer:

50

55

5	Diethylenetriaminepentaacetic Acid	1.0 g
	1-Hydroxyethylidene-1,1-diphosphonic Acid	2.0 g
	Sodium Sulfite	4.0 g
	Potassium Carbonate	30.0 g
	Potassium Bromide	1.4 g
	Potassium Iodide	1.3 mg
	Hydroxylamine Sulfate	2.4 g
10	4-(N-ethyl-N-β-hydroxyethylamino)-2-methylaniline Sulfate	4.5 g
	Water to make	1 liter
		pH 10.0

Bleaching Solution:

15


Ammonium (1,3-diaminopropane-tetraacetato)iron(III) complex
(1,3-DPTA·Fe)

See Table 2-1
and Table 2-2

20

Bleaching Accelerator

25

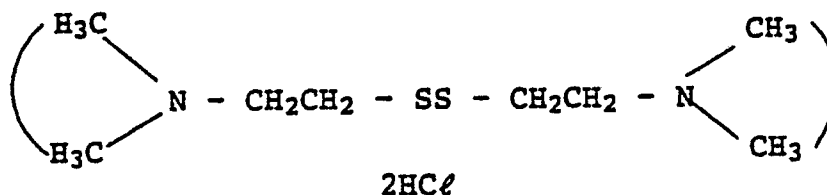

30

7×10^{-3} mol

Ammonium (Ethylenediaminetetraacetato)-
iron(III) Complex (EDTA·Fe)

See Table 2-1
and Table 2-2

35

1,3-Diaminopropanetetraacetic Acid

5.0 g

40

Ammonium Bromide

150.0 g

Ammonium Nitrate

10.0 g

pH

See Table 2

45

Water to make

1.0 liter

50

Fixing Solution:

55

1-Hydroxyethylidene-1,1-diphosphonic Acid	5.0 g
Disodium Ethylenediaminetetraacetic Acid	5.0 g
Sodium Sulfite	4.0 g
Aqueous Ammonium Thiosulfate (70 wt.%/volume)	240 ml
Sodium Bisulfite	4.6 g
Water to make	1.0 liter pH 6.6

10

Stabilizer:

15

Formalin (40 wt.%)	1.0 ml
Polyoxyethylene-p-monononylphenyl Ether (mean polymerization degree; about 10)	0.3 g
5-Chloro-2-methyl-4-isothiazolin-3-one	0.03 g
Water to make	1.0 liter

20

Stirring of the bleaching bath and the fixing bath was effected in accordance with two different systems: (1) a jet stream-stirring system and (2) a circulation-stirring system, which were applied to the bleach-fixing bath in Example 1 of JP-A-62-183460. The former system is an embodiment of the present invention, while the latter system is a comparative conventional embodiment. The jet stream of the processing solution was applied to the sample in 10 seconds after the sample was introduced into the bleaching bath or the fixing bath.

25

For the thus processed samples, the residual silver amounts in the 20 CMS-exposed area and the non-exposed area were measured by a fluorescent X-ray method. In addition, the degree of the stain, if any, of the processed sample was visually observed.

30

The results of the samples processed by circulation-stirring system of the bleaching bath are shown in Table 2-1 and those of samples processed by jet steam-stirring system of the bleaching bath are shown in Table 2-2.

35

Stirring System:

J : Jet stream-stirring system, described in Example 1 of JP-A-62-183460

N : Normal circulation-stirring system, described in Example 1 of JP-A-62-183460

40

45

50

55

5
10
15
20
25
30
35
40
45
50
55

Table 2-1
Stirring System of Bleaching Solution: J

Example No.	Composition of Bleaching Solution				Stirring System of Fixing Bath	Amount of Residual Silver (µg/cm ²)		Stain (**)
	① DETA-Fe mol/ℓ	② 1,3-DPTA Fe mol/ℓ	①/②	pH		20 CMS	No Exposure	
1R	0.3	0	∞	4.3	J	23	5	O
2R	0.225	0.075	3	4.3	J	10	5	O
3R	0.2	0.1	2	4.3	J	8	5	O
4R	0.15	0.15	1	4.3	J	7	5	O
5R	0.1	0.2	0.5	4.3	J	7	5	O
6R	0	0.3	0	4.3	J	8	8	Δ
7R	0.3	0	∞	4.3	N	24	2	O
8R	0.225	0.075	3	4.3	N	7	5	Δ
9R	0.2	0.1	2	4.3	N	13	10	X
10R	0.15	0.15	1	4.3	N	19	16	X
11R	0.1	0.2	0.5	4.3	N	24	20	X
12R	0	0.3	0	4.3	N	30	24	X
13R	0.15	0.15	1	6.0	J	9	5	O
14R	0.15	0.15	1	3.6	J	7	7	O
15R	0.15	0.15	1	2.5	J	8	8	Δ
16R	0.15	0.15	1	6.0	N	18	10	X
17R	0.15	0.15	1	3.6	N	33	25	X
18R	0.15	0.15	1	2.5	N	35	31	X

Notes: (*) R indicates comparative example.
(**) Evaluation of Stain was as follows: O: No Stain Δ: Slightly Stained X: Stained

5
10
15
20
25
30
35
40
45
50
55

Table 2-2
Stirring System of Bleaching Solution: N

Example No.	Composition of Bleaching Solution				Stirring System of Fixing Bath	Amount of Residual Silver (µg/cm ²)		Stain (**)
	①DETA·Fe mol/ℓ	②1,3-DPTA Fe mol/ℓ	③/④	pH		20 CMS	No Exposure	
1R	0.3	0	∞	4.3	J	18	2	○
2R	0.225	0.075	3	4.3	J	6	2	○
3R	0.2	0.1	2	4.3	J	4	2	○
4R	0.15	0.15	1	4.3	J	3	2	○
5R	0.1	0.2	0.5	4.3	J	3	2	○
6R	0	0.3	0	4.3	J	3	3	△
7R	0.3	0	∞	4.3	N	20	2	○
8R	0.225	0.075	3	4.3	N	6	5	△
9R	0.2	0.1	2	4.3	N	10	10	X
10R	0.15	0.15	1	4.3	N	16	16	X
11R	0.1	0.2	0.5	4.3	N	20	20	X
12R	0	0.3	0	4.3	N	24	24	X
13R	0.15	0.15	1	6.0	J	7	2	○
14R	0.15	0.15	1	3.6	J	4	4	○
15R	0.15	0.15	1	2.5	J	5	5	△
16R	0.15	0.15	1	6.0	N	15	10	X
17R	0.15	0.15	1	3.6	N	31	25	X
18R	0.15	0.15	1	2.5	N	33	31	X

In Tables 2-1 and 2-2, the amount of the residual silver in the 20 CMS-exposed area contains both the non-bleached silver and the non-fixed silver halide; while the amount of the residual silver in the non-exposed area corresponds to the non-fixed silver halide only and is the value of the silver due to fixation failure.

As is clear from the results in Table 2-1, the amount of the silver due to fixation failure was far smaller in the case where the fixing solution was applied to the sample in accordance with a jet stream-stirring system (Examples Nos. 2 to 6 and Nos. 13 to 15, embodiments of the invention) than in the comparative case where the fixing solution was applied to the sample by conventional circulation-stirring system (comparative Examples Nos. 8 to 12 and Nos. 16 to 18).

In addition, when the bleaching solution was applied to the sample in accordance with a jet stream-stirring system, the amount of the silver due to fixation failure was further reduced when the fixing solution was applied to the sample by a jet stream-stirring system, but this effect could not be obtained when the fixing solution was applied to the sample by a conventional circulation-stirring system.

Further, as is noted from the results in Table 2-1 and 2-2, the amount of the residual silver in the non-exposed part increased in accordance with the increase of the proportion of 1,3-DPTA·Fe(III) and the photographic material samples processed were noticeably stained, when the fixation was effected by conventional circulation stirring (Comparative Examples Nos. 7 to 12).

As opposed to this, excellent desilvering which was free from these problems was possible, when the jet stream-stirring of the present invention was employed in the fixation step (Examples Nos. 2 to 6).

When the pH value of the bleaching solution was lowered, the fixation failure increased in the comparative case where the fixation was effected by conventional circulation stirring, while no fixation was noted in the case of the present invention where the fixation was effected by the jet stream-stirring system of the invention.

As is clear from the above results, the desilvering was effectively achieved by the method of the present invention and the photographic materials after being desilvered by the invention were not stained.

Example 2

A multilayer color photographic material (Sample B) was prepared by forming the layers having the compositions shown below on a subbed cellulose triacetate film support.

The compositions of the layers were as follows, where values are the amount coated (g/m²), and amount of the silver halide emulsion coated is the amount of silver therein. The amount of the sensitizing dye coated is represented by the molar unit to mol of the silver halide in the same layer.

First Layer : Anti-halation Layer	
Black Colloidal Silver	0.18 as Ag
Gelatin	0.40

Second Layer : Interlayer	
2,5-Di-t-pentadecylhydroquinone	0.18
Ex-1	0.07
Ex-3	0.02
Ex-12	0.002
U-1	0.06
U-2	0.08
U-3	0.10
HBS-1	0.10
HBS-2	0.02
Gelatin	1.04

5
10
15
20
25
30
35
40
45
50
55

Third Layer : First Red-sensitive Emulsion Layer	
Monodispersed Silver Iodobromide Emulsion (Agl 6 mol%; mean grain size 0.6 μm ; variation coefficient of grain size 0.15)	0.55 as Ag
Sensitizing Dye I	6.9×10^{-5}
Sensitizing Dye II	1.8×10^{-5}
Sensitizing Dye III	3.1×10^{-4}
Sensitizing Dye IV	4.0×10^{-5}
EX-2	0.350
HBS-1	0.005
EX-10	0.020
Gelatin	1.20

Fourth Layer : Second Red-sensitive Emulsion Layer	
Tabular Silver Iodobromide Grain Emulsion (Agl 10 mol%; mean grain size 0.7 μm ; mean aspect ratio 5.5; mean thickness 0.2 μm)	1.0 as Ag
Sensitizing Dye I	5.1×10^{-5}
Sensitizing Dye II	1.4×10^{-5}
Sensitizing Dye III	2.3×10^{-4}
Sensitizing Dye IV	3.0×10^{-5}
EX-2	0.400
EX-3	0.050
EX-10	0.015
Gelatin	1.30

Fifth Layer : Third Red-sensitive Emulsion Layer	
Silver Iodobromide Emulsion (Agl 16 mol%; mean grain size 1.1 μm)	1.60 as Ag
Sensitizing Dye I	5.4×10^{-5}
Sensitizing Dye II	1.4×10^{-5}
Sensitizing Dye III	2.4×10^{-4}
Sensitizing Dye IV	3.1×10^{-5}
EX-3	0.240
EX-4	0.120
HBS-1	0.22
HBS-2	0.10
Gelatin	1.63

Sixth Layer : Interlayer	
EX-5	0.040
HBS-1	0.020
EX-12	0.004
Gelatin	0.80

EP 0 329 051 A2

Seventh Layer : First Green-sensitive Emulsion Layer		
5	Tabular Silver Iodobromide Grain Emulsion (AgI 6 mol%; mean grain size 0.6 μm; mean aspect ratio 6.0; mean thickness 0.15 μm)	0.40 as Ag
	Sensitizing Dye V	3.0×10^{-5}
	Sensitizing Dye VI	1.0×10^{-4}
	Sensitizing Dye VII	3.8×10^{-4}
10	EX-6	0.260
	EX-1	0.021
	EX-7	0.030
	EX-8	0.025
	HBS-1	0.100
	HBS-4	0.010
15	Gelatin	0.75

Eighth Layer : Second Green-sensitive Emulsion Layer		
20	Monodispersed Silver Iodobromide Emulsion (AgI 9 mol%; mean grain size 0.7 μm; variation coefficient of grain size 0.18)	0.80 as Ag
	Sensitizing Dye V	2.1×10^{-5}
25	Sensitizing Dye VI	7.0×10^{-5}
	Sensitizing Dye VII	2.6×10^{-4}
	Ex-6	0.180
	EX-8	0.010
	EX-1	0.008
30	EX-7	0.012
	HBS-1	0.160
	HBS-4	0.008
	Gelatin	1.10

Ninth Layer : Third Green-sensitive Emulsion Layer		
40	Silver Iodobromide Emulsion (AgI 12 mol%; mean grain size 1.0 μm)	1.2 as Ag
	Sensitizing Dye V	3.5×10^{-5}
	Sensitizing Dye VI	8.0×10^{-5}
	Sensitizing Dye VII	3.0×10^{-4}
	Ex-6	0.065
	EX-11	0.030
	EX-1	0.025
45	HBS-1	0.25
	HBS-2	0.10
	Gelatin	1.74

Tenth Layer : Yellow Filter Layer		
50	Yellow Colloidal Silver	0.05 as Ag
	EX-5	0.08
	HBS-3	0.03
55	Gelatin	0.95

Eleventh Layer : First Blue-sensitive Emulsion Layer		
5	Tabular Silver Iodobromide Grain Emulsion (Agl 6 mol%; mean grain size 0.6 μm ; mean aspect ratio 5.7; mean thickness 0.15 μm)	0.24 as Ag
	Sensitizing Dye VIII	3.5×10^{-4}
	EX-9	0.85
	EX-8	0.12
	HBS-1	0.28
10	Gelatin	1.28

Twelfth Layer : Second Blue-sensitive Emulsion Layer		
15	Monodispersed Silver Iodobromide Emulsion (Agl 10 mol%; mean grain size 0.8 μm ; variation coefficient of grain size 0.16)	0.45 as Ag
	Sensitizing Dye VIII	2.1×10^{-4}
	Ex-9	0.20
20	EX-10	0.015
	HBS-1	0.03
	Gelatin	0.46

Thirteenth layer : Third Blue-sensitive Emulsion Layer		
25	Silver Iodobromide Emulsion (Agl 14 mol%; mean grain size 1.3 μm)	0.77 as Ag
	Sensitizing Dye VIII	2.2×10^{-4}
	Ex-9	0.20
30	HBS-1	0.07
	Gelatin	0.69

Fourteenth Layer : First Protective Layer		
35	Silver Iodobromide Emulsion (Agl 1 mol%; mean grain size 0.7 μm)	0.5 as Ag
	U-4	0.11
	U-5	0.17
40	HBS-1	0.90
	Gelatin	1.00


Fifteenth Layer : Second Protective Layer		
45	Polymethyl Acrylate Grains (diameter: about 1.5 μ)	0.54
	S-1	0.15
	S-2	0.05
50	Gelatin	0.72

In addition to the above-mentioned components, a gelatin hardening agent H-1 and a surfactant were added to each of the respective layers.

The compounds used were as follows.


- 55 U-1: Same as UV-1 in Example 1
 U-2: Same as UV-2 in Example 1
 U-3: Same as UV-3 in Example 1
 U-4: Same as UV-4 in Example 1

- U-5: Same as UV-5 in Example 1
 EX-1: Same as ExM-9 in Example 1
 EX-2: Same as ExC-2 in Example 1
 EX 3: Same as ExC-4 in Example 1
 5 EX-4: Same as ExC 7 in Example 1
 EX-5: Same as Cpd-1 in Example 1
 EX-6: Same as ExM-8 in Example 1 (mean molecular weight: 30,000)
 EX-7: Same as EXM-12 in Example 1
 EX-8: Same as ExY-13 in Example 1
 10 EX-9: Same as ExY-15 in Example 1
 EX-10: Same as ExC-16 in Example 1



15

- EX-11: Same as ExM-9 in Example 1 (R = H)
 20 EX-12: Same as ExF-1 in Example 1

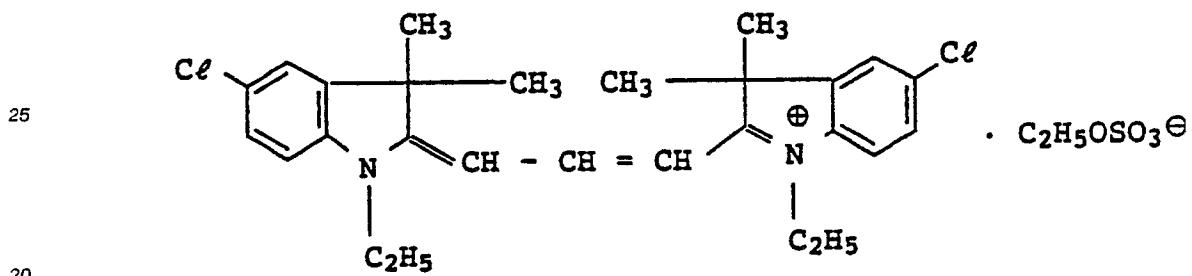

- S-1: Same as Cpd-5 in Example 1
 S-2: Same as Cpd-6 in Example 1
 HBS-1: Tricresyl Phosphate (same as Solv-1 in Example 1)
 35 HBS-2: Dibutyl Phthalate (same as Solv-2 in Example 1)
 HBS-3: Bis(2-ethylhexyl) Phthalate
 HBS-4: Same as Solv-4 in Example 1

40 Sensitizing Dyes:


45

50

55

I

5

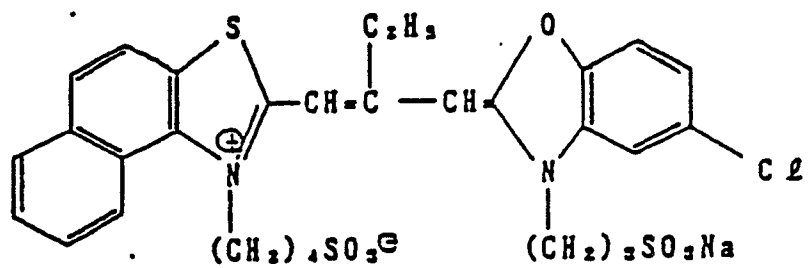


10

II

15

20

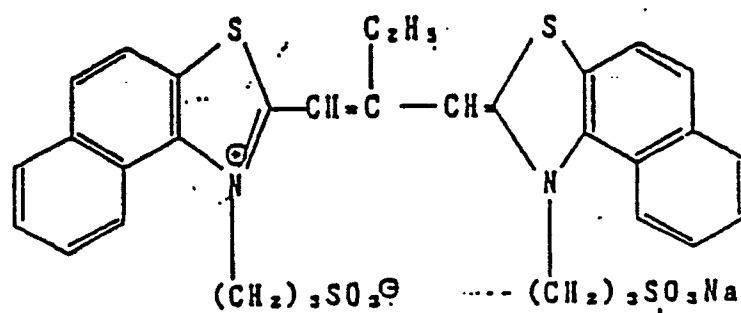


25

III

30

35

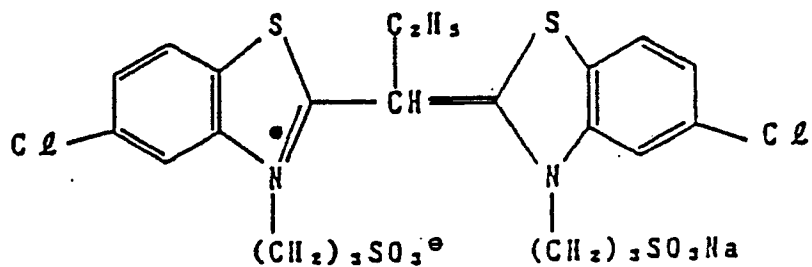

40


45

50

55

IV


5

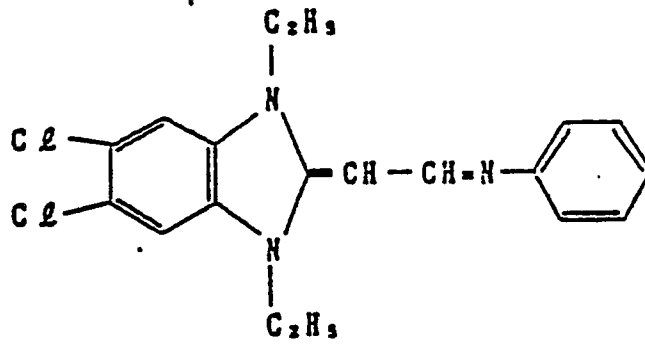

10

V

15

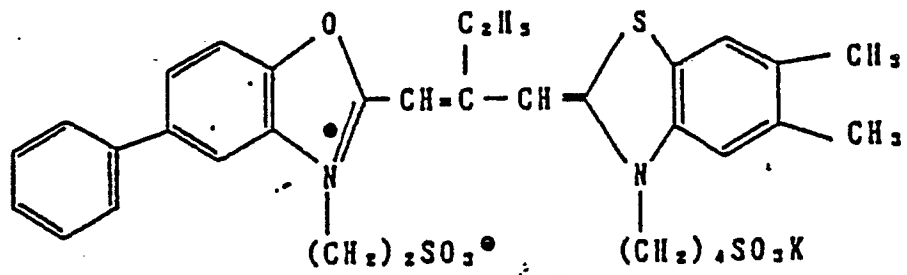


20

25

VI

30

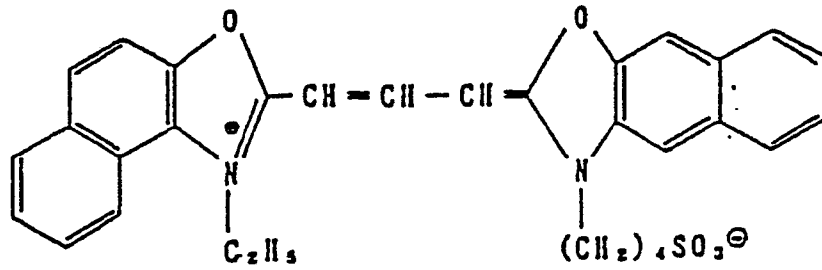

35


40

45


50

55


VI

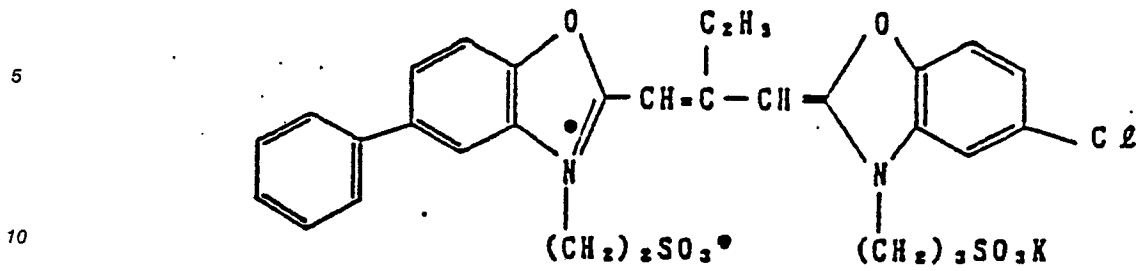

VIII

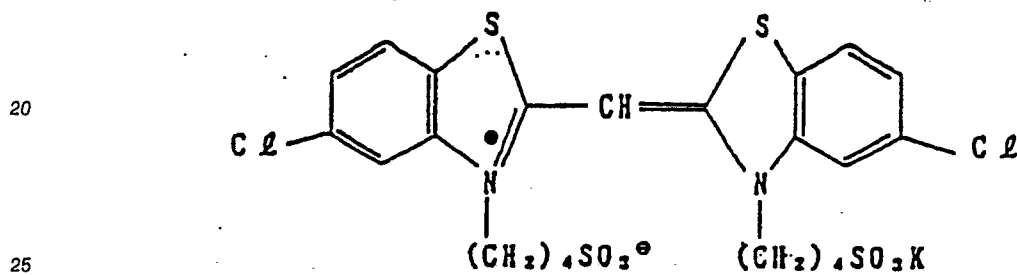

IX

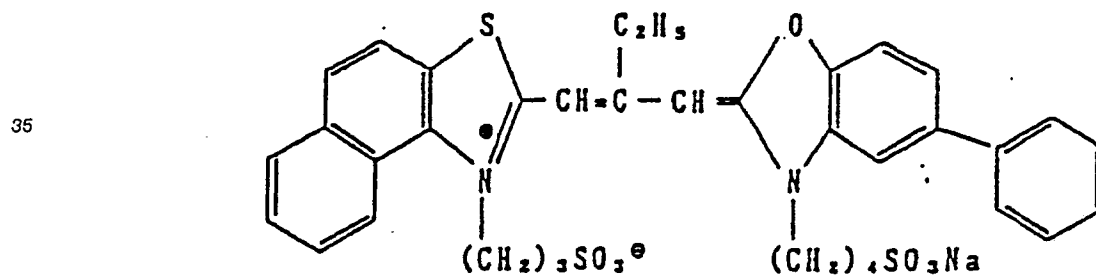

The thus prepared Sample (B) was imagewise exposed in the same manner as in Example 1 and then developed in accordance with the development procedure.

45 The nozzles used have a round shape, each nozzle has 5 mm in diameter. 30 nozzles are arranged in a way to have 3 nozzles horizontally and 10 nozzles vertically and those are placed at the same intervals. The distance from the nozzle to the emulsion surface of the photographic material is about 1 cm, and the liquid is circulated at 15 l/min of jet stream speed.

50

55

Table 3

Processing Steps (temperature 38 ° C)		
Steps	Processing Time	Tank Capacity
Color Development	3 min 00 sec	8 liters
Bleaching	1 min 30 sec	8 liters
Fixation	1 min 30 sec	8 liters
Stabilization (1)	15 sec	4 liters
Stabilization (2)	15 sec	4 liters
Stabilization (3)	15 sec	4 liters

After being processed, the sample was dried at 65 ° C for 45 seconds.

In the above procedure, the stabilization was effected by a three-tank countercurrent system from the bath (3) to (2) to (1).

The crossover time between the respective steps was 5 seconds, and the processing time shown in the Table 3 above includes the crossover time.

The color developer and the stabilization used were same as those used in Example 1, and the bleaching solution and fixing solution used were as follows.

Bleaching Solution:

25

30

35

Compound (A) (indicated in Table 4)	See Table 4
Bleaching Accelerator (indicated in Table 4)	7×10^{-3} mol
Compound (B) (indicated in Table 4)	See Table 4
Disodium Ethylenediaminetetraacetate	10.0 g
Ammonium Bromide	150.0 g
Ammonium Nitrate	10.0 g
pH	See Table 4
Water to make	1.0 liter

Fixing Solution:

40

45

Disodium Ethylenediaminetetraacetate	5.0 g
Sodium Sulfite	4.0 g
Aqueous Ammonium Thiosulfate Solution (70 wt.%/volume)	240ml
Sodium bisulfite	4.6 g
Water to make	1.0 liter
	pH 6.6

The stirring system in the bleaching bath and the fixing bath was same as that in Example 1. In Example 2, the position of the first nozzle from which the jet stream of the bleaching solution was jetted was varied to thereby vary the time from the introduction of the sample being processed into the bleaching bath to the first application of the jet stream of the bleaching solution to the same sample. Accordingly, the time-dependent effect of the jet stream of the bleaching solution applied to the sample was clarified.

The amount of the residual silver, the minimum yellow density and the maximum cyan density were measured for the thus processed samples, and the results are shown in Table 4 below.

For determination of the color density, an X-light 310 Photographic Densitometer was used.

Table 4 (cont'd.)

No.	Bleaching Accelerator	Compound (A) (content)	Compound (B) (content)	pH	Stirring System	Amount of Residual silver ($\mu\text{g}/\text{cm}^2$)	Minimum Yellow Density	Maximum Cyan Density
1 (Comparative Example)	-	Comparative Compound (0.3 mol)	-	5.0	J (5 sec)	14.0	0.66	1.65
2 (Comparative Example)	(I)-(1)	Comparative Compound (0.3 mol)	-	5.0	J (5 sec)	9.0	0.66	1.63
3 (Example of the Invention)	-	1,3-DPTA.Fe (III) (0.3 mol)	-	5.0	N	9.5	0.90	1.69
4 (Example of the Invention)	-	Comparative Compound (0.3 mol)	-	5.0	J (20 sec)	7.3	0.85	1.69
5 (Example of the Invention)	-	Comparative Compound (0.3 mol)	-	5.0	J (15 sec)	2.9	0.70	1.77
6 (Example of the Invention)	-	Comparative Compound (0.3 mol)	-	5.0	J (10 sec)	2.5	0.68	1.79
7 (Example of the Invention)	-	Comparative Compound (0.3 mol)	-	5.0	J (5 sec)	2.2	0.67	1.81
8 (Example of the Invention)	(I)-(1)	Comparative Compound (0.3 mol)	-	5.0	J (10 sec)	0.5	0.67	1.79

5
10
15
20
25
30
35
40
45

Table 4

No.	Bleaching Accelerator	Compound (A) (content)	Compound (B) (content)	pH	Stirring System	Amount of Residual silver (µg/cm ²)	Minimum Yellow Density	Maximum Cyan Density
9 (Example of the Invention)	(I)-(1)	Comparative Compound (0.3 mol)	-	5.0	J (5 sec)	0.2	0.67	1.81
10 (Example of the Invention)	(I)-(1)	Comparative Compound (0.15 mol)	Comparative Compound-(1) (0.15 mol)	5.5	J (5 sec)	1.4	0.65	1.81
11 (Example of the Invention)	(I)-(1)	Comparative Compound (0.15 mol)	Comparative Compound-(1) (0.15 mol)	5.0	J (5 sec)	0.9	0.65	1.82
12 (Example of the Invention)	(I)-(1)	Comparative Compound (0.15 mol)	Comparative Compound-(1) (0.15 mol)	4.5	J (5 sec)	0.7	0.64	1.80
13 (Example of the Invention)	(II)-(2)	Comparative Compound (0.15 mol)	Comparative Compound-(1) (0.15 mol)	4.5	J (5 sec)	0.8	0.64	1.79
14 (Example of the Invention)	(III)-(1)	1,3-DPTA-Fe(III) (0.15 mol)	Comparative Compound-(1) (0.15 mol)	4.5	J (5 sec)	0.8	0.65	1.80
15 (Example of the Invention)	(V)-(1)	1,3-DPTA-Fe(III) (0.15 mol)	Comparative Compound-(1) (0.15 mol)	4.5	J (5 sec)	0.8	0.65	1.80
16 (Example of the Invention)	(IV)-(1)	1,3-DPTA-Fe(III) (0.15 mol)	Comparative Compound-(1) (0.15 mol)	4.5	J (5 sec)	1.2	0.64	1.81

The time as parenthesized in the item of Stirring System indicates a time from the introduction of the sample being processed into the bleaching bath to the application of the jet stream of the bleaching solution to the same sample.

J: Jet stream-stirring system, described in Example 1 of JP-A-62-183460

N: Normal circulation-stirring system, described in Example 1 of JP-A-62-183460

Comparative Compound (1): (Ethylenediaminetetraacetato)iron(III) Complex

50
55

As is noted from the results of Tests Nos. 4 to 7 in Table 4 above, when the time from the introduction of the photographic material sample into the bleaching bath to the application of the jet stream of the bleaching solution to the same sample was 20 seconds, the amount of the residual silver in the sample processed was large and increase of the minimum yellow density (bleaching fog) and depression of the maximum cyan density (insufficiency in recoloration) were noticeable, however, when the said time was 15 seconds or less, these problems were overcome.

5 The same process as in Example 2 was repeated except that a multilayer color photographic material (Sample C) prepared as mentioned below was used in place of Sample (B) used in Example 2. The results obtained were the same as those in Table 4 of Example 2, and demonstrate that the method of the present invention is extremely excellent in desilvering capacity and is effective for prevention of bleaching fog and for prevention of insufficiency in recoloration of cyan dye.

10 In addition, it was also demonstrated that the method of the present invention is effective to improve image storability, which is often problematic in rapid photographic processing, as shown by the experimental data in Table 5 below.

For evaluation of image stability, the images formed were stored under the condition of 60 °C and relative humidity of 70 % for 2 weeks, and the variation of the minimum magenta density after and before storage was determined.

15 Sample (C) was prepared by forming the layers having the compositions shown below on a subbed cellulose triacetate film support.

The compositions of the layers were as follows. The amount coated is in units of g/m², calculated as silver for silver halide and colloidal silver, and in units of g/m² for couplers, additives and gelatin. The coated amount of sensitizing dye (ExS) is represented in molar amounts per mol of silver halide incorporated in the same layer.

20 **First Layer: Anti-halation Layer**

	Black Colloidal Silver	0.2 as Ag
25	Gelatin	2.2
	UV-1	0.1
	UV-2	0.2
30	Cpd-1	0.05
	Solv-1	0.01
35	Solv-2	0.01
	Solv-3	0.08

40 **Second Layer: Interlayer**

45

50

55

Fine Silver Bromide Grains(sphere-corresponding diameter 0.07 μm)

5		0.15 as Ag
	Gelatin	1.0
10	Cpd-2	0.2

Third Layer: First Red-sensitive Emulsion Layer**Silver Iodobromide Emulsion**

15 (AgI 10.0 mol%, AgI-rich core type grains, sphere-
corresponding diameter 0.7 μm ; variation
20 coefficient of sphere-corresponding diameter 14 %;
tetradecahedral grains) 0.26 as Ag

Silver Iodobromide Emulsion

25 (AgI 4 mol%, AgI-rich core type grains, sphere-
corresponding diameter 0.4 μm ; variation
30 coefficient of sphere-corresponding diameter 22 %,
tetradecahedral grains) 0.2 as Ag

Gelatin

35	ExS-1	4.5 x 10 ⁻⁴ mol
	ExS-1	1.5 x 10 ⁻⁴ mol
40	ExS-3	0.4 x 10 ⁻⁴ mol
	ExS-4	0.3 x 10 ⁻⁴ mol
	ExC-1	0.33
45	ExC-2	0.009
	ExC-3	0.023
50	ExC-6	0.14

55

Fourth Layer: Second Red-sensitive Emulsion Layer

Silver Iodobromide Emulsion

5 (AgI 16 mol%, AgI-rich core type grains, sphere-
 corresponding diameter 1.0 μm ; variation
 10 coefficient of sphere-corresponding diameter 25 %;
 tabular grains, ratio of diameter/thickness 4.0)

		0.55 as Ag
15	Gelatin	0.7
	ExS-1	3×10^{-4}
20	ExS-2	1×10^{-4}
	ExS-3	0.3×10^{-4}
	ExS-4	0.3×10^{-4}
25	ExC-3	0.05
	ExC-4	0.10
30	ExC-6	0.08

Fifth Layer: Third Red-sensitive Emulsion Layer

Silver Iodobromide Emulsion

35 (AgI 10.0 mol%; AgI-rich core type grains, sphere-
 corresponding diameter 1.2 μm ; variation
 40 coefficient of sphere-corresponding diameter 28 %;
 tabular grains, ratio of diameter/thickness 6.0)

		0.9 as Ag
45	Gelatin	0.6
	ExS-1	2×10^{-4}
50	ExS-2	0.6×10^{-4}

55

	ExS-3	0.2 x 10 ⁻⁴
	ExC-4	0.07
5	ExC-5	0.06
	Solv-1	0.12
10	Solv-2	0.12
	<u>Sixth Layer: Interlayer</u>	
	Gelatin	1.0
15	Cpd-4	0.1
	<u>Seventh layer: First Green-sensitive Emulsion Layer</u>	
20	Silver Iodobromide Emulsion	
	(AgI 1.0 mol%; AgI-rich core type grains, sphere-	
	corresponding diameter 0.7 μm; variation	
25	coefficient of sphere-corresponding diameter 22 %;	
	tetradecahedral grains)	0.2 as Ag
30	Silver Iodobromide Emulsion	
	(AgI 4.0 mol%; AgI-rich core type; sphere-	
	corresponding diameter 0.4 μm; variation	
35	coefficient of sphere-corresponding diameter 22 %;	
	tetradecahedral grains)	0.1 as Ag
40	Gelatin	1.2
	ExS-5	5 x 10 ⁻⁴
	ExS-6	2 x 10 ⁻⁴
45	ExS-7	1 x 10 ⁻⁴
	ExM-1	0.41
50	ExM-2	0.10

ExM-5	0.03
Solv-1	0.2

5 Eighth Layer: Second Green-sensitive Emulsion Layer

Silver Iodobromide Emulsion

10 (AgI 10 mol%; AgI-rich core type grains; sphere-
corresponding diameter 1.0 μm ; variation
coefficient of sphere-corresponding diameter 25 %;
15 tabular grains; ratio of diameter/thickness 3.0)

0.4 as Ag

20 Gelatin 0.35

ExS-5 3.5×10^{-4}

ExS-6 1.4×10^{-4}

25 ExS-7 0.7×10^{-4}

ExM-1 0.09

30 ExM-3 (same as ExM-12 in Example 1) 0.01

Solv-1 0.15

35 Nineth Layer: Interlayer

Gelatin 0.5

Tenth Layer: Third Green-sensitive Emulsion Layer

40 Silver Iodobromide Emulsion

(AgI 10.0 mol%; AgI-rich core type grains; sphere-
corresponding diameter 1.2 μm ; variation
45 coefficient of sphere-corresponding diameter 28 %;
tabular grains; ratio of diameter/thickness 6.0)

50 1.0 as Ag

55

	Gelatin	0.8
	ExS-5	2×10^{-4}
5	ExS-6	0.8×10^{-4}
	ExS-7	0.8×10^{-4}
10	ExM-3	0.01
	ExM-4	0.04
	Solv-1	0.2
15	<u>Eleventh Layer:</u> Yellow Filter Layer	
	Cpd-3	0.05
20	Gelatin	0.5
	Solv-1	0.1
	<u>Twelfth Layer:</u> Interlayer	
25	Gelatin	0.5
	Solv-1	0.1
30	<u>Thirteenth Layer:</u> First Blue-sensitive Emulsion Layer	
	Silver Iodobromide Emulsion	
35	(AgI 10 mol%; I-rich core type grains; sphere- corresponding diameter 0.7 μm ; variation coefficient of sphere-corresponding diameter 14 %; tetradecahedral grains)	
40		0.1 as Ag
	Silver Iodobromide Emulsion	
45	(AgI 4.0 mol%; I-rich core type grains; sphere- corresponding diameter 0.4 μm ; variation coefficient of sphere-corresponding diameter 22 %; tetradecahedral grains)	
50		0.05 as Ag

55

	Gelatin	1.0
	ExS-8	3 x 10 ⁻⁴
5	ExY-1	0.53
	ExY-2	0.02
10	Solv-1	0.15

Fourteenth Layer: Second Blue-sensitive Emulsion Layer

Silver Iodobromide Emulsion

(AgI 19.0 mol%; AgI-rich core type grains; sphere-
corresponding diameter 1.0 μm ; variation
coefficient of sphere-corresponding diameter 16 %;
tetradecahedral grains)

		0.19 as Ag
	Gelatin	0.3
25	ExS-8	2 x 10 ⁻⁴
	ExY-1	0.22
30	Solv-1	0.07

Fifteenth Layer: Interlayer

Fine Silver Iodobromide Grains

(AgI 2 mol%; uniform type; sphere-corresponding
diameter 0.13 μm)

		0.2 as Ag
40	Gelatin	0.36

Sixteenth Layer: Third Blue-sensitive Emulsion Layer

Silver Iodobromide Emulsion

(AgI 14.0 mol%; AgI-rich core type grains; sphere-
corresponding diameter 1.5 μm ; variation

coefficient of sphere-corresponding diameter 28 %;
tabular grains; ratio of diameter/thickness 5.0)


5		1.0 as Ag
	Gelatin	0.5
10	ExS-8	1.5×10^{-4}
	ExY-1	0.2
	Solv-1	0.07
15	<u>Seventeenth Layer: First Protective Layer</u>	
	Gelatin	1.8
20	UV-1	0.1
	UV-2	0.2
	Solv-1	0.01
25	Solv-2	0.01
	<u>Eighteenth Layer: Second Protective Layer</u>	
30	Fine Silver Bromide Grain Emulsion (sphere-corresponding diameter 0.07 μm)	
		0.18 as Ag
35	Gelatin	0.7
	Polymethyl Methacrylate Grains	
40	(diameter 1.5 μm)	0.2
	W-1	0.02
	H-1	0.4
45	Cpd-5	1.0

The compounds used were as follows:


50

55


UV-1

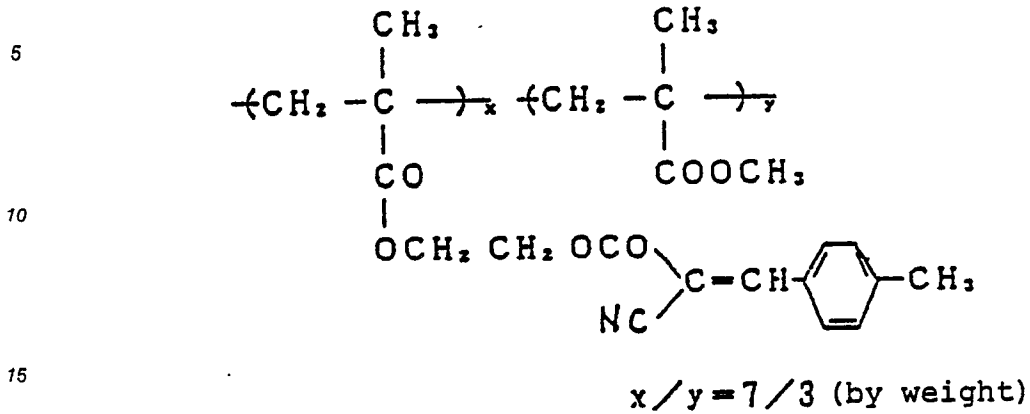

UV-2 (Same as UV-5 in Example 1)

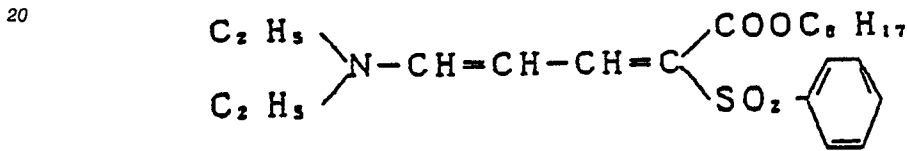


ExM-3 (Same as ExM-12 in Example 1)

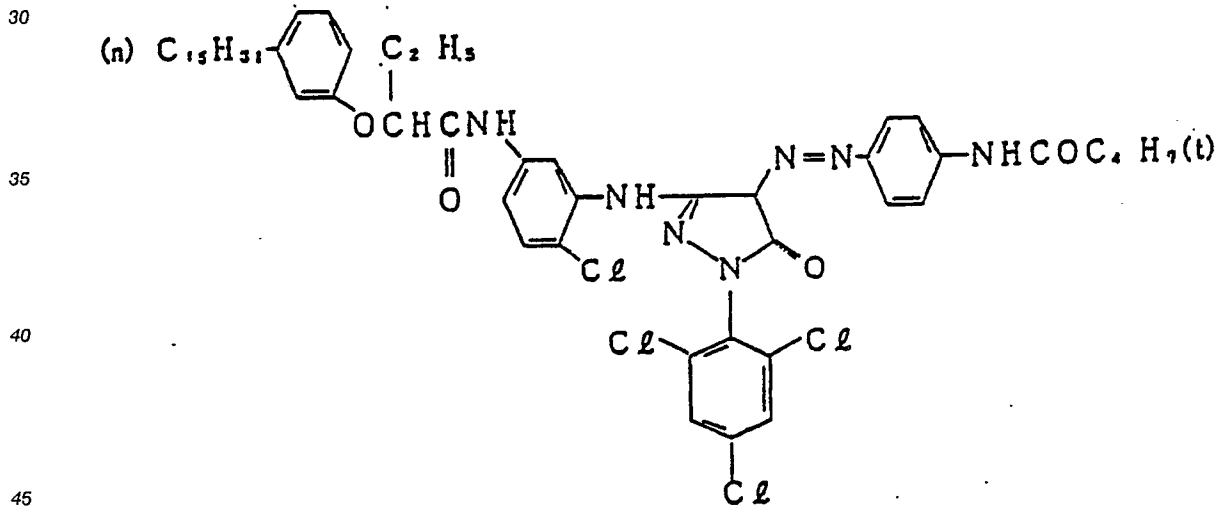

Ex C - 1 (Same as ExC-2 in Example 1)

5

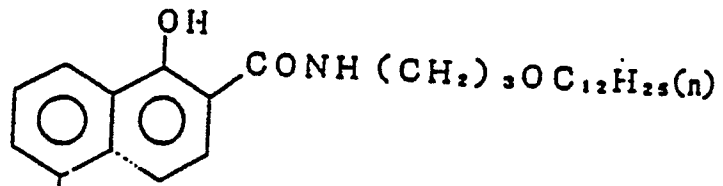

10


(i) C₆H₅OCOCNH

15

20

Ex C - 2 (Same as ExC-5 in Example 5)

25

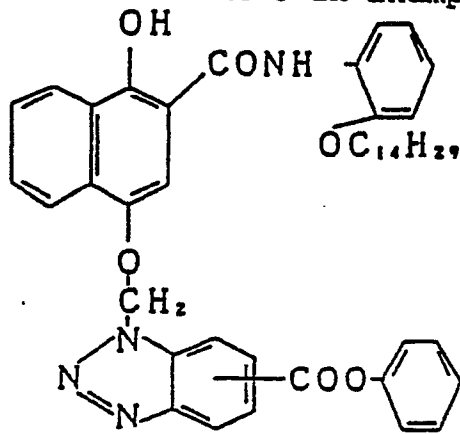

30

35


40

45


50

55


Ex C-3 (Same as ExC-4 in Example 1)

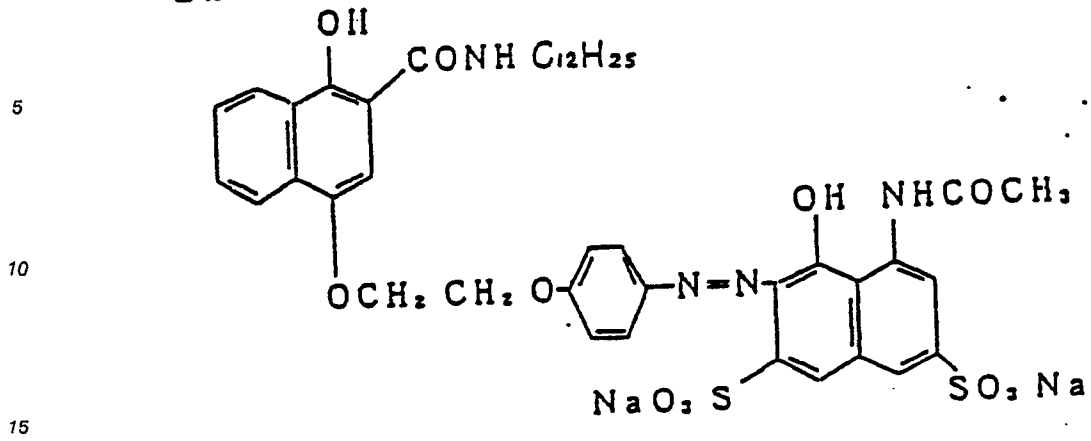


Ex C-6 (Same as ExC-7 in Example 1)

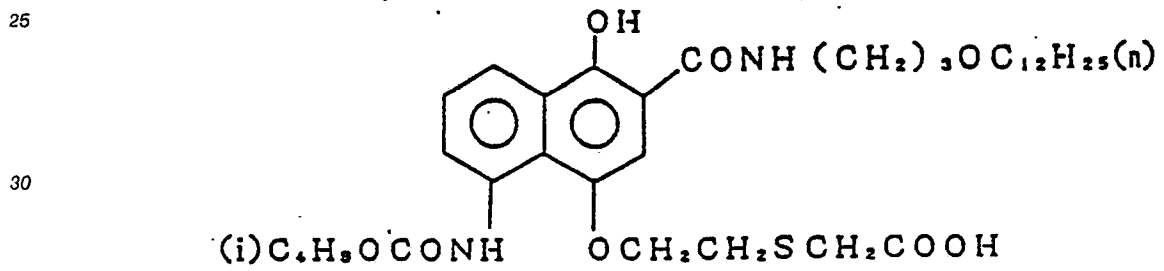


Ex C-4 (Same as Compound C-5)

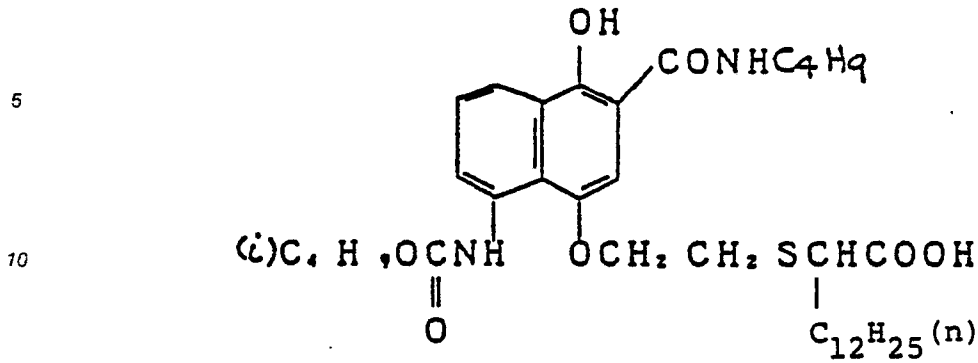


Ex C-5

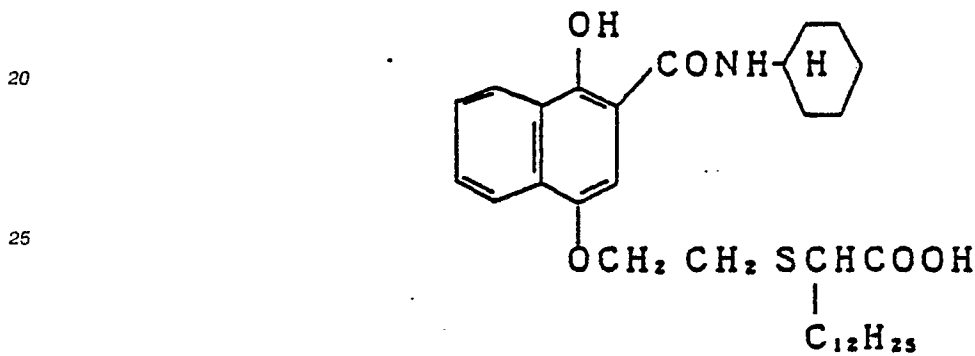


Ex M-1

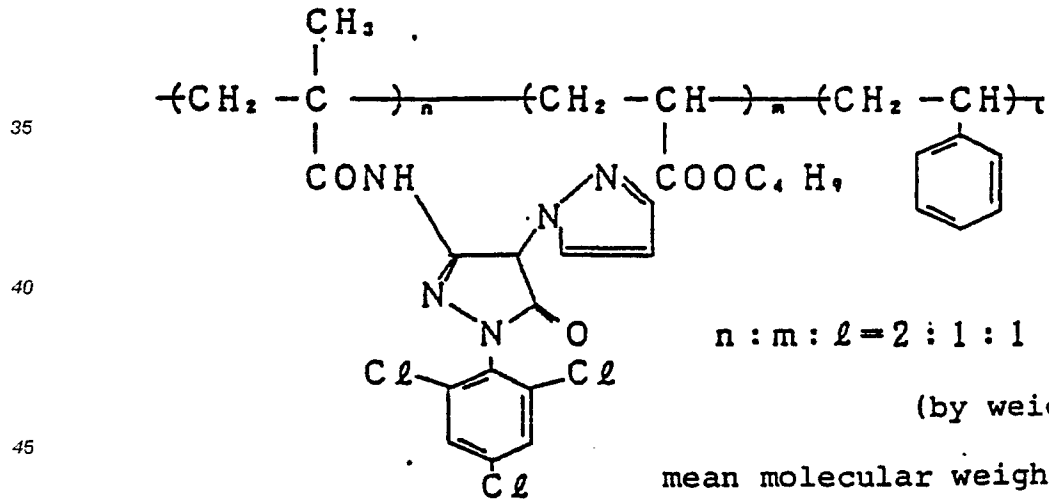

ExY-1 (Same as ExY-5 in Example 1)

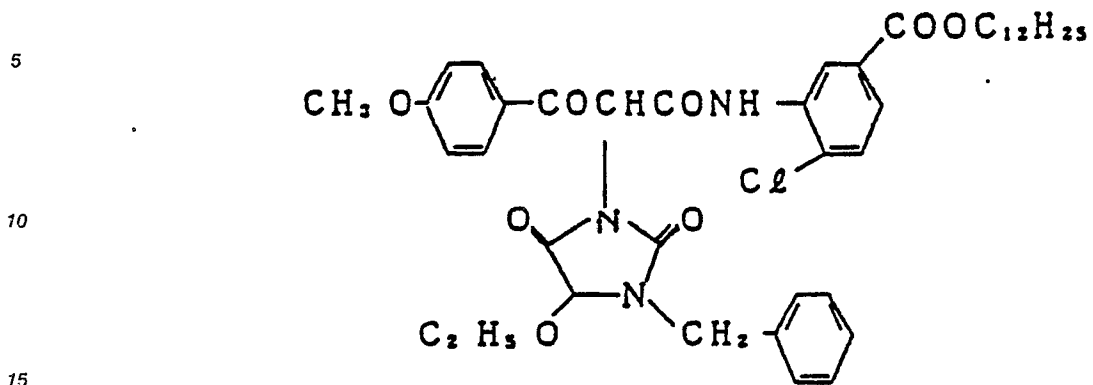


ExY-2

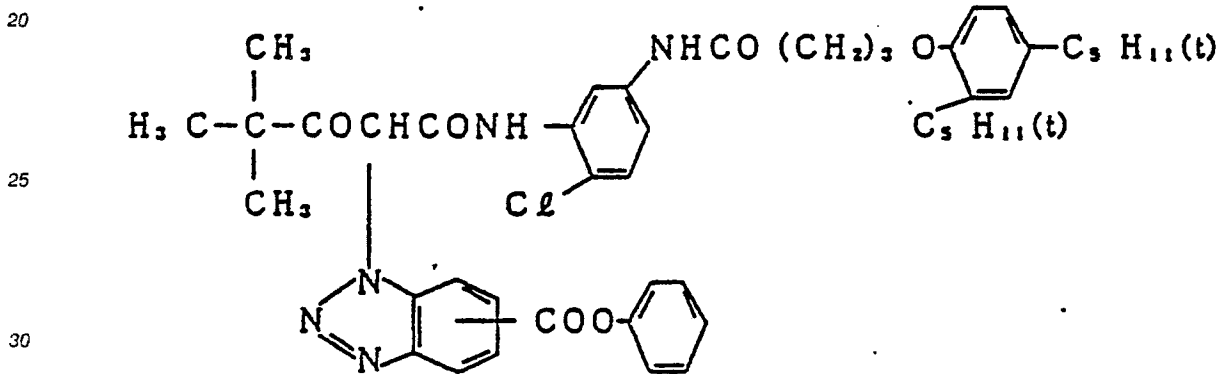


35


ExS-1 (Same as ExS-2 in Example 1)

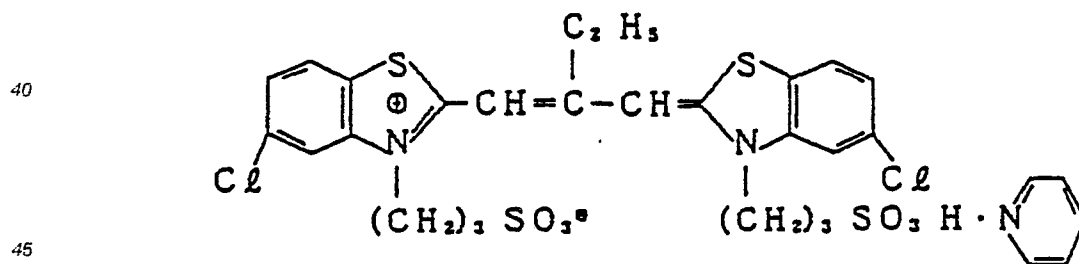


ExS-2 (Same as ExS-1 in Example 1)

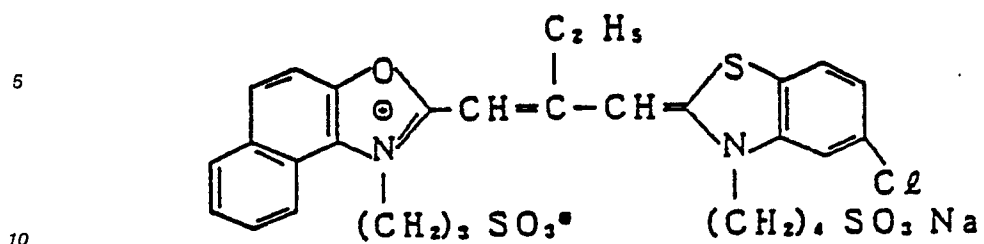


ExS-3

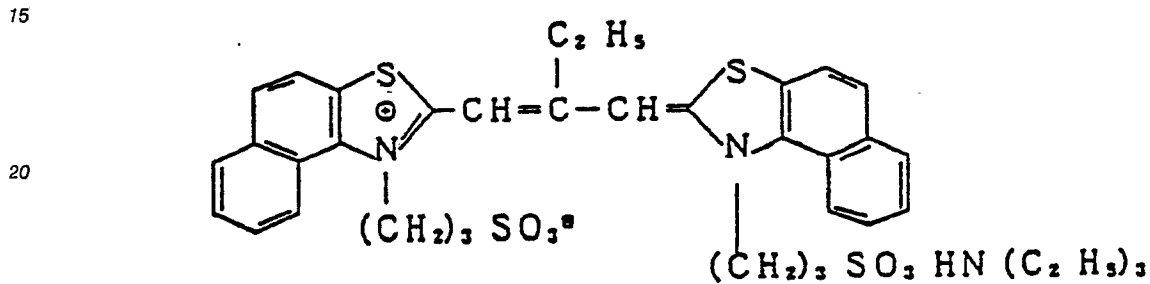


ExS-4 (Same as Sensitizing Dye IV in Example 2)

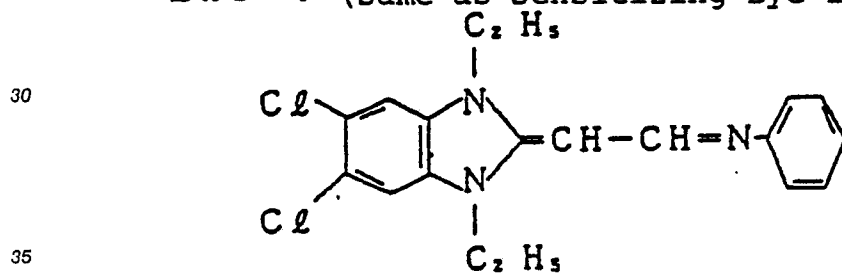


ExS-5

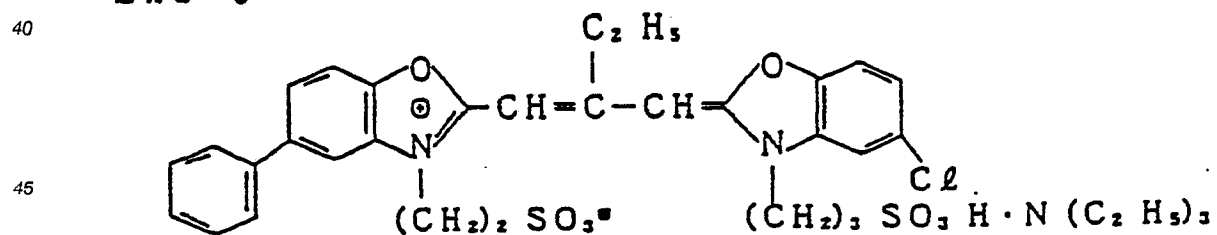


ExS-6

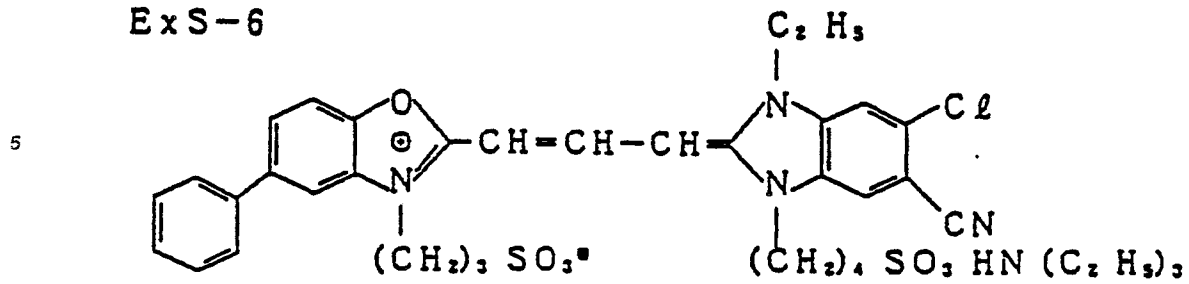


ExS-8

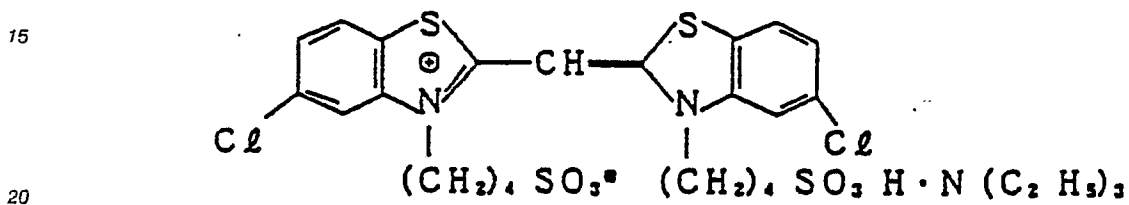

ExS-7 (Same as ExS-5 in Example 1)

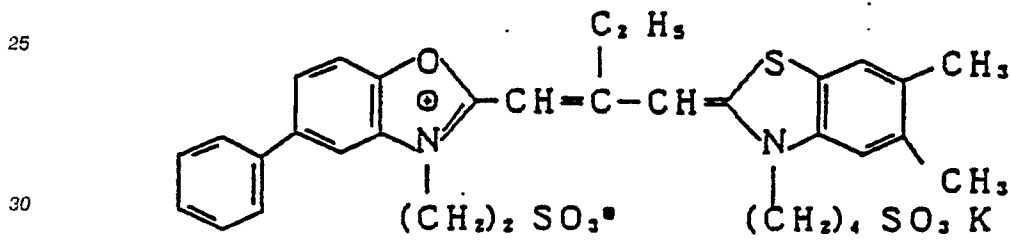

Solv-1 (Same as Solv-1 in Example 1)

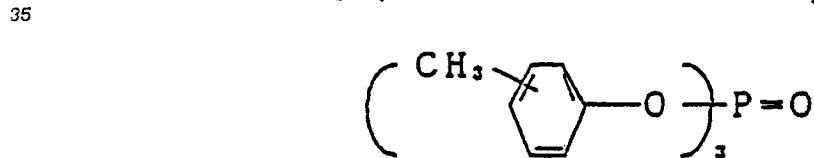


Solv-2 (Same as Solv-2 in Example 1)



55

Solv-3


5



10

Solv-4 (Same as Solv-3 in Example 1)


15



20

Cpd-1


25

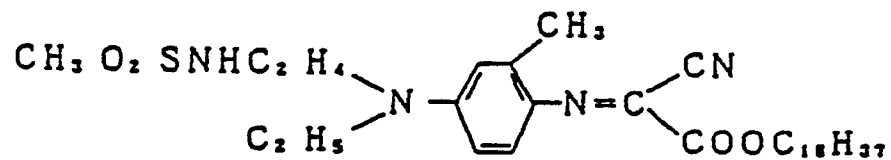

30

Cpd-2


35

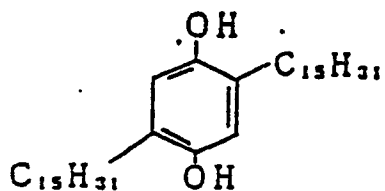

40

Cpd-3

45

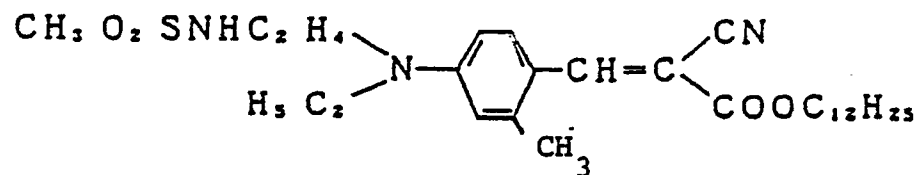


50

55

Cpd-4


5

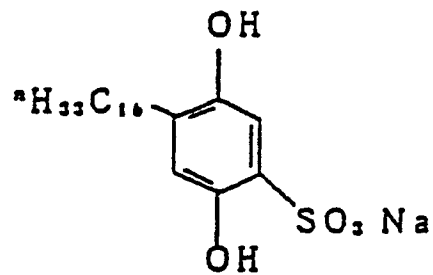

10

Cpd-5 (Same as Compound-5 in Example 1)


15




20

25

W-1



30




35

H-1 (Same as H-1 in Example 1)



40



45

Table 5

	Process	Variation of Minimum Magenta Density
Comparative Example	No. 1 of Table 4 in Example 2	+0.12
Example of the Invention	No. 7 of Table 4 in Example 2	+0.04
Example of the Invention	No. 11 of Table 4 in Example 2	+0.03

50

As is clear from the data in Table 5, the method of the present invention is effective for improving the image storability of the sample processed.

55

EXAMPLE 4

The same samples as those in Example 2 were, after being imagewise exposed in the same manner as in Example 2, processed in accordance with the procedure described below.

5

Table 6

10

Steps	Processing/time	Tank Capacity ℓ	Amount of Replenisher (*)m ℓ
Color Development	3 min 15 sec	8	38
Bleaching	30 sec	8	8
Bleach-fixation	1 min 45 sec	8	33
Rinsing (1)	20 sec	4	-
Rinsing (2)	20 sec	4	33
Stabilization	20 sec	4	33

15

(*) The amount of the replenisher is that per 1 m of the photographic material sample (35 m/m width) processed.

20

After being thus processed, the sample was dried at 65 ° C for one minute.

In the above procedure, the rinsing was effected by a two-tank countercurrent system from the rinsing tank 2) to the rinsing tank (1). The overflow from the bleaching bath was introduced into the bleach-fixing bath.

25

The compositions of the respective processing solutions used were as follows. Each replenisher used was the same as that of tank solution therefor.

Color Developer:

30

Same as that used in Example 1

Bleaching Solution:

35

Compound (A) (indicated in Table 7)	See Table 7
Compound (B) (indicated in Table 7)	See Table 7
Disodium Ethylenediamine tetraacetate	10.0 g
Ammonium Nitrate	10.0 g
Ammonium Bromide	150 g
Bleaching Accelerator (Compound indicated in Table 7)	5×10^{-3} mol
Water to make	1.0 ℓ

45

Bleach-fixing Solution:

50

Compound (A) (indicated in Table 7)	See Table 7
Compound (B) (indicated in Table 7)	See Table 7
Disodium Ethylenediamine tetraacetate	5.0 g
Sodium Sulfite	12.0 g
Aqueous Ammonium Thiosulfate (70 wt%)	240 m ℓ
Aqueous Ammonium to make	pH of 7.3
Water to make	1.0 ℓ

55

Rinsing Solution:

20 mg/l of sodium chloroisocyanurate was added to deionized water having an electroconductivity of 5 $\mu\text{S/cm}$.

5

Stabilizing Solution:

10

Formalin (37 wt%)	2.0 ml
Polyoxyethylene-p-monononylphenyl Ether (mean polymerization degree 10)	0.3 g
Disodium Ethylenediaminetetraacetate	0.06 g
Water to make	1.0 l

15

20

25

30

35

40

45

50

55

Table 7 (Cont'd)

No.	Bleaching Accelerator	Compound (A) (Content)	Compound (B) (content)	pH	Stirring system	Amount of Residual Silver ($\mu\text{g}/\text{cm}^2$)	Minimum Yellow Density	Maximum Cyan
1 (Comparative Example)	-	Comparative Compound (I) (0.3 mol)	-	5.0	J (3 sec)	28	0.64	1.73
		Comparative Compound (I) (0.1 mol)	-	7.3	J (10 sec)			
2 (Comparative Example)	(III)-(1)	Comparative Compound (I) (0.3 mol)	-	5.0	J (3 sec)	14	0.64	1.73
		Comparative Compound (I) (0.1 mol)	-	7.3	J (10 sec)			
3 (Example of the Invention)	(III)-(1)	1,3-DPTA-Fe (III) (0.3 mol)	-	5.0	N	7.5	0.87	1.75
		1,3-DPTA-Fe (III) (0.1 mol)	-	7.3	J (10 sec)			
4 (Example of the Invention)	(III)-(1)	1,3-DPTA-Fe (III) (0.3 mol)	-	5.0	J (3 sec)	0.9	0.67	1.80
		1,3-DPTA-Fe (III) (0.1 mol)	-	7.3	J (10 sec)			

Table 7

No.	Bleaching Accelerator	Compound (A) (Content)	Compound (B) (content)	pH	Stirring system	Amount of Residual Silver ($\mu\text{g}/\text{cm}^2$)	Minimum Yellow Density	Maximum Cyan
5 (Example of the Invention)	(III)-(1)	1,3-DPTA-Fe (III) (0.15 mol)	Comparative Compound (1) (0.15 mol)	5.0	J (3 sec)	1.8	0.63	1.80
		1,3-DPTA-Fe (III) (0.05 mol)	Comparative Compound (1) (0.05 mol)	7.3	J (10 sec)			
6 (Example of the Invention)	(IV)-(1)	1,3-DPTA-Fe (III) (0.15 mol)	Comparative Compound (1) (0.15 mol)	5.0	J (3 sec)	1.9	0.63	1.81
		1,3-DPTA-Fe (III) (0.15 mol)	Comparative Compound (1) (0.15 mol)	7.3	J (10 sec)			

In each experiment, the upper column indicates the condition for bleaching solution and the lower column that for bleach-fixing solution. the numeral as parenthesized in the item of Stirring system indicates a time from the introduction of the sample being processed into the bleaching bath to the application of the jet stream of the bleaching solution to the same sample.

As is clear from the data in Table 7, the method of the present invention proved effective in the procedure where the photographic material sample was bleached and then bleach-fixed.

5

Example 5

10 The processes of Tests Nos. 2 to 6, Nos. 13 to 15 in Example 1 and Tests Nos. 3 to 16 in Example 2 were carried out, using color negative films mentioned below, and the same good results as those attained in Examples 1 (Tables 2-1 and 2-2) and 2 were also attained.

Color Negative Films Used:

15

Products by Fuji Photo Film Co.

20 Fuji Color Super HR 100 (Emulsion No. 6266689)
 Fuji Color Super HR 200 (Emulsion No. 523009)
 Fuji Color Super HR 400 (Emulsion No. 315059)
 Fuji Color Super HR 1600 (Emulsion No. 723005)

Products by Konica Co.

25

Konica Color GX 100 (Emulsion No. 106)
 Konica Color GX 400 (Emulsion No. 861)
 Konica Color GX 3200 (Emulsion No. 751)

Products by Eastman Kodak Co.

30 Kadacolor VRG 100 (Emulsion No. 5095 104)
 Kadacolor VRG 200 (Emulsion No. 5096 034)
 Kadacolor VRG 400 (Emulsion No. 5097 123)
 35 Kadacolor VRG 1000 (Emulsion No. 5090 254)

EXAMPLE 6

40 Sample (B) of Example 2 was exposed to light at 20 CMS at 4800° K and then processed. The cyan dye density of the image formed was measured (first measurement). Next, the thus processed sample was dipped in the recoloring solution described below and then rinsed with water and dried. Then the cyan dye density was again measured (second measurement). The difference between the two values measured (Value of the second measurement minus value of the first measurement) indicates the degree of
 45 insufficiency in recoloration of cyan dye. The larger the value, the greater the insufficiency in recoloration.

The procedure of processing the exposed sample was as follows.

An automatic developing machine shown in Fig. 1, which was equipped with a conveyance mechanism, was used for processing the exposed sample. With reference to Fig. 1, which show a partial sectional view of one embodiment of an automatic developing apparatus for the method of the present invention, (1) is a
 50 processing solution level; (2) is a means for liquid sealing and liquid squeezing; (3) is a receiver of liquid drops; (4) is a following lid; (5) is a conveyance roller; (6) is a conveyance roller; (7) is a pair of facing rollers; (8) is photographic material being processed; (9) is a processing liquid tank; (10) is a conveyance level; (11) is a bleaching solution; (12) is a fixing solution; (13) is a jet stream pipe; (14) is a circulation pump; and (15) is a circulation pipe. The arrows from the jet stream pipe (13) indicate the jet stream of a
 55 fixing solution to be jetted from the nozzles as provided in the jet stream pipe. The fixing solution (12) is introduced into the jet stream pipe (13) via the circulation pipe (15) under section by the pump (14). At the position (14), the emulsion surface of the photographic material being processed faces downwards. In the fixing bath (12), the emulsion surface faces the jet stream pipe.

EP 0 329 051 A2

The crossover time between the bleaching solution and the fixing solution was varied, by changing the distance between the two tanks, as indicated in Table 8 below (Tests Nos. 1-1 to 9-2).

The processing procedure included the following

Steps	Processing/time	Tank Capacity °C	Amount of Replenisher (per m of 35 mm wide sample) m l
Color Development	3 min 15 sec	38	20
Bleaching	40 sec	38	4
Fixation	1 min 15 sec	38	30
Rinsing (1)	20 sec	38	-
Rinsing (2)	20 sec	38	20
Stabilization	20 sec	38	35
Drying	1 min 15 sec	50 to 70	-

The rinsing was carried out by a two-tank countercurrent system from the rinsing tank (2) to the rinsing tank (1). The processing time for all the steps (except the bleaching step) contained a 5 second-crossover time. The bleaching step included no crossover time

The compositions of the processing solutions used were as follows.

Color Developer:

	Tank Solution	Replenisher
Diethylenetriaminepentaacetic Acid	5.0 g	6.0 g
Sodium Sulfite	5.0 g	6.4 g
Potassium Carbonate	30.0 g	37.0 g
Potassium Bromide	1.3 g	0.3 g
Potassium Iodide	1.2 mg	-
Hydroxylamine Sulfate	2.0 g	2.8 g
4-(N-ethyl-N-β-hydroxyethylamino)-2-methylaniline Sulfate	4.7 g	5.3 g
Water to make	1.0 l	1.0 l
pH	10.0 g	10.20 g

Bleaching Solution:

EP 0 329 051 A2

Tank Solution and replanisher were same.

5	Formalin (37%)	2.0 ml
	Polyoxyethylene-p-monononylphenyl Ether (mean polymerization degree 10)	0.3 g
	Disodium Ethylenediaminetetraacetic Acid	0.05 g
	Water to make	1.0 l
	pH	5.5

10

Rinsing Solution

15 City water was passed through a mixed bed column filled with an H-type strong acidic cation-exchange resin (Amberlite 1R-120B, product by Rhom and Haas Co.) and an OH-type anion-exchange resin (Amberlite IR-400, product by Rhom and Haas Co.) thereby to reduce the calcium ion concentration and the magnesium ion concentration to 3 mg/liter or less.

The results are shown in Table 8 below.

20

25

30

35

40

45

50

55

Table 8

No.	Crossover Time	Jet Stream of Bleaching Solution	Jet Stream of Fixing Solution	Time Required until Arrival at Jet Stream of Fixing Solution	Amount of Residual Silver ($\mu\text{g}/\text{cm}^2$)	Degree of Recoloration Insufficiency	Remarks
1-1	20 sec	No	No	-	23	0.03	Comparative Example
1-2		Yes	Yes		23	0.03	"
2-1	10	No	No	-	21	0.10	"
2-2		Yes	Yes		21	0.09	"
3-1	10	No	No	20 sec	9	0.10	Example of the Invention
3-2		Yes	Yes		4	0.09	"
4-1	10	No	No	10 sec	6	0.02	"
4-2		Yes	Yes		3	0.01	"
5-1	10	No	No	5 sec	5	0.01	"
5-2		Yes	Yes		3	0.00	"
6-1	3	No	No	-	18	0.14	Comparative Example
6-2		Yes	Yes		18	0.12	"
7-1	3	No	No	20 sec	8	0.13	Example of the Invention
7-2		Yes	Yes		4	0.11	"
8-1	3	No	No	10 sec	5	0.02	"
8-2		Yes	Yes		3	0.00	"
9-1	3	No	No	5 sec	4	0.01	"
9-2		Yes	Yes		3	0.00	"

As is clear from the results in Table 8, the amount of the residual silver in the sample processed was noticeably reduced by application of the jet stream of the fixing solution to the sample. When the crossover time of the fixing solution was shortened, the insufficiency in recoloration increased. However, when the time required until arrival at the jet stream of the fixing solution was made 10 seconds or less, the insufficiency in recoloration was noted to be remarkably overcome.

Example 7

Sample Nos. 101 to 108 in Example 1 and Examples Nos. 201 to 208 in Example 2 of the European Patent 285,1786 were imagewise exposed and then processed by the procedure described below, whereupon the processing was continued until the replenisher was consumed in an amount of two times the tank capacity of the color developer tank for running test. In the procedure, the composition of the bleaching solution was varied, as indicated in Table 9 below.

The automatic developing machine used in Example 8 was a belt conveyance type machine described in JP-A-60-191257, and the respective processing baths were stirred by the jet stream-stirring system described in JP-A-62-183460.

The processing steps were as follows.

Steps	Processing/time	Temperature °C	Amount of Replenisher (per m of 35 mm wide sample) ml
Color Development	3 min 15 sec	38	38
Bleaching	1 min	38	4
Fixation	1 min	38	30
Stabilization(1)	20 sec	38	-
Stabilization(2)	20 sec	38	20
Stabilization(3)	20 sec	38	35 ml (*)
Drying	1 min 15 sec	50 to 70	-

(*) The stabilization was carried out by a three-tank countercurrent system from the stabilization tank (3) to (2) to (1).

The crossover time in the respective steps was 5 seconds, and the above processing times include the crossover time.

The compositions of the processing solutions used were as follows.

Color Developer:

	Tank Solution	Replenisher
Diethylenetriaminepentaacetic Acid	5.0 g	6.0 g
Sodium Sulfite	4.0 g	4.4 g
Potassium Carbonate	30.0 g	37.0 g
Potassium Bromide	1.3 g	0.9 g
Potassium Iodide	1.2 mg	-
Hydroxylamine Sulfate	2.0 g	2.8 g
4-(N-ethyl-N-β-hydroxyethylamino)-2-methylaniline Sulfate	4.7 g	5.3 g
Water to make	1.0 l	1.0 l
pH	10.00 g	10.05 g

Bleaching Solution:

EP 0 329 051 A2

Formalin (37%)	1.2 ml
5-Chloro-2-methyl-4-isothiazolin-3-one	6.0 mg
2-Methyl-4-isothiazoline-3-one	3.0 mg
Surfactant (C ₁₀ H ₂₁ -O-(CH ₂ CH ₂ O) ₁₀ -H)	
Ethylene Glycol	1.0 g
Water to make	1.0 l
pH	5.0 to 7.0

5

10

The above sample were exposed with light at 20 CMS and then processed with the running-equilibrated solution, and the amount of the residual silver in the thus processed samples was measured by a fluorescent X-ray method.

15

20

25

30

35

40

45

50

55

Table 9

Bleaching Solution	Composition of Bleaching Solution			pH after Running Test (Value Parenthesized Indicates pH of Replenisher)
	EDTA.Fe/1,3-DPTA.Fe (*)	Amount of Bleaching Accelerator (g/liter) Added to both Mother Liquid and Replenisher		
A	4	2		5.1 (3.7)
B	3	2		5.1 (3.7)
C	1.8	2		5.1 (3.7)
D	1	2		5.1 (3.7)
E	0.5	2		5.1 (3.7)
F	0	2		5.1 (3.7)
G	1	2		6.0 (4.8)
H	1	2		5.5 (4.5)
I	1	-		5.1 (3.7)

* The total of EDTA.Fe and 1,3-DPTA.Fe was 0.30 mol/liter (in tank solution) and 0.45 mol/liter (in replenisher) in every processing.

As a result, the difference in the photographic characteristic between the samples Nos. 101 to 108 and that between the sample Nos. 201 to 208 were relatively small despite of the extreme difference between the bleaching solutions (A) to (I) used.

Regarding the amount of the residual silver, the sample processed with the bleaching solution (A) had the largest residual silver amount and that processed with the bleaching solution (B) had the second largest residual silver amount, while the samples processed with bleaching solutions (D), (E) and (H) had the smallest residual silver amount. It is noted from the results, that the ratio of EDTA•Fe/1,3-EDTA•Fe in the bleaching solution is preferably 3 to less.

While the invention has been described in detail and with reference to specific embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made therein without departing from the spirit and scope thereof.

Claims

15

1. A method of processing a silver halide color photographic material comprising the steps of:

(a) color-developing an imagewise exposed silver halide color photographic material comprising a support having thereon at least one light-sensitive silver halide emulsion layer;

(b) processing said color-developed color photographic material with a bleaching solution containing (1,3-diamino-propanetetraacetato)iron(III) complex; and

(c) containing the emulsion surface of said material from step (b) with a jet stream of a solution having a fixing ability.

2. The method as claimed in claim 1, wherein said solution having a fixing ability is a fixing solution.

3. The method as claimed in claim 1, wherein said jet stream at a nozzle has at a flow velocity of from 0.3 m/sec to 3 m/sec.

4. The method as claimed in claim 1, wherein said photographic material is contacted by said jet stream within 15 seconds after being introduced into said bath.

5. The method as claimed in claim 4, wherein said photographic material is contacted by said jet stream within 10 seconds after being introduced into said bath.

6. The method as claimed in claim 1, wherein said solution having a fixing ability is a fixing solution containing a thiosulfate in an amount of from 50 to 500 g per liter of the fixing solution.

7. The method as claimed in claim 1, wherein the processing time from the beginning of step (b) to the end of step (c) is from 1 minute to 4 minutes.

8. The method as claimed in claim 1, wherein said (1,3-diamino-propanetetraacetato)iron(III) complex is an ammonium salt complex.

9. The method as claimed in claim 1, wherein said bleaching solution contains from 0.05 mol to 1 mol of said (1,3-diamino-propanetetraacetato)iron(III) complex per liter of said bleaching solution.

10. The method as claimed in claim 1, wherein said bleaching solution further contains at least one ferric complex of an acid selected from the group consisting of ethylenediaminetetraacetic acid, diethylenetriaminepentaacetic acid, cyclohexanediaminetetraacetic acid and 1,2-propylenediaminetetraacetic acid.

11. The method as claimed in claim 10, wherein said bleaching solution contains from 0.1 to 3.0 mols of said ferric complex per mol of (1,3-diaminopropanetetraacetato)iron(III) complex.

12. The method as claimed in claim 1, wherein the emulsion surface of said developed color photographic material in step (b) is contacted with a jet stream in a bath of said bleaching solution.

13. The method as claimed in claim 1, wherein the pH of said bleaching solution in step (b) is from 5.5 to 2.0.

14. The method as claimed in claim 13, wherein the pH of said bleaching solution in step (b) is from 5.0 to 3.0.

15. The method as claimed in claim 14, wherein the pH of said bleaching solution in step (b) is from 4.5 to 3.5.

16. The method as claimed in claim 1, wherein the interval between said developing step (a) and said bleaching solution processing step (b) is at most 10 seconds.

17. The method as claimed in claim 1, wherein the interval between said bleaching solution processing step (b) and said processing step (c) with the jet stream of the solution having a fixing ability is 10 seconds or less.

18. The method as claimed in claim 1, wherein the said bleaching solution has a bromide ion concentration of from 1.2 to 3.0 mols/liter.

19. The method as claimed in claim 1, wherein silver halide contained in said silver halide color photographic material contains 30 mol% or less of silver iodide.

5

10

15

20

25

30

35

40

45

50

55

Fig. 1

