



**EUROPEAN PATENT SPECIFICATION**

Date of publication of patent specification :  
**01.07.92 Bulletin 92/27**

Int. Cl.<sup>5</sup> : **C23C 4/12**

Application number : **89302156.8**

Date of filing : **03.03.89**

**Production of aluminum matrix composite coatings of metal structures.**

Priority : **04.03.88 US 164234**

Date of publication of application :  
**06.09.89 Bulletin 89/36**

Publication of the grant of the patent :  
**01.07.92 Bulletin 92/27**

Designated Contracting States :  
**BE CH DE FR IT LI NL SE**

References cited :  
**DE-A- 1 796 342**  
**DE-A- 2 205 199**  
**DE-A- 2 930 638**  
**US-A- 3 332 752**

Proprietor : **ALCAN INTERNATIONAL LIMITED**  
**1188 Sherbrooke Street West**  
**Montreal Quebec H3A 3G2 (CA)**

Inventor : **Schuster, David M.**  
**963 Candlelight Place**  
**Lajolla California 92037 (US)**  
Inventor : **Fisher, Harvey**  
**22 Nickerson Road**  
**Lexington Massachusetts 02173 (US)**  
Inventor : **Cinq-Mars, Pierre**  
**133 Walmer Road**  
**Toronto Ontario (CA)**  
Inventor : **Altschuller, Bernard**  
**307 Avenue Road**  
**Toronto Ontario (CA)**

Representative : **Wilkinson, Stephen John et al**  
**Stevens, Hewlett & Perkins 1 St. Augustine's**  
**Place**  
**Bristol BS1 4UD (GB)**

**EP 0 331 519 B1**

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

### Background of the Invention

This invention relates to the application of corrosion and mechanical wear resistant coatings to metal surfaces and, more particularly, to the coating of steel structures with aluminum matrix composite coatings.

It is known to form aluminum coatings on steel structures to provide protection against corrosion and mechanical wear. Such coatings are used in all environments where marine, industrial or urban corrosion are linked with mechanical wear. Such coatings are typically applied by a thermal spraying process and zinc and pure aluminum wires have been used for this purpose, particularly in marine environments where aluminum shows high resistance to salt water. This process remains in use today.

While pure aluminum provides some cathodic protection, it is mainly a barrier coating having relatively low strength and wear resistance. To solve this problem, aluminum matrix composite compositions have been used as coatings on steel substrates to give not only high cathodic protection but also good wear resistance to the steel structure. These coatings have in the past been applied by techniques such as flame spraying a body of molten metal onto the substrate to be coated, with particulate refractory or ceramic particles introduced into the spray. Flame spraying of metal powder together with refractory or ceramic particles has also been used. It is also known to use thermal spraying or plasma spraying in place of the above mentioned flame spraying technique.

The above techniques are very difficult to control in commercial operation and it is most difficult to obtain a uniform distribution of the refractory or ceramic particles throughout the coating. In particular, problems have been encountered with poor adhesion, high coating porosity and generally an unsound coating structure.

It is the object of the present invention to provide a method for application of metal matrix composite material coatings and in particular aluminum matrix composite material coatings of improved quality on metal structures.

### Summary of the Invention

The aforementioned object is realized by the subject-matter of claim 1.

More particularly, according to the present invention an aluminum matrix composite coating is applied to metal substrates by directly flame spraying or arc spraying a preformed aluminum matrix composite material. The preformed material is in the form of a wire or rod which acts as a feedstock for the flame spraying or arc spraying process.

Metal matrix composites are well known in the art

and are formed of a metal matrix having distributed therein a divided solid filler, i.e. a fibrous or particulate material which is capable of being incorporated in and distributed through the metal matrix and which at least substantially maintains its integrity as incorporated rather than losing its form or identity by dissolution in or chemical combination with the metal.

It is known that the strength of aluminum and aluminum alloy articles can be significantly enhanced by incorporation of fibrous or particulate solid fillers in the form of short, discontinuous, more or less randomly oriented particles. For many applications it is known to distribute the fibers substantially uniformly throughout the metal article.

As examples of solid filler materials that have been used for the above purpose, there may be mentioned alumina, titanium diboride, silica, zirconia, silicon carbide, silicon nitride, etc. Aluminum-TiB<sub>2</sub> composites, for instance, have been used for applications requiring high strength and/or high resistance to wear.

The aluminum matrix composite materials utilized as feedstocks in the process of this invention are manufactured by techniques known in the art and typically contain 5 to 60 volume % of the refractory or ceramic filler. A range of 5 to 40 volume % of filler is preferred, with a range of 10 to 20 volume % being particularly preferred. The coating is preferably applied to a thickness in the range of about 50 to 5000 μm (microns).

The substrate to be treated is typically a ferrous metal, e.g. steel, structure. Other substrates that may be coated according to the invention include a heat treatable, high strength aluminum alloy structure, e.g. an AA 7000 series alloy. Such aluminum alloys are sometimes subject to stress corrosion in service.

The surface of the substrate to be treated is preferably prepared by grit blasting, e.g. using alumina particles. It has also been found to be advantageous, but not essential, to preheat the substrate to at least about 120°C to remove surface moisture prior to application of the coating. Of course, this is not always feasible, particularly for marine applications. In some instances, it may also be advantageous to precoat the substrate by conventional metallizing with aluminium prior to the application of the aluminum matrix composite coating.

It has surprisingly been found that the composite coating formed by the method of this invention are generally superior to those obtained by the prior methods. In particular, the composite coatings obtained by the present invention have improved adhesion, low porosity and generally a sound structure.

### Brief Description of the Drawings

Figure 1 is a photomicrograph showing a prior art coating;

Figure 2 is a photomicrograph showing a coating according to this invention;

Figure 3 is a photomicrograph of a further coating according to this invention; and

Figure 4 is a photomicrograph of a still further coating according to this invention.

The following specific examples illustrate certain preferred features of the present invention.

#### Example 1

A cast ingot was formed comprising an AA 1350 aluminum containing about 15 volume % of silicon carbide particles uniformly distributed throughout. The ingot was made according to the method disclosed in PCT application WO87/06624, published November 5, 1987. The ingot was extruded and drawn into a wire having a diameter of about 2.3 mm and this became the feedstock for an arc spray process.

A steel substrate was used in the form of a steel cylinder and an arc was struck between a pair of feed wires formed of the above aluminum matrix composite material. The arc was held at a distance of approximately 10 cm from the cylinder while the cylinder was rotated, with an arc current of approximately 150 amps being used. A coating having a thickness of approximately 3000  $\mu\text{m}$  (microns) was deposited on the cylinder.

The product obtained was subjected to metallographic examination and the coating had good adhesion, a low porosity and a generally sound structure.

#### Example 2

Tests were conducted to compare a composite coating produced by the method of this invention with a composite coating produced by a prior art method.

##### A. Inventive method-

Following the same general procedure as in Example 1, a cast ingot was obtained containing about 10 volume % of silicon carbide particles uniformly distributed in an AA 6061 aluminum alloy.

The ingot was extruded and drawn into a wire having a diameter of about 2.3 mm and this was used as a feedstock for an arc spray process.

A steel substrate in the form of a flat bar was used and an arc was struck between a pair of feed wires formed of the above ingot. The arc was held at a distance of about 10 cm from the steel bar with an arc current of about 150 amps being used. A coating having a thickness of about 3000  $\mu\text{m}$  (microns) was deposited on the bar.

The product was subjected to metallographic examination and the results obtained are shown in

Figure 2.

##### B. Prior Art Method -

An AA 6061 aluminum alloy was formed into a wire having a diameter of about 2.3 mm and this was used as a feedstock for an arc spray process.

A steel substrate in the form of a flat bar was used and an arc was struck between a pair of feed wires formed of the above alloy. The arc was held at a distance of about 10 cm from the steel bar with an arc current of about 150 amps being used. Simultaneously, silicon carbide particles were fed between the arcing wires to be deposited with the aluminum, the silicon carbide particles being fed at a rate of about 10 volume % relative to the aluminum alloy fed. A composite coating having a thickness of about 5000  $\mu\text{m}$  (microns) was deposited on the bar.

The product was subjected to metallographic examination and the results obtained are shown in Figure 1.

Comparing Figure 2 with Figure 1, it is readily evident that the process of this invention produces a much more uniform coating with fewer voids (shown as black areas) than does the coating produced by the prior art process.

#### Example 3

Following the same general procedure as in Example 1, a cast ingot was formed comprising an AA-1060 aluminum containing about 15 volume % of aluminum oxides particles uniformly distributed throughout. The ingot was extruded and drawn into wires having diameters of 3.2 and 2.4 mm and this became the feedstock for a flame spray process.

Prior to flame spraying, flat steel sheet was solvent degreased and then grit blasted with No. 16 alumina. A 75 to 80  $\mu\text{m}$  (micron) anchor tooth pattern was obtained on the steel.

The steel samples were flame sprayed within 10 minutes after grit blasting with either 3.2 or 2.4 mm composite wire.

The flame spray system was operated at an oxygen gas setting of 2.45 Kg./sq./cm. at 1.4 m<sup>3</sup>/h, an acetylene gas setting of 1.4 Kg./sq./cm. at 1.1 m<sup>3</sup>/h and an air setting of 4.55 Kg./sq./cm. at 1.6 m<sup>3</sup>/h. The spray gun was held at a distance of approximately 15 cm from the steel samples.

The coated samples were subjected to metallographic examination and the results obtained are shown in Figures 3 and 4, Figure 3 being with the 2.4 mm wire and Figure 4 being with the 3.2 mm wire. Both photomicrographs show uniform coatings with very few voids.

## Claims

1. A method of producing a corrosion and mechanical wear resistant coating on a metal surface to be protected which comprises

(a) providing a rod or wire formed of a preformed metal matrix composite material comprising a metal matrix having distributed therein a finely divided solid filler material and

(b) applying a coating of said metal matrix composite material on said metal surface to be protected by means of a flame spraying or arc spraying process.

2. A method according to claim 1 wherein the metal matrix composite material is an aluminum matrix containing fibrous or particulate refractory filler material.

3. A method according to claim 2 wherein the matrix contains 5 to 60 volume percent of filler.

4. A method according to claim 2 wherein the matrix contains 5 to 40 volume percent of filler.

5. A method according to claim 2 wherein the matrix contains 10 to 20 volume percent of filler.

6. A method according to claim 2 wherein the metal surface is the surface of a ferrous metal structure.

7. A method according to claim 2 wherein the metal surface is the surface of a heat treatable, high strength aluminum alloy structure.

8. A method according to claim 6 wherein the filler material is selected from alumina, titanium diboride, silica, zirconia, silicon carbide and silicon nitride.

9. A method according to claim 6 wherein the filler material is alumina.

10. A method according to claim 8 wherein the aluminum matrix is unalloyed aluminum.

11. A method according to claim 8 wherein the protective coating is applied to a thickness of about 50 to 5000  $\mu\text{m}$  (microns).

## Revendications

1. Méthode de fabrication d'un revêtement, résistant à la corrosion et à l'usure mécanique, sur une surface métallique à protéger, qui comprend :

a) l'obtention d'une tige ou d'un filament obtenu à partir d'un matériau composite de matrice métallique, comprenant une matrice métallique dans laquelle est distribué un matériau de remplissage solide finement divisé, et

b) l'application d'une couche dudit matériau composite à matrice métallique sur ladite surface métallique devant être protégée, au moyen d'un procédé d'atomisation à la flamme ou à l'arc.

2. Méthode selon la revendication 1, selon laquelle le matériau composite de matrice métallique est une matrice en aluminium contenant un matériau

de remplissage réfractaire fibreux ou sous forme de particules.

3. Méthode selon la revendication 2, selon laquelle la matrice contient 5 à 60 pourcent en volume de matériau de remplissage.

4. Méthode selon la revendication 2, selon laquelle la matrice contient 5 à 40 pourcent en volume de matériau de remplissage.

5. Méthode selon la revendication 2, selon laquelle la matrice contient 10 à 20 pourcent en volume de matériau de remplissage.

6. Méthode selon la revendication 2, selon laquelle la surface métallique est une structure de métal ferreux.

7. Méthode selon la revendication 2, selon laquelle la surface métallique est la surface d'une structure en alliage aluminium de forte résistance, et traité à la chaleur.

8. Méthode selon la revendication 6, selon laquelle le matériau de remplissage est sélectionné parmi le diboride titanium, la silice, le zirconium, le carbure de silicium et le nitrure de silice.

9. Méthode selon la revendication 5, selon laquelle le matériau de remplissage est l'alumine.

10. Méthode selon la revendication 8, selon laquelle la matrice en aluminium est un aluminium non allié.

11. Méthode selon la revendication 8, selon laquelle le revêtement protecteur est appliqué avec une épaisseur d'environ 50 à 5000  $\mu\text{m}$  (microns).

## Patentansprüche

1. Verfahren zur Herstellung einer gegen Korrosion und mechanischen Verschleiß widerstandsfähigen Beschichtung auf einer zu schützenden Metalloberfläche, das

a) die Schaffung eines Stabes oder eines Drahtes, der aus einem vorgeformten Metallmatrixverbundmaterial gebildet ist, das eine Metallmatrix mit einem darin verteilten, fein zerteiltem, festen Füllmaterial umfaßt, und

b) das Aufbringen einer Beschichtung aus dem Metallmatrixverbundmaterial auf die zu schützende Metalloberfläche mittels eines Flamsprüh- oder Bogensprühverfahrens umfaßt.

2. Verfahren nach Anspruch 1, wobei die Metallmatrixverbundmaterial eine Aluminiummatrix ist, die ein fibröses oder teilchenförmiges, feuerfestes Füllmaterial enthält.

3. Verfahren nach Anspruch 2, wobei die Matrix 5 bis 60 Volumenprozent des Füllers enthält.

4. Verfahren nach Anspruch 2, wobei die Matrix 5 bis 40 Volumenprozent des Füllers enthält.

5. Verfahren nach Anspruch 2, wobei die Matrix 10 bis 20 Volumenprozent des Füllers enthält.

6. Verfahren nach Anspruch 2, wobei die Metall-

oberfläche die Oberfläche einer eisenhaltigen Metallstruktur ist.

7. Verfahren nach Anspruch 2, wobei die Metalloberfläche die Oberfläche einer wärmebehandelbaren, hochfesten Aluminiumlegierungsstruktur ist. 5

8. Verfahren nach Anspruch 6, wobei das Füllmaterial aus Aluminiumoxid, Titandiborid, Siliziumdioxid, Zirkonoxid, Siliziumcarbid und Siliziumnitrid ausgewählt wird.

9. Verfahren nach Anspruch 6, wobei das Füllmaterial Aluminiumoxid ist. 10

10. Verfahren nach Anspruch 8, wobei die Aluminiummatrix unlegiertes Aluminium ist.

11. Verfahren nach Anspruch 8, wobei die Schutzbeschichtung in einer Dicke von ungefähr 50 bis 5000 µm aufgetragen wird. 15

20

25

30

35

40

45

50

55

5



100X

**FIG. 1**  
**( PRIOR ART )**



100X

**FIG. 2**

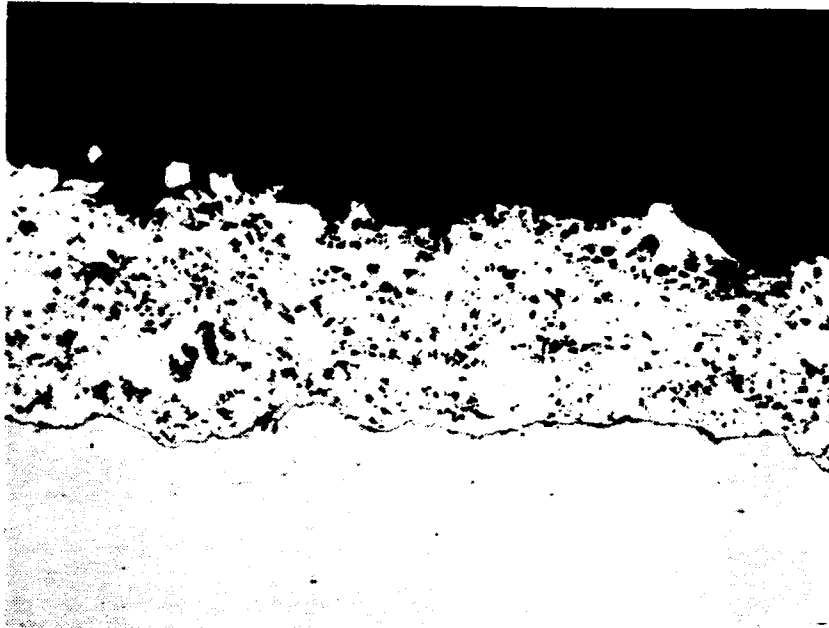


FIG. 3



FIG. 4