

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 344 549 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **03.03.93** (51) Int. Cl.⁵: **D06F 58/26**, D06F 39/04,
D06F 25/00

(21) Application number: **89109099.5**

(22) Date of filing: **19.05.89**

(54) **Heating apparatus for combined clothes washing and drying machine.**

(30) Priority: **30.05.88 IT 3402488**

(43) Date of publication of application:
06.12.89 Bulletin 89/49

(45) Publication of the grant of the patent:
03.03.93 Bulletin 93/09

(84) Designated Contracting States:
DE ES FR GB IT

(56) References cited:
EP-A- 0 214 510 EP-A- 0 240 910
EP-A- 0 252 323 DE-A- 3 340 313
FR-A- 1 160 079 GB-A- 2 044 297
US-A- 2 607 209 US-A- 2 682 599
US-A- 2 867 430

(73) Proprietor: **INDUSTRIE ZANUSSI S.p.A.**
Via Giardini Cattaneo 3
I-33170 Pordenone(IT)

(72) Inventor: **Cinello, Arturo**
Via Purive 1
I-33032 Bertiole Udine(IT)

(74) Representative: **Grosse, Wolfgang et al**
Patentanwälte Herrmann-Trentepohl, Kirsch-
ner Grosse, Bockhorni & Partner Forsten-
rieder Allee 59
W-8000 München 71 (DE)

EP 0 344 549 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The present invention relates to a heating apparatus for a combined laundering machine for washing and drying clothes, in particular to a front-loading domestic washing machine, which is equipped with a wash tub within which a clothes drum is able to rotate about a horizontal axis, and to accommodate the washload during both the washing and the drying process.

From the European Patent Application EP-A-0 240 910 a combined washing and drying machine is known with heating elements for both water and air heating. The heating elements are arranged in a container welded on the upper portion of the laundering tub. During the washing phase the washing liquid is pumped into the container and returns to the tub by overflowing one side-wall of the container, i.e. the heating elements are fully immersed during water heating.

The following disadvantages arise in connection with this solution:

The heating elements, during the drying phase not cooled by water, reach high temperatures and will burn soon or must consist of expensive materials of increased corrosion strength. Such special heating elements require also manufacturing processes which are quite complex and imply high defect rates.

A metal screen is furthermore arranged above the body of said heating elements in view of both increasing the heat-exchange surface area and minimizing heat radiation losses towards the outside of the appliance, while at the same time reducing the temperature values which the electrical and other functional parts housed in the upper part of the machine may become exposed to.

As a consequence, heating elements of this type are both intensively power-consuming and expensive, and they also require the use of thermal screening arrangements which not only contribute to the construction complexity of the machine, but can also give rise to disturbing noise and vibration problems during certain operation cycles (e.g., spin extraction) of the machine.

Further problems of the solution according to European Patent Application EP-A-0 240 910 are encountered in getting at the heating elements for maintenance and repair purposes, since access to them can be only gained by first taking the tub-drum assembly apart.

A further disadvantage lies in the corrosion initiation effects induced by the welding operation performed to attach the heating-element housing onto the wash tub.

US-Patent 2867430 discloses a heating apparatus for a front-loading dryer machine for domestic use. Because of the great constructive and func-

tional differences between special dryers and combined washing-drying-machines, e.g. the absence of a tub in the special dryer, the solutions shown in this document are not applicable to the problems of the combined washing-drying-machines.

Under these circumstances it would therefore be desirable, and is in fact the main object of the present invention, to provide a heating apparatus for a combined clothes washing and drying machine capable of eliminating all above described disadvantages, while ensuring the same or possibly a better efficiency of the machine during the clothes drying process.

These and other objects are attained according to the present invention by a heating apparatus for a combined clothes washing and drying machine, particularly a front-loading washer-dryer machine for home use comprising a wash tub within which a drum is rotatable about a horizontal axis and is capable of accommodating the clothes to be both washed and dried, with a system for circulating the wash liquor a drying pneumatic circuit equipped with a blower forcing the drying air to successively flow through a housing containing heating elements and communicating with an opening in the upper part of the wash tub, and the drum containing the clothes, to finally expel it out of the tub of the machine, characterized in that the housing of the heating apparatus is joined in a removable way with the opening in the upper part of the wash tub that the heating apparatus is formed by one or more electrical resistance heating elements embedded in a mass of heat-radiating material which is shaped as a rectangular plate extending transversally so as to cover almost the whole surface of the opening through which the drying air flows into the tub, and that drying air conveying means are formed by fins and through holes showing a diverging pattern along the direction in which the drying air is made to flow into the tub and that a conduit for circulating the wash liquor ends into the tub above the heating apparatus.

The characteristics and advantages of the invention will become more clearly apparent from the following description, given by way of nonlimiting example with reference to the accompanying drawings, wherein:

Figure 1 is a partial cut-away, side view of a clothes washing and drying machine equipped with a preferred embodiment of the apparatus according to the invention;

Figures 2 and 3 respectively show a longitudinal cut-away view along the II-II line of Fig. 3 and a partial top view of the apparatus according to Fig. 2.

The clothes washing and drying machine 4 shown in Fig. 1 is essentially formed by a wash tub 5 in which a drum 6 is mounted in such a way as

to be capable of rotating about a horizontal axis and accomodating the clothes to be washed and dried.

The drum 6 is driven rotationally by an electric motor and belt-type driving means in a per se known, not shown way, and it features a front loading opening 7 which is in a line with both the front opening 8 in the wash tub and the front opening in the outer cabinet (not shown) of the washing and drying machine.

The wash tub 5 has a lower opening 9 connected via a conduit 10 with a filtering device, a pump and a drain conduit (not shown) which are provided to duly discharge the wash liquor or the water from the machine at the end of the various washing and rinsing cycles.

After completion of a washing process, the machine 4 can in a per se know way perform also the drying of the washed clothes by means of a heated-up air flow which is circulated through the drum 6 containing the wet drying load, and which is then expelled from the tub 5, dehumidified, heated up and blown again into the tub 5.

To this purpose, a blower 11 is provided, the suction side of which is connected with the drain conduit 10 of the wash tub 5 through a water-cooled condensing device 12, while the delivery side of said blower 11 is connected with an opening 13 in the upper part of the wash tub 5 through a housing 14 containing a heating apparatus 15 formed by electrical resistance heating elements.

The condensing device 12 is connected to the water mains through a conduit 16 and a water inlet solenoid valve (not shown) which deliver to a spray nozzle 17 the water needed to form the cooling curtain for condensing the moisture out of the air expelled from the tub 5.

Both cooling water and condensate are then conveyed to the discharge pump and, from there, to the drain.

The machine equipped with the heating apparatus according to the invention is capable, in a per se known way, of either traditionally washing the clothes by soaking them in the wash liquor or washing the clothes by spraying a reduced quantity of continuously circulated wash liquor on them.

To this purpose, the filtering apparatus (not shown) of the machine is connected, via a collecting manifold and a circulation pump (not shown), with a conduit 18 which penetrates into the top part of the tub 5, just above the heating apparatus 15, so that it can spray heated-up wash liquor onto the clothes contained in the drum 6.

The housing 14 of the heating apparatus 15 is in a preferred way made of stainless steel and is attached in a removable way to the opening 13 in the upper part of the wash tub 5 with the interposition of suitable sealing means 19 (eg., rubber

sealing gaskets) therebetween.

The connection of the housing 14 of the heating apparatus 15 with the wash tub 5 is made through the use of tie-rods 20 connected to the ends of a circular strap (not shown) which is capable of being applied in a removable way against the circumference of the wash tub 5 as described in European Patent Application EP-A-0 214 510.

Instead of or together with said tie-rods, traditional screw-and-nut fastening means can also be used.

The heating apparatus 15 (Fig. 2) is fixed in a removable way to the housing 14, eg. by screw-and-nut or similar fastening means 21, and includes one or more electrical resistance heating elements 22 made of conventional stainless steel material and embedded in a plate 23 of heat-radiating material.

Said heat-radiating plate 23 has a rectangular shape extending transversally so as to cover almost the whole surface of the opening 13 in the wash tub 5, except for a narrow passage gap 24 all along the perimeter (Fig. 1).

The plate 23 is further provided with a number of through holes 25 (Fig. 3) which are so designed as to enable both the drying air and the wash liquor issuing from the circulation conduit 18 during spray washing of the clothes to freely flow through them.

The upper surface of the plate 23 is provided with fins 26 (Fig. 3) which feature a diverging pattern along the direction in which the drying air flows into the tub 5, in view of enabling the drying air to be distributed over the largest possible surface area of the plate 23.

The plate 23 may for example be formed by a cast slab of aluminium in all those cases in which the heating elements 22 are required to operate at medium-to-low temperature values which would therefore exclude the occurrence of problems arising from the difference in the thermal expansion coefficients of the stainless steel, of which the heating elements 22 are made, and the aluminium forming the plate 23.

Should on the contrary heating elements for higher operating temperatures be required, the plate 23 may advantageously be made of a ceramic material enabling also normal heating elements, ie. not specially sheathed, to be embedded therein.

It is to be noticed that the heating apparatus as described herein is connected in a removable way with the wash tub 5, thereby eliminating all disadvantages deriving from a welded attachment and simplifying maintenance of the housing 14 as well as the possible replacement of the heating apparatus 15.

Furthermore, the heating apparatus 15 is such as to make it unnecessary to use expensive heat-

ing elements sheathed with high-grade steel claddings, since the heat-radiating plate 23 enables the actually available heat-exchange surface, and as a consequence the efficiency of normal heating elements, to be increased and, at the same time, the heating elements themselves to be effectively protected against corrosion.

As a consequence, the heating apparatus 15 may be made to operate at lower temperatures and makes it unnecessary to provide for the arrangement of such heat shielding means as usually required by traditional solutions.

In the above-described embodiment, the heating apparatus is used in a closed-loop condensing-type combined clothes washing and drying machine. However, it is quite apparent that the same advantages would also derive from its use in washing and drying machines provided with an open-loop drying circuit.

The heating apparatus according to the present invention can of course be further modified or differently made as compared to the described embodiment without departing from the scope of the invention.

For example, the heating plate 23 could also be given different shapes (eg. oval or arched) or be made of materials other than those previously mentioned (eg., special ceramics).

Claims

1. Heating apparatus for water and air heating in a combined clothes washing and drying machine, particularly a front-loading washer-dryer machine for home use comprising a wash tub within which a drum is rotatable about a horizontal axis and is capable of accomodating the clothes to be washed and dried, with a system for circulating the wash liquor and a drying pneumatic circuit equipped with a blower forcing the drying air to successively flow through a housing containing heating elements and communicating with an opening in the upper part of the wash tub, and the drum containing the clothes, to finally expel it out of the tub of the machine, characterized in that the housing (14) of the heating apparatus (15) is joined in a removable way with the opening (13) in the upper part of the wash tub (5), that the heating apparatus (15) is formed by one or more electrical resistance heating elements (21) embedded in a mass of heat-radiating material which is shaped as a rectangular plate (23) extending transversally so as to cover almost the whole surface of the opening (13) through which the drying air flows into the tub (5), and that drying air conveying means are formed by fins (26) and through holes (25) showing a diverging

pattern along the direction in which the drying air is made to flow into the tub (5) and that a conduit (18) for circulating the wash liquor ends into the tub (5) above the heating apparatus (15).

2. Heating apparatus according to claim 1 with a circular strap of plastic material being applied in a removable way characterized in that the housing (14) of the heating apparatus (15) is kept in its position over the opening (13) in the upper part of wash tub (5) by means of tie-rods (20) connected to the ends of the circular strap.


Patentansprüche

1. Heizvorrichtung zum Heizen von Wasser und Luft in einer kombinierten Wasch- und Trocknermaschine für Wäsche, insbesondere einer Frontlader-Wasch- und Trocknermaschine für den Hausgebrauch mit einem Waschbehälter, in dem eine Trommel um eine horizontale Achse drehbar ist und geeignet ist, die zu waschende und zu trocknende Wäsche aufzunehmen, und mit einem System zum Umwälzen der Reinigungsflüssigkeit und einem Trocknungsluftkreis, der mit einem Gebläse ausgerüstet ist, das die Trocknungsluft durch ein Gehäuse strömen läßt, das Heizelemente enthält und mit einer Öffnung im oberen Teil des Waschbehälters in Verbindung steht, und danach durch den die Wäsche enthaltenden Behälter, und sie schließlich aus dem Behälter der Maschine ausstößt, dadurch gekennzeichnet, daß das Gehäuse (14) der Heizvorrichtung (15) mit der Öffnung (13) im oberen Teil des Waschbehälters (5) lösbar verbunden ist, daß die Heizvorrichtung (15) von einem oder mehreren elektrischen Widerstands-Heizelementen (21) gebildet wird, die in einer Masse eines wärmeausstrahlenden Materials eingebettet sind, die als rechteckige Platte (23) geformt ist, die sich in Querrichtung erstreckt, so daß sie fast die gesamte Oberfläche der Öffnung (13) bedeckt, durch die die Trocknungsluft in den Behälter (5) strömt, und daß Trocknungsluftfördermittel von Leitflossen (26) und Löchern (25) gebildet werden, die in Strömungsrichtung der Trocknerluft zum Behälter (5) divergierend angeordnet sind, und daß ein Rohrleitungssystem (18) zum Umwälzen der Reinigungsflüssigkeit oberhalb der Heizvorrichtung (15) in den Behälter (5) mündet.
2. Heizvorrichtung nach Anspruch 1 mit einer kreisförmigen Befestigung aus Kunststoffmaterial, die abnehmbar angebracht ist,

dadurch gekennzeichnet, daß das Gehäuse (14) der Heizvorrichtung (15) mittels Verbindungsbolzen (20), die mit den Enden der kreisförmigen Befestigung verbunden sind, in seiner Position über der Öffnung (13) im oberen Teil des Waschbehälters (5) gehalten wird. 5

Revendications

1. Dispositif chauffant pour chauffer de l'eau et de l'air dans une machine combinée de lavage et de séchage de vêtements, particulièrement une machine de lavage-séchage à chargement frontal pour usage domestique, comprenant une cuve de lavage dans laquelle un tambour est mobile en rotation autour d'un axe horizontal et peut recevoir les vêtements à laver et à sécher, avec un système pour faire circuler l'eau de lessive et un circuit pneumatique de séchage équipé d'une soufflante forçant l'air de séchage à s'écouler successivement à travers un carter contenant des éléments chauffants et communiquant avec une ouverture située à la partie supérieure de la cuve de lavage, dans le tambour contenant les vêtements, pour finalement l'expulser hors de la cuve de la machine, caractérisé en ce que le carter (14) du dispositif chauffant (15) est fixé d'une manière amovible à l'ouverture (13) dans la partie supérieure de la cuve de lavage (5), en ce que le dispositif chauffant (15) est formé d'un ou plusieurs éléments chauffants (21), à résistance électrique, noyés dans une masse de matière rayonnant la chaleur qui est conformée en une plaque rectangulaire (23) s'étendant transversalement de manière à couvrir presque toute la surface de l'ouverture (13) à travers laquelle l'air de séchage s'écoule dans la cuve (5), et en ce que des moyens amenant l'air de séchage sont constitués d'ailettes (26) et de trous traversants (25) représentant un motif divergent dans la direction dans laquelle l'écoulement de l'air de séchage est réalisé dans la cuve (5), et en ce qu'un conduit (18) pour faire circuler l'eau de lessive se termine dans la cuve (5) au dessus du dispositif chauffant (15). 10 15 20 25 30 35 40 45
2. Dispositif chauffant selon la revendication 1, avec une attache circulaire faite de matière plastique qui est montée de manière amovible, caractérisé en ce que le carter (14) du dispositif chauffant (15) est maintenu dans sa position, au dessus de l'ouverture (13) à la partie supérieure de la cuve de lavage (5), au moyen de tirants (20) reliés aux extrémités de l'attache circulaire. 50 55

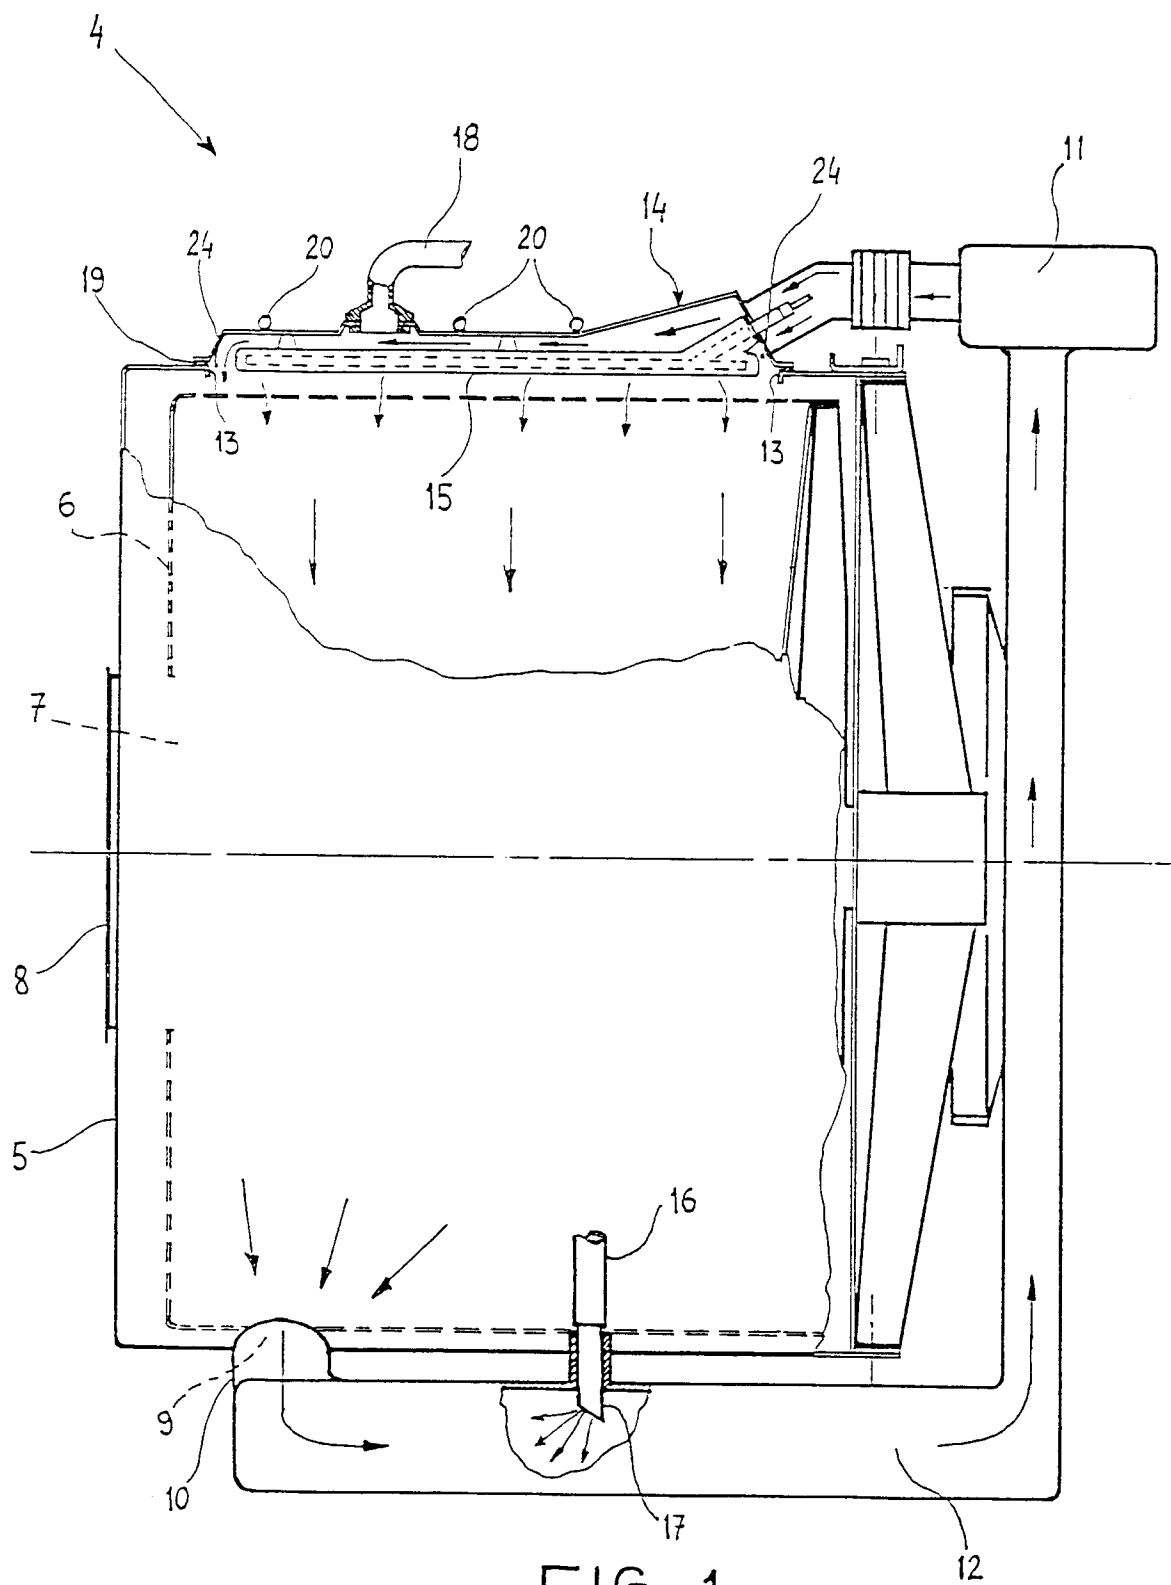

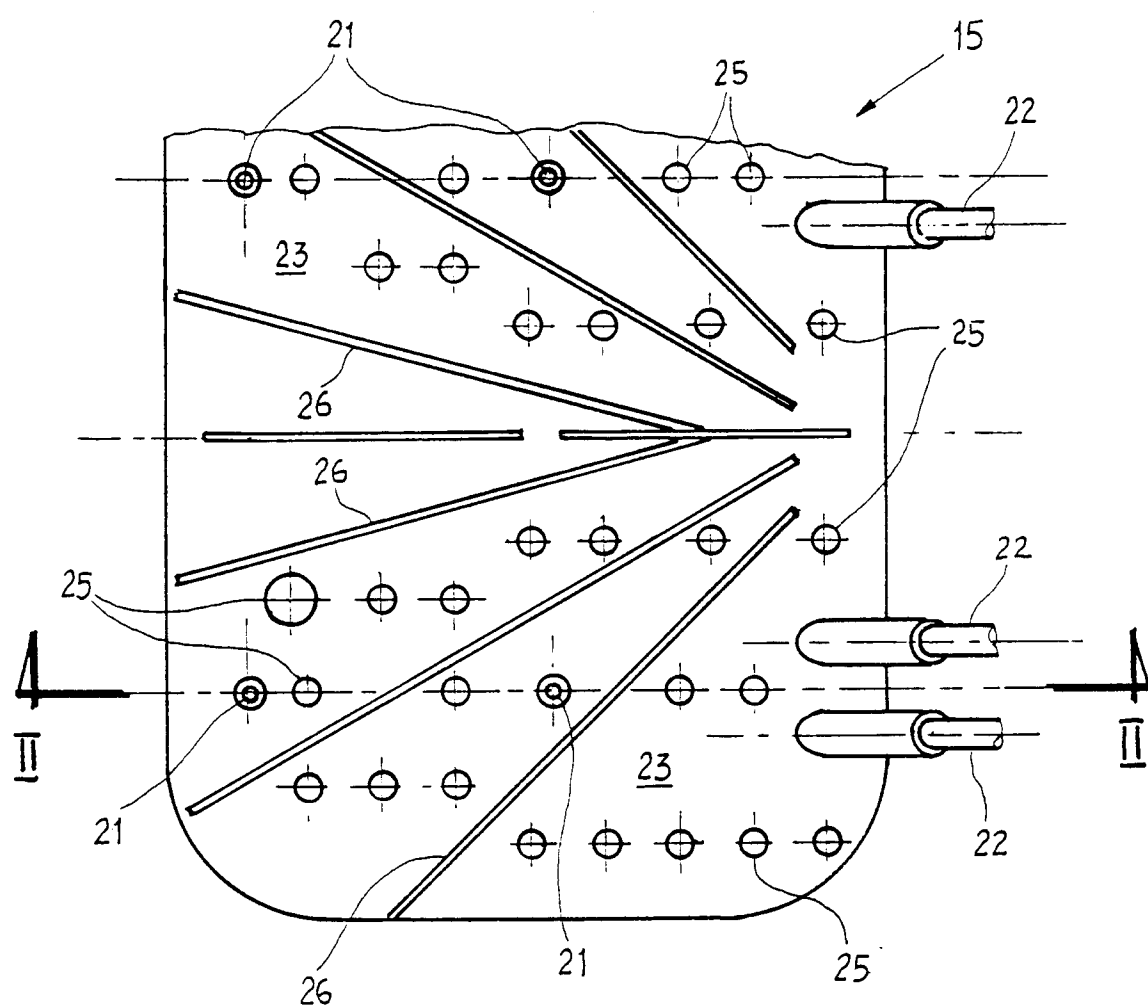
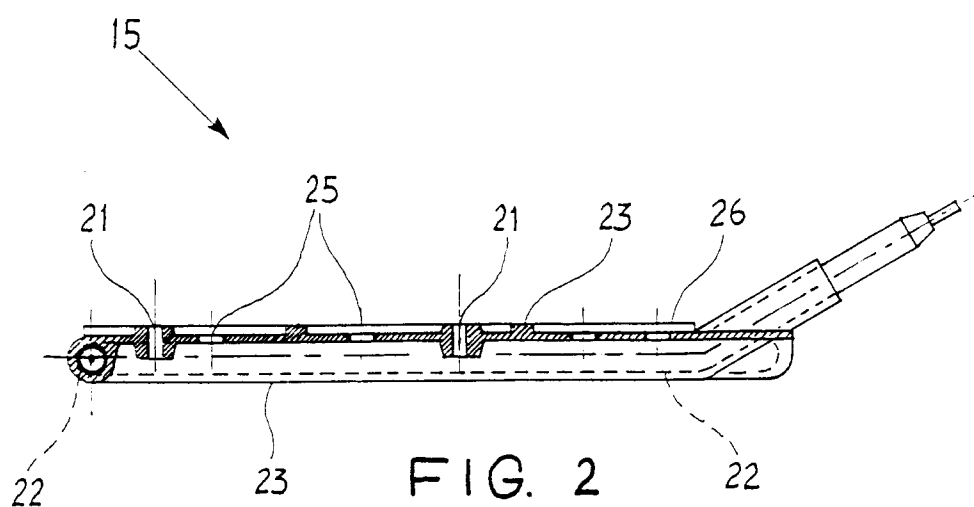


FIG. 3