11 Publication number:

**0 353 705** A1

(12)

## **EUROPEAN PATENT APPLICATION**

21 Application number: 89114176.4

(51) Int. Cl.4: **G07F** 17/32

(22) Date of filing: 01.08.89

(30) Priority: 03.08.88 JP 102383/88 U

43 Date of publication of application: 07.02.90 Bulletin 90/06

Designated Contracting States:
DE ES FR GB IT

Applicant: NAMCO, LTD.8-5, Tamagawa 2-chomeOhta-Ku Tokyo 146(JP)

Inventor: Kobayashi, Hiroyuki2-9-10, Kitakata

Ichikawa-shi Chiba-ken(JP) Inventor: Ishikawa, Shukuo 4-10-14, Shimomaruko Ota-ku Tokyo(JP)

Inventor: Nakahata, Hiroki

1970-1, Kosugaya-cho Sakae-ku Yokohama-shi Kanagawa-ken(JP)

Inventor: Koenuma, Masaki


1-44-30, Hayamiya Nerima-ku Tokyo(JP) Inventor: Mieda, Yoshihiro 5-20-19, Omorinishi Oto-ku Tokyo(JP)

Representative: Valentin, Ekkehard et al Patentanwälte Hemmerich, Müller, Grosse, Pollmeier, Mey, Valentin Hammerstrasse 2 D-5900 Siegen(DE)

## Game machine.

(57) A game machine of a type which includes a plurality of movable members (2a-2e) are provided and in which a player scores a point at the time he hits any of the movable members (2a-2e) when it is moved is disclosed. The game machine comprises a storing portion (4) for storing the movable members (2a-2e), device for reciprocating (17, 18, 19) each of the movable members between a home position mathematical inside the storing portion (4) and a predetermined turning position outside the storing portion (4) and a hitting sensor (13) for detecting one of the movable members (2a-2e) which is moved outwardly at least natially beyond the storing portion (4) and hitted by La hammer (22) brought down by the player in a direction intersecting the moving direction of the one movable member (2a-2e), whereby a score of points

is obtained on the basis of a detection result of the hitting sensor (13).

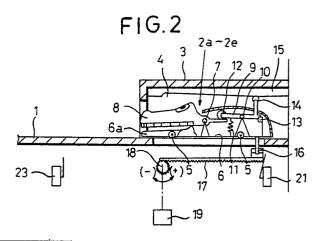

#### Game Machine

The present invention relates to a game machine and, particularly, to a game machine in which a plurality of movable members are provided and a player scores a point every time he succeeds to hit one of the movable members on movement.

As one of known game machine of such type, there is a game machine which includes a panel formed with a plurality of holes through each of which a movable member associated therewith appears at random and a player scores a point every time he succeeds to hit the appeared movable member with a hammer or the like.

In such conventional game machine, the movable members are moved vertically of the panel through the holes formed therein and the direction of hitting by the player is made coincident with the moving direction of the movable member. Therefore, it is enough for the player to select an appeared member and hit it. Since such is relatively low.

In view of the above problem, an object of the present invention is to provide a game machine of the type mentioned above by which an amusingness of the game is increased by making conditions under which a player can hit a movable member more complicated.

The above object can be achieved according to the present invention by a game machine of a type which includes a plurality of movable members are provided and in which a player scores a point at the time he hits any of the movable members when it is moved, comprising a storing portion for storing the movable members, means for reciprocating each of the movable members between a home position inside the storing portion and a predetermined turning position outside the storing portion and a hitting sensor for detecting one of the movable members which is moved outwardly at least partially beyond the storing portion and hitted by a hammer brought down by the player in a direction intersecting the moving direction of the one movable member, whereby a score of points is obtained on the basis of a detection result of the hitting sensor.

In one aspect of the present invention, each of the movable members takes in the form of animal having an openable portion corresponding to a mouth and each point of score is obtained at the time the openable portion is closed by hitting.

In another aspect of the present invention, the openable portion is opened and shut during the movement thereof toward the predetermined turning position.

In a further aspect of the present invention, a distance between the home position and the pre-

determined turning position is made variable.

The moving direction of the hammer intersects the moving direction of the movable member. Thus, a position of a hit portion of the movable member is varied with respect to the player, so that a proper hitting of the movable member by the player becomes more difficult, resulting in an improved amusingness.

The moving means for moving the movable members may be a combination of a rack and a pinion, or any other driving means may be used therefor.

The movable member may take any configulation. However, it is preferrable that the hit portion thereof is constituted such that, when it is hitted, it deforms and presents a visual interest to the player. For example, it is possible to form the hit portion as an animal head having a mouth opened gradually with an outward movement thereof and closed when hitted by the player.

Further, it is preferrable to control the distance between the home and the predetermined turning positions such that it is shortened at least once during its reciprocal movements. In such case, it is possible to return the movable member toward the home position before it reaches the turning position estimated by the player. Thus, a feinted motion of the movable member is provided.

One way of carrying out the invention is described in detail below with reference to drawings which illustrate only one specific embodiment, in which:-

Fig. 1 is a perspective view of an embodiment of a game machine according to the present invention;

Figs. 2 to 5 are cross sectional side views of a movable member, respectively, showing a movement thereof; and

Fig. 6 is a flowchart showing an example of control thereof.

Fig. 1 is a perspective view of a game machine according to an embodiment of the present invention. In Fig. 1, a plurality (five in this embodiment) of movable members 2a, 2b, 2c, 2d and 2e are arranged on a game table 1. In this embodiment, each movable member takes in the form of crocodile. An upper panel 3 is provided above a rear portion of the game table 1 and a movable member storing portion 4 is defined between the upper panel 4 and the rear portion of the game table 1. The movable members 2a, 2b, 2c, 2d and 2e are normally in respective home positions within this storing portion 4, as shown in Fig. 2.

In Fig. 2, each of the movable members 2a to 2e is composed of a base member 6 having rolls 5

40

and movable on the game table 1, a hit portion 8 in the form of a crocodile head arranged on a left or front end portion of the base member 5 and a fallen "L" shape lever 9 provided on a right or rear end portion of the base member 6 rotatably about a support shaft 10. The hit portion 8 is swingable vertically about a support shaft 7. A spring 11 is provided between the base member 6 and a vertical leg portion of the L lever 9 to bias the latter in counterclockwise direction so that a front end and a rear end of the lever 9 are brought always into contact with a rear end of the hit portion 8 and a cam 15 provided on a lower surface of the upper panel 3 through rolls 12 and 14, respectively. The surface configulation of the cam 15 includes a flat front portion, a rear flat portion and a gradually changing intermediate portion between them, so taht a vertical position of the roll 14 in contact therewith is low when the movable member is in its home position, rises gradually when it is moved forwardly and becomes low again abruptly when it reaches the predetermined turning position. A boader between the rear flat portion and the gradually changing portion is stepped sharply so that the lever 9 is rotated clockwisely sharply to thereby realize the abrupt positional change of roll 14. An optical sensor 13 is fixedly provided on the rear end portion of the base member 6 as a sensor for detecting an open and close operation of the hit portion 8.

A lower surface of the rear portion of the base member 6 is coupled through a connecting member 16 to a rack 17 which meshes with a pinion 18 provided beneath the front portion of the base member 6. The pinion 18 is driven by a reversible motor 19.

An operation of the movable members 2a to 2e will be described with reference to Figs. 2 to 5 together with a flowchart shown in Fig. 6. Since the movable members are identical in configulation and operation, the operation of only one movable member will be described. It should be noted, however, that operation timings of the respective movable members can be determined at random in any well known manner.

The game machine shown in Fig. 1 is brought into a ready state when a coin is thrown into a coin inlet 20 thereof. The motor 19 is actuated in one direction at a suitable timing after the initialization of the game machine to rotate the pinion 18 in counterclockwise direction. With this counterclockwise rotation of the pinion 18, the rack 17 is moved forwardly. With this forward movement of the rack 17, the associated movable member starts to move forwardly or outwardly from a home position in the storing portion 4. The start of movement of the movable member is detected by a home position sensor 21 which may comprises a micro switch.

When the movable member is moved forwardly gradually from the home position shown in Fig. 2, with the roll 14 tracing the gradual portion of the cam 15, the movable member appears on the exposed portion of the game table. During this movement of the movable member, the lever 9 is allowed by the biasing spring 11 to rotate in counterclockwise direction gradually to gradually open the hit portion 8, i.e., a mouth of the crocodile, as shown in Fig. 3.

A player will bring his hammer 22 down to hit the opened hit portion 8, as shown in Fig. 4, and, if he succeeds to hit it, he will score a point. When he succeeds to hit, the crocodile mouth is shut down as shown by an arrow A, so that the lever 9 is rotated clockwise direction as shown by an arrow B in Fig. 4, which is detected by the sensor 13. Upon detection of hitting, it is displayed on a display 24 shown in Fig. 1. This display may be an addition of point number. At the same time, the motor 19 is driven in the reverse direction to rotate the pinion 18 in clockwise direction to thereby retract or return the movable member to the home position in the storing portion 4. When the movable member reaches the home position, it is detected by the home position sensor 21 upon which the motor 19 is deenergized.

It is not always possible for the player to hit the hit portion 8 of the movable member when the latter is in a position in which it can be hitted. When he failed to hit, the movable member continues to move forwardly until a top portion of the rack 17 reaches the predetermined turning position and the fact is detected by the turning position sensor 23, as shown in Fig. 5. Upon detection of the turning position sensor 23, an addition of a loss or damage point is displayed on the display 24 or a subtraction of a point from success points on the display 24 is performed.

When the movable member reaches the turning position to be detected by the turning position sensor 23, the roll 14 of the lever 9 rides on the front flat portion 15a of the cam 15, so that the hit portion 8 is closed and the fact is detected by the sensor 13. Thereafter, the movable member is moved in the opposite direction to the home position in the storing portion 4.

Alternatively, it is possible to make the turning position changeable under a control of a computer such that the movable member is turned before it reaches the predetermined turning position. In such case, a feinted motion is given to the movable member causing difficulty of hitting it to be increased and hence the amusingness of the game to be improved.

### Claims

30

40

- 1. A game machine of a type which includes a plurality of movable members (2a-2e) are provided and in which a player scores a point at the time he hits any of the movable members (2a-2e) when it is moved, characterized by a storing portion (4) for storing said movable members (2a-2e), means for reciprocating (17, 18, 19) each of said movable members (2a-2b) between a home position inside said storing portion (4) and a predetermined turning position outside said storing portion (4) and a hitting sensor (13) for detecting one of said movable members (2a-2e) which is moved outwardly at least partially beyond said storing portion (4) and hitted by a hammer (22) brought down by the player in a direction intersecting the moving directoin of said one movable member (2a-2e), and in that a score of points is obtained on the basis of a detection result of said hitting sensor (13).
- 2. The game machine as claimed in claim 1, characterized in that each said movable member (2a-2e) takes in the form of animal having an openable portion corresponding to a mouth thereof and each point of score is obtained every time said openable portion is closed by hitting.
- 3. The game machine as claimed in claim 2, characterized in that said openable portion is opened and shut during the movement thereof toward said predetermined turning position.
- 4. The game machine as claimed in any of claims 1 to 3, characterized in that said predetermined turning position is variable.

10

15

20

25

30

35


40

45

50

55

FIG.1

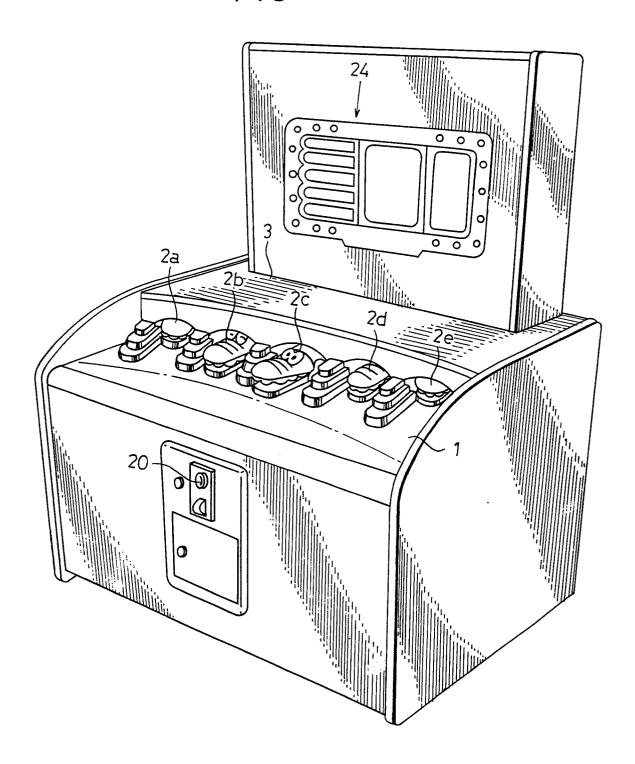

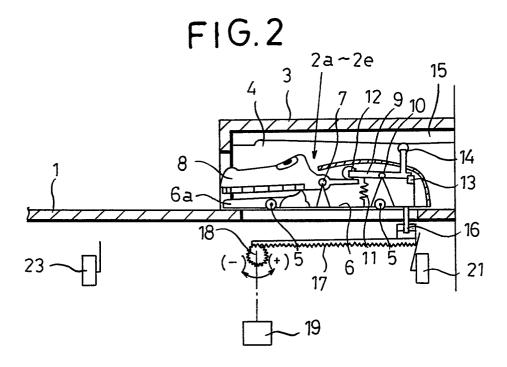
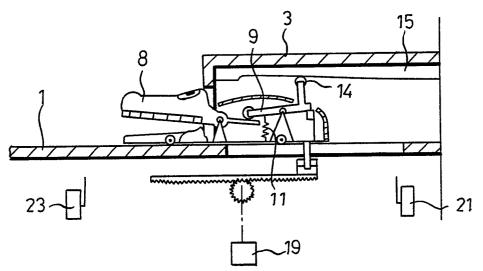


FIG.3



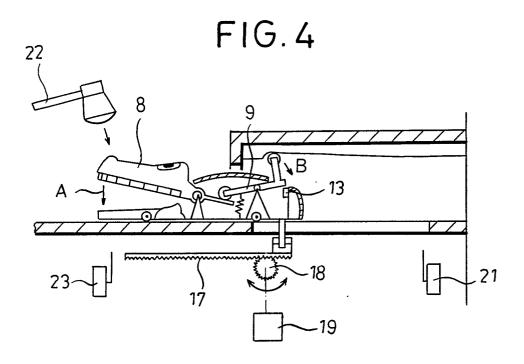


FIG. 5

9

15a

15a

15a


17

18

17

19

FIG.6

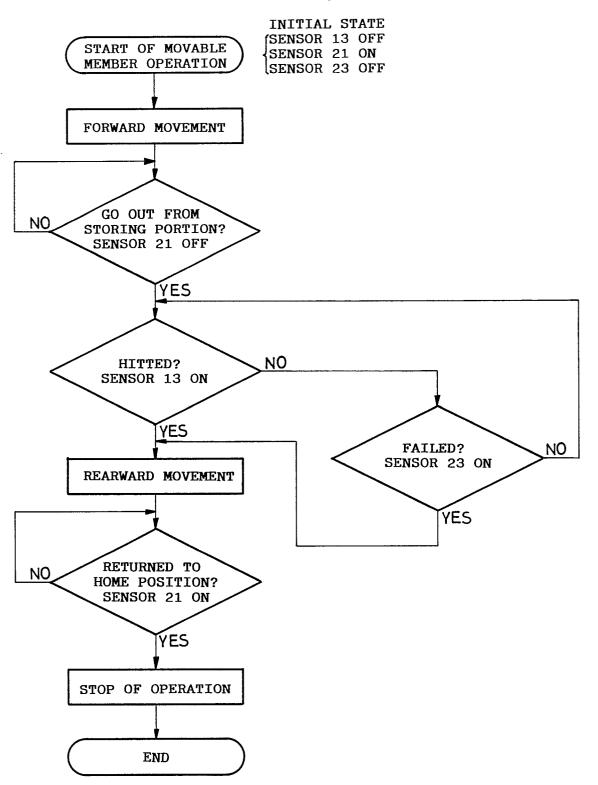

# **EUROPEAN SEARCH REPORT**

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category		th indication, where appropriate, vant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CI K) 5
	EP - A2 - 0 276 (SOUND LEISURE * Totality *	LIMITED)	1	G 07 F 17/32
	GB - A - 285 13 (GERTRUDE EMMA * Fig. 1-4 *	TAYLOR)	1	
	DE - C - 306 01 (WILHELM PAILLE * Totality *	ER)	2	
				TECHNICAL FIELDS SEARCHED (Int. CI &, S
				A 63 B 63/00 A 63 B 67/00 A 63 F 9/00 G 07 F 17/00
				·
	The present search report has b	een drawn up for all claims		
Place of search VIENNA		Date of completion of the search 03-10-1989	BEHMER BEHMER	
Y: part doci A: tech	CATEGORY OF CITED DOCL icularly relevant if taken alone icularly relevant if combined wument of the same category inological background -written disclosure	E : earlier paten after the filin	nt document, ng date ited in the ap ited for other	