

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 357 151 B2

(12)

NEW EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the opposition decision:
14.08.1996 Bulletin 1996/33

(51) Int Cl.⁶: **E04G 11/04, E04B 1/16**

(45) Mention of the grant of the patent:
01.04.1992 Bulletin 1992/14

(21) Application number: **89202214.6**

(22) Date of filing: **31.08.1989**

(54) Method for manufacturing a building structure

Verfahren zur Herstellung von Gebäuden

Procédé pour la réalisation de bâtiments

(84) Designated Contracting States:
AT BE CH DE ES FR GB GR IT LI LU NL SE

(30) Priority: **01.09.1988 NL 8802165**

(43) Date of publication of application:
07.03.1990 Bulletin 1990/10

(73) Proprietor: **INTERNATIONAL DOME SYSTEMS
NL-3083 DS Rotterdam (NL)**

(72) Inventor: **Van Eeden, Johannes Petrus
NL-2992 BS Barendrecht (NL)**

(74) Representative: **de Bruijn, Leendert C. et al
Nederlandsch Octrooibureau
P.O. Box 29720
2502 LS Den Haag (NL)**

(56) References cited:
**EP-A- 0 035 722 EP-A- 0 262 818
EP-A- 4 155 967 DE-U- 8 710 320
FR-A- 781 192 US-A- 1 573 069
US-A- 3 277 219**

Remarks:

The file contains technical information submitted
after the application was filed and not included in this
specification

EP 0 357 151 B2

Description

The invention relates to a method for manufacturing a building structure in accordance with the preamble of claim 1.

A method of this kind is known from US-A-4,155,967.

According to said known method the foam layer is applied layer by layer and the foot plates of the anchors are attached by means of adhesive to the first foam layer. This attachment is insufficient. Many anchors fall down under the influence of the forces which occur during spraying and due to deformations of the form by wind forces. Even after surrounding the anchor feet by the next foam layer applied over said feet said anchors are not capable to take up the loads which occur during attachment of the reinforcing rods and during spraying of the concrete.

Purpose of the invention is to provide a method by means of which the progress of the work is not disturbed by anchors which do not maintain their proper position.

According to the invention this purpose is achieved by the characterizing features of claim 1.

By the fact that the foam layer has obtained its final thickness prior to mounting the anchors it is possible to insert the bent over parts of the feet of the anchors easily into the foam layer. Due to this the anchors are quickly attached.

By the fact that moreover the first concrete layer is sprayed over said feet and covers said feet, a hard layer is obtained which holds the anchors in a manner such that they can no longer loosen and are capable to carry the weight of the reinforcing rods and are capable to withstand the forces which occur during spraying of the concrete on the anchors and reinforcing rods, including the weight of not yet completely hardened concrete parts.

Preferably the reinforcing is one which at least in horizontal planes is pretensionable. This is made possible by the rigid attachment of the anchors.

It is observed that from US-A-3,277,219 a method is known for the manufacturing of a building structure by making use of an inflatable form against the inner side of which a foam layer is sprayed until the layer has its full required thickness. After spraying and completing said layer anchors are inserted into the foam layer in the form of wire clips having a barbed or turned over inserted end which provide an attachment such that prior to any spraying of concrete reinforcing rods can be attached to said anchors. The mounting of said anchors by pressure or hammering is time consuming and can damage the foam layer. Concrete is only applied for the first time after the reinforcing rods are placed. Although said known method discloses the possibility of primarily manufacturing the foam layer until its final thickness is obtained it has disadvantages in respect of the mounting of the anchors.

Spraying of the resin can be performed such that

the entire innerside of the form is covered so that a building structure is already obtained from resin such as a resin dome.

It is also possible to spray part of the height with resin and to start spraying the concrete already whilst the spraying of the resin proceeds upwardly towards the top.

Mounting of the reinforcing rods can take place such that the reinforcing is completed first prior to applying the further concrete layers. One, however, can also perform the work in such a way that said concrete layers are applied after mounting part of the reinforcement in which case the mounting of the reinforcing rods proceeds upwardly followed by the application of the concrete, which application of the concrete of course starts at the basis.

The synthetic form can remain in place or be removed respectively. For performing the work use can be made of a movable platform lifting device having at the outer end of a swingable and extendable arm a work platform from which any position inside the blown form can be reached with spraying devices.

With the invention it is possible to manufacture building structures of preferably dome shaped configuration in a simple manner. They can have a circular basis and be part spherical. They however may have as well an oval basis or even a rectangular basis.

The invention will be further illustrated with reference to the drawings.

Figure 1 shows part of a building structure according to the invention.

Figure 2 shows a possible embodiment of the anchor.

Figures 3a to f inclusive show different phases of the method according to the invention.

The building structure which can be obtained with the invention has a form 1 which by blowing is brought into the proper shape and is made from plastic. Against the innerside a foam synthetic layer 2 is applied by spraying. The anchors 3 are fixed upon said layer and reinforcing rods 4 are attached to said anchors. For mounting the anchors use can be made of an auxiliary reinforcement 4' such as rods which support the anchors for and during performing further operations. The space around said reinforcing rods which is defined outwardly by the foam synthetic layer 2 is filled with concrete 5 by spraying. Prior to building the concrete layer 5 layer by layer a first layer 5' is sprayed over the feet 8 of the anchors. The plastic form 1 is connected in an air-tight manner at to a prefabricated foundation 7.

The anchors may have the form shown in figure 2 comprising a perforated footplate 8 having bent over tongues 9, which can be pressed into the foam synthetic layer 2 and with an outwardly extending rod or arm 10 serve for connecting to them the reinforcing rods. By applying the first concrete layer 5' said anchors are well held in place sufficiently to carry the reinforcing rods.

Figure 3 shows in figure 3a diagrammatically a

part of an annular foundation 7 which has to be provided.

Figure 3b shows the application of the form 1 in the not yet inflated condition.

Figure 3c shows the inflation by means of fans 11. The inflated hall is provided with an air lock 12 known in itself.

Figure 3d shows the inflated hall in a cut-open way. Present in the hall is a working device 13 having a working platform 14 by means of which through a supply conduit 15 synthetic foam, such as polyurethane can be supplied by the schematically shown device 16 and sprayed upon the innerside of the inflated form 1.

Figure 3e shows the mounting of horizontal annular reinforcing rods as well as reinforcing rods extending in vertical planes, after which, as shown in figure 3f, by means of the device 13 concrete 5' and 5 respectively can be sprayed.

The hall obtained finally no longer needs the fans and entrance lock respectively.

In case windows are needed auxiliary frames can be placed with the aid of anchors upon the synthetic foam layer 3 as schematically indicated at 17 in figure 3d. After completing the building structure, which means after hardening of the concrete, which concrete surrounds the auxiliary frames, the plastic layer of the form and the foam layer can be cut away and a real window frame with or without glass can be placed in the opening obtained therewith.

Claims

1. Method for manufacturing a building structure in which an inflatable form (1) which has been provided with an entrance lock (12) is mounted in an airtight manner on a base or foundation (7) which form (1) by means of suitable devices is inflated and after having obtained its correct shape by inflation a foam resin layer (2) is sprayed upon the innerside of the form (1), anchors, each having a perforated foot plate (8) to which an anchoring rod (10) is attached, are placed with their plate-shaped feet (8) on said foam resin layer (2), whereby said anchoring rods (10) are inwardly directed, reinforcing rods (4) are attached to said anchoring rods (10) after spraying a first layer concrete (5') upon the foam layer (2), characterized in that primarily the foam resin layer (2) is manufactured until its final required thickness is obtained, that only thereafter the anchors (8, 10) are placed and fixed to the foam layer (2) by inserting of bent portions (9) which are cut free from the plate (8) and bent over into a position perpendicular to the plane of the plate (8) and turned away from said rod (10) and that the first concrete layer (5) is sprayed over the feet (8) of said anchors which lie against the innerside of the foam layer (2).

2. Method according to claim 1, characterized in that

the reinforcement at least in horizontal planes is a pre-tensionable reinforcement

3. Method according to claim 1 or 2 in which for the manufacturing of window frames and the like frames are placed which are fixed by the spraying of the concrete layer, characterized in that the frames are temporary frames of which form and dimension correspond to the form and dimension of the final window frames, which frames are placed upon the foam layer and after the application of the concrete, form material and foam are removed at the location of the frames and said frames are removed and replaced by the final window frames.

Patentansprüche

1. Verfahren zum Herstellen eines Gebäudes, bei dem eine aufblasbare Form (1), welche mit einer Einfahrtschleuse (12) versehen ist, luftdicht abschließend auf einer Basis oder einem Fundament (7) angebracht wird, welche Form (1) mit Hilfe geeigneter Einrichtungen aufgeblasen wird und nach Erreichen der genauen Gestalt durch das Aufblasen eine Schaumharzschicht (2) auf der Innenseite der Form (1) aufgesprüht wird, Anker, die jeweils eine perforierte Fußplatte (8) haben, an welcher ein Ankerstab (10) angebracht ist, mit ihren plattenförmigen Füßen (8) auf die Schaumharzschicht (2) gelegt werden, wobei die Ankerstab (10) nach innen weisen, und Bewehrungsstäbe (4) an den Ankerstäbe (10) angebracht werden, nachdem eine erste Betonschicht (5') auf die Schaumschicht (2) gesprüht wurde, dadurch **gekennzeichnet**, daß die Schaumharzschicht (2) zuerst hergestellt wird, bis ihre abschließend erforderliche Stärke erreicht ist, daß nur anschließend die Anker (8, 10) auf die Schaumschicht (2) gelegt und fixiert werden, indem die gebogenen Abschnitte (9), welche aus der Platte (8) ausgeschnitten und in eine Lage umgebogen sind, die senkrecht zu der Ebene der Platte (8) ist und von dem Anker (10) wegweist, eingeführt werden, und daß die erste Betonschicht (5) über die Füße (8) der Anker gesprüht wird, welche gegen die Innenseite der Schaumschicht (2) anliegen.

2. Verfahren nach Anspruch 1, dadurch gekennzeichnet, daß die Versteifung wenigstens in horizontalen Ebenen eine vorspannbare Versteifung ist

3. Verfahren nach Anspruch 1 oder 2, bei dem zur Herstellung von Fensterrahmen u.dgl. Rahmen angeordnet werden, welche durch das Aufsprühen der Betonschicht fixiert werden, dadurch gekennzeichnet, daß die Rahmen vorläufige Rahmen sind, deren Form und Abmessungen der Form und den Abmessungen der endgültigen Fensterrahmen ent-

sprechen, die Rahmen auf die Schaumschicht gelegt werden und nach dem Aufbringen des Betons das Formmaterial und der Schaum an der Stelle der Rahmen entfernt werden und die Rahmen entfernt und durch die endgültigen Fensterrahmen ersetzt werden. 5

Revendications

1. Procédé de réalisation d'une structure de bâtiment dans lequel une forme gonflable (1) qui a été pourvue d'un sas d'entrée (12) est montée d'une manière étanche à l'air sur une base ou fondation (7), laquelle forme (1) est gonflée au moyen de dispositifs appropriés et, après avoir obtenu sa forme correcte par gonflage, une couche de résine en mousse (2) est projetée sur le côté intérieur de la forme (1), des ancrages, qui ont chacun une plaque de base perforée (8) à laquelle est fixée une tige d'ancrage (10), sont mis en place avec leurs bases en forme de plaque (8) sur la dite couche de résine en mousse (2), les dites tiges d'ancrage (10) étant dirigées vers l'intérieur, des fers à béton (4) sont fixés aux dites tiges d'ancrage (10) après application d'une première couche de béton (5') sur la couche de mousse (2), caractérisé en ce que, tout d'abord, la couche de résine en mousse (2) est fabriquée jusqu'à ce que son épaisseur finale requise soit atteinte, en ce que seulement après les ancrages (8, 10) sont mis en place et fixés à la couche de mousse (2) en insérant des parties repliées (9) qui sont découpées dans la plaque (8) et rabattues dans une position perpendiculaire au plan de la plaque (8) et à l'opposé de la dite tige (10) et en ce que la première couche de béton (5) est projetée sur les bases (8) des dits ancrages qui reposent contre le côté intérieur de la couche de mousse (2). 10 15 20 25 30 35
2. Procédé selon la revendication 1, caractérisé en ce que l'armature est une armature qui peut être précontrainte au moins dans des plans horizontaux. 40
3. Procédé selon la revendication 1 ou 2 dans lequel, pour la fabrication de bâtis de fenêtre et équivalents, des bâtis qui sont fixés par la projection de la couche de béton sont mis en place, caractérisé en ce les bâtis sont des bâtis temporaires dont la forme et la dimension correspondent à la forme et la dimension des bâtis de fenêtre finaux, lesquels bâtis sont mis en place sur la couche de mousse, et, après l'application du béton, la matière de la forme et la mousse sont enlevés à l'emplacement des bâtis et les dits bâtis sont enlevés et remplacés par les bâtis de fenêtre finaux. 45 50 55

fig-1

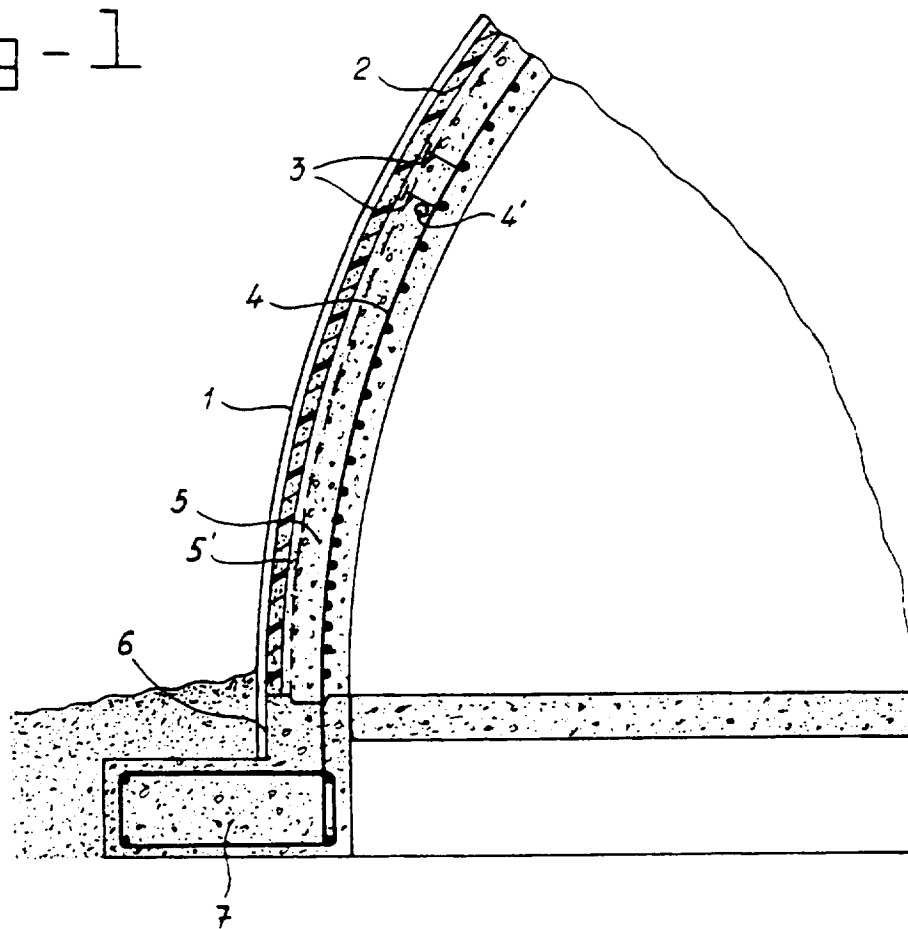


fig-2

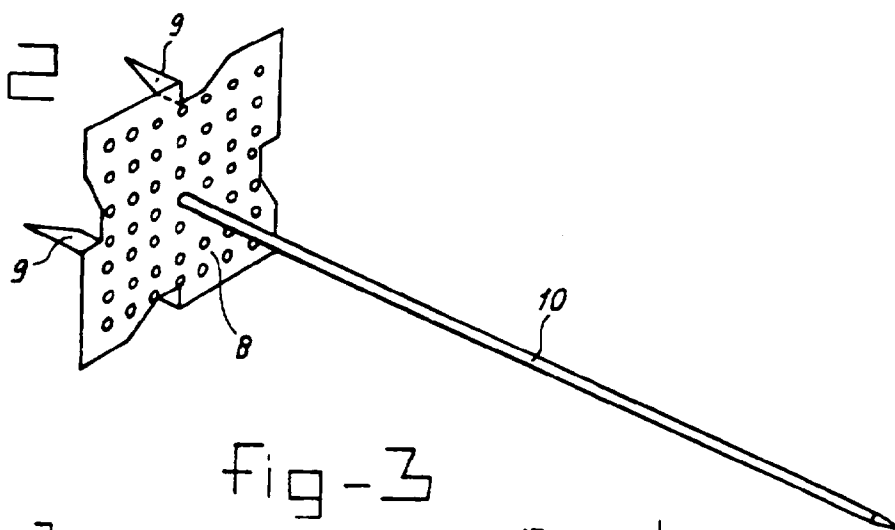


fig-3

