

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 367 202 B1

(12)

EUROPEAN PATENT SPECIFICATION

(49) Date of publication of patent specification: **21.09.94** (51) Int. Cl.⁵: **B65H 1/06**, B65H 1/24

(21) Application number: **89120134.5**

(22) Date of filing: **30.10.89**

(54) **Sheet feeding apparatus.**

(30) Priority: **31.10.88 JP 275391/88**
31.10.88 JP 275392/88
11.07.89 JP 178250/89
13.07.89 JP 181563/89
13.09.89 JP 238976/89

(43) Date of publication of application:
09.05.90 Bulletin 90/19

(45) Publication of the grant of the patent:
21.09.94 Bulletin 94/38

(84) Designated Contracting States:
DE FR GB IT

(56) References cited:
EP-A- 0 023 603
WO-A-86/07339
GB-A- 827 057
US-A- 4 458 890

(73) Proprietor: **CANON KABUSHIKI KAISHA**
30-2, 3-chome, Shimomaruko,
Ohta-ku
Tokyo (JP)

Proprietor: **DAI-ICHI SEIKI KOGYO CO., LTD.**
5540-11, Sakate-machi
Mitsukaido-shi Ibaraki-ken (JP)

(72) Inventor: **Saito, Jun**
17-1-109, Miyamaedaira 2-chome
Miyamae-ku
Kawasaki-shi Kanagawa-ken (JP)
Inventor: **Asakawa, Toshiyuki**
4-15, Fuchinobe 2-chome
Sagamihara-shi Kanagawa-ken (JP)
Inventor: **Higeta, Akira**
Canon Daiichi Fujigaokaryo
36-17, Fujigaoka 2-chome
Midori-ku Yokohama-shi Kanagawa-ken (JP)
Inventor: **Kameyama, Toru**
7-D512, Mukaihara 3-chome
Itabashi-ku
Tokyo (JP)

(74) Representative: **Tiedtke, Harro, Dipl.-Ing. et al**
Patentanwaltsbüro
Tiedtke-Bühling-Kinne & Partner
Bavariaring 4
D-80336 München (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 367 202 B1

Description

This invention relates to a sheet feeding apparatus (sheet feeder) used -for an image-forming apparatus such as a copier or a laser beam printer. More particularly, the invention concerns a sheet feeder which can feed thick sheets such as envelopes one by one.

US-A-1,919,238 discloses a sheet feeder, which feeds sheets with the lowermost sheet in a sheet stack in contact with a feed roller.

US-A-3,963,339 discloses a sheet feeder, which feeds sheets with the lowermost sheet of a sheet stack in contact with a conveyor belt, and in which the sheet stack is urged against the conveyor belt by a lever.

Further, it is conceivable to put a weight on the sheet stack so as to increase the sheet-feeding force in case where the lowermost sheet of sheet stack is fed by the feed roller.

However, since such weight in such sheet feeder has a constant weight, when a large number of sheets are stacked, the urging force is absorbed by an air cushioning effect between adjacent sheets, the effect being pronounced particularly between adjacent envelopes to be fed. In this case, the urging force is not sufficiently transmitted to the lowermost sheet, and defective sheet-feeding is liable to result from insufficient sheet-feeding force. Further, when sheets in the stack are reduced, double feeding is liable due to excessive urging force.

According to the document US-A-4 458 890, there is disclosed a generic sheet feeding apparatus, the construction of which shows an elongated arm with a pressing roller being rotatably supported in the middle thereof, with one end of said elongated arm being journaled by a shaft and the other end of said elongated arm being provided with a spring biasing this end against a stopper. Thus, in the case of this construction, the size of the urging means in the sheet feeding direction is extended, and since the arm is disposed outside of the side plate, the size of the urging means in the direction of the sheet width is also extended, so that the known urging means becomes bulky, which causes various restrictions as regards the arrangement of the urging means.

The present invention is intended in the light of the above, and its object is to prevent the drawbacks inherent in the prior art.

This object is achieved by means of the features defined in the characterizing portion of claim 1. According to these features, the first urging member includes an outer weight and the second urging member includes an inner weight contained in the outer weight.

In this sheet feeder, the urging means is constituted by a plurality of urging members, these urging members being coupled to one another such that they can be displaced vertically by a predetermined distance. The number of urging members riding on the sheet stack is changed according to the number of sheets stacked on supporting means, thus changing the urging force of the urging means at least in two stages.

With the above construction, the sheets stacked on the supporting means are urged against the feeding means by the urging means to be fed out by the feeding means one by one from the lowermost one. The urging means changes its urging force at least in two stages by changing the number of urging members riding on the sheet stack according to the number of sheets stacked on the supporting means.

When the urging force applied to the sheet stack is reduced stepwise as above, when the number of remaining sheets in the stack becomes very small, the urging force may be excessive, possibly resulting in double or simultaneous feeding of sheets.

Accordingly, according to the invention there is also provided urging means for a sheet feeder, which can provide continuously reducing urging force to the sheet stack on stack support when the stacked sheets are reduced to a certain number.

According to the invention, there is further provided a sheet feeder, which comprises feeding means for feeding out stacked sheets one by one from the lowermost one, and urging means for urging the feeding means and urging the stacked sheets thereagainst, the urging means including a plurality of urging elements consisting of a second urging member comprising auxiliary urging elements which cease to provide urging action according to reduction of stacked sheets and a first urging member comprising main urging elements which provide continual urging action, the number of operative urging elements being thereby reduced stepwise according to the reduction of stacked sheets, a biasing member being provided between an auxiliary urging element and a main urging element for continuously reducing the urging force of the main urging elements.

With this construction, the stacked sheets are urged against the feeding means by the urging means and are fed out one by one from the lowermost one. When there are a large number of stacked sheets, the sheets are urged by both the auxiliary and main urging elements of the urging means. When the stacked sheets are reduced to a predetermined number of sheets, the auxiliary urging elements cease to provide urging action, and only the main urging elements continually provide urging action. The main urging elements are biased

by biasing means such as to continuously reducing urging force with reduction of stacked sheets, thus preventing double feeding of sheets.

Preferable embodiments of the invention are defined in the claims 2 to 6.

In the following the invention is further illustrated by an embodiment of a sheet feeding apparatus with reference to the enclosed figures.

Fig. 1 is a sectional view showing an embodiment of the invention;

Fig. 2 is a plan view showing the same embodiment;

Fig. 3 is a sectional view showing a driving system of the same embodiment;

Fig. 4 is a sectional view showing an image forming apparatus;

Figs. 5 and 6 are views for explaining a sheet-feeding operation;

Figs. 7 to 10 are views for explaining the function of weight;

Fig. 11 is an exploded perspective view showing a weight construction;

Fig. 12 is a graph showing a weight characteristic;

Figs. 13 to 19 are views for explaining different examples of weight;

Figs. 20 to 24 are views for explaining a friction member provided on weight; and

Fig. 25 is a sectional view illustrating the relation between weight and detecting lever.

Now, an embodiment of the sheet feeding apparatus will be described with reference to the accompanying drawings.

Fig. 1 is a sectional view best illustrating the features of the embodiment, Fig. 2 is a plan view showing the embodiment, and Fig. 3 is a side view showing a driving system of the embodiment.

Referring to these Figures, there is shown a sheet feeding apparatus or sheet feeder which is generally designated by reference numeral 1. Sheet feeder 1 has a pair of positioning members 10 provided at its front end (i.e., left end in Fig. 1). It can be mounted in or dismounted from laser beam printer 2 serving as image forming means by inserting or removing the positioning members 10 into or out of holes 10b provided in an upper portion of housing 3 of the printer 2. Beneath the sheet feeder 1, the cassette 11 can be mounted in and dismounted from the laser beam printer 2. Ordinary sheets are stacked in the cassette 11. A wall of the laser beam printer 2 above the cassette 11 has a manual feed opening 3a, through which a sheet can be fed manually.

A housing 13 of the sheet feeder 1 has stack support 15 serving as supporting means for stacking sheets S thereon. The stack support 15 has restricting members 16a and 16b for restricting the stacked sheets S against movement in the width

directions. The restricting members 16a and 16b, have respective slidable racks 17 and 19 extending in the width direction of the stack support 15. The racks 17 and 19 are in mesh with pinion 20 rotatably mounted on the back surface of the stack support 15. Thus, the racks 17 and 19 with the respective integral restricting members 16a and 16b are movable in the width directions in an interlocked relation to each other.

A detecting lever 21 is pivotally mounted by pin 22 on the stack support 15 for detecting the presence or absence of sheets S. A lower end portion of the lever 21 can be advanced into and retreated from an on-off operated photointerpreter 23 provided on the back surface of the stack support 15. When the stack support 15 gets out of sheet S, an upper end portion of the detecting lever 21 is turned upwardly with respect to the stack support 15, thus indicating the absence of sheet S.

After the photointerpreter 23 in the sheet-feeding direction, feed roller 25 serving as feeding means is rotatably mounted for feeding sheets stacked on the stack support 15 one by one from the lowermost one. Above the feed roller 25, a weight 26 serving as urging means is provided for vertical displacement with its opposite end ears 26b (see Fig. 2) loosely received in pair guide grooves 27 (see Fig. 2) provided in the housing 13. The weight 26 serves to urge sheets S against the feed roller 25 in a manner as described later. Sheets S are envelopes or like thick sheets.

Support member 29 (see Fig. 1) secured in position after the weight 26 in the sheet-feeding direction supports an end-restricting member 30 for restricting and aligning the front ends of sheets S stacked on the stack support 15. The lower end of the end-restricting member 30 is spaced apart from the front end of the stack support 15 by a predetermined distance to permit feeding of sheets S through this space. Separating pad support 31 secured to a lower portion of the support member 29 is provided with separating plate (separating pad) 32 serving as separating means made of rubber or like highly frictional material. The separating pad 32 has a suitable inclination angle with respect to the sheet-feeding direction, in which each sheet S is fed out from the stack support 15. An elastic member 33 having flexibility is secured in position such that it faces the separating pad 32 for urging sheets S fed out from the feed roller 25 against the separating pad 32 and thus preventing double feeding of sheets S.

Pair transport guides 35 and 36 for guiding sheet S and transport roller 37 are disposed after the separating pad 32 in the sheet-feeding direction. A pinch roller 39 biased by a spring (not shown) is urged against the transport roller 37. A

bracket 40 secured in position above the transport guides 35 and 36 has microswitch 41 secured to it.

To bracket 40 is also pivoted by set screw 43 detecting lever 42 for detecting the set state of sheet feeder 1 with respect to laser beam printer 2. Detecting lever 42 is biased in the counterclockwise direction in Fig. 1 by torsion spring 45 having the opposite ends secured to bracket 40 and detecting lever 42, respectively. When setting sheet feeder 1 in position, detecting lever 42 is urged by housing 3 and rotated in the clockwise direction in Fig. 1. As a result, projection 42a of detecting lever 42 urges an operating lever of microswitch 41 and turns on the same, thus detecting the setting of sheet feeder 1.

Now, a driving system of the sheet feeder having the above construction will be described with reference to Figs. 2 and 3.

Referring to the Figures, sheet feeder 1 has a pair of side plates 46 and 47, which are formed with guide grooves 27 noted above for guiding weight 26. Board 49 is secured by a plurality of supports to the outer surface of side plate 46. It undertakes control of drive motor 50 secured to its inner surface and also transfer of signals between laser beam printer 20 and sheet feeder 1. To other side plate 47 is connected one end of cable 51, which connects sheet feeder 1 and laser beam printer 2 to each other.

Solenoid 53 for spring clutch control to be described later is secured to bracket 52 which is in turn secured to side plate 46. Bracket 52 also serves as a grounding member to ground metal bearing 56 supporting transport roller 37 noted above.

As shown in Fig. 3, relay gear 59 integral with relay gear 49a is rotatably supported by shaft 60 in support 57, which is secured in position at a suitable spacing from side plate 46. Relay gear 59 is in mesh with gear 61 secured to output shaft 50a of drive motor 50. Relay gears 62 and 63 meshing with relay gear 59 are supported by shaft 64 in support 57, and also relay gear 65 meshing with relay gear 59a is supported by shaft 66 in support 57. Support 57 is electrically connected via shaft 64 to bracket 52. Thus by grounding bracket 52 shaft 25a of feed roller 25 and shaft 37a of transport roller 37 are also grounded.

Relay gear 62 meshing with relay gear 59 is coupled to gear 63 via clutch unit 55 having a well-known spring clutch. Clutch unit 55 is on-off operated to on-off control drive power transmission of gears 62 and 63 under on-off control of solenoid 53.

Lever 53a for locking clutch unit 55 is pivoted to bracket 52. It is coupled at one end to spring 53b, which is provided on bracket 52, and thus it is spring-biased in the clockwise direction. Solenoid

53 serves to attract and release lever 53a. Gear 63 is in mesh with gear 67 secured to shaft 25a of feed roller 25 (see Fig. 1). Relay gear 65 is in mesh with gear 69 mounted on shaft 37a of feed roller 37. A one-way clutch (not shown) is provided between shaft 37a and gear 69. When gear 69 is rotated in the counterclockwise direction in Fig. 3, shaft 37a is rotated in the same direction, while it idles when gear 69 is rotated in the clockwise direction.

Torsion spring 71 is mounted on dowel 70 secured to side plate 46 and has its opposite ends attached to shaft 39a of pinch roller 39 and shaft 66, respectively. Pinch roller 39 is urged against transport roller 37 by the spring force of torsion spring 71. In Fig. 2, reference numeral 72 designates a connection member for electrically connecting transport roller 37 via metal bearing 73 supporting roller 37. Connecting member 72 has a stem portion secured to side plate 46 and its free end bolted to shaft 66, and it also serves as cover of gear 69.

In the above construction, when drive motor 50 is operated by a sheet-feeding signal from housing 3 of printer 2, transport roller 37 starts rotation via the gear train noted above. When predetermined period T1 of time has been passed from the instant of generation of the sheet-feeding signal, solenoid 53 is turned on to cause rotation of feed roller 25, thus causing start of feeding of sheets S such as envelopes.

After the lapse of predetermined period T2 of time, solenoid 53 is turned off to cut drive power transmission to feed roller 25. At this time, the leading end of sheet S being fed has reached guide while the trailing end of the sheet is on feed roller 25. Thus, the sheet is fed by the guide while feed roller 25 is rotated by the action of the one-way clutch. Sheet S fed out from Sheet feeder 1 is fed by feed roller 75 in laser beam printer 2 as shown in Fig. 4 into housing 3. Sheet S fed manually through manual feed opening 3a of laser beam printer 2 is detected by paper sensor 76 shown in Fig. 4 to be fed by feed roller 75 into housing 3 of laser beam printer 2 for printing and then discharging.

Laser beam printer 2, as shown in Fig. 4 has feed roller 75 for feeding out sheets S accommodated in cassette 11 and separating pad 180, which is urged by a spring (not shown) against feed roller 75 for blocking second and subsequent sheets S to separate the first fed sheet. Reference numerals 181 and 182 designate transport guides. The leading end of a sheet fed out from the stationary state is brought into contact with a nip of pair registration rollers 183 for skew feeding before being fed with a timing synchronized to an image formed on photosensitive drum 185 to be de-

scribed later.

Reference numeral 110 designates an image-forming unit, 185 a photosensitive drum, 186 a scanner for scanning photosensitive drum 185 with a laser beam for forming a latent image, 187 a developing unit for developing the latent image on the photosensitive drum to a tonor image, and 188 a transfer roller for transferring the tonor image formed on photosensitive drum 185 onto sheet. Reference numeral 190 designates a fixing unit for fixing the transferred tonor image on the sheet, and 191 a tray for stacking sheets discharged after the fixing operation. Reference numeral 184 designates a guide for guiding sheet from registration roller pair 183 to photosensitive drum 185, and 189 a torque conveyor for transporting the sheet from photo-sensitive drum 185 to fixing roller 190.

The operation of separating and feeding out each sheet will now be described with reference to Figs. 5 and 6.

Sheets S stacked on stack support 15 with their leading ends aligned in contact with end-restricting member 30 are fed out one by one from the lowermost one Sa with an urging force provided by weight 26 and rotation of feed roller 25 in the direction of arrow. At this time, subsequent sheets Sb, Sc, ... come out with sheet Sa due to frictional force between adjacent sheets. However, since their leading ends are urgedly retained by separating pad 32, which has a high coefficient of friction. Consequently, only sheet Sa which directly receives the feeding force of feed roller 25 is advanced by surpassing the frictional resistance offered by separating pad 32, and it thus fed out by clearing end 32a of separating pad 32.

Elastic member 33 is a thin sheet having flexibility, with its stem portion secured to support 77. When sheet Sa is fed to elastic member 33, the free end thereof is flexed toward the sheet-feeding direction, and the reaction force at this time has an effect of raising sheets Sa, Sb, Sc, ... toward upper separating pad 32, thus helping the separation of the sheet. After the clearing free end 32a of the separating pad 32, serving as separating means, sheet Sa is transported by being guided by transport guides 35 and 36 to enter between transport roller 37 and pinch roller 39. The sequence of operations described above takes place for succeeding sheets Sb, Sc, ... for separation thereof.

Weight 26 will now be described in detail with reference to Figs. 7 to 11.

Figs. 7 and 9 show, in a section taken along line B-B in Fig. 1, a state when there is no sheet on stack support 15 and a state when there are at least a certain number of sheets on the support, respectively. Figs. 8 and 10 are sectional views corresponding to Figs. 7 and 9, respectively.

Referring to these Figures, weight 26 includes outer weight 79 and inner weight 81. Outer weight 79 has a channel-like sectional profile open upwardly. Inner weight 81 is accommodated in outer weight 79 and has a channel-like sectional profile open downwardly. A plurality of (i.e., two in Fig. 8) auxiliary weights 82 are accommodated in and secured by bolts 82a to inner weight 81. These auxiliary weights 82 are provided for controlling the weight of inner weight 81. Weight cover 83 is fitted on outer weight 79 to permit weight 26 to be held with a hand of the operator.

The outer surface of weight cover 83 is formed with grooves 83a. Pair pins 85, which penetrate weight cover 83 and outer weight 79 and are retained against detachment by E-rings 85a, also penetrate vertically elongate slots 80a and 80b formed in inner weight 81 and auxiliary weights 82. With this arrangement, inner weight 81 is capable of being displaced vertically with respect to outer weight 79 by the distance, by which pins 85 can be displaced along slots 80a and 80b. Inner weight 81 has opposite end projections 81a and 81b, and stopper means or stoppers 46a and 47a formed as shoulders in side plates 46 and 47 of housing 13 are found below and face respective projections 81a and 81b. Grounding spring 86 has one end connected to outer weight 79 for grounding the same. Its other end is secured to a grounding plate (not shown). Outer weight 79 has projections 79b received in guide grooves 27 on the printer side. Friction member 79c is applied to the outer surface of a bottom portion to vertical front side portion in the sheet-feeding direction of outer weight 79. It is made of a material having substantially the same coefficient of friction as that of sheet. Further, buffering members 79d are applied to opposite end portions of the inner surface of the bottom portion of outer weight 79.

When a certain number of sheets S are stacked on stack support 15, as shown in Figs. 9 and 10, projections 81a and 81b are found above stoppers 46a and 47a. In this state, inner weight 81 is supported by bottom portion 79a of outer weight 79. Thus, the total weight of weight 26 mainly comprising outer weight 79, inner weight 81 and weight cover 83 is acting as urging force on sheets S. As the number of sheets S on stack support 15 is reduced due to one-by-one feeding, weight 26 is progressively lowered, and eventually projections 81a and 81b of inner weight 81 come to engage with stoppers 46a and 46b.

As the number of stacked sheets S is further reduced, inner weight 81 is separated from bottom 79a of outer weight 26, and only the weight the other part of weight 26 than inner weight 81 and auxiliary weights 82 is applied to sheets S. This operation is graphically shown as in Fig. 12. As is

shown, the urging force is constant from the instant when there is a full stack of sheets S until projections 81a and 81b engage with stoppers 46a and 47a. This operation is represented by a plot segment from point a to point b. When projections 81a and 81b come to engagement with stoppers 46a and 47a, the urging force is reduced from point b to point c. Subsequently, the urging force is fixed until the number of stacked sheets becomes zero as represented by a plot segment from point c to point e.

The urging force is varied step-wise as shown above because the optimum urging force applied to sheets S is high when there are many stacked sheets S and low when there are a small number of sheets S. Thus, when there are many sheets stacked on the sheet-stacking means, a sufficient urging force can be ensured to provide a stable sheet-feeding force. Also, when the number of stacked sheets is reduced, excessive urging force is prevented to prevent double feeding. If the urging force applied to the stack of sheets S is inadequate, defective feeding or double feeding is liable.

In the above embodiment the urging force applied to the stack of sheets S is varied stepwise. However, the urging force is still too high when remaining stacked sheets S are reduced to a very small number, and therefore double feeding of sheets S is liable.

In the following, an embodiment which can solve the above problem will be described. Parts like those in the preceding embodiment are designated by like reference numerals and symbols while omitting their description.

Figs. 13 and 14 show weight (or urging means) 5 when there is no sheet S on stack support 15, while Figs. 15 and 16 show the weight when there is a stack of sheets S.

Referring to Figs. 13 to 17, biasing member 7 consisting of a leaf spring having channel-shaped stem 7a is provided between weight cover 83 and inner weight 6, with a folded upper portion of stem 7a urged against the back or inner surface of weight cover 83. Biasing member 7 has a pair of opposite side projections 7b and 7c projecting from its portion facing the folded portion. Stem 7a of biasing member 7 is supported with projections 7b and 7c urgedly held in notches 9b formed in upper portions of the inner surface of the side portions of outer weight 9. Biasing member 7 has arcuately curved feed end 7d, which urges a central portion of the inner surface of the top of inner weight 6.

When more than a certain number of sheets S are stacked on stack support 15 as shown in Fig. 15, projections 6a and 6b at the opposite ends of inner weight 6 are found above stoppers 46a and 47a. In this state, inner weight 6 is supported by

bottom portion 9a of outer weight 9. In this state, any urging force applied to inner weight 6 by biasing member 7 does not become a force urging sheets S.

Thus, in this state, like weight 26 shown in Figs. 9 and 10, the weight of the total components of weight 5 including outer weight 9, inner weight 6 and weight cover 83 is being applied as urging force to sheets S. When the number of sheets S on stack support 15 is reduced after the engagement of projections 6a and 6b of inner weight 6 with stoppers 46a and 47a, inner weight 6 is separated from bottom portion 9a of outer weight 9. This time, the distance h between the top of inner weight 6 and top of weight cover 83 is reduced progressively to cause progressive increase of the flexing of biasing member 7.

As a result, a weight is applied to sheets S, which is the weight of weight 5 minus the sum of the weights of inner weight 6 and auxiliary weights 82 and an acting force provided by the elasticity of biasing member 7. Since distance h is reduced with reducing number of stacked sheets S, the urging force of weight 5 applied to sheets S is reduced progressively as shown in Fig. 12. More specifically, the urging force of weight 5 is changed in the order of points a, b, c and d in Fig. 12, and the urging force when there is no stacked sheet is less than that in the prior art case.

In the above embodiment, the point of action of biasing member 7 on inner weight 6 is set to be substantially the center of the top of inner weight 6 in order to permit automatic adjustment of urging forces on the opposite sides of the point of action lest the opposite side urging forces should be different in case of envelopes having different opposite side swelling portions as sheets S.

Inner weight 5, outer weight 9 and biasing member 7 are made of an electrically conductive material and are held in contact with one another. By so doing, weight 5 can be perfectly grounded.

Figs. 18 and 19 show a different example of urging means according to the invention.

Referring to the Figures, biasing member 7 provided between weight cover 83 and inner weight 6 of weight 5 is a compression coil spring, and the other structure is the same as that of weight 5 shown in Figs. 13 and 14. With this example of weight 5, the same function and results as with weight 5 shown in Fig. 13 can be obtained when urging sheets S. While urging member 7 in this example and also that in the previous example of Fig. 13 are provided between weight cover 83 and inner weight 6, since weight cover 83 is made integral with outer weight 9 via pins 85, biasing member 7 equivalently intervenes between outer weight 9 and inner weight 6.

While in each of the above examples the action of weight 5 is changes stepwise in two stages, it is also possible to permit reduction of the urging force of weight 5 in three stages.

Further, while in the above cases the initial biasing force of biasing member 7 is zero as shown by points a, b, c and d in Fig. 12, it is of course possible to permit variation of the urging force as shown at points a, b, f and g by providing biasing member 7 with a suitable initial biasing force.

Further, it is possible to vary the weight applied to sheets S by varying the position of contact between projections 81a and stoppers 46a and 47a with variation of the thickness of buffering members 79d.

A further embodiment will now be described, in which the weight is provided with a friction member. As shown in Figs. 20 and 21, the lower or outer surface of the bottom portion of weight 5 has a pair of urging surfaces 5a for urging sheets S. Urging surfaces 5a are provided with friction members 106 for preventing double feeding of sheets S. The materials of friction members 106 and feed roller 25 are selected such as to satisfy a relation

$$\mu_3 < \mu_1 < \mu_2$$

where μ_1 is the coefficient of friction of between friction members 106 and sheet S, μ_2 is the coefficient of friction between feed roller 55 and sheet S, and μ_3 is the coefficient of friction between adjacent sheets S.

Since the coefficient μ_1 of friction between friction members 106 provided on urging surfaces 5a of weight 5 and sheet S is greater than the coefficient μ_3 of friction between adjacent sheets S and less than the coefficient μ_2 of friction between feed roller 25 and sheet S as noted above, when it becomes that two sheets S remain on stack support 15, the feeding-out of the last sheet S from stack support 15 is prevented by the frictional force provided by friction members 106 of weight 5, and only the last but one sheet S (i.e., the lowermost sheet) is thus fed out by feed roller 55. It is thus possible to prevent double feeding of the last sheet along with the last but one sheet. In addition, since the frictional force provided by feed roller is greater than the frictional force provided by friction members 106, the last sheet can be fed out smoothly after completion of the feeding-out of the last but one sheet.

A further embodiment will be described with reference to Fig. 22. Referring to the Figure 22, a pair of friction members 106 are applied to the bottom surface to a front upright surface in the sheet-feeding direction. Friction members 106 are made of a material having substantially the same

coefficient of friction as that of sheets. They are covered by or located inwardly of weight cover 83. In this construction, the operator inserts sheet stack S in the direction of arrow A. At this time, even if the leading ends of sheets S strike weight 5, they will never touch end portions of friction members 106 covered by or located inwardly of weight cover 83. The operator aligns the leading ends of sheets S by bringing them into contact with end-restricting member 30. Also, the operator restricts movement of sheets S in the width direction thereof by displacing restricting members 16a and 16b. Further, the operator lowers weight 5 to urge sheets S against feed roller 25.

Further, as shown in Figs. 23 and 24, on the front side of outer weight 9 low frictional coefficient projections 9a projecting from friction members 106 by slight distance D are provided on the opposite sides of friction members 106 or on outer weight 9. With this structure, when ends of sheets touch weight 5 while weight 5 is held raised for replenishment with sheets, they strike projections 9a and are smoothly guided downwardly of weight 5. It is thus possible to prevent sheet end portions from being bent or curled in contact with friction members 106 being raised.

A further embodiment will be described with reference to Fig. 25. Referring to the Figure, detecting lever 21 for detecting sheet S is pivoted by pin 22 to stack support 15, and its lower portion can be advanced into and retreated from and thus on-off operate photointerpreter 23 provided on the back surface of stack support 15. When there is no sheet S on stack support 15, an upper end portion of detecting lever 21 is turned upwardly with respect to stack support 15, thus indicating the absence of sheet S. Stack support 15 is provided with escapement 15b for avoiding interference of sheet-detecting means (21, 23) with detecting lever 21.

If detecting lever 21 is exposed without any sheet S on stack support 15, sheet-detecting means (21, 23) are liable to execute an erroneous operation or damaged.

With detecting lever 21 disposed beneath weight 26 as shown in Fig. 25, the user can difficultly touch detecting lever even when there is no sheet S on stack support 15. Even if detecting lever 21 is touched, only its portion near the center of its rotation is touched.

As one goes toward the free end of detecting lever 21, the contact action is more delicate. That is, slightly touching a portion of detecting lever 21 near the rotational center thereof has no substantial adverse effects compared to the case of touching the free end of the lever. It is thus possible to realize prevention of erroneous operation or damage to detecting lever 21 due to touching.

Claims

1. A sheet feeding apparatus, comprising
supporting means (15) for supporting stacked sheets (S);
feeding means (25) for applying a feeding force to a lowermost sheet of said stacked sheets;
urging means (5; 26) comprising a first urging member (83, 9; 83, 79) and a second urging member (6, 82; 81, 82), each for urging the stacked sheets onto said feeding means; and
stopper means (6a, 6b; 46a, 47a) for releasing the urge of said stacked sheets by one of said urging members when the amount of said sheets becomes less than a predetermined value,
characterized in that
said first urging member (83, 9; 83, 79) includes an outer weight (9; 79), and said second urging member (6, 82; 81, 82) includes an inner weight (6; 81) contained in said outer weight (9; 79).
2. A sheet feeding apparatus according to claim 1, **characterized in that** said urging means further comprises a biasing member (7) provided between said first urging member (9, 83) and said second urging member (6, 82), for urging the respectively other one of said first and said second urging members (9, 83) reversely to the urging direction thereof, after the urge by one of said urging members (6, 82) has been released.
3. A sheet feeding apparatus according to claim 1, **characterized in that** said stopper means (6a, 6b, 46a, 47a) comprises a protrusion (6a, 6b) provided on one of said urging members (6, 82), and a stopper (46a, 47a) provided on a side plate (46, 47) of said sheet feeding apparatus, said protrusions engaging with said stopper when the amount of said stacked sheets (S) reaches a predetermined value, for releasing the urge of the respective one of said urging members (6, 82).
4. A sheet feeding apparatus according to claim 1, **characterized in that** said urging means (5; 26) comprises a frictional member (106) provided on the surface thereof in contact with said stacked sheets (S), said frictional member being in frictional contact with the sheet stack.
5. A sheet feeding apparatus according to claim 1, **characterized in that** said sheet feeding apparatus further comprises a separating

means (32, 32a) provided obliquely with respect to the sheet feeding direction at the downstream side of said feeding means (25), said separating means separating said stacked sheets (S) one by one by cooperation of the frictional force and a frictional force generated when a tip end of the fed sheet is abutted.

6. An image forming apparatus, comprising
a sheet feeding apparatus (1) according to any one of claims 1 to 5; and
an image forming means (2) for forming an image on a sheet (S) fed out by said feeding means (25) of said feeding apparatus (1).

Patentansprüche

1. Ein Blattfördergerät mit einer Trägereinrichtung zum Tragen gestapelter Blätter (S);
einer Fördereinrichtung (25) zum Aufbringen einer Förderkraft auf das unterste Blatt der gestapelten Blätter;
einer Druckeinrichtung (5; 26) mit einem ersten Druckteil (83, 9; 83, 79) und einem zweiten Druckteil (6, 82; 81, 82), jeweils zum Drücken der gestapelten Blätter auf die Fördereinrichtung; und
einer Stoppereinrichtung (6a, 6b; 46a, 47a) zum Aufheben des Druckes eines der Druckteile auf die gestapelten Blätter, wenn die Anzahl der Blätter geringer als ein vorbestimmter Wert wird,
dadurch gekennzeichnet, daß
das erste Druckteil (83, 9; 83, 79) ein äußeres Gewicht (9; 79) umfaßt und das zweite Druckteil (6; 82; 81, 82) ein inneres Gewicht (6; 81) umfaßt, daß in dem äußeren Gewicht (9; 79) aufgenommen ist.
2. Ein Blattfördergerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Druckeinrichtung weiter ein Vorspannteil (7) umfaßt, das zwischen dem ersten Druckteil (9, 82) und dem zweiten Druckteil (6, 82) vorgesehen ist, um jeweils das andere des ersten und zweiten Druckteiles (9, 83) umgekehrt zu deren Druckrichtung zu belasten nachdem der Druck durch eines der Druckteile (6, 82) weggenommen wurde.
3. Ein Blattfördergerät nach Anspruch 1,
dadurch gekennzeichnet, daß
die Stoppereinrichtung (6a, 6b, 46a, 47a) einen Vorsprung (6a, 6b) umfaßt, der an einem der Druckteile (6, 82) vorgesehen ist und einen Stopper (86a, 47a), der an einer Seitenplatte (46, 47) des Blattfördergerätes vorgesehen ist, wobei die Vorsprünge mit den Stopper in Ein-

griff kommen, wenn die Anzahl gestapelter Blätter (S) einen bestimmten Wert erreicht, um den Druck des jeweiligen einen Druckteil (6, 82) aufzuheben.


4. Ein Blattfördergerät nach Anspruch 1, **dadurch gekennzeichnet, daß** die Druckeinrichtung (5; 26) ein Reibelement (106) umfaßt, das an dessen mit den gestapelten Blättern (S) in Kontakt befindlichen Oberfläche vorgesehen ist, wobei das Reibelement in Reibkontakt mit dem Blattstapel ist. 5 10
5. Ein Blattfördergerät nach Anspruch 1, **dadurch gekennzeichnet, daß** das Blattfördergerät weiter eine Separiereinrichtung (32, 32a) umfaßt, die stromunterhalb der Fördereinrichtung (25) schräg bezüglich der Blattförderrichtung angeordnet ist, wobei die Separiereinrichtung gestapelte Blätter (S) eins nach dem anderen vereinzelt indem die Reibkraft und eine Reibkraft zusammenwirken, die erzeugt wird, wenn ein spitzes Ende eines geförderten Blattes anstößt. 15 20 25
6. Ein Bilderzeugungsgerät mit einem Blattfördergerät (1) nach einem der Ansprüche 1 bis 5 und einer Bilderzeugungseinrichtung zum Erzeugen eines Bildes auf einem Blatt, das mittels der Fördereinrichtung (25) des Blattfördergerätes (1) gefördert wird. 30

Revendications

1. Appareil d'alimentation feuille à feuille, comportant
 - des moyens de support (15) destinés à supporter des feuilles empilées (S) ;
 - des moyens d'alimentation (25) destinés à appliquer une force d'alimentation à la feuille la plus basse desdites feuilles empilées ;
 - des moyens de sollicitation (5 ; 26) comportant un premier élément de sollicitation (83, 9 ; 83, 79) et un second élément de sollicitation (6, 82 ; 81, 82), destinés chacun à solliciter les feuilles empilées jusque sur lesdits moyens d'alimentation ; et
 - des moyens d'arrêt (6a, 6b ; 46a, 47a) destinés à relâcher la sollicitation desdites feuilles empilées par l'un desdits éléments de sollicitation lorsque la quantité desdites feuilles devient inférieure à une valeur prédéterminée, caractérisé en ce que
 - ledit premier élément de sollicitation (83, 9 ; 83, 79) comprend un poids extérieur (9 ; 79) et ledit second élément de sollicitation (6, 82 ; 81, 82) comprend un poids intérieur (6 ; 81) contenu dans ledit poids extérieur (9 ; 79).

2. Appareil d'alimentation feuille à feuille selon la revendication 1, caractérisé en ce que lesdits moyens de sollicitation comportent en outre un élément de rappel (7) prévu entre ledit premier élément de sollicitation (9, 83) et ledit second élément de sollicitation (6, 82) pour solliciter l'autre, respectivement, desdits premier et second éléments de sollicitation (9, 83) inversement à son sens de sollicitation, après que la sollicitation de l'un desdits éléments de sollicitation (6, 82) a été relâchée.
3. Appareil d'alimentation feuille à feuille selon la revendication 1, caractérisé en ce que lesdits moyens d'arrêt (6a, 6b, 46a, 47a) comprennent une saillie (6a, 6b) située sur l'un desdits éléments de sollicitation (6, 82), et un élément d'arrêt (46a, 47a) situé sur une plaque latérale (46, 47) dudit appareil d'alimentation feuille à feuille, lesdites saillies entrant en contact avec ledit élément d'arrêt lorsque la quantité desdites feuilles empilées (S) atteint une valeur prédéterminée, pour relâcher la sollicitation de l'un, respectif, desdits éléments de sollicitation (6, 82).
4. Appareil d'alimentation feuille à feuille selon la revendication 1, caractérisé en ce que lesdits moyens de sollicitation (5 ; 26) comprennent un élément à frottement (106) dont la surface est en contact avec lesdites feuilles empilées (S), ledit élément de frottement étant en contact de frottement avec l'empilage de feuilles.
5. Appareil d'alimentation feuille à feuille selon la revendication 1, caractérisé en ce que ledit appareil d'alimentation feuille à feuille comporte en outre des moyens de séparation (32, 32a) disposés obliquement par rapport à la direction d'alimentation feuille à feuille sur le côté d'aval desdits moyens d'alimentation (25), lesdits moyens de séparation séparant lesdites feuilles empilées (S) une à une par la coopération de la force de frottement et d'une force de frottement générée lorsqu'un bout extrême de la feuille avancée est en butée.
6. Appareil de formation d'images, comportant
 - un appareil (1) d'alimentation feuille à feuille selon l'une quelconque des revendications 1 à 5 ; et
 - des moyens (2) de formation d'images destinés à former une image sur une feuille (S) avancée par lesdits moyens d'alimentation (25) dudit appareil (1) d'alimentation.

FIG. 1

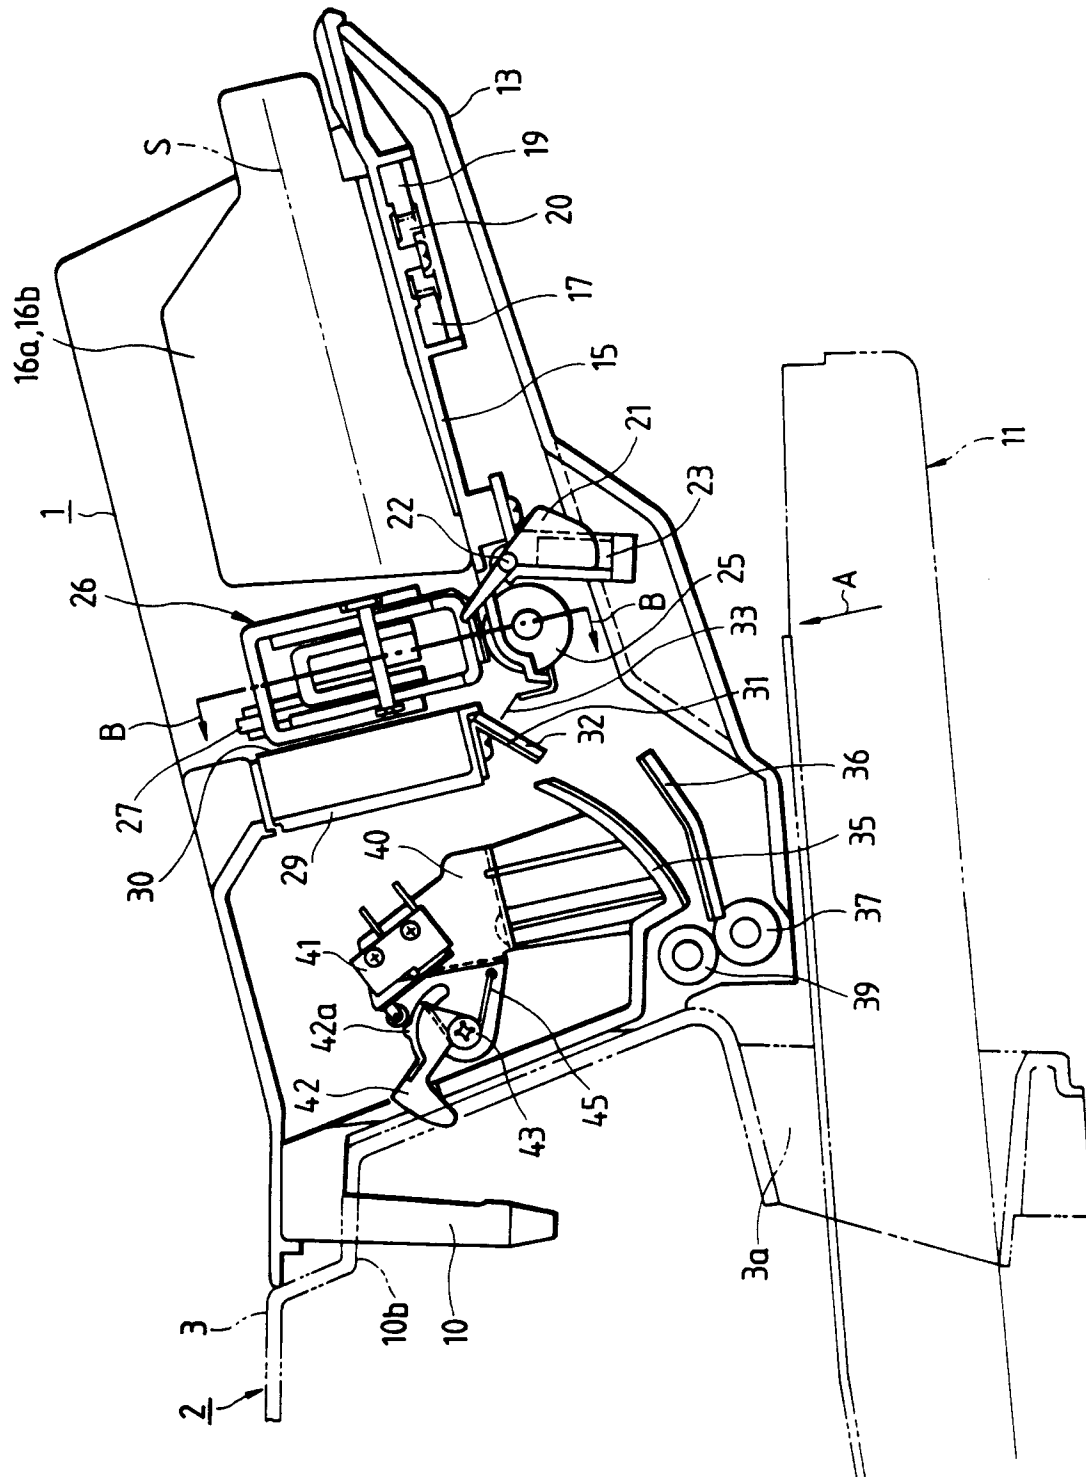

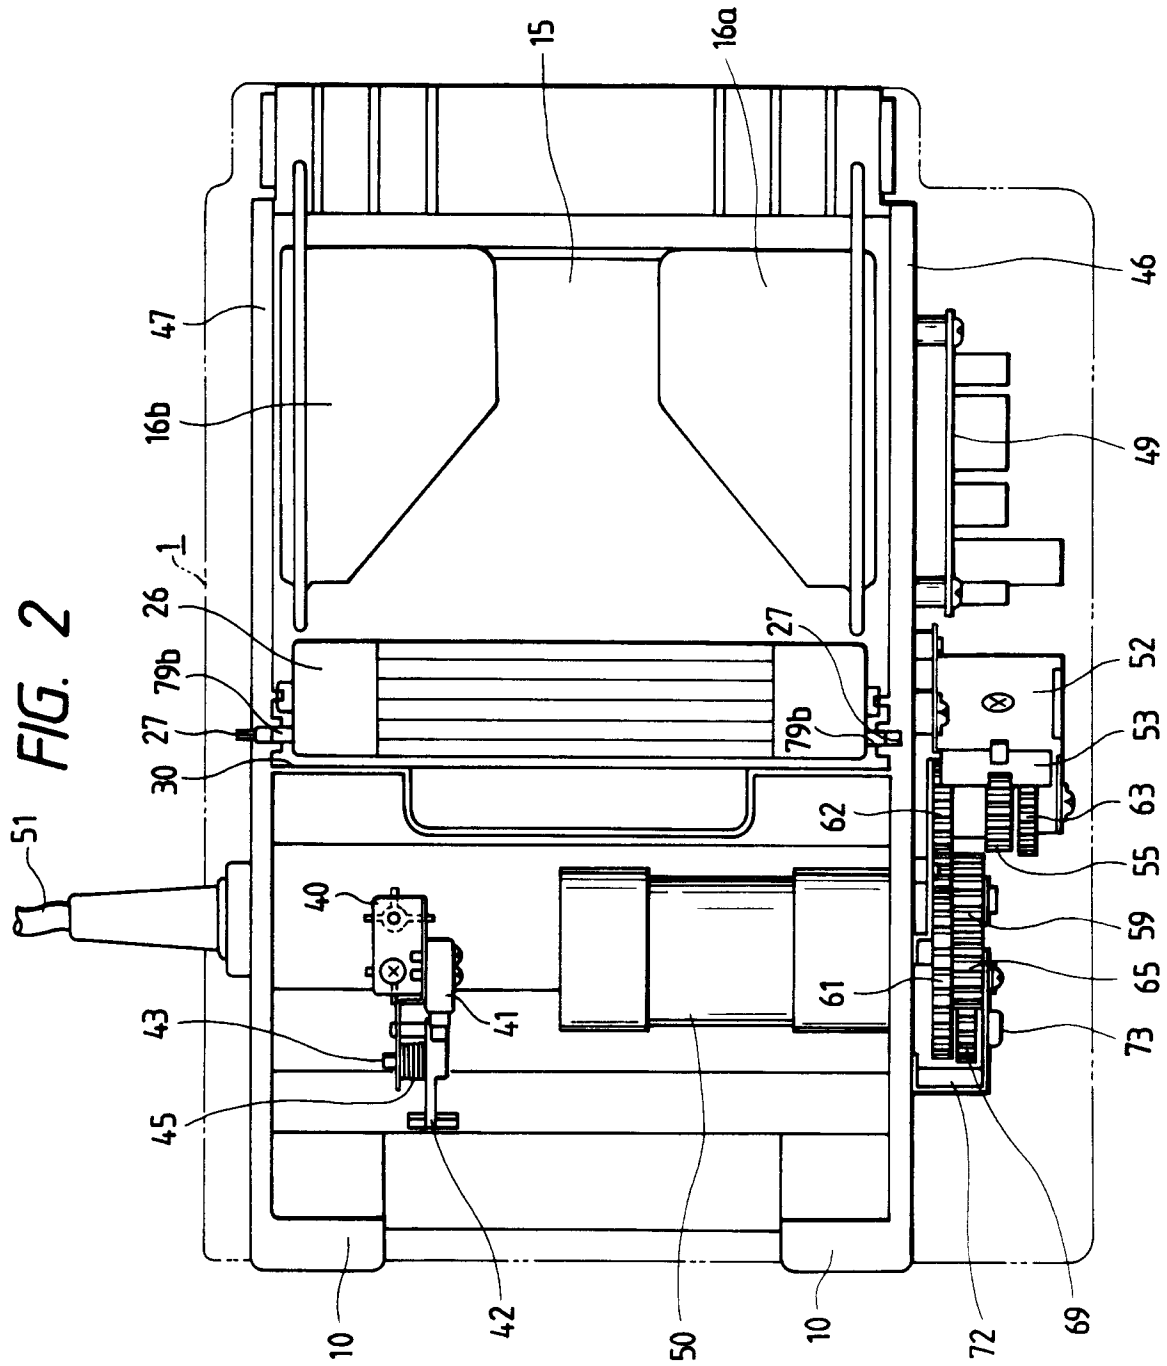


FIG. 3

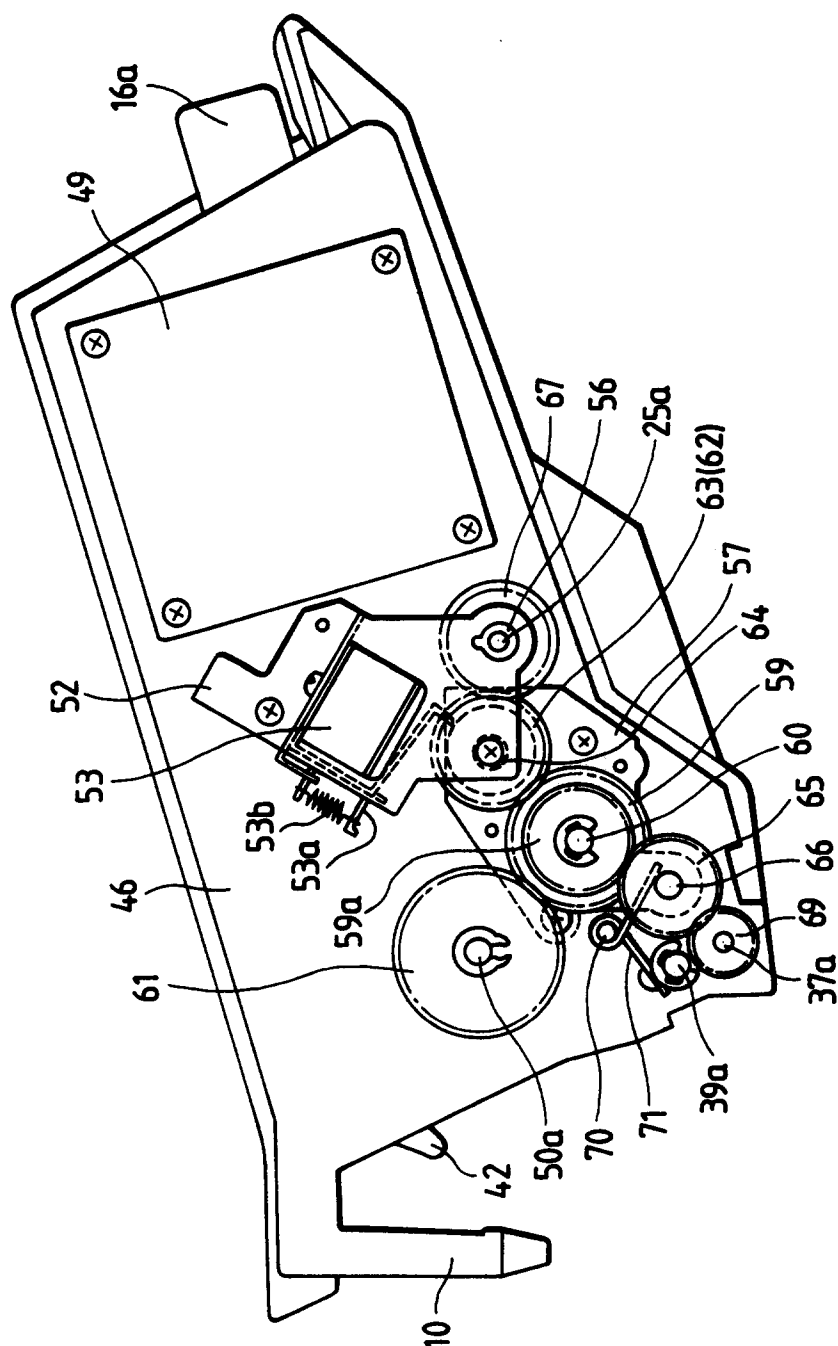


FIG. 4

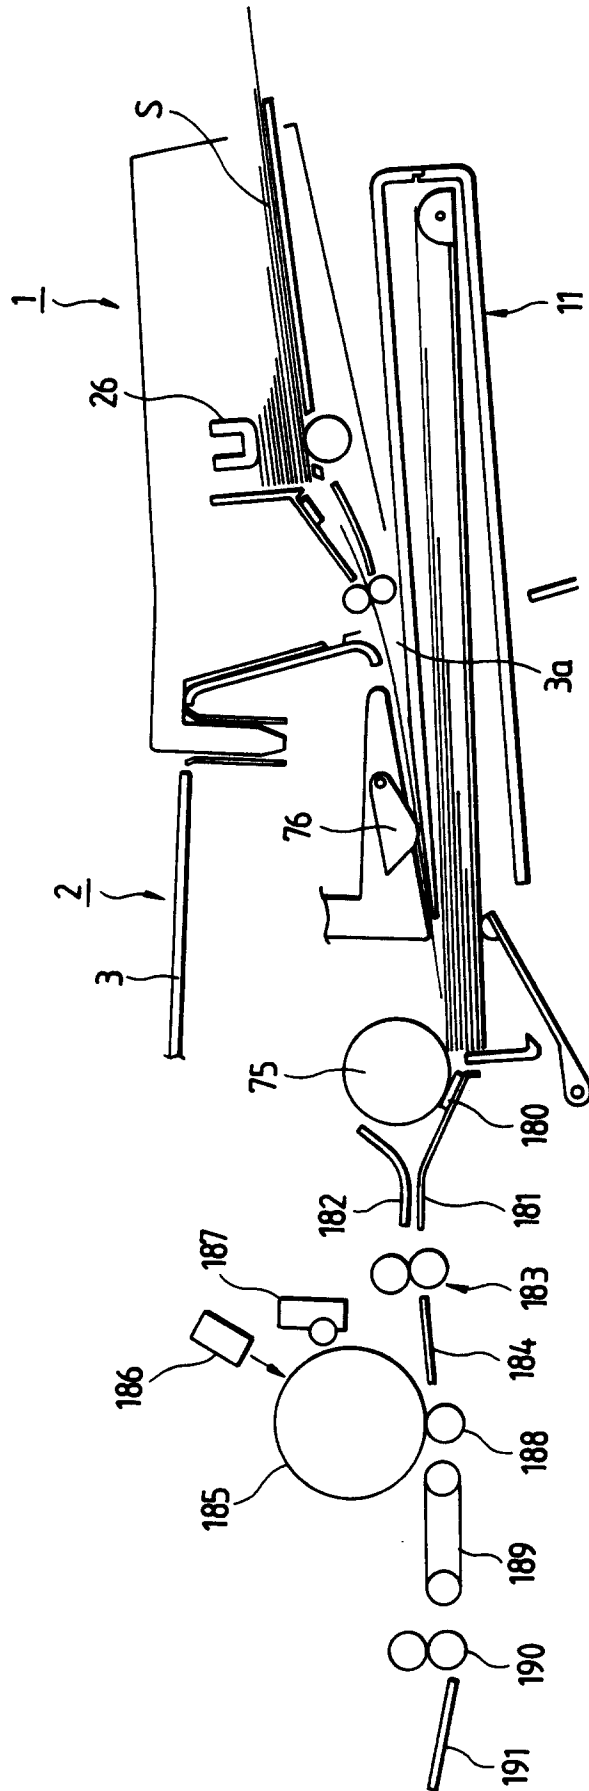


FIG. 5

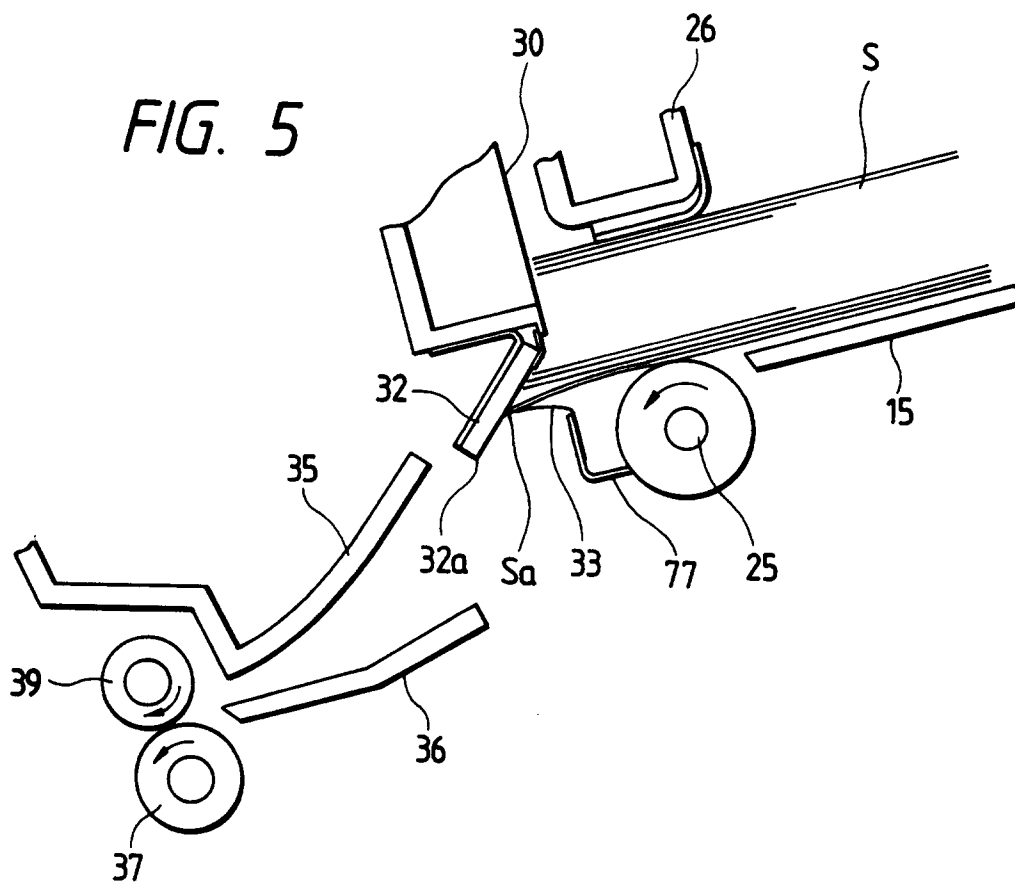


FIG. 6

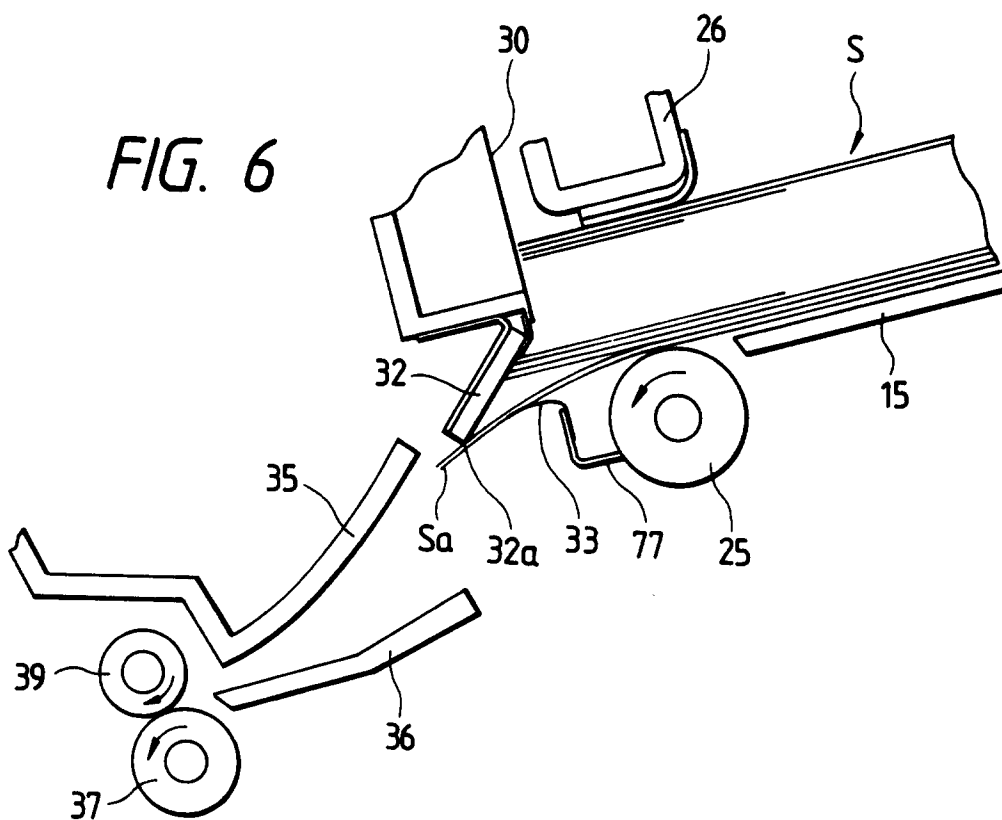


FIG. 7

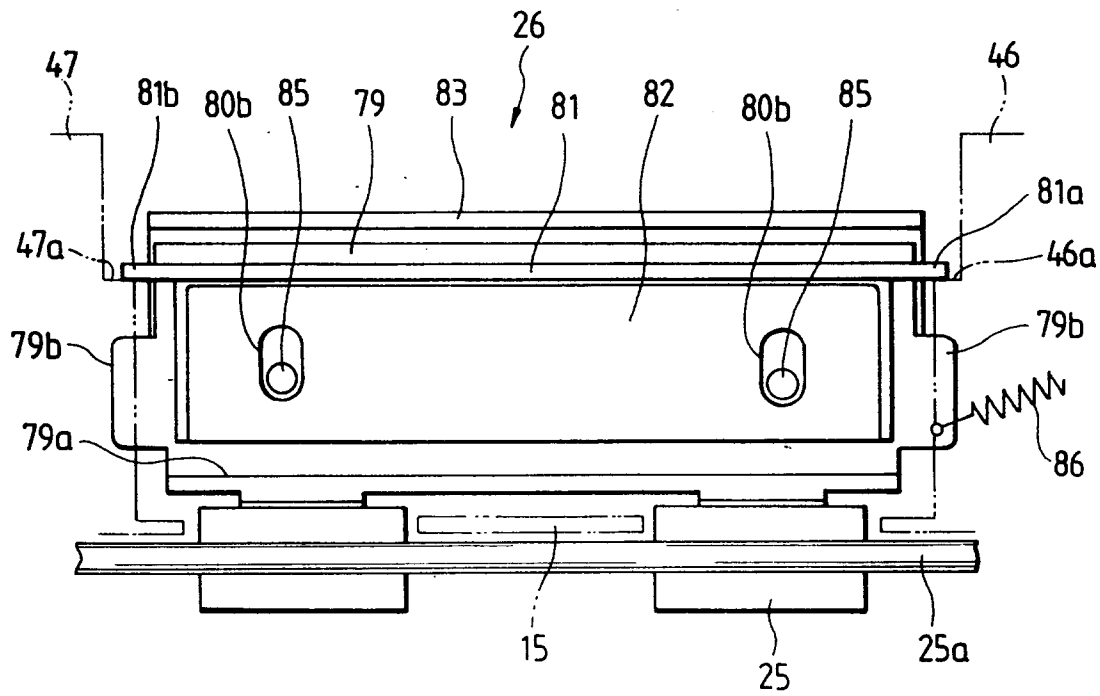


FIG. 8

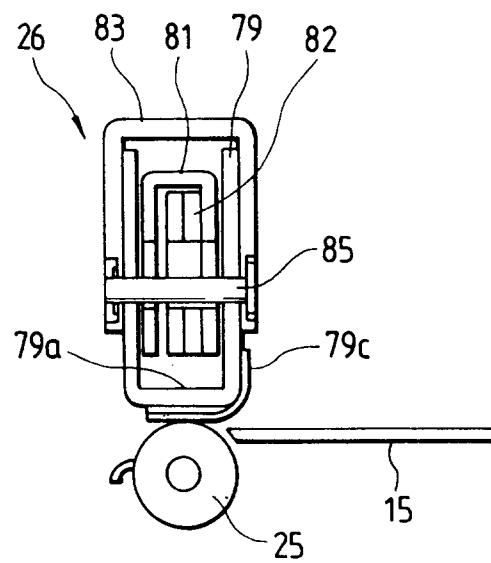


FIG. 9

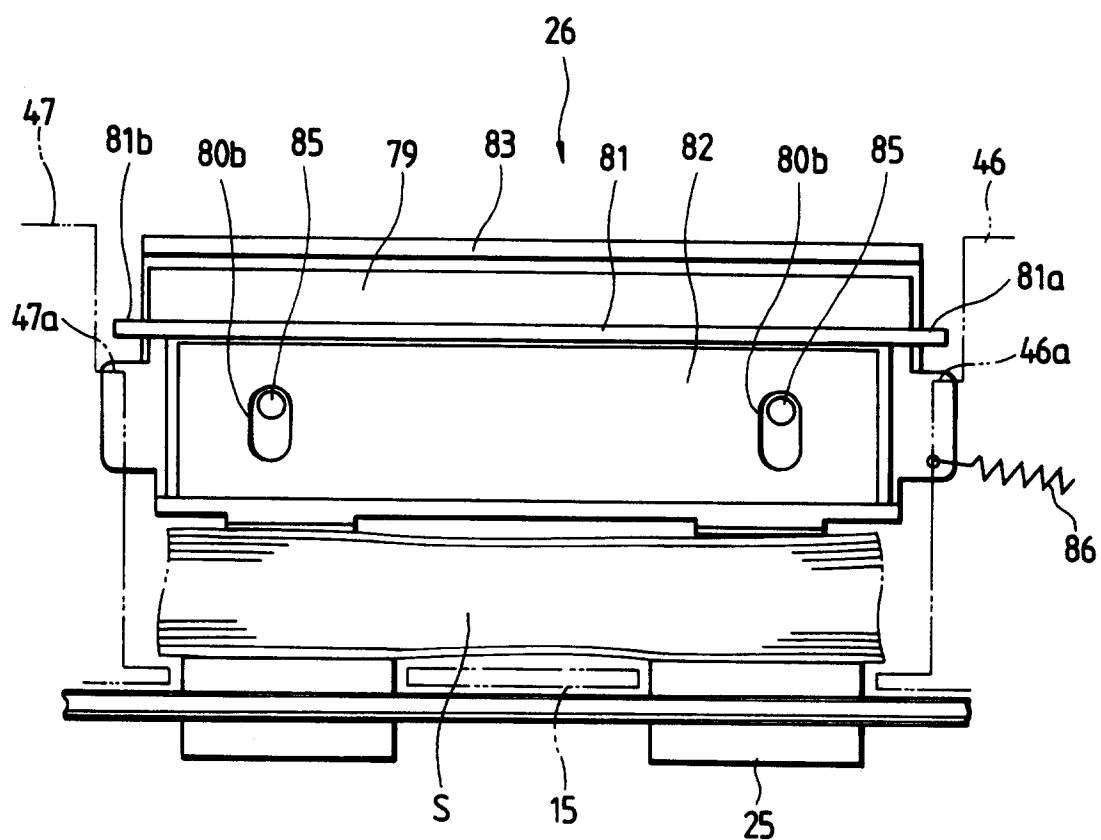


FIG. 10

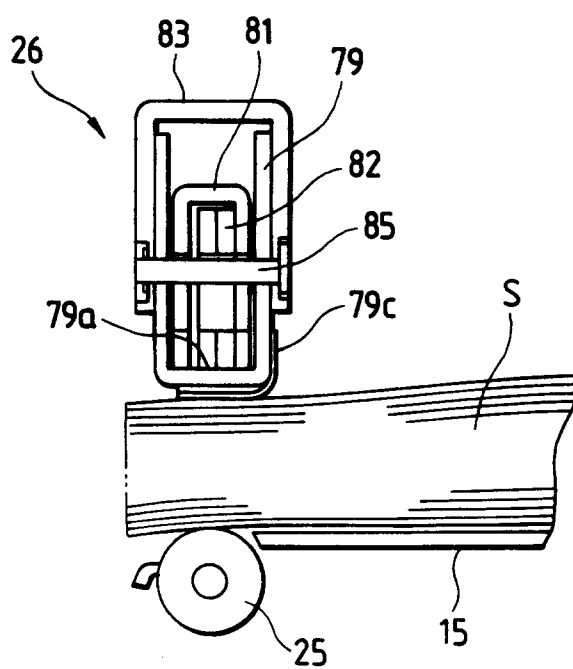


FIG. 11

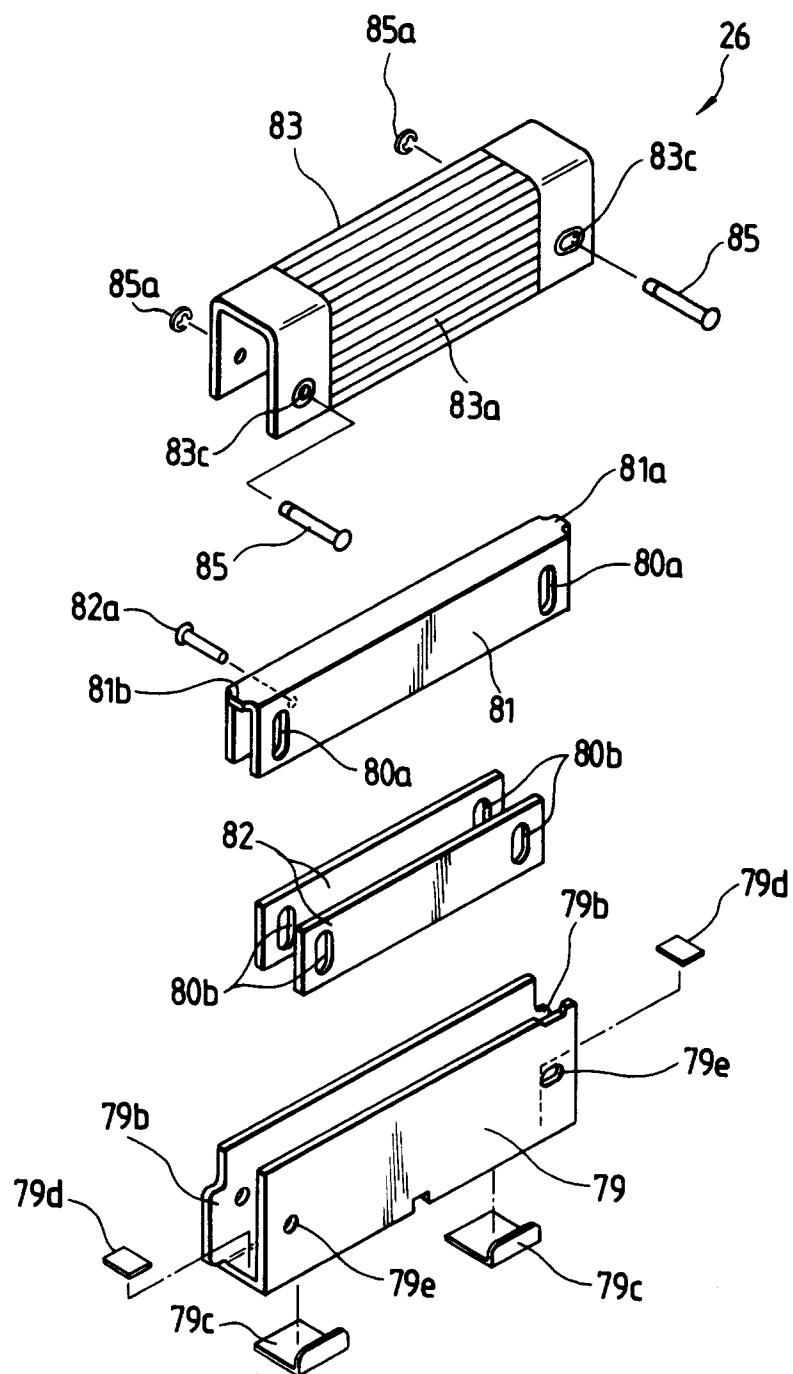


FIG. 12

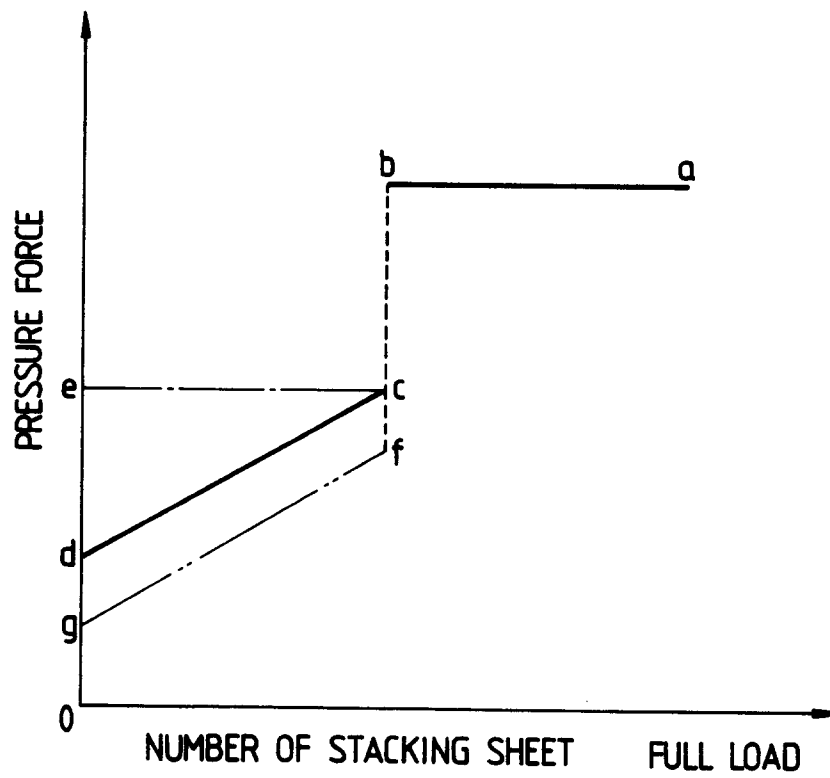


FIG. 13

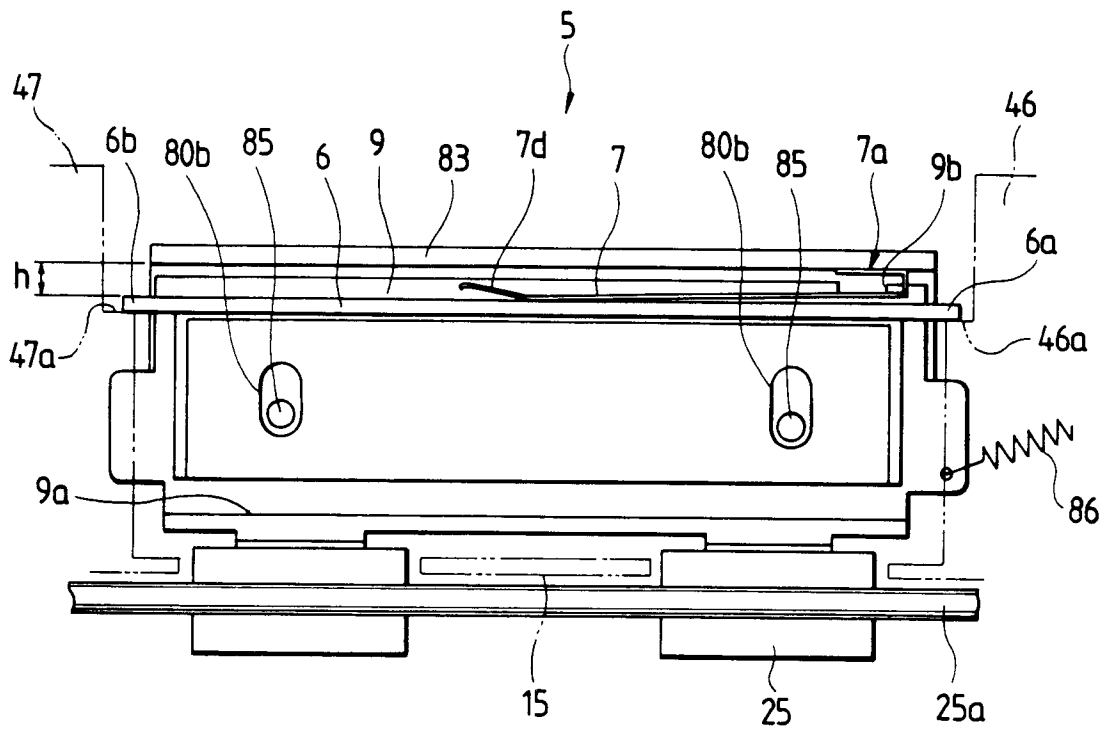


FIG. 14

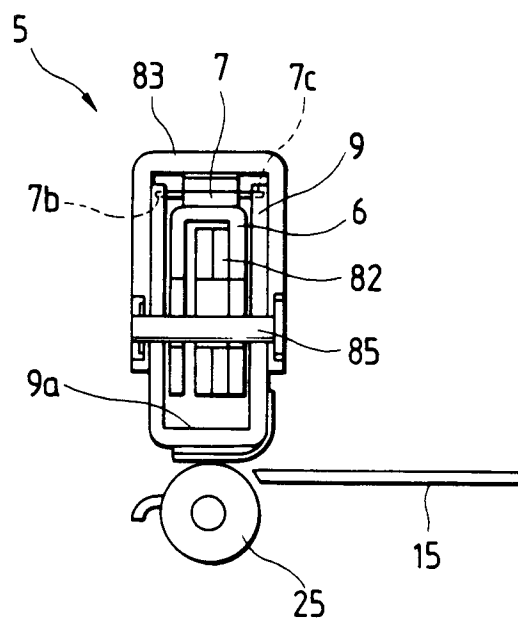


FIG. 15

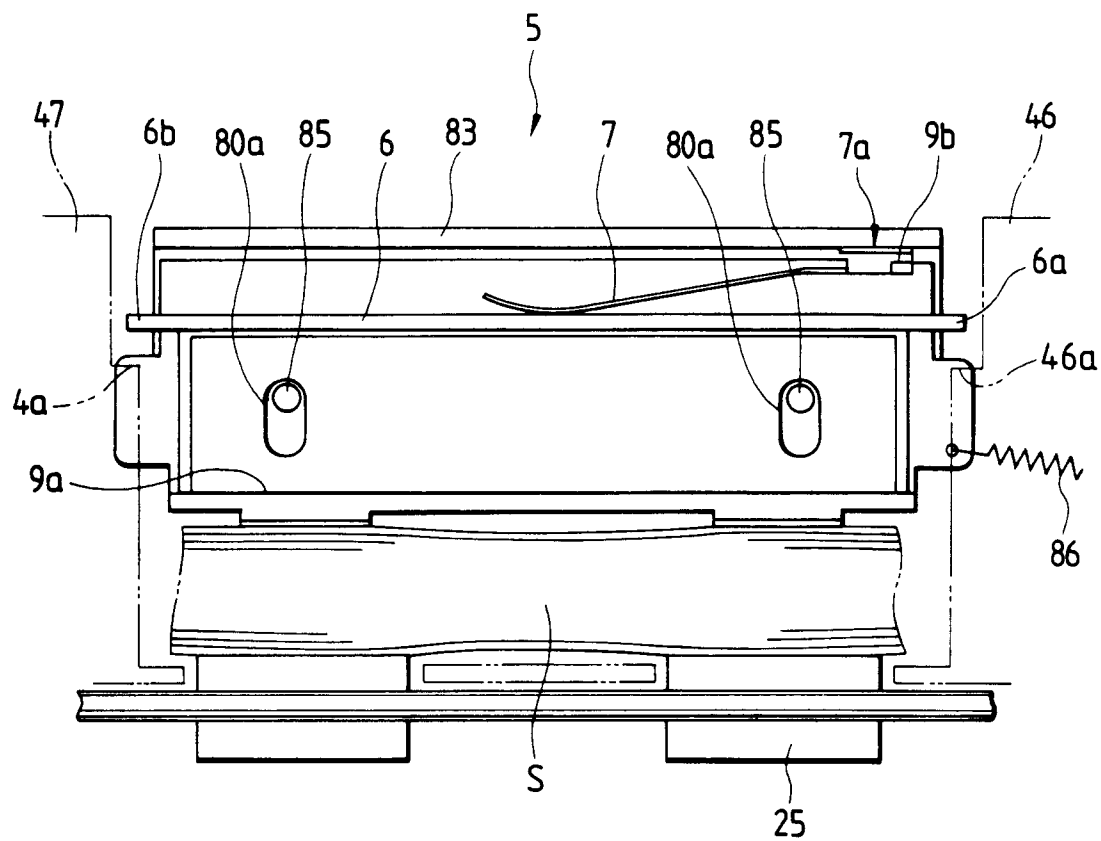


FIG. 16

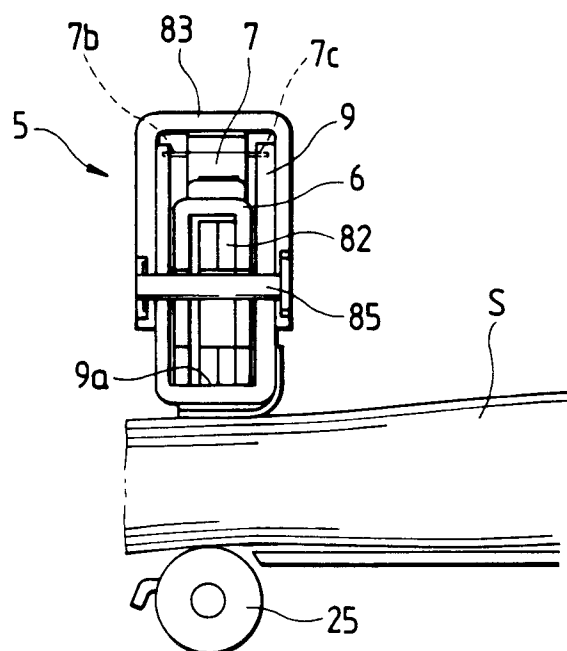


FIG. 17

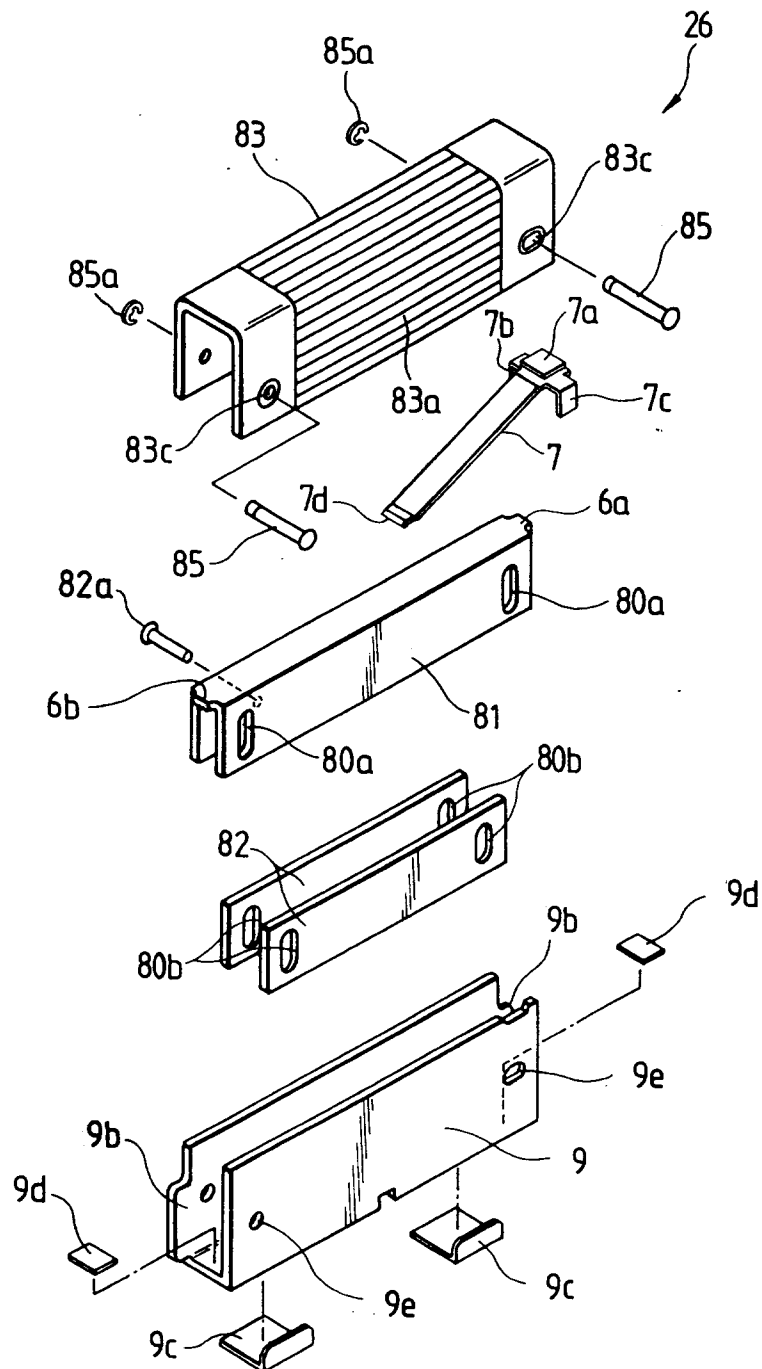


FIG. 18

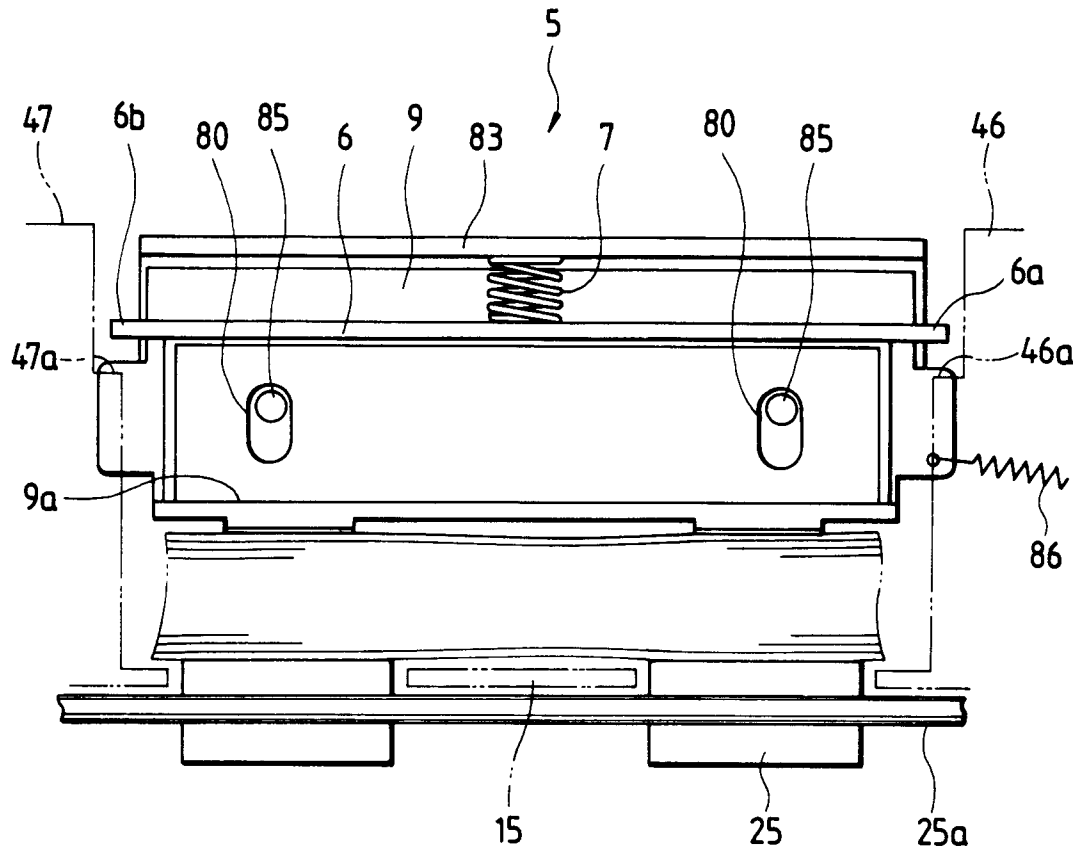


FIG. 19

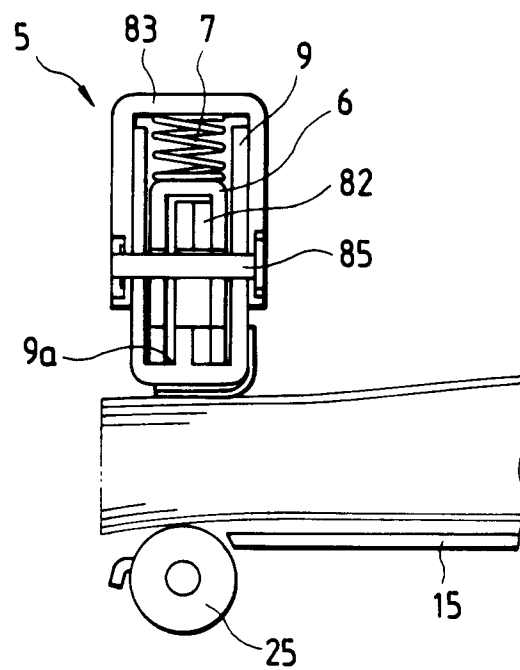


FIG. 20

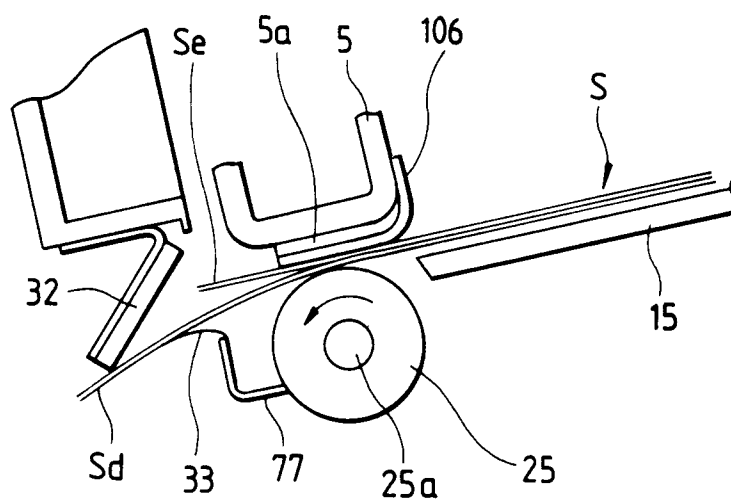


FIG. 21

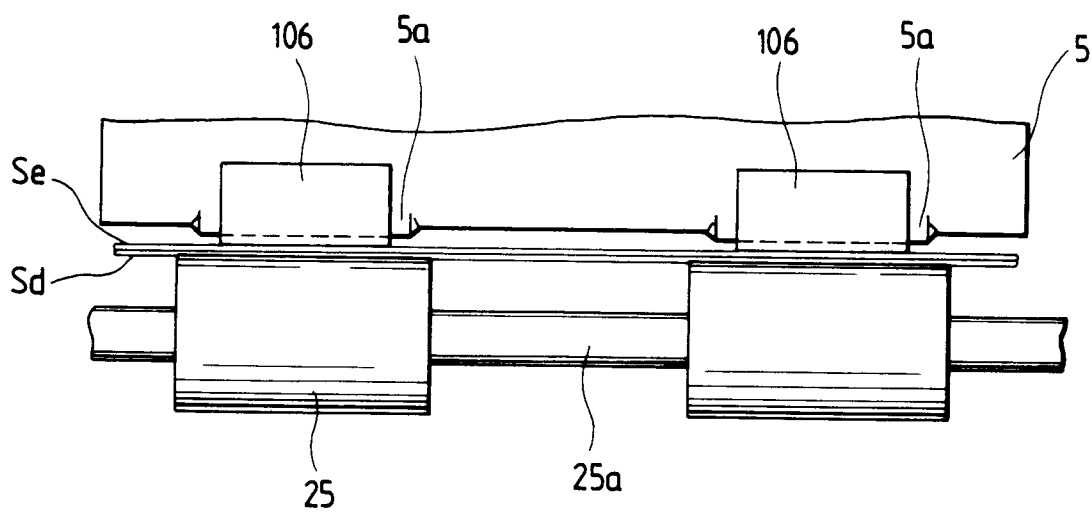


FIG. 22

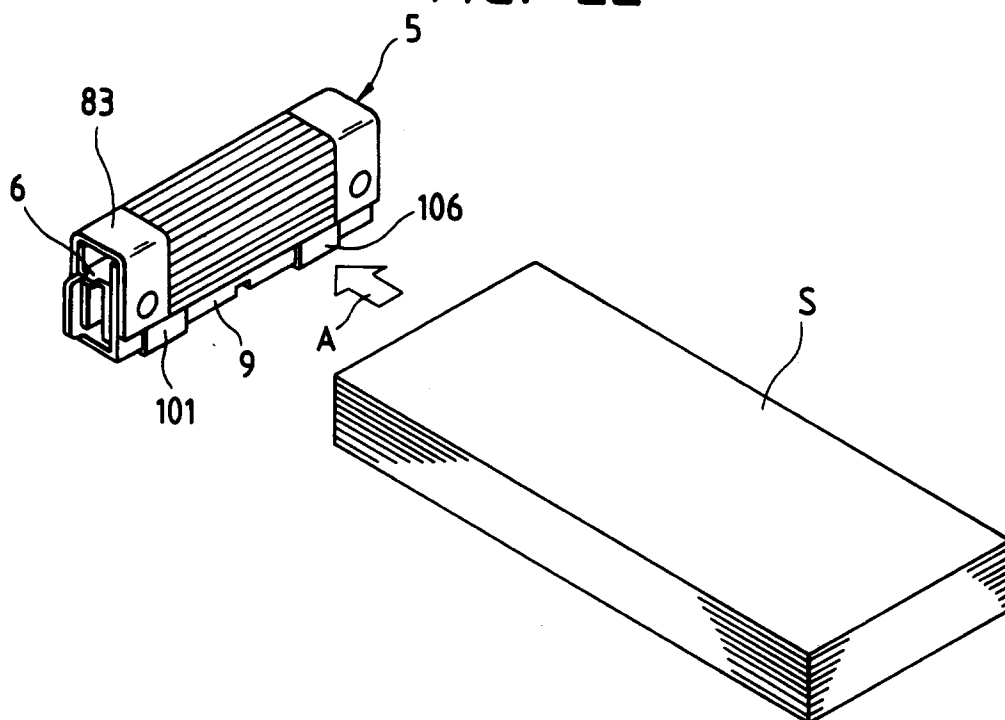


FIG. 23

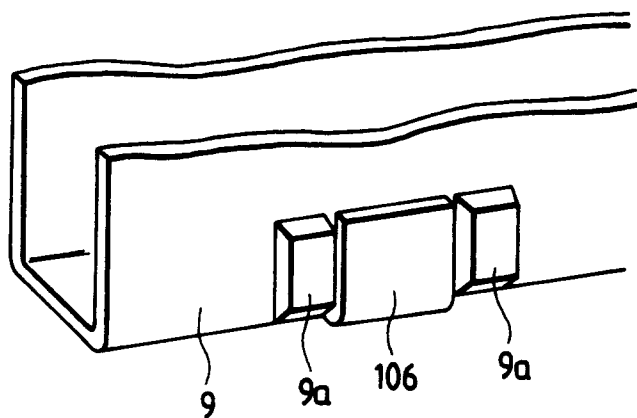


FIG. 24

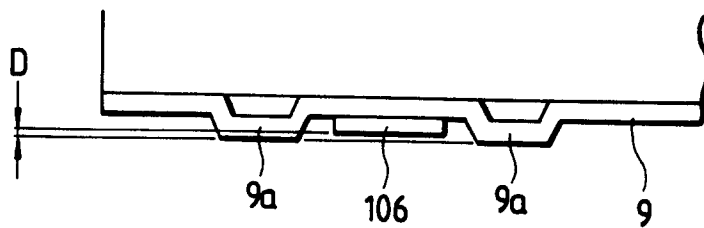


FIG. 25

