

12

EUROPEAN PATENT APPLICATION

21 Application number: 89201564.5

51 Int. Cl.⁵: A61H 33/14

22 Date of filing: 28.05.89

The title of the invention has been amended
(Guidelines for Examination in the EPO, A-III,
7.3).

30 Priority: 27.05.88 NL 8801360

43 Date of publication of application:
23.05.90 Bulletin 90/21

64 Designated Contracting States:
ES GR

71 Applicant: **Essaidi, Mohammed**
13, Hosingenhof
NI-5625 NJ Eindhoven(NL)


72 Inventor: **Essaidi, Mohammed**
13, Hosingenhof
NI-5625 NJ Eindhoven(NL)

74 Representative: **Timmermans, Anthonius**
C.Th., Ir. et al
European Patent Attorneys Octrooibureau
Zuid P.O. Box 2287
NL-5600 CG Eindhoven(NL)

54 **Therapeutic vaporized mixture and method for the preparation and use thereof.**

57 A novel method has been discovered for the preparation and application of a special vapourized mixture having therapeutical characteristics. This method has now been used for curing specific diseases in plant, human and animal cells by fully subjecting such affected cells to such vapourized mixture. This mixture is generated from a heated liquid, such as water, in which controllably a certain quantity of certain free gas particles e.g. hydrogen and oxygen is added, whereafter a chemical reaction takes place and a new material composition, specified as "Aquatilis", is created under simultaneous generation of heat. These free hydrogen and free oxygen gas particles with which the vapour mixture is enriched thereafter are kept in a state wherein diseased cell structures, are entirely and intensively surrounded by the "Aquatilis" mixture, and whereby during the treatment said mixture is kept in an enclosed space, e.g. a saunacabin (1). The mixture is kept at a predetermined elevated temperature by generating more free gas particles and maintaining in said space a predetermined vapour pressure, thereby forcing "Aquatilis" to attack e.g. chemical groups of so-called radicals which are considered to be found in certain diseased cell structures, thereby essentially and aggressively supporting and augmenting the inner cellular offensive system energy

against the presence of any noxious nuclei which affect the normal operational cell functions and destroying thereby such noxious nuclei entirely. The mixture has been successfully used to cure a.o. major diseases such as incurable multiple sclerosis, skin cancers and is believed to cure also patients from aids diseases.

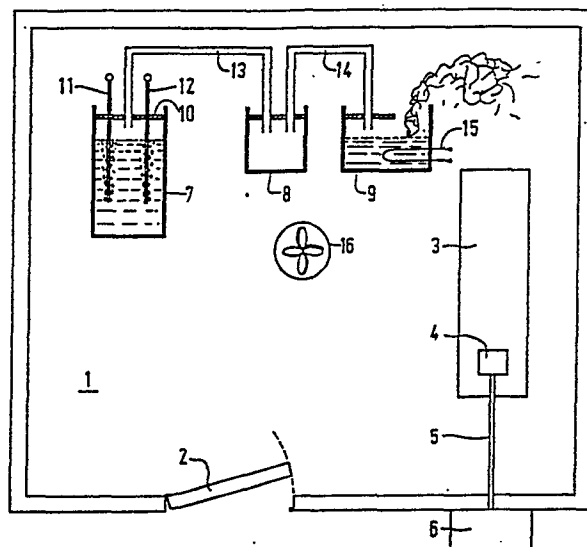

EP 0 369 496 A2

Method for the preparation and application of a special vapourized mixture, called "Aquatilis", having therapeutical characteristics, a vapourized mixture "Aquatilis" and a cabin for such application.

This invention relates to a method for the preparation and application of a special vapourized mixture having therapeutical characteristics to be used in curing specific diseases in plant, human and animal cells by fully subjecting such affected cells to such vapourized mixture, which mixture is generated from a heated liquid and in which controllably a certain quantity of certain gas particles is added to said mixture.

From British patent specifications 740 945 [1953] and 1 352 142 [1970] respectively therapeutic treatments and treatment cabinets are already known to cure certain human diseases by subjecting a patient to heated steam, oxygen or other gases like CO₂ [740 945] or by subjecting a patient to a mixture of air and water vapour [1 352 142] in both examples, an elevated temperature being used.

In French patent application 77 00272 [1977] a dermatologic or cosmetic treatment has been disclosed whereby a mixture of water vapour in which ozon is injected next to the addition of certain other cosmetic essential oils is applied for treatment of e.g. the human face.

None of the known methods however result in the creation of a special vapourized mixture having operational results which are of a highly unexpected level, since the combination of water vapour has always a known and predictable good effect on the opening of skin pores but never a surprising effect.

According to the invention however it has now been discovered that a vapourized mixture is generated from a heated liquid and in which controllably a certain quantity of certain free gas particles is added, a chemical reaction taking place and a new material, specified as "Aquatilis", being created under simultaneous generation of heat; these free hydrogen and free oxygen gas particles respectively, with which the vapour mixture is enriched thereafter being kept in a state wherein said supposedly diseased cells are entirely and intensively being surrounded by the "Aquatilis" mixture, and whereby during the treatment said mixture is kept in an enclosed space which it so voluminously occupies, and also keeping the mixture at a predetermined elevated temperature by generating more free gas particles and maintaining in said space a predetermined vapour pressure, thereby forcing "Aquatilis" to attack e.g. chemical groups of so-called radicals which are considered to be found in certain diseased cell structures, thereby essentially and aggressively supporting and augmenting the inner cellular offensive system energy against

the presence of any noxious nuclei which affect the normal operational cell functions and destroying thereby such noxious nuclei entirely.

Whereas in general it has hitherto been thought beneficial to use normal water vapour as a vehicle for the addition of certain gas particles, the invention provides further for a novel method for the preparation and application of a special vapourized mixture having certain desirable therapeutic characteristics characterized in that the liquid used is normal water which is transferred by heat generation into saturated steam vapour and the generation of both free hydrogen and free oxygen gas particles being obtained by the electrolysis of water, whereafter the generated gases are added to and mixed up respectively with the steam vapour to a predetermined and fully controllable mixture ratio, a chemical reaction taking place and a new material, specified "Aquatilis" being created.

To carry the invention into effect no special temperatures or pressures are needed and said mixture is generated under the conditions of generating steam at a temperature of about 100° Celsius [boiling water temperature] and at an air pressure in the enclosed space which is nearly equal to the outside air pressure whereas free hydrogen and free oxygen gas particles respectively are then fed into said space nearby the most intensive sources of steam generation in said space.

Apparently the novel method also provides for an absolutely novel therapeutic mixture, called hereby "Aquatilis", which consists of a vapour mixture at an elevated temperature, a predetermined pressure and certain additives mixed up with said vapour mixture, which additives comprise at least different free gas particles, preferably but not exclusively free hydrogen and free oxygen gas particles, said vapour mixture being maintained in an enclosed space.

Fuermore it has been discovered that according to the invention, said electrolysis is controllably carried out in a device containing normal water thereby using during the application of the method and for effecting such control metal electrodes of equal or different material characteristics and of equal or different lengths and at mutual different distances, whereby any required concentration or ratio of the vapour content and gas particles content [Aquatilis] can be realized by control and measuring device means.

In accordance with this new techniques described before, the invention also provides for an enclosed spaced to contain the generated and en-

riched vapour mixture "Aquatilis", which space is provided thereto with entrance door means, container means for the liquid to be vapourized, heat generating means and a free gas particles distribution means. In a preferred embodiment of the invention such an enclosed space may be shaped as a [sauna] cabin for treatment which is provided with general control and inspection means to carry out the novel method as described before.

Other provisions to enable a good therapeutical control if human patients are treated, provides for medical inspection equipment which should preferably be interconnected with control and inspection means which are located at the outside of the cabin.

Since it has been discovered that many variations in the extent of applicable treatments for entirely different situations or even similar situations may result in variable effects it is highly preferable to provide the cabin according to the invention with a device in such a way that all relevant data about the liquid to be vapourized, data about the electrolysis and any other relevant data [e.g. relating to the person, the plant or the animal, subjected to the operation of the novel method are collected and recorded by a central computing system unit which is located outside of the cabin.

During the various tests with the method and the cabin, it has been discovered that also the availability of a water shower inside the cabin appears most desirable whereas if the vertical inner cabin walls are carried out as mirrors, such mirrors may reflect a number of special lamp spot means which are fitted at the inner side of the cabin improving the effectiveness of the novel method as described before.

It is an advantage that the enriched vapourized "Aquatilis" mixture, applied to living creatures and/or cell structures, appears to have a range of therapeutic characteristics which have never before been discovered. Apart therefrom it also appears that in the event of experimental subjects being brought in contact with the "Aquatilis" mixture, thereafter they feel very much activated and refreshed.

It is believed that the effect of the vapourized mixture upon living creatures results from the fact that free hydrogen gas particles and free oxygen gas particles intrude or penetrate deeply into pores of the skin which are widely opened as a result of the steam vapour which serves as a vehicle means for the free gas particles.

Furthermore it is also believed that these free gas particles, which in itself are considered to be at least of a virulent character, thereby seem to cause the leucocytes of the blood to react in a very violent way against these intruding free gas par-

ticles. As a result an extra large quantity of such activated leucocytes rush upon the pretended or alleged intruders and consequently also rush upon other noxious nuclei which may be present in the blood as well and these attacked noxious nuclei may so be expelled from the body via the pores. For such treatment of human beings it can also be achieved e.g. by surgery, that the human blood containing noxious nuclei, is partly or totally treated outside the body, the treated blood again being brought in normal circulation afterwards.

Various tests according to the method as described have meanwhile been carried out and it is almost quite obvious that while using this vapourized "Aquatilis" mixture for treatment of diseases, most curing processes can so be shortened. Moreover it has been found that the invented novel method cures various diseases, such as inflammations of the bladder and the prostate, viral inflammations such as a cold and influenza, acne, eczema, come out of the hair, dandruff, varices, migraine and certain types of backaches e.g. suffered by pregnant women.

Other experienced advantages are: wrinkles in the skin disappear whereas redundant fat cells disappear also in surprisingly short time and fever disappears instantly. Tests are prepared now and will be carried out shortly to investigate the application of the invented novel method for curing aids patients since it is known that these patients suffer much as a result of the inactivity of the leucocytes. Recently tests have been carried out with persons suffering of the incurable disease of multiple sclerosis and the results were absolutely astonishing. At least cancers of the human skin can be totally cured and tests are now being carried out with persons who are nearly or almost totally in a lethal state of very serious cancers for which otherwise no existing medical treatment would be applicable anymore. First results obtained do assume that the application of the invented novel method brings these diseases at least to a stop and hopefully a continued treatment may even initiate some curing effect on such organs of the body which have already been seriously attacked, partly or fully, by cancer.

Another but not less surprising test achieved the total curing of a person who suffered the incurable disease of multiple sclerosis and which person happened to be in a very serious state of illness, having lost control over major functions already. A treatment of three weeks, each other day, of each time one hour at the most, resulted in the total absence of this disease! It is now also believed that the Parkinson's disease could similarly be cured this way.

It has also been discovered that certain plant diseases may easily be treated by the novel meth-

od and succesfull tests were carried out and achieved the disappearance of certain plant mycosis also.

The invention will now be described with reference to the accompanying drawing of a saunacabin type for treatment according to the invented method, which is given by way of example only.

An enclosed space **1**, which may be a saunacabin of a type which is normally available in the trade, comprises an entrance door means **2** and a bank **3** to comfort a patient when under treatment. The saunacabin **1** is provided also with medical indicator and checking means **4** which may e.g. comprise a blood pressure meter and a heart pulsation meter. These means **4** are interconnected by means of cables **5** contained in a conduct to a main control unit **6** from which the entire operation of the saunacabin **1** is watched. Schematically shown only in the saunacabin **1** are located the means for carrying out the electrolysis of water. A first container **7**, a second container **8** and a third container **9** are provided for. First container **7** is filled with water and it is closed by a non conducting lid **10** through which are carried two electrodes **11** and **12** respectively. The power supply to the electrodes **11**, **12**, not shown here, is interconnected to the control unit **6** and by switching on the power supply, the water in the first container **7** is electrolytically decomposed into hydrogen and oxygen respectively. Preferably use is made of electrodes of antimagnetic material to prevent lime deposits. Free hydrogen and oxygen gas particles generated by the electrolysis of the water are diffusing through the interconnecting tube **13** to the second container **8** to cause the deposition of impurities which may have been carried away with the free gas particles from the electrolytic process. Also interconnected between the second container **8** and the third container **9** is another tube **14**. This container **9** is filled with water to be vapourized to steam by means of heat generator means **15** which are also electrically interconnected (not shown here) to the main control unit **6**. Once the operator has switched on the power to the electrodes **11**, **12** and also to the heat generator means **15**, the method for the preparation of the "Aquatilis" vapourized mixture is put in operation as soon as the operating temperatures are reached and the free gas particles from the container **7** mix up with the hot steam which is generated in container **9** whereafter the saunacabin **1** is intensively filled up with the "Aquatilis" mixture and the person (or plant or animal) in the saunacabin **1** is intensily "attacked" by said mixture for therapeutic curing treatment. The operator who operates the main control unit **6** may also actuate a fan **16** to let fresh air in the saunacabin **1** partly mix up with the "Aquatilis" mixture, depending on the individual

necessity to apply for a gradual increase or decrease of the prompt effectiveness of the treatment to a person, an animal or a plant or the like.

Although in this embodiment of the saunacabin **1** three containers **7**, **8**, and **9** are shown, it will e.g. also be possible to use only one container **7** in which the electrolytic process and the heat generation are simultaneously carried out. For practical reasons it has been found more safely to locate the steam generator inside the saunacabin **1** and to provide for the electrolysis of the water outside of the saunacabin **1** and simply pass the tube **13**, **14** through the cabin wall.

In a particularly practical embodiment of a saunacabin **1** it has been discovered that it should at the inside be provided with stone tiles which are to be backed up by wall having very good isolating characteristics. It has also been found that obviously a much better efficiency can be obtained with the method by providing at least the vertical inner cabinwalls with reflecting mirror material in conjunction with special spot lights (not shown here) which apparently than also have a much greater positive effect on the duration of the treatment. For further comfort of the user of the saunacabin it has been found an advantage to install a commonly known water shower, the purpose of which need not be further described here.

Since the invented novel method requires a rather complex operation and manipulation to master various data like temperature, pressure, patient data, environmental data, water data and power data, the main control unit should preferably be controlled by means of a microprocessor which can be programmed for reliable saunacabin operation.

Under circumstances there is not always need for a large treatment cabin for e.g. more than one person. Enclosed spaces of variable shapes can be utilized as well, particularly those which fit very good around parts of the body of human beings and of animals whereas for plant treatment a treatment cabin could be provided e.g. with shelves. Insofar as treatment by the "Aquatilis" vapourized mixture need not expressly go through the lungs of a patient, a provision can be made to comfort a patient in the saunacabin by making available breathing apparatus connections at the inner side of the cabin easily controllable by the patient himself.

Claims

1. Method for the preparation and application of a special vapourized mixture having therapeutical characteristics to be used in curing specific diseases in plant, human and animal cells by fully

subjecting such affected cells to such vapourized mixture, which mixture is generated from a heated liquid and in which controllably a certain quantity of certain free gas particles is added, a chemical reaction taking place and a new material, specified as "Aquatilis", being created under simultaneous generation of heat; these free hydrogen and free oxygen gas particles respectively, with which the vapour mixture is enriched thereafter being kept in a state wherein said supposedly diseased cells are entirely and intensively being surrounded by the "Aquatilis" mixture, and whereby during the treatment said mixture is kept in an enclosed space which it so voluminously occupies, and also keeping the mixture at a predetermined elevated temperature by generating more free gas particles and maintaining in said space a predetermined vapour pressure, thereby forcing "Aquatilis" to attack e.g. chemical groups of so-called radicals which are considered to be found in certain diseased cell structures, thereby essentially and aggressively supporting and augmenting the inner cellular offensive system energy against the presence of any noxious nuclei which affect the normal operation cell functions and destroying thereby such noxious nuclei entirely.

2. Method for the preparation and application of a special vapourized mixture having certain desirable therapeutic characteristics according to claim 1, characterized in that the liquid used is normal water which is transferred by heat generation into saturated steam vapour and the generation of both free hydrogen and free oxygen gas particles being obtained by the electrolysis of water, whereafter the generated gases are added to and mixed up respectively with the steam vapour to a predetermined and fully controllable mixture ratio, a chemical reaction taking place and a new material, specified "Aquatilis" being created.

3. Method to generate a vapourized mixture as described in any one of the foregoing claims 1-2, characterized in that said mixture is generated under the conditions of generating steam at a temperature of about 100° Celsius and at an air pressure in the enclosed space which is nearly equal to the outside air pressure whereas free hydrogen and free oxygen gas particles respectively are then fed into said space nearby the most intensive sources of steam generation in said space.

4. Therapeutic vapour mixture consisting of a vapour mixture at an elevated temperature a predetermined pressure and certain additives mixed up with said vapour mixture, which additives comprise at least different gas particles, preferably but not exclusively free hydrogen and free oxygen gas particles, said vapour mixture being maintained in an enclosed space.

5. Method according any one of the foregoing

claims 1-3, characterized in that said electrolysis is controllably carried in a device containing normal water thereby using metal electrodes of equal or different material characteristics and of equal or different lengths and at mutual different distances, whereby any required concentration or ratio of the vapour content and gas particles content can be realized by control and measuring device means.

6. Enclosed space to contain the generated and enriched vapour mixture "Aquatilis", which space is provided with entrance door means, container means for the liquid to be vapourized, heat generating means and a free gas particles distribution means.

7. An enclosed space which is shaped as a cabin for treatment according to claim 6, characterized in that this cabin is provided with general control and inspection means to carry out the method of any of the foregoing claims.

8. Cabin for the application of a curing treatment while using the method of any of the foregoing claims 1-3 and 5, characterized in that said cabin is provided with medical inspection equipment interconnected with control and recording means which are located at the cabin's outside.

9. Cabin according to claim 8, characterized in that all relevant data about the liquid to be vapourized, data about the electrolysis and any other relevant data on the operation of the method falling under the scope of claims 1-3 and 5 are collected and recorded by a central computing system unit which is located outside of the cabin.

10. Cabin according to claim 9, characterized in that it is also provided with a water shower whereas the vertical inner cabin walls are preferably carried out as mirrors which mirrors may reflect a number of special lamp spot means which are fitted at the inner side of the cabin improving the effectiveness of the method as described in claims 1-3 and 5 respectively.

