

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11) Publication number:

**0 375 273**  
**A2**

(12)

# EUROPEAN PATENT APPLICATION

(21) Application number: 89313064.1

(51) Int. Cl.<sup>5</sup>: **C21D 8/04, C22C 38/00**

(22) Date of filing: 14.12.89

(30) Priority: 19.12.88 JP 318404/88  
26.10.89 JP 277158/89

(43) Date of publication of application:  
27.06.90 Bulletin 90/26

(84) Designated Contracting States:  
BE DE ES FR GB IT NL SE

(71) Applicant: **KAWASAKI STEEL CORPORATION**  
1-28, Kitahonmachi-dori 1-chome  
Chuo-ku Kobe City(JP)

(72) Inventor: Yamazaki, Yoshio Technical  
Research Division  
Kawasaki Steel Corporation 1, Kawasaki-Cho  
Chiba City Chiba Pref.(JP)  
Inventor: Okada, Susumu Technical Research  
Division  
Kawasaki Steel Corporation 1, Kawasaki-Cho  
Chiba City Chiba Pref.(JP)  
Inventor: Satoh, Susumu Technical Research  
Division  
Kawasaki Steel Corporation 1, Kawasaki-Cho  
Chiba City Chiba Pref.(JP)  
Inventor: Kato, Toshiyuki Technical Research  
Division  
Kawasaki Steel Corporation 1, Kawasaki-Cho  
Chiba City Chiba Pref.(JP)  
Inventor: Abe, Hideo Technical Research  
Division  
Kawasaki Steel Corporation 1, Kawasaki-Cho  
Chiba City Chiba Pref.(JP)  
Inventor: Nishimura, Keiji Chiba Works  
Kawasaki Steel Corporation 1, Kawasaki-Cho  
Chiba City Chiba Pref.(JP)

(74) Representative: Overbury, Richard Douglas et  
al  
**HASELTINE LAKE & CO** Hazlitt House 28  
Southampton Buildings Chancery Lane  
London WC2A 1AT(GB)

**EP 0 375 273 A2**

(54) Formable thin steel sheets and method of producing the same.

(57) A formable thin steel sheet such as hot rolled sheet, cold rolled sheet or surface treated sheet comprises not more than 0.003 wt% of C, not more than 1.0 wt% of Si, not more than 1.0 wt% of Mn, not more than 0.15 wt% of P, not more than 0.020 wt% of S, not more than 0.0045 wt% of O, not more than 0.0020 wt% of N, not more than 0.15 wt% of Al provided that a ratio of Al/N is not less than 30, and the balance being Fe and inevitable impurities, and has not only improved formability for press forming, deep drawing or the like but also improved fatigue resistance as a welded joint.

## FORMABLE THIN STEEL SHEETS AND METHOD OF PRODUCING THE SAME

This invention relates to hot rolled steel sheets, cold rolled steel sheets and surface treated steel sheets having not only improved formability for press forming, deep drawing or the like but also improved fatigue resistance at a welded joint.

In general, the thin steel sheets are widely used for press forming, deep drawing and the like. However, it is required to have properties in accordance with use purposes in addition to the above formability. For example, the thin steel sheets are frequently subjected to a welding, particularly, spot welding irrespective of cold rolled sheets, hot rolled sheets and surface treated sheets.

Particularly, the thin steel sheet is used for automobiles. In this case, the spot number in the spot welding per one vehicle amounts to several thousand points and also stress concentration is apt to be caused in the welded joint portion when a load is applied from exterior. That is, the fatigue breakage through the repetition of such a stress concentration during the running of the vehicle is caused in the welded joint portion, resulting in the occurrence of serious accidents. In the formable thin steel sheet, therefore, the fatigue resistance of the welded joint is a very important characteristic.

On the other hand, extreme-low carbon steels having a formability higher than that of the conventional low carbon steel are frequently used for the thin steel sheet. However, the fatigue strength of the extreme-low carbon steel may be lowered due to poor texture of heat-affected zone in the welded joint in accordance with the conditions.

Moreover, it is demanded to more improve the safety of machines and structures such as automobiles and the like as a worldwide theme, and consequently it becomes significant to enhance the fatigue strength of the welded joint as compared with the case of using the conventional steel sheets.

In this connection, there are proposed various steel sheets in Japanese Patent laid open No. 54-135616, No. 53-52222, No. 61-246344, No. 58-25436, No. 53-137021, No. 58-110659 and the like. However, all of these techniques disclose the mechanical properties of the cold rolled steel sheet but are silent in the fatigue strength of the welded joint.

Furthermore, Japanese Patent laid open No. 63-317625 discloses a method of controlling amounts of Ti, Nb and B to particular ranges for improving the fatigue resistance of the welded joint in the steel sheet. In this method, however, the tensile shear fatigue properties in the spot welded zone are considered, but there is no consideration on the cross tensile fatigue properties. Moreover, Japanese Patent laid open No. 225748 discloses cold rolled steel sheets having excellent fatigue properties, but in this case the fatigue properties of the sheet itself are merely improved.

It is, therefore, an object of the invention to provide thin steel sheets having not only an improved formability for press forming, deep drawing or the like but also excellent fatigue resistance at welded joints, particularly fatigue resistance in spot welding.

According to a first aspect of the invention, there is the provision of a formable thin steel sheet having an improved fatigue resistance at welded joints, comprising not more than 0.003 wt% of C, not more than 1.0 wt% of Si, not more than 1.0 wt% of Mn, not more than 0.15 wt% of P, not more than 0.020 wt% of S, not more than 0.0045 wt% of O, not more than 0.0020 wt% of N, not more than 0.15 wt% of Al provided that a ratio of Al/N is not less than 30, and the balance being Fe and inevitable impurities.

In a preferred embodiment of the first invention, the steel sheet contains at least one of 0.001-0.025 wt% of Nb and 0.0002-0.0020 wt% of B, or further contains at least one of not more than 0.10 wt% of Ti, not more than 0.10 wt% of V, not more than 0.10 wt% of Zr, not more than 0.10 wt% of Ca, not more than 1.0 wt% of Cr, not more than 1.0 wt% of Cu and not more than 1.0 wt% of Ni.

According to a second aspect of the invention, there is the provision of a method of producing formable thin steel sheets having an improved fatigue resistance at welded joints, which comprises hot rolling a sheet of steel comprising not more than 0.003 wt% of C, not more than 1.0 wt% of Si, not more than 1.0 wt% of Mn, not more than 0.15 wt% of P, not more than 0.020 wt% of S, not more than 0.0045 wt% of O, not more than 0.0020 wt% of N, not more than 0.15 wt% of Al provided that a ratio of Al/N is not less than 30, and the balance being Fe and inevitable impurities at a finish temperature of not lower than 600°C, cold rolling the hot rolled sheet at a rolling reduction of not less than 60% and then subjecting the cold rolled sheet to a recrystallization annealing at a temperature of not higher than  $A_{c3}$  transformation point.

In preferred embodiments of the second invention, the hot rolled sheet is coiled at a coiling temperature of not lower than 200°C after the hot rolling, and the resulting thin steel sheet is subjected to a galvanizing or electroplating.

The invention will be described with reference to the accompanying drawings, wherein:

Fig. 1 is a graph showing influence of oxygen amount and Al/N ratio upon the value of tensile shear

fatigue limit in the spot welded joint of the cold rolled steel sheet;

Fig. 2 is a graph showing influences of oxygen amount and Al/N ratio upon the value of tensile shear fatigue limit in the spot welded joint of the hot rolled steel sheet;

Fig. 3 is a graph showing an influence of oxygen amount upon the value of tensile shear fatigue limit in the spot welded joint when Al/N ratio of the hot rolled steel sheet is about 37;

Fig. 4 is a schematically sectional view of a specimen used for tensile shear fatigue test of spot welded joint showing a position of crack produced in the fatigue test;

Fig. 5 is a graph showing influences of oxygen amount and Al/N ratio upon the value of cross tensile fatigue limit in the spot welded joint;

Figs. 6a and 6b are graphs showing an influence of Al/N ratio upon values of cross tensile fatigue limit and tensile shear fatigue limit in the spot welded joint when oxygen amount is about 0.0030 wt%; and

Figs. 7a and 7b are schematic views showing modes of spot welded specimen in the tensile shear fatigue test and cross tensile fatigue test, respectively.

The inventors have aimed at a point that there are less reports on the influence of steel component upon the fatigue properties though the fatigue properties of welded joints in the thin steel sheet are very important even in articles using such steel sheet and made various studies with respect to the influence of steel components on the fatigue properties of the welded joint, particularly fatigue properties of the spot welded joint, and found out the following knowledges.

At first, the invention is described with respect to experimental results leading in the success of the invention. Moreover, the fatigue test for the spot welded joint is carried out by a fatigue test method of the spot welded joint according to JIS Z3138, and the fatigue limit value means an upper limit of loading range when a repeat number of loading applied to the test specimen is 10,000,000 times.

In Fig. 1 are shown a relationship among oxygen amount, Al/N ratio and tensile shear fatigue limit value at the spot welded joint in a cold rolled steel sheet of 0.8 mm in thickness. The chemical composition of steels used in the fatigue test is shown in the following Table 1, and the conditions of the spot welding are shown in the following Table 2. Moreover, the steel sheet was hot rolled at a finish temperature of about 900 °C, cold rolled at a rolling reduction of 75-80% and continuously annealed at a temperature of 820-840 °C.

In Fig. 1, a shadowed area shows a region that the fatigue limit value is higher by 10% or more than that of the conventional low carbon aluminum killed and box annealed steel sheet (tensile shear fatigue limit: 82 kgf), which corresponds to a region that the oxygen amount is not more than 0.0045 wt% and the Al/N ratio is not less than 30.

Table 1

(wt%)							
Kind of steel	C	Si	Mn	P	S	Nb	B
Nb, B not added	0.0009~0.0014	0.01	0.1	0.015	0.01	-	-
Nb, B added	0.0008~0.0013	0.01	0.1	0.015	0.01	0.003~0.006	0~0.0008
low carbon steel *	0.038	0.02	0.22	0.018	0.013	-	-

\* comparative steel

Table 2

Sample size		Welding conditions			
width	length	chip	welding force	welding current	Average nugget diameter
(mm)	(mm)				(mm)
40	150	Cr-Cu, 4.8 $\phi$ mm, CF model	200 kgf	8.5~9.5 kA	5.0

In Fig. 2 is shown a relationship among oxygen amount, Al/N ratio and tensile shear fatigue limit value at the spot welded joint in a hot rolled steel sheet of 2.6 mm in thickness. The chemical composition of steels used in the fatigue test is shown in the following Table 3, and the conditions of the spot welding are shown in the following Table 4. Moreover, the steel sheet was hot rolled at a finish temperature of about 900 °C and coiled at a coiling temperature of 550 °C.

In Fig. 2, a shadowed area shows a region that the fatigue limit value is higher by 10% or more than that of the conventional low carbon aluminum killed and hot rolled steel sheet (tensile shear fatigue limit: 168 kgf), which corresponds to a region that the oxygen amount is not more than 0.0045 wt% and the Al/N ratio is not less than 30 likewise the case of the cold rolled sheet.

Table 3

(wt%)							
Kind of steel	C	Si	Mn	P	S	Nb	B
Nb, B not added	0.0009~0.0015	0.01	0.1	0.015	0.01	-	-
Nb, B added	0.0007~0.0013	0.01	0.1	0.015	0.01	0.003~0.008	0~0.0010
low carbon steel *	0.032	0.02	0.25	0.018	0.013	-	-

\* comparative steel

Table 4

Sample size		Welding conditions			
width	length	chip	welding force	welding current	Average nugget diameter
(mm)	(mm)				(mm)
50	180	Cr-Cu, 9 $\phi$ mm, CF model	650 kgf	12~14 kA	10.0

In Fig. 3 is shown a relationship between tensile shear fatigue limit value and oxygen amount when the Al/N ratio is about 37, from which it is clear that the fatigue limit value higher than the conventional low carbon aluminum killed and hot rolled steel sheet (tensile shear fatigue limit: 168 kgf) is obtained when the O amount is not more than 0.0045 wt%.

In these tests, the breakage due to the fatigue results from the occurrence of cracks generated at heat-affected zone as shown in Fig. 4, in which letter A is a position of crack generated, letter B a nugget portion, letter C a heat-affected zone and letter D a thin steel sheet.

In order to elucidate these reasons, the inventors have investigated a hardness distribution in a section of a welded zone on a specimen having a high fatigue limit value and found that the hardness difference

ranging from the fused zone to the heat-affected zone is small as compared with the steel sheet having a low fatigue limit value and is smooth in the distribution. From this fact, it is considered that such a small hardness difference effectively acts to the occurrence of fatigue cracks and the propagation thereof due to stress concentration in the welded joint portion under stress loading.

Furthermore, it has been found from Figs. 1-3 that the fatigue limit value becomes higher in steel sheets containing at least one of Nb and B within a proper amount.

On the other hand, a cold rolled Ti-containing steel sheet of 0.7 mm in thickness having a chemical composition as shown in the following Table 5 was welded under spot welding conditions as shown in the following Table 6, and then a cross tensile fatigue test was made thereto. In this case, the steel sheet was hot rolled at a finish temperature of about 900 °C, cold rolled at a rolling reduction of 75-80% and continuously annealed at a temperature of 820-840 °C.

Table 5

(wt%)								
Kind of steel	C	Si	Mn	P	S	Ti	Nb	B
not added	0.0009/0.0018	0.01	0.1	0.015	0.01	-	-	-
Ti added steel	0.0008/0.0015	0.01	0.1	0.015	0.01	0.026/0.052	-	-
Ti, Nb, B added steel	0.0006/0.0014	0.01	0.1	0.015	0.01	0.022/0.048	0.003/0.018	0/0.0012
low carbon steel *	0.032	0.02	0.25	0.018	0.013	-	-	-

\* comparative steel

Table 6

Sample size		Welding conditions			Average nugget diameter
width	length	chip	welding force	welding current	
(mm)	(mm)				(mm)
50	150	Cr-Cu, 4.5 φmm, CF model	165 kgf	7.2~7.9 kA	4.0

In this test, a relation of oxygen amount and Al/N ratio to the cross tensile fatigue limit value is shown in Fig. 5. From Fig. 5, it has been found that the cross tensile fatigue limit value becomes considerably high when the oxygen amount and Al/N ratio in the Ti-containing steel and Ti, Nb and B containing steel are within ranges shown by a shadowed region, that is, the oxygen amount is not more than 0.0045 wt% and the Al/N ratio is not less than 30.

In Fig. 6a is shown a relationship between cross tensile fatigue limit and Al/N ratio when the oxygen amount is 0.0030 wt%. As seen from Fig. 6a, in the Ti-containing steel and Ti-Nb-B containing steel, the high fatigue limit value is obtained when the Al/N ratio is not less than 30. Furthermore, it is understood from the simultaneously conducted tensile shear fatigue test that the addition of Ti or Ti-Nb-B does not affect the fatigue limit as shown in Fig. 6b.

Moreover, similar results are obtained in the hot rolled steel sheets.

The reason why the excellent cross tensile fatigue limit value is obtained under the above conditions is considered as follows. That is, the breakage due to fatigue is led from the cracks generated at the heat-affected zone even in the cross tensile fatigue test. In case of Ti-containing steel, it is considered that the solid soluted Ti or Ti series precipitate acts to improve the toughness of the heat-affected zone, whereby the cross tensile fatigue properties are improved.

And also, it has been found that the similar effect is obtained by adding at least two of Ti, V, Zr, Ca, Cr, Cu and Ni within proper ranges in addition to the steel containing only Ti.

For the reference, the methods of tensile shear and cross tensile fatigue tests using spot welded specimens are schematically shown in Figs. 7a and 7b, respectively. As seen from Figs. 7a and 7b, the deformation mode is largely different between both the test methods.

The reason why the chemical composition of the steel used in the invention is limited to the above range will be described below.

C: The C amount should be considerably lower than that of the conventional low carbon steel in order to obtain steels having good elongation and r-value. Furthermore, the fatigue resistance becomes advantageously improved as the C amount reduces in the steel according to the invention. Therefore, the C amount is not more than 0.003 wt%, preferably not more than 0.0015 wt%.

Si: The Si amount should be not more than 1.0 wt% because when the amount exceeds 1.0 wt%, the elongation and drawability of the steel sheet are degraded.

Mn: The excessive addition of Mn degrades the elongation and drawability of the steel sheet likewise Si, so that the Mn amount should be not more than 1.0 wt%.

P: When the P amount exceeds 0.15 wt%, P segregates into the grain boundary to cause brittleness, so that it should be not more than 0.15 wt%.

S: When the S amount is too small, the descaling property is degraded to make the surface properties bad, so that the lower limit is 0.0035 wt%. While, when the amount exceeds 0.020 wt%, the corrosion resistance is considerably degraded, so that the upper limit is 0.020 wt%.

O: The O amount is particularly important in the invention because it is considered that O at solid soluted state or in form of oxide affects the occurrence and propagation of cracks. Therefore, in order to obtain the fatigue properties higher than those of the conventional low carbon steel sheet, the O amount is necessary to be not more than 0.0045 wt%. Preferably, it is not more than 0.0035 wt%.

N: As the N amount becomes larger, the Al amount required becomes excessive to degrade the surface properties as mentioned later. Therefore, the N amount is not more than 0.0020 wt%, preferably not more than 0.0017 wt%.

Al: The Al amount is also important in the invention because it is considered that the fatigue properties are improved by an influence of distribution state of solid soluted Al or AlN precipitate upon the structure of the heat-affected zone. Therefore, it is closely related to the N amount. In order to improve the fatigue properties of the welded joint, it is required to have Al (wt%)/N (wt%) ratio of not less than 30. Moreover, when the Al amount is too large, the surface properties are degraded, so that the upper limit is 0.15 wt%.

Nb, B: These elements are effective for the improvement of fatigue properties, but when the amount to be added becomes excessive, the recrystallization temperature undesirably rises. Therefore, at least one of Nb and B may be added within ranges of  $0.001 \text{ wt\%} \leq \text{Nb} \leq 0.025 \text{ wt\%}$  and  $0.0002 \text{ wt\%} \leq \text{B} \leq 0.0020 \text{ wt\%}$ , respectively, for improving the fatigue properties.

Ti, V, Zr, Ca, Cr, Cu, Ni: It is considered that each of these elements affects the structure of the heat-affected zone at a solid solution state or a precipitate state to enhance the fatigue properties. However, the excessive addition degrades the quality of the steel sheet. Therefore, at least one of Ti, V, Zr, Ca, Cr, Cu and Ni may be added within ranges of not more than 0.10 wt% in each of Ti, V, Zr and Ca and not more than 1.0 wt% in each of Cr, Cu and Ni, respectively, for particularly improving the cross tensile fatigue properties.

The invention will be described below with respect to preferable conditions in the production of formable thin steel sheets using the above chemical composition of steel as a starting material.

In the production of hot rolled steel sheets, the finish temperature is limited to not lower than 600 °C because when the finish temperature in the hot rolling is lower than 600 °C, the deep drawability is degraded. Furthermore, the coiling temperature is limited to not lower than 200 °C because when the coiling temperature is lower than 200 °C, the quality is degraded.

In the production of cold rolled steel sheets, the finish temperature at the hot rolling step is not lower than 600 °C, preferably not lower than 800 °C because when it is lower than 600 °C, the deep drawability is degraded. Furthermore, the rolling reduction at the cold rolling step is not less than 60% in order to obtain a satisfactory formability. Moreover, the annealing temperature at the continuous annealing step after the cold rolling is not higher than  $A_{C3}$  point because when it is higher than  $A_{C3}$  point, the crystal grains become coarse. Particularly, the lower limit of the annealing temperature is not critical, but it is preferably higher by 30 °C than the recrystallization temperature. As the annealing method, a box annealing may be used.

Of course, these thin steel sheets may be subjected to a skin pass rolling within a usual range, i.e. about few percent of the sheet gauge (mm) for correcting the sheet shape and the like.

Even if the thin steel sheet is subjected to a galvanizing or an electroplating, the breakage in the fatigue test is generated from the heat-affected zone, so that according to the invention, the thin steel sheet may be subsequently subjected to a surface treatment such as galvanizing, electroplating or the like.

As the welding method, the fatigue strength in the heat-affected zone comes into problem in MIG method, TIG method and the like in addition to the spot welding, so that the invention is effective for improving the fatigue strength of welded joint even in these welding methods.

The following examples are given in illustration of the invention and are not intended as limitations thereof.

### Example 1

A steel having a chemical composition as shown in the following Table 7 was melted to form a slab, which was hot rolled at a finish temperature of 850-900 °C, cold rolled at a rolling reduction of 71-78% and continuously annealed at an annealing temperature of 790-830 °C to obtain a cold rolled steel sheet of 0.8 mm in thickness. Moreover, the steel No. 18 was the conventional low carbon aluminum killed steel and was produced by box annealing.

The steel Nos. 1-9 were acceptable in the invention, among which the steel Nos. 1 and 8 were subjected to a galvanizing and electroplating, respectively.

The steel Nos. 10-17 were comparative examples, whose chemical compositions were outside the range of the invention.

The mechanical properties and tensile shear fatigue limit value at spot welded joint portion (upper limit of loading range when the repeat number of tensile loading was 10,000,000) were measured with respect to these cold rolled steel sheets to obtain results as shown in the following Table 8.

Moreover, a specimen of JIS Z2201 No. 5 was used in the tensile test, and the spot welding conditions and tensile shear fatigue test conditions were the same as in Table 2.

Table 7

No.	Chemical composition (wt%)									Remarks
	C	Si	Mn	P	S	N	Al	O	others	
1	0.0007	0.01	0.21	0.015	0.008	0.0013	0.051	0.0018		acceptable example
2	0.0021	0.02	0.26	0.021	0.015	0.0007	0.075	0.0023		"
3	0.0015	0.6	0.18	0.016	0.012	0.0011	0.066	0.0028		"
4	0.0018	0.03	0.55	0.069	0.005	0.0016	0.062	0.0029		"
5	0.0005	0.01	0.12	0.015	0.007	0.0015	0.055	0.0033	Nb:0.005	"
6	0.0008	0.01	0.12	0.017	0.016	0.0014	0.045	0.0021	Nb:0.016	"
7	0.0009	0.02	0.20	0.005	0.009	0.0009	0.041	0.0012	B:0.0006	"
8	0.0018	0.01	0.35	0.025	0.011	0.0012	0.038	0.0022	Nb:0.007 B:0.0005	"
9	0.0008	0.02	0.26	0.022	0.018	0.0016	0.062	0.0032	Nb:0.018 B:0.0017	"
10	0.0022	0.01	0.15	0.012	0.009	0.0017	0.023	0.0034		comparative example
11	0.0014	0.01	0.16	0.013	0.011	0.0022	0.070	0.0029		"
12	0.0016	0.02	0.14	0.015	0.012	0.0014	0.048	0.0053		"
13	0.0033	0.03	0.23	0.015	0.004	0.0012	0.080	0.0042		"
14	0.0016	1.12	0.10	0.022	0.004	0.0015	0.075	0.0036		"
15	0.0022	0.02	1.21	0.026	0.006	0.0019	0.069	0.0029		"
16	0.0022	0.01	0.23	0.022	0.009	0.0015	0.081	0.0019	Nb:0.027	"
17	0.0015	0.01	0.16	0.009	0.006	0.0016	0.062	0.0035	B:0.0026	"
18	0.0350	0.01	0.16	0.015	0.016	0.0042	0.035	0.0056		conventional example

Table 8

			Y.S.	T.S.	El.		S-FL	
5	No.	Surface treatment	kg/mm <sup>2</sup>	kg/mm <sup>2</sup>	%	r-value	kgf	Remarks
	1a	none	16.2	30.5	51.0	2.02	125.6	acceptable example
	1b	galvanizing	17.8	32.0	49.2	1.90	116.7	"
10	1c	zinc electroplating	17.5	31.4	49.8	1.95	126.5	"
	2	none	17.2	31.5	49.0	1.91	114.0	"
	3	"	19.6	32.9	46.5	1.92	105.8	"
	4	"	19.2	36.6	44.1	1.91	122.5	"
15	5	"	15.6	29.8	53.0	2.21	135.5	"
	6	"	15.9	30.2	52.5	2.16	132.2	"
	7	"	16.8	31.0	52.2	2.18	130.5	"
20	8a	"	17.5	30.2	51.6	2.06	154.5	"
	8b	galvanizing	18.7	31.8	50.2	1.92	142.5	"
	8c	zinc electroplating	18.3	31.5	50.8	1.95	147.0	"
25	9	none	20.1	31.6	48.1	1.86	145.4	"
	10	"	18.7	30.2	45.8	1.71	78.8	comparative example
	11	"	17.5	31.2	47.2	1.72	82.6	"
	12	"	19.2	31.0	47.0	1.67	83.2	"
30	13	"	21.2	32.1	45.0	1.60	86.5	"
	14	"	26.0	37.2	37.0	1.38	82.5	"
	15	"	23.9	36.2	38.1	1.52	80.5	"
35	16	"	21.2	32.1	45.0	1.60	83.4	"
	17	"	22.0	31.8	44.0	1.38	85.4	"
	18	"	18.8	31.9	45.0	1.72	82.2	conventional example
40	S-FL: tensile shear fatigue limit							

As seen from Table 8, all of the steels according to the invention exhibit good mechanical properties and tensile shear fatigue limit value, while the comparative steels and the conventional steel are poor in either the mechanical properties or the tensile shear fatigue limit value.

Furthermore, the surface treated steels according to the invention are naturally excellent in the properties as compared with the comparative and conventional steels because the breakage in the fatigue test is generated from the heat-affected zone.

Moreover, in the steel Nos. 5-9 containing either Nb or B or both, the fatigue resistance at the heat-affected zone is further improved, so that they exhibit a higher tensile shear fatigue limit value among the steels according to the invention.

## Example 2

A steel having a chemical composition as shown in the following Table 9 was melted to form a slab, which was hot rolled at a finish temperature of 830-900 °C and would at a coiling temperature of 550-650 °C to obtain a hot rolled steel sheet of 2.6 mm in thickness.



The steel Nos. 1-9 were acceptable in the invention, among which the steel Nos. 2 and 8 were subjected to a galvanizing and electroplating, respectively.

The steel Nos. 10-17 were comparative examples, whose chemical compositions were outside the range of the invention, and the steel No. 18 was the conventional low carbon aluminum killed steel.

5 The mechanical properties and tensile shear fatigue limit value at spot welded joint portion (upper limit of loading range when the repeat number of tensile loading was 10,000,000) were measured with respect to these hot rolled steel sheets to obtain results as shown in the following Table 10.

Moreover, a specimen of JIS Z2201 No. 5 was used in the tensile test, and the spot welding conditions and tensile shear fatigue test conditions were the same as in Table 4.

10

15

20

25

30

35

40

45

50

55

Table 9

Chemical composition (wt%)											
No.	C	Si	Mn	P	S	N	Al	O	others	At/N	Remarks
1	0.0008	0.01	0.20	0.015	0.008	0.0012	0.050	0.0016		41.7	acceptable example
2	0.0013	0.02	0.21	0.020	0.015	0.0009	0.070	0.0023		77.8	"
3	0.0015	0.50	0.26	0.016	0.010	0.0014	0.066	0.0023		47.1	"
4	0.0010	0.03	0.60	0.056	0.005	0.0015	0.060	0.0030		40.0	"
5	0.0006	0.02	0.12	0.015	0.007	0.0015	0.055	0.0020	Nb:0.006	36.7	"
6	0.0025	0.01	0.12	0.017	0.016	0.0014	0.045	0.0033	Nb:0.013	32.1	"
7	0.0009	0.02	0.20	0.005	0.009	0.0009	0.041	0.0012	B:0.0005	45.6	"
8	0.0013	0.01	0.35	0.025	0.011	0.0012	0.038	0.0022	Nb:0.008 B:0.0005	31.7	"
9	0.0008	0.02	0.26	0.022	0.010	0.0014	0.056	0.0022	Nb:0.018 B:0.0017	40.0	"
10	0.0012	0.01	0.15	0.012	0.009	0.0017	0.020	0.0034		11.8	comparative example
11	0.0014	0.01	0.10	0.014	0.011	0.0022	0.070	0.0029		31.8	"
12	0.0016	0.02	0.14	0.015	0.015	0.0014	0.048	0.0055		34.3	"
13	0.0035	0.03	0.23	0.015	0.016	0.0012	0.080	0.0040		66.7	"
14	0.0016	1.10	0.10	0.022	0.013	0.0015	0.075	0.0023		50.0	"
15	0.0013	0.02	1.25	0.026	0.006	0.0019	0.069	0.0029		36.3	"
16	0.0012	0.01	0.23	0.022	0.009	0.0015	0.081	0.0019		54.0	"
17	0.0008	0.01	0.16	0.009	0.006	0.0016	0.062	0.0025		38.8	"
18	0.036	0.01	0.26	0.018	0.016	0.0050	0.035	0.0056	B:0.0026	7.0	conventional example

Table 10

No.	Surface treatment	Y.S. kg/mm <sup>2</sup>	T.S. kg/mm <sup>2</sup>	El. %	S-FL kgf	Remarks
1	none	16.8	31.5	54.0	208	acceptable example
2a	"	16.5	30.2	54.7	210	"
2b	galvanizing	17.5	31.8	52.0	204	"
2c	zinc electroplating	17.1	31.5	52.7	208	"
3	none	19.2	33.9	50.5	218	"
4	"	20.5	37.8	48.1	210	"
5	"	15.0	29.6	56.0	232	"
6	"	15.7	31.2	56.3	228	"
7	"	16.8	32.0	54.5	220	"
8a	"	18.5	31.7	54.6	236	"
8b	galvanizing	20.1	32.5	52.2	223	"
8c	zinc electroplating	19.7	31.9	52.8	238	"
9	none	20.4	32.2	50.6	220	"
10	"	18.8	30.8	49.7	160	comparative example
11	"	18.5	32.5	50.2	172	"
12	"	19.6	31.6	51.0	166	"
13	"	21.8	33.4	48.8	178	"
14	"	26.0	37.8	43.2	176	"
15	"	24.9	36.9	45.1	181	"
16	"	23.2	32.8	49.1	166	"
17	"	23.5	32.8	48.0	172	"
18	"	20.6	32.9	51.1	175	conventional example
S-FL: tensile shear fatigue limit						

As seen from Table 10, all of the steels according to the invention exhibit good mechanical properties and tensile shear fatigue limit value, while the comparative steels and the conventional steel are poor in either the mechanical properties or the tensile shear fatigue limit value.

5 Furthermore, the surface treated steels according to the invention are naturally excellent in the properties as compared with the comparative and conventional steels because the breakage in the fatigue test is generated from the heat-affected zone.

Moreover, in the steel Nos. 5-9 containing either Nb or B or both, the fatigue resistance at the heat-affected zone is further improved, so that they exhibit a higher tensile shear fatigue limit value among the  
10 steels according to the invention.

### Example 3

15 A steel having a chemical composition as shown in the following Table 11 was melted to form a slab, which was subjected to the following treatments under production conditions as shown in the following Table 12.

The hot rolled steel sheet of 2.6 mm in thickness was produced by subjecting the slab at a finish temperature of 830-900 °C and winding at a coiling temperature of 550-650 °C.

20 On the other hand, the slab was hot rolled at a finish temperature of 830-920 °C and coiled at a coiling temperature of 550-650 °C to obtain a hot rolled sheet of 3.2 mm in thickness. Then, the hot rolled sheet was cold rolled to a thickness of 0.7 mm at a rolling reduction of 78%, annealed at 750-880 °C and further subjected to a skin pass rolling at 0.7%.

Furthermore, a part of the hot rolled steel sheets and cold rolled steel sheets was subjected to a  
25 galvanizing or electroplating.

The steel Nos. 1-14 and Nos. 26-36 were acceptable in the invention, and the steel Nos. 15-24 and Nos. 37-43 were comparative examples, whose chemical compositions were outside the range of the invention. Moreover, the steel Nos. 25 and 44 were the conventional low carbon aluminum killed steel, in which the steel No. 25 was produced by box annealing.

30 The mechanical properties and cross tensile fatigue limit value at spot welded joint portion (upper limit of loading range when the repeat number of tensile loading was 10,000,000) were measured with respect to these thin steel sheets to obtain results as shown in Table 12.

Moreover, a specimen of JIS Z2201 No. 5 was used in the tensile test, and the spot welding conditions and cross tensile fatigue test conditions were the same as in Table 6 in case of the cold rolled steel sheets  
35 and were carried out under conditions as shown in the following Table 13 in case of the hot rolled steel sheets.

40

45

50

55

Table 11(a)

5	Chemical composition (wt%)											
	No.	C	Si	Mn	P	S	Al	N	O	others	Al/N	Remarks
	1	0.0008	0.01	0.11	0.012	0.008	0.049	0.0014	0.0023	Ti:0.031	35.0	acceptable example
	2	0.0012	0.01	0.08	0.012	0.010	0.062	0.0016	0.0029	Ti:0.035	38.8	"
10	3	0.0011	0.01	0.17	0.010	0.009	0.071	0.0020	0.0032	V:0.063	35.5	"
	4	0.0012	0.02	0.22	0.020	0.009	0.038	0.0010	0.0026	Cr:0.58	38.0	"
	5	0.0015	0.01	0.14	0.018	0.013	0.061	0.0018	0.0032	Cu:0.83	33.9	"
15	6	0.0007	0.01	0.13	0.015	0.012	0.047	0.0012	0.0028	Ti:0.025, V:0.016, Cr:0.35	39.2	"
	7	0.0012	0.02	0.15	0.012	0.015	0.063	0.0019	0.0032	Ti:0.018, Zr:0.041, Cu:0.56	33.2	"
20	8	0.0013	0.01	0.15	0.018	0.008	0.067	0.0020	0.0035	V:0.042, Ca:0.013, Cr:0.31, Ni:0.25	33.5	"
	9	0.0015	0.01	0.11	0.012	0.010	0.059	0.0017	0.0028	Ti:0.017, V:0.031, Zr:0.018, Cr:0.14, Cu:0.35	34.7	"
25	10	0.0009	0.01	0.15	0.011	0.009	0.042	0.0011	0.0025	Ti:0.028, Nb:0.005	38.2	"
	11	0.0008	0.02	0.18	0.010	0.007	0.058	0.0015	0.0032	Ti:0.033, B:0.0004	38.7	"
30	12	0.0006	0.01	0.15	0.021	0.009	0.068	0.0019	0.0035	Ti:0.027, Nb:0.003, B:0.0003	35.8	"
	13	0.0012	0.02	0.15	0.010	0.011	0.050	0.0013	0.0021	V:0.052, Nb:0.012, B:0.0005	38.5	"
35	14	0.0014	0.01	0.14	0.012	0.008	0.061	0.0017	0.0027	Zr:0.069, Cr:0.37, Ni:0.28, Nb:0.007	35.9	"
	15	0.0024	0.02	0.20	0.015	0.010	0.055	0.0018	0.0035	Ti:0.12	30.6	comparative example
	16	0.0013	0.01	0.20	0.018	0.015	0.059	0.0018	0.0079	Ti:0.024, B:0.0007	32.8	"
40	17	0.0018	0.02	0.14	0.023	0.012	0.038	0.0038	0.0033	Ti:0.042	10.0	"
	18	0.0025	0.01	0.18	0.018	0.012	0.015	0.0016	0.0035	V:0.023	9.4	"
	19	0.0013	0.02	0.12	0.017	0.012	0.060	0.0019	0.0033	Zr:0.17	31.6	"
45	20	0.0010	0.02	1.2	0.010	0.020	0.055	0.0018	0.0030	Ca:0.089	30.6	"
	21	0.0012	0.02	0.13	0.012	0.010	0.081	0.0018	0.0089	Cu:1.15	45.0	"
50	22	0.0048	0.01	0.15	0.012	0.015	0.056	0.0017	0.0028	Ti:0.037, Cr:0.57, Ni:0.42	32.9	"

Table 11(b)

5	Chemical composition (wt%)											
	No.	C	Si	Mn	P	S	Al	N	O	others	Al/N	Remarks
	23	0.0014	0.02	0.12	0.010	0.018	0.11	0.0032	0.0032	V:0.026, Ca:0.020, Cr:0.32, Ni:0.73	34.4	Comparative example
10	24	0.0018	0.01	0.21	0.018	0.012	0.068	0.0019	0.0026	Zr:0.052, Ca:0.041, Cr:0.42, Cu:0.41, Ni:2.3	35.8	"
	25	0.036	0.01	0.26	0.018	0.016	0.035	0.0050	0.0056		7.0	conventional example
15	26	0.0006	0.01	0.09	0.012	0.010	0.053	0.0015	0.0032	Ti:0.035	35.3	acceptable example
	27	0.0007	0.02	0.12	0.015	0.007	0.040	0.0011	0.0027	Zr:0.085	36.4	"
	28	0.0013	0.02	0.18	0.025	0.010	0.058	0.0015	0.0031	Ca:0.027	38.7	"
20	29	0.0014	0.02	0.12	0.015	0.012	0.049	0.0012	0.0030	Ni:0.33	40.8	"
	30	0.0008	0.01	0.15	0.012	0.015	0.060	0.0017	0.0025	Ti:0.028, V:0.015, Cr:0.38	35.3	"
25	31	0.0010	0.01	0.15	0.015	0.010	0.056	0.0018	0.0035	Zr:0.063, Cr:0.33, Cu:0.45	31.1	"
	32	0.0009	0.02	0.10	0.010	0.012	0.071	0.0018	0.0012	Ti:0.025, Zr:0.023, Ca:0.018, Cr:0.41	39.4	"
30	33	0.0013	0.01	0.12	0.012	0.008	0.068	0.0020	0.0028	V:0.045, Zr:0.020, Ca:0.027, Cu:0.32, Ni:0.43	34.0	"
	34	0.0015	0.01	0.15	0.015	0.012	0.047	0.0012	0.0034	Ti:0.032, Cr:0.30, Nb:0.006	39.2	"
35	35	0.0010	0.02	0.12	0.012	0.009	0.055	0.0017	0.0030	Ti:0.033, Nb:0.007, B:0.0006	32.4	"
	36	0.0009	0.01	0.20	0.010	0.009	0.051	0.0015	0.0028	V:0.042, Nb:0.013, B:0.0005	34.0	"
40	37	0.0041	0.02	0.15	0.010	0.014	0.078	0.0020	0.0029	Ti:0.015	39.0	comparative example
	38	0.0029	0.01	0.17	0.015	0.010	0.062	0.0018	0.0033	Ti:0.13	34.4	"
45	39	0.0015	0.03	0.23	0.013	0.011	0.072	0.0015	0.0033	Cr:2.2	48.0	"
	40	0.0013	0.02	0.10	0.018	0.010	0.17	0.0020	0.0025	Ni:0.87	85.0	"
	41	0.0015	0.01	0.20	0.012	0.020	0.061	0.0078	0.0032	V:0.042, Zr:0.028, Cu:0.37	7.8	"
50	42	0.0011	0.02	0.15	0.010	0.015	0.058	0.0018	0.0072	Zr:0.067, Ca:0.028, Cr:0.41, Cu:0.37	32.2	"
	43	0.0018	0.02	0.10	0.015	0.012	0.071	0.0020	0.0030	Ti:0.021, V:0.015, Ca:0.023, Cr:1.8, Ni:0.25	35.5	"
55	44	0.034	0.02	0.22	0.015	0.018	0.032	0.0055	0.0062		5.8	conventional example

Table 12(a)

No.	Production conditions		Y.S. kgf/mm <sup>2</sup>	T.S. kgf/mm <sup>2</sup>	El %	r-value	C-FL kgf	Remarks
	kind of steel	surface treatment						
1a	cold rolled steel sheet	none	14.7	30.2	53.8	2.35	15.5	acceptable example
1b	"	galvanizing	16.2	31.0	52.7	2.20	15.0	"
1c	"	zinc electroplating	16.2	30.8	52.9	2.28	15.5	"
2	"	none	15.1	31.0	53.2	2.41	15.0	"
3	"	none	16.2	31.8	53.0	2.38	15.0	"
4	"	none	20.0	33.2	51.8	2.13	15.5	"
5	"	none	20.8	33.5	52.6	2.22	14.5	"
6	"	none	18.5	32.1	53.5	2.30	15.0	"
7	"	galvanizing	19.8	33.0	51.9	2.28	14.5	"
8	"	none	21.0	33.8	52.3	2.17	15.0	"
9	"	zinc electroplating	20.4	33.5	51.8	2.28	15.5	"
10	"	galvanizing	14.1	30.2	53.8	2.40	16.0	"
11	"	none	13.3	29.1	55.4	2.47	16.0	"
12a	"	none	14.7	31.0	54.2	2.53	17.0	"
12b	"	galvanizing	15.8	31.5	52.1	2.39	16.5	"
12c	"	zinc electroplating	15.0	31.9	52.5	2.45	17.0	"
C-FL: cross tensile fatigue limit value								

Table 12(b)

No.	Production conditions		Y.S. kgf/mm <sup>2</sup>	T.S. kgf/mm <sup>2</sup>	El %	r-value	C-FL kgf	Remarks
	kind of steel	surface treatment						
13	cold rolled steel sheet	gulfanizing	16.0	31.2	54.5	2.50	16.5	acceptable example
14	"	none	18.7	33.8	53.7	2.45	15.5	"
15	"	none	20.4	30.2	48.2	1.47	11.0	comparative example
16	"	none	18.1	31.0	47.0	1.98	8.5	"
17	"	gulfanizing	16.4	30.7	51.9	2.10	8.0	"
18	"	none	17.1	32.7	49.0	2.02	7.5	"
19	"	none	18.9	32.7	48.2	2.11	11.5	"
20	"	none	25.0	36.2	43.6	1.48	11.5	"
21	"	gulfanizing	22.3	33.9	51.4	1.55	8.0	"
22	"	none	22.5	34.5	44.1	1.43	11.0	"
23	"	none	21.8	35.3	45.7	1.57	8.0	"
24	"	zinc electroplating	24.0	36.1	41.3	1.32	12.0	"
25	"	none	19.8	32.0	50.8	1.82	7.5	conventional example
C-FL: cross tensile fatigue limit value								



Table 12(c)

No.	Production conditions		Y.S. kgf/mm <sup>2</sup>	T.S. kgf/mm <sup>2</sup>	EI %	C-FL kgf	Remarks
	kind of steel	surface treatment					
26a	hot rolled steel sheet	none	15.6	29.8	54.2	150	acceptable example
26b	"	gulfanizing	17.2	31.4	52.0	145	"
26c	"	zinc electroplating	16.5	31.0	52.8	145	"
27	"	gulfanizing	18.3	33.8	52.4	135	"
28	"	none	20.5	32.6	53.4	140	"
29	"	none	21.8	33.0	52.2	130	"
30	"	none	19.2	32.5	53.8	150	"
31	"	zinc electroplating	20.5	33.3	52.1	145	"
32	"	none	19.8	32.8	53.5	140	"
33	"	none	22.3	34.0	52.7	135	"
34	"	gulfanizing	17.5	31.4	53.8	155	"
35a	"	none	13.4	29.1	55.2	165	"
35b	"	gulfanizing	14.5	30.9	52.1	150	"
35c	"	zinc electroplating	14.2	30.5	53.3	155	
36	"	none	16.1	30.2	54.1	160	"
37	"	gulfanizing	21.6	33.8	46.8	105	comparative example
38	"	none	17.2	32.1	46.0	105	"
39	"	none	25.4	36.7	47.2	110	"
40	"	none	23.3	34.9	45.1	100	"
41	"	gulfanizing	19.7	33.0	49.5	85	"
42	"	none	22.5	35.3	42.7	90	"
43	"	zinc electroplating	25.8	37.4	40.1	100	"
44	"	none	20.3	33.6	49.3	75	conventional example
C-FL: cross tensile fatigue limit value							

Table 13

Sample size		Welding conditions			
width	length	chip	welding force	welding current	Average nugget diameter
(mm)	(mm)				(mm)
50	150	Cr-Cu, 8.5 $\phi$ mm, CF model	650 kgf	14~17 kA	7.8

As seen from Table 12, all of the steels according to the invention exhibit good mechanical properties and cross tensile fatigue limit value, while the comparative steels and the conventional steel are poor in either the mechanical properties or the cross tensile fatigue limit value.

5 Furthermore, the surface treated steels according to the invention are excellent in the properties as compared with the comparative and conventional steels because the breakage in the fatigue test is generated from the heat-affected zone.

Moreover, in the steel Nos. 10-14 and Nos. 34-36 containing either Nb or B or both, the fatigue resistance at the heat-affected zone is further improved, so that they exhibit a higher cross tensile fatigue limit value among the steels according to the invention.

As mentioned above, according to the invention, formable thin steel sheets having not only good formability for press forming, deep drawing or the like but also improved fatigue properties at welded joint are obtained, so that when they are applied to automobiles, structural members and the like, the prolongation of the life or the improvement of the safety is achieved.

15

## Claims

1. A formable thin steel sheet having improved fatigue resistance at welded joints, comprising not more than 0.003 wt% of C, not more than 1.0 wt% of Si, not more than 1.0 wt% of Mn, not more than 0.15 wt% of P, not more than 0.020 wt% of S, not more than 0.0045 wt% of O, not more than 0.0020 wt% of N, not more than 0.15 wt% of Al provided that a ratio of Al/N is not less than 30, and the balance being Fe and inevitable impurities.

2. The formable thin steel sheet according to claim 1, which further contains at least one of 0.001-0.025 wt% of Nb and 0.0002-0.0020 wt% of B.

3. The formable thin steel sheet according to claim 1 or 2, which further contains at least one of not more than 0.10 wt% of Ti, not more than 0.10 wt% of V, not more than 0.10 wt% of Zr, not more than 0.10 wt% of Ca, not more than 1.0 wt% of Cr, not more than 1.0 wt% of Cu and not more than 1.0 wt% of Ni.

4. A method of producing formable thin steel sheet having improved fatigue resistance at welded joints, which comprises hot rolling a sheet of steel comprising not more than 0.003 wt% of C, not more than 1.0 wt% of Si, not more than 1.0 wt% of Mn, not more than 0.15 wt% of P, not more than 0.020 wt% of S, not more than 0.0045 wt% of O, not more than 0.002 wt% of N, not more than 0.15 wt% of Al provided that a ratio of Al/N is not less than 30, and the balance being Fe and inevitable impurities at a finish temperature of not lower than 600°C, cold rolling the hot rolled sheet at a rolling reduction of not less than 60% and then subjecting the cold rolled sheet to a recrystallization annealing at a temperature of not higher than  $A_{C3}$  transformation point.

5. The method according to claim 4, wherein said steel further contains at least one of 0.001-0.025 wt% of Nb and 0.0002-0.0020 wt% of B.

6. The method according to claim 4 or 5, wherein said steel further contains at least one of not more than 0.10 wt% of Ti, not more than 0.10 wt% of V, not more than 0.10 wt% of Zr, not more than 0.10 wt% of Ca, not more than 1.0 wt% of Cr, not more than 1.0 wt% of Cu and not more than 1.0 wt% of Ni.

7. The method according to claim 4, 5 or 6 wherein said hot rolled sheet is coiled at a coiling temperature of not lower than 200°C after the hot rolling.

8. The method according to claim 4, 5, 6 or 7 wherein said thin steel sheet is subjected to a galvanizing or an electroplating.

50


55

**FIG. 1**

*Numerical Value is Fatigue Limit (kgf)*

○ *Nb, B Not Added*

△ *Nb, B Added*

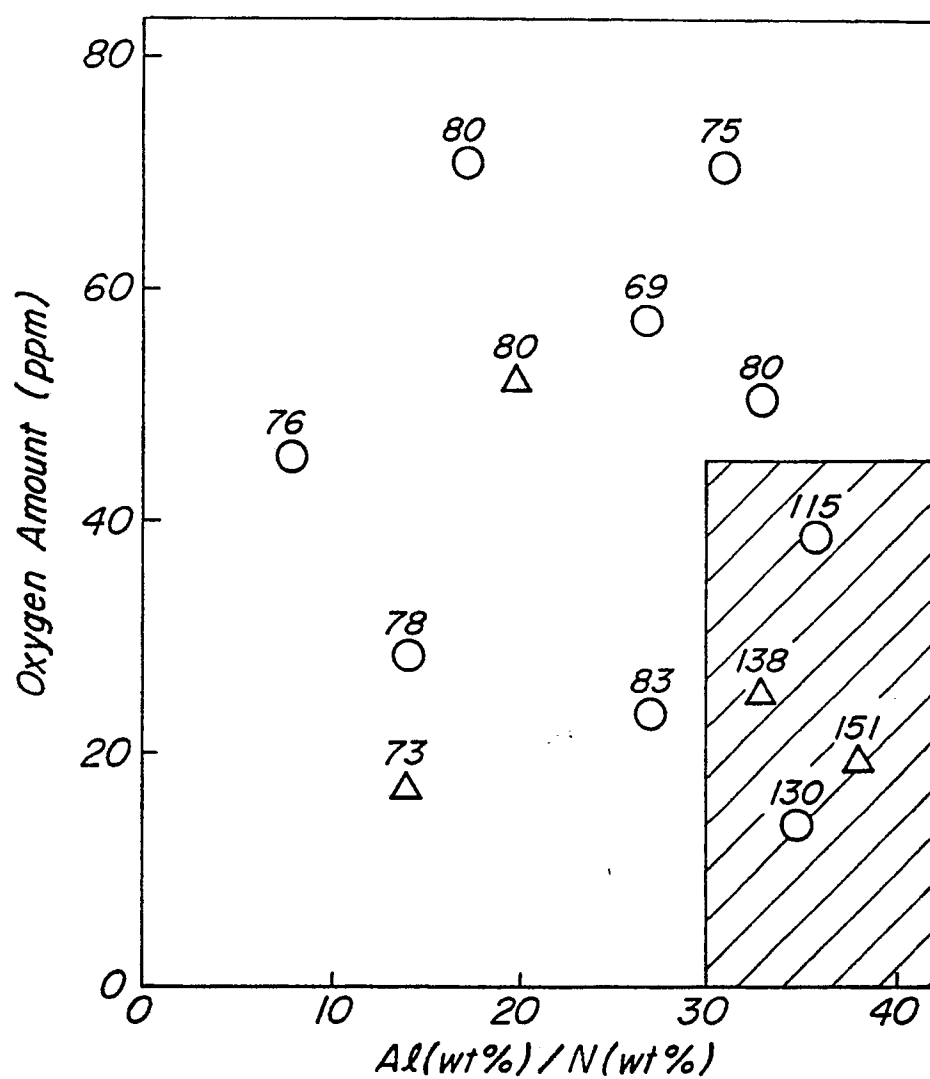



**FIG. 2**

*Numerical Value is Tensile  
Shear Fatigue Limit (kgf)*


○ *Nb, B Not Added*

△ *Nb, B Added*

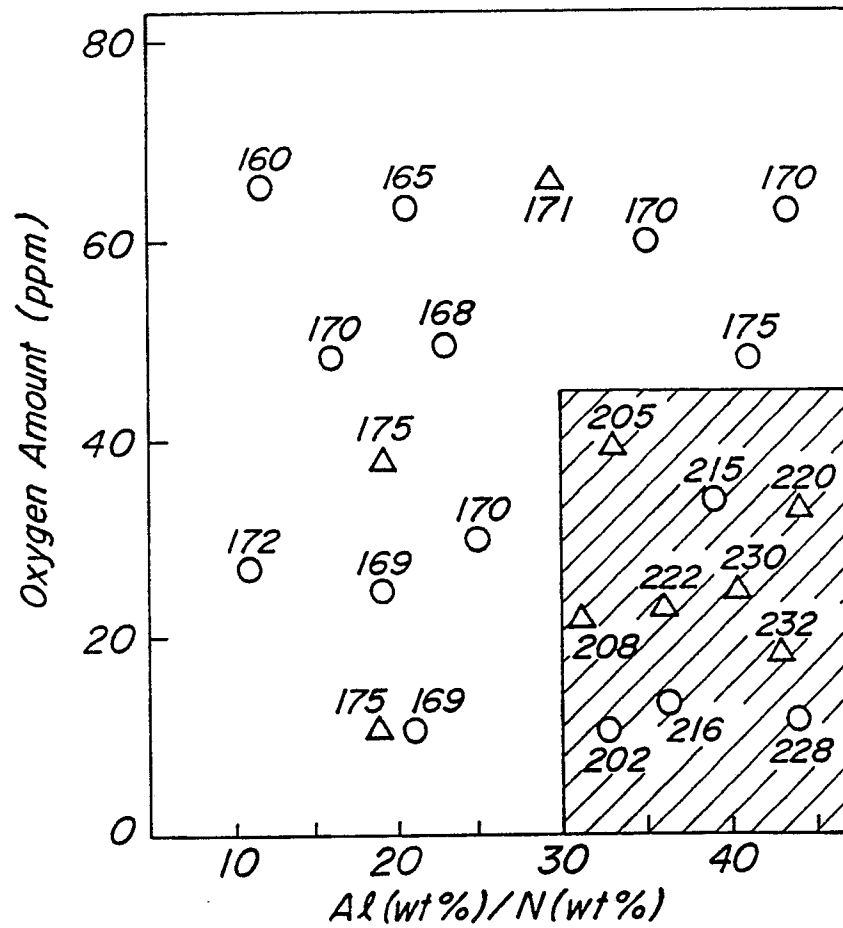

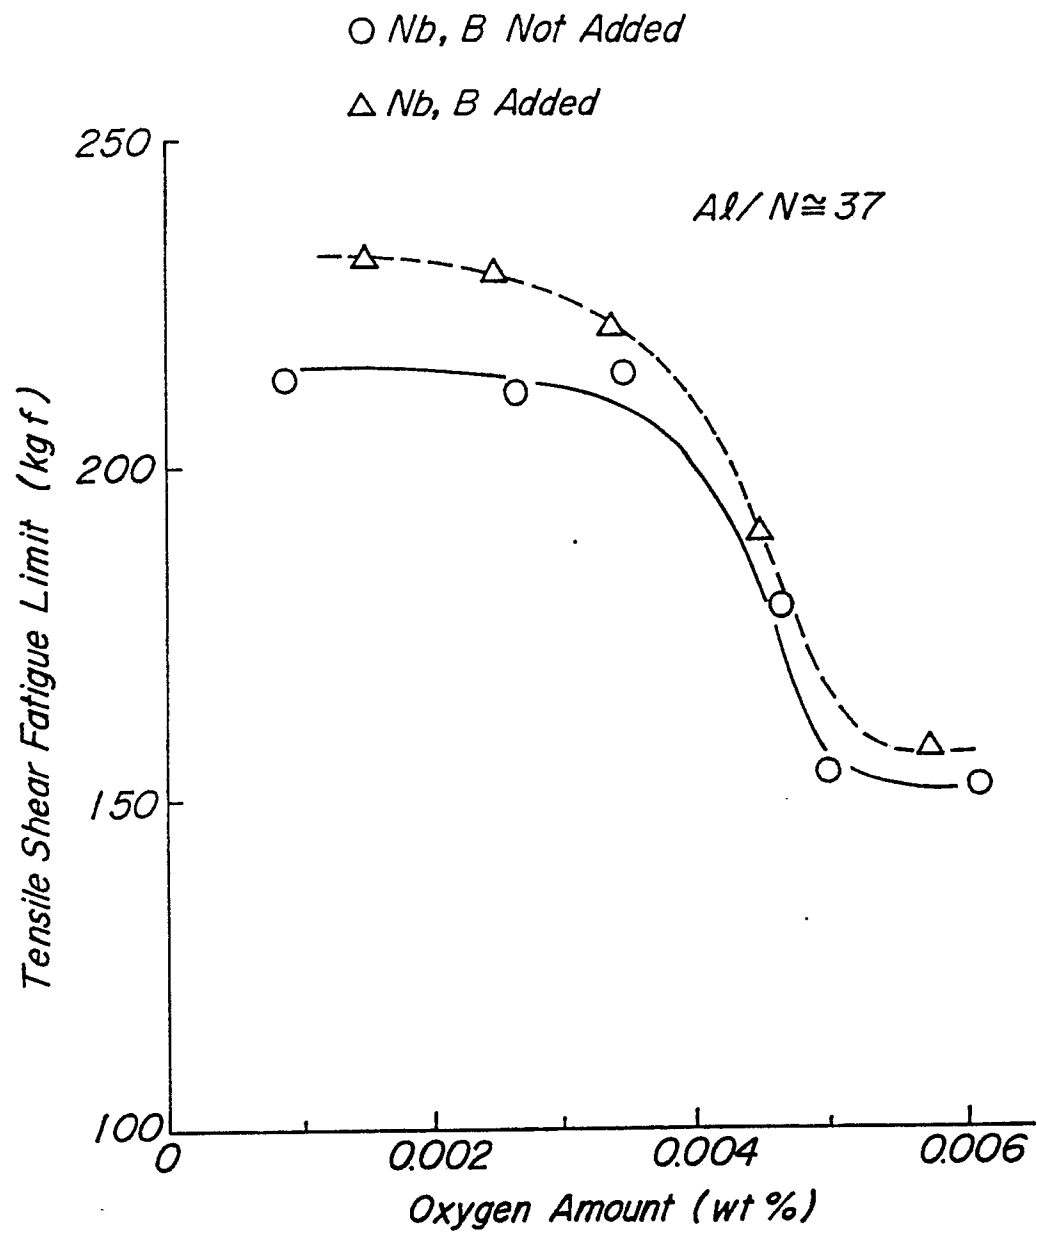**FIG. 3**

*FIG. 4*

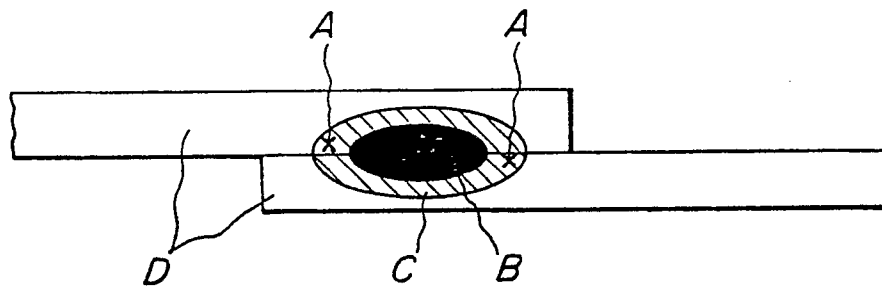


**FIG. 5**

*Numerical Value is Cross Tensile  
Fatigue Limit (kgf)*


□ *Not Added*


○ *Ti Added*

△ *Ti, Nb, B Added*

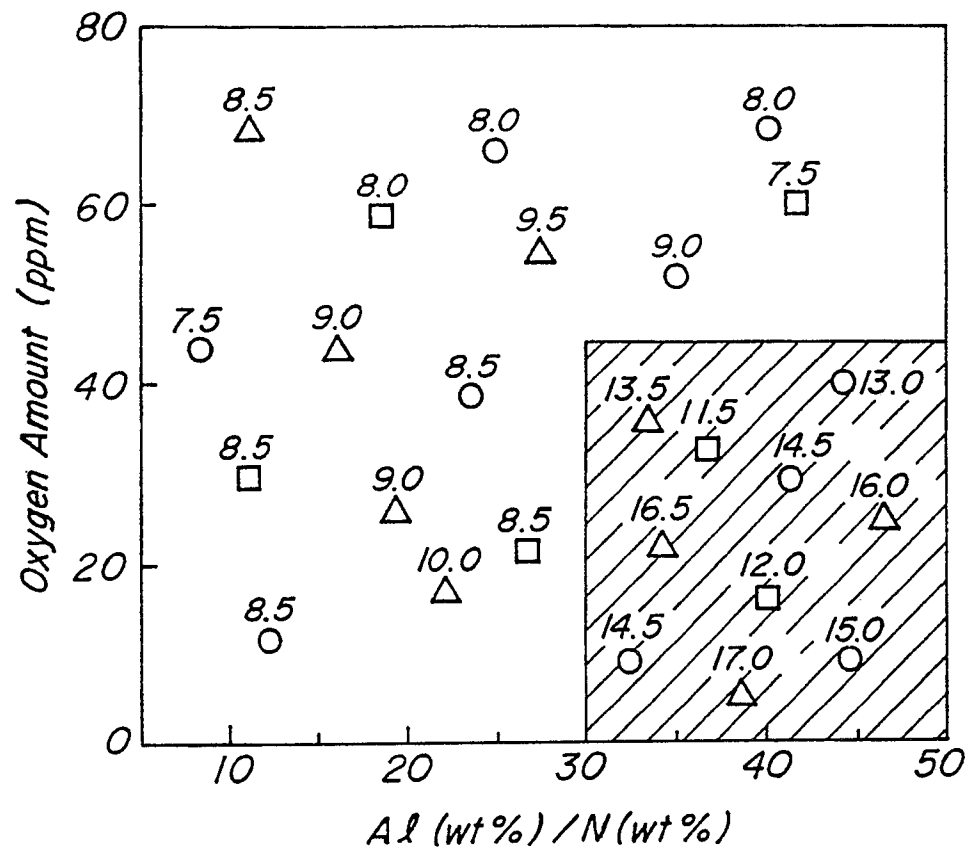

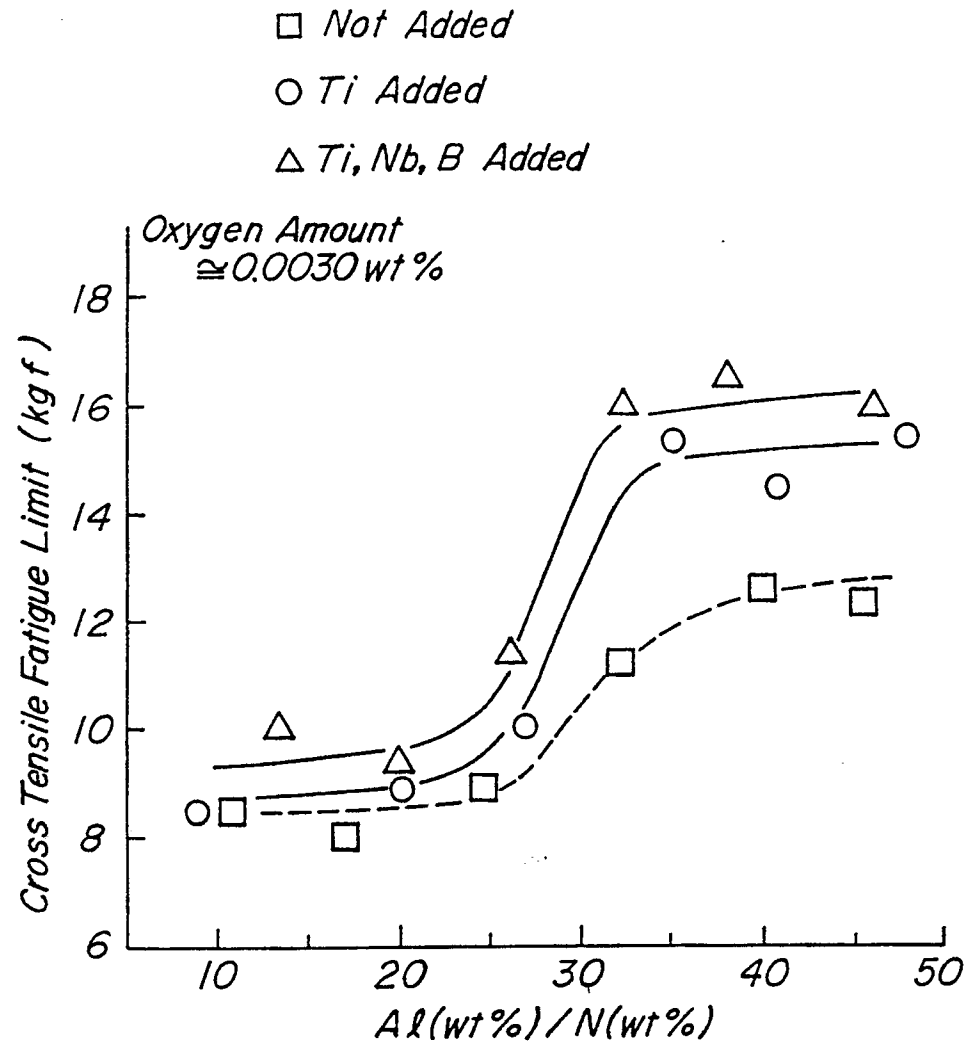

**FIG. 6a**

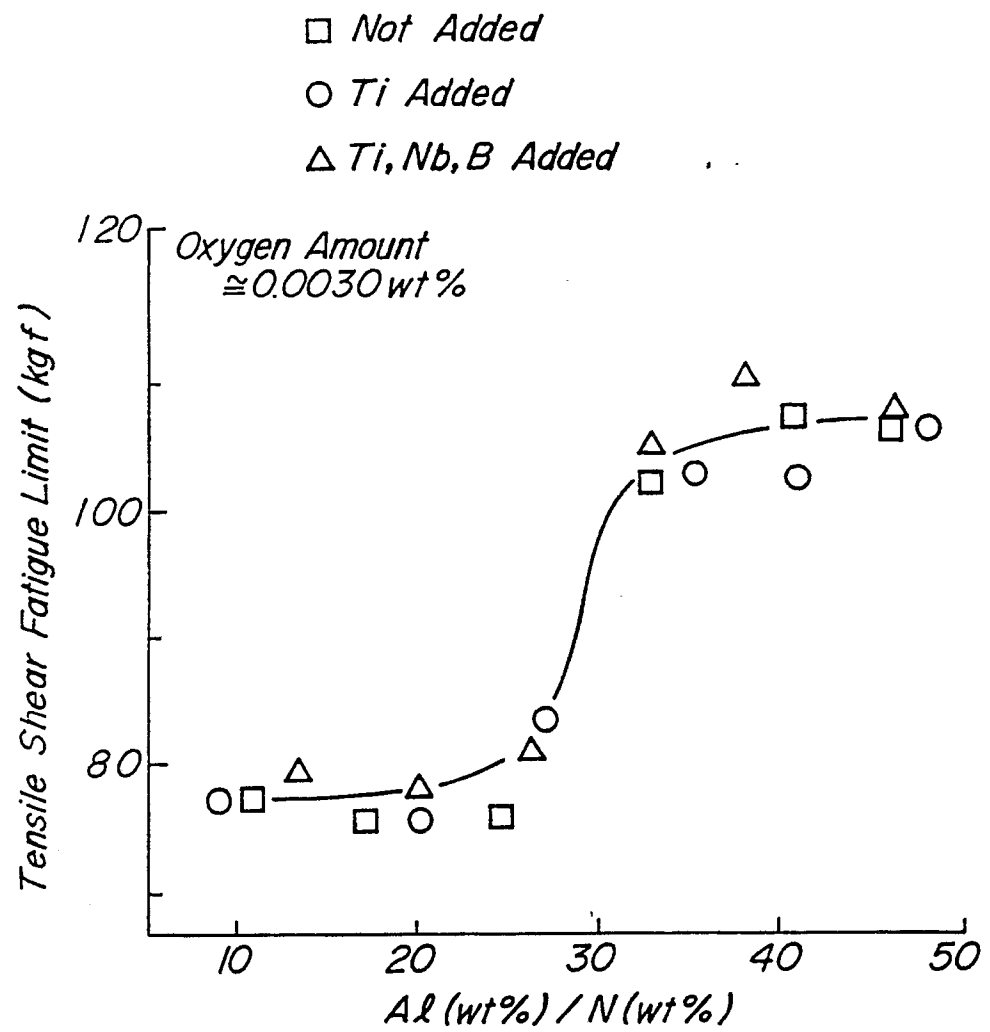**FIG. 6b**

*FIG. 7a*



*FIG. 7b*

