

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 379 673 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: **13.04.94** (51) Int. Cl.⁵: **B41M 5/24**

(21) Application number: **89121803.4**

(22) Date of filing: **25.11.89**

(54) **Electroerosion recording medium of improved corrosion resistance.**

(30) Priority: **23.01.89 US 300665**

(43) Date of publication of application:
01.08.90 Bulletin 90/31

(45) Publication of the grant of the patent:
13.04.94 Bulletin 94/15

(84) Designated Contracting States:
DE FR GB

(56) References cited:
EP-A- 0 147 624 EP-A- 0 147 641
EP-A- 0 147 642 EP-A- 0 147 703
EP-A- 0 158 276 US-A- 4 339 758
US-A- 4 617 579 US-A- 4 622 262

(73) Proprietor: **International Business Machines Corporation**
Old Orchard Road
Armonk, N.Y. 10504(US)

(72) Inventor: **Afzali-Ardakani, Ali**
9-1 Woodlands Drive
Yorktown Heights, New York 10598(US)
Inventor: **Pennington, Keith S.**
Londonderry Lane
Somers N.Y. 10589(US)

(74) Representative: **Mönig, Anton, Dipl.-Ing.**
IBM Deutschland Informationssysteme GmbH,
Patentwesen und Urheberrecht
D-70548 Stuttgart (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 379 673 B1

Description

The invention relates to electroerosion printing and to recording materials characterized by an improved hydrophilic, conductive or resistive lubricant top-coat, especially for use in the production of direct offset masters or direct negative applications.

Electroerosion printing is a well-known technique for producing markings, such as, letters, numbers, symbols, patterns, such as, circuit patterns, or other legible or coded indicia on recording material in response to an electric signal which removes or erodes material from the surface of the recording material as the result of spark initiation.

The surface which is eroded or removed to provide such indicia on the recording material is usually a thin film of conductive material which is vaporized in response to localized heating associated with sparking (arcing) initiated by applying an electric current to an electrode in contact with the surface of a recording material comprising the thin conductive film on a flexible nonconductive backing or support. In the present state of the technology the thin conductive film is usually a thin film of vaporizable metal, such as, aluminum.

Electroerosion printing is effected by the movement of a stylus or a plurality of styli relative to the surface of specially prepared recording media. Electrical writing signals are fed to the stylus to provide controlled electrical pulses which generate sparks at the surface of the recording material to selectively heat and remove by evaporation a layer of the recording material; the locations from which material is removed correspond to the indicia or images which are to be recorded.

In the course of this process, the stylus is moved relatively to a surface of the recording material and in contact with the removable layer, e.g., a thin film of vaporizable material, usually a metal, such as aluminum.

Due to the fragility of the thin conductive layer and stylus pressure, considerable scratching (undesired removal of the removable layer) is observed to take place during electroerosion printing.

It has been recognized for some time, therefore, that the use of a lubricant and/or protective overcoat on the surface of such electroerosion recording materials would be helpful to reduce scratching by the stylus. After some investigation, lubricants comprising long chain fatty acids were adopted. Even with the use of such lubricants, however, some stylus scratching of the thin aluminum film of electroerosion recording materials continues to be observed. Therefore, efforts continued to be directed to finding a superior lubricant-protective layer composition for the surface of electroerosion recording materials.

U.S. Patent 4,622,262 describes the use of graphite dispersed in a water insoluble polymeric binder, for example, ethyl cellulose. Although the corrosion resistance of the film is very good, the material cannot readily be used as direct offset plate because the surface of the material is hydrophobic and the top coat can not be easily removed from the surface.

U.S. Patent 4,617,579 describes the use of a hydrophilic-water soluble binder (hydroxy ethyl cellulose or the like) in the top coat. In this case although the material can be used both as negative and plate, because of the conductivity, hydrophilicity and water solubility of the top coat, it undergoes rapid corrosion of the aluminum film from fingerprinting and in humid environments. Therefore, after handling or short storage times it could not reliably be used as direct negative/direct plate (DNP).

U.S. Patent 4,567,490 describes the use of fluorinated graphite and Teflon with or without addition of graphite. Although the corrosion resistance of DNP materials coated with these fluorinated compounds increases due to their low conductivity, the print quality is poor.

From EP-A-147 624 an electroerosion recording material is known, comprising a support of non-conductive Mylar, an intermediate base layer of a hard urethane cross-linked CAB filled with silica particles, an aluminum conductive layer and a lubricant overlayer of a water insoluble but water wettable partially cross-linked polymer containing conductive lubricant particles of graphite.

EP-A-147 642 discloses an electroerosion recording medium which comprises a non-conductive support, a hard, abrasion resistant layer, comprising an organic polymeric matrix containing an inorganic particulate material, a thin conductive film, and an abrasion resistant overlayer that comprises a solid conductive lubricant dispersed in an organotitanium reagent modified polymer system. The polymer system comprises a cross-linked polymer formed by interaction of a hydroxyl group-containing polymer with one or more organotitanium reagents.

It has been found that improved electroerosion recording materials can be prepared by providing the aluminum surface of such materials with a protective layer of solid conductive lubricant dispersed in a water insoluble hydrophilic crosslinked polymer matrix.

The recording medium according to this invention provides use as a defect-free "direct negative" and/or "direct offset printing master" and thus has the advantage of process simplification by eliminating the need for removal of the overlayer after electroerosion recording and prior to use on the printing press as commonly practiced with conven-

tional recording media. A further advantage of the unique protective coatings described herein is realized from application using aqueous dispersions of polymer- particulate compositions and thus avoiding the use of organic solvents.

The conductive solid lubricant may be selected from the various conductive particulate lubricants disclosed in U.S. 4,622,262.

The overlayer disclosed herein can be applied directly to the surface of electroerosion recording materials.

One object of the invention, therefore, is to produce electroerosion recording materials of improved resistance to stylus scratching by use of the special lubricating coatings of this invention.

Another object is to provide an abrasion-resistant recording material suitable for generation of a high quality "direct negative" which also functions as a "direct offset printing master" with no extra step involved after electroerosion recording.

Another object of the invention is to provide a superior lubricant composition which can also exhibit improved contrast when used to produce direct-negatives by electroerosion printing. In such usage a dark graphite/polymer film serves to help block light that may be partially transmitted through the thin conductive film, e.g., a thin aluminum film. A further object of the present invention is to provide a lubricant composition which does not have to be removed in the production of offset masters.

Another object of this invention is to provide a superior lubricant composition which has improved corrosion resistance to fingerprinting or storage in a humid environment.

Yet another object is to provide improved electroerosion recording material having a thin, uniform, and adherent overcoat for the aluminum film for protection against damage during storage and handling.

Fig. 1 of the drawings is a general schematic rendering of an illustrative electroerosion operation.

Fig. 2 of the drawings is a cross-sectional view of a direct offset master made in accordance with the invention and showing the removal of surface layers in regions where electroerosion has been effected.

The present invention generally comprises electroerosion recording materials consisting of a flexible support preferably with an abrasion-resistant, ink-receptive layer of polymer-particulate compositions, and an electroerodible metal film such as Al with a protective coating comprising lubricating particles of good electric conductivity in special types of organic polymeric binders. Electroerosion materials for use as direct-negatives or direct masters can be prepared utilizing this invention. In

general, the lubricating layer should have a density between about 2 and 30 micrograms per square centimeter since lower concentrations give inadequate lubrication and higher concentrations are too thick for good writing at low writing voltages (about 50 V) and short pulse lengths (about 3 microseconds). If more energy is applied by increasing the voltage of the writing pulse and increasing the pulse length, thicker films can be used. Also the lubricating agent binder ratio should be adjusted to avoid flake-off of the lubricating agent.

Many conductive laminar solids may be used as the particulate conductive lubricant agent for the protective layer. Preferred materials are concentrated aqueous colloidal suspension of graphite/purified carbon with average particle size less than 1 μm available from Superior Graphite Co., Acheson Colloid Co., or similar products from Graphite Product Corp. Other materials which are expected to be useful include, for example, carbon black of mean particle diameter 0.02 μm , solids such as ZnO , TiO_2 , MoS_2 , WS_2 , VSe_2 , TaSe_2 , CdS , Sb_2O_3 and TaS_2 ; other soft compounds such as AgI , PbO , Pb(OH)_2 , MoO , ZnI_2 , and PbCO_3 ; and soft metal particles such as Sn , Cu , Ag , Pb , Au , Bi , Zn , Al , etc.

A typical structure comprises a flexible support such as polyethylene terephthalate (Mylar) with an abrasion-resistant base layer of polymer-particulate matrix which is preferably cross-linked, a thin conductive electroerodible film such as Al and a protective overlayer consisting of solid lubricants dispersed in a hydrophobic polymer matrix.

The lubricating top coat of this invention consists of a solid lubricant and a polymeric binder that glues the solid lubricant to the aluminum film so that it can not be easily removed either by hand or in the printer. Because electroerosion printing requires that electric current be passed from the printer head (array of 32 tungsten electrodes) to the aluminum film, the solid lubricant on the material has to be somewhat conductive and that is the reason that graphite or a mixture of graphite (conductive) and Teflon (non-conductive) is used as solid lubricant. The reason for lubricant is to reduce scratching (some times referred to as burnishing) of the aluminum film in the electroerosion process. The binder in the top coat which is used to glue the lubricant to aluminum plays an important role in the wettability of the materials. In order to be able to use the material as direct offset plate, the surface of the material must be hydrophilic. The water soluble cellulosic (hydroxy ethyl cellulose) materials make the aluminum surface much more susceptible to corrosion by finger prints or humidity of the environment. But if the binder is chosen from water insoluble polymeric materials

(like ethyl cellulose), which reduces the chances of the corrosion of the aluminum film, the materials cannot be used as direct plate. This invention describes choice of a water soluble-hydrophilic binder which after partial crosslinking with potassium dichromate becomes water insoluble (while maintaining its hydrophilicity) and which can be removed easily by conventional etchants, and therefore increases the corrosion resistance of the materials at the same time it retains its dual application as direct negative and direct plate. Furthermore, this invention describes the reaction of dichromate with aluminum film which makes a conversion layer on top of the aluminum which results in significant reduction of scratching (burnishing).

The detailed description of the invention can be better appreciated by reference to the accompanying drawings. Fig. 1 illustrates schematically an electroerosion printing system 1 which includes a source of electrical energy 2, which is connected with writing control means 3 for controlling the flow (voltage and pulse length) of electrical current to styli 4 which are electrodes which contact the surface of the electroerosion recording material 5.

In operation, electric current pulses corresponding to information to be printed on the recording material 5 are transmitted through the writing control systems 3 to the styli 4. As a result, electrical discharges are generated at the surface of the recording material 5, and the temperature of the thin surface film is locally raised causing evaporation of the surface film or layer and the underlying material is exposed to produce the desired image.

Means (not shown) are provided for moving the styli 4 relative to and in contact with the surface of the recording material 5. As the styli 4 move relative to the recording material 5 and the writing control means 3 direct pulses of current to the styli of sufficient voltage to cause arcing and evaporation of a conductive layer of the material, there can be recorded desired information, patterns and graphics of any kind. It is during the movement of the styli over and in contact with the surface of the recording material that the thin film on the surface of the recording material is liable to be scratched and abraded resulting in poor writing quality and perhaps the recording of erroneous information.

Referring to Fig. 2, the electroerosion recording material of this invention 6 is shown in cross-section to comprise a support 7 of paper, polymer film, etc., a thin, conductive, evaporable layer or film 8, and a lubricant layer or film 9; optionally a tough, hard, transparent film 10 may be positioned between the support 7 and the evaporable layer 8. This intermediate film 10 preferably is of a layer of small hard particles in a suitable polymeric binder,

for example, silica particles in a cellulose-acetate-butyrate (CAB) polymeric binder, or silica particles in a cross-linked polymer such as urethane cross-linked CAB, which may be light transmissive or transparent, to further reduce scratching of the material during electroerosion printing. The evaporable film 8 usually has a resistance from about 1 to 5 ohms per square centimeter and is frequently a vapor-deposited thin film of aluminum.

Where the backing or support is a light transparent or transmissive material, the resulting product can be used as a photomask or direct negative medium for the development of photosensitive materials, e.g., in the production of offset lithography masters, circuit boards, etc.

The recording material is preferably to be used as an offset master where the support is chosen to be an ink receptive material such as polyester. After imaging by electroerosion printing to expose the support layer selectively, the overlayer lubricating composition does not have to be removed, as illustrated by Fig. 2.

Electroerosion recording materials of the invention may be prepared in accordance with the following procedure:

As a support, a flexible sheet of Mylar polyester 50 micrometers thick was provided. On this support, using conventional web-coating apparatus, a coating of silica particles in a urethane cross-linked CAB binder was put down. Onto this layer there was evaporation deposited, by conventional technique, a thin conductive film of aluminum, about 40 nm thick. This type of structure was used in the Examples hereinbelow, onto which the protective lubricating films were coated.

The following working examples are described to illustrate the best mode of carrying out this invention to provide an improved recording medium and generation of a "direct offset master" and/or a "direct negative". A unique feature of this material is provided by the lubricant overlayer on the aluminum surface which is effective in preventing mechanical abrasion of the conductive film during electroerosion recording and which need not be removed prior to use of the material as an offset printing master.

EXAMPLE 1

A mixture of 2.5 g polyvinylmethyl ether maleic acid (Gantrez S-95, GAF Co.) with 7.0 g graphite particles and 0.50 g surfactant in 990 g of water was stirred to disperse the graphite. The DNP materials were coated with a 1% solid of the above mixture to a thickness of 2-10 microgram/square centimeter and dried at 80-110° C for about 0.5-1.0 minutes. The top coated materials were then treated with 0.1-1.0% aqueous solution of potas-

sium dichromate and dried at 100° C for 30 seconds. The resulting materials were water insoluble but also had a water wettable surface which could be used as direct plate. The corrosion resistance of the latter was increased 20-50 times compared with that of standard DNP.

Also, due to the formation of a conversion layer, the burnishing and scratching of the material is reduced by a factor of three to four over that of a film not treated with dichromate.

EXAMPLE 2

In another experiment 40.0 g Graphite (ElectroDag 191, Acheson Industries) was mixed with 2.2 g of water dispersed Teflon (Teflon 30, DuPont Co.) and 2.7 g Gantrez S-95 in 1050 g of H₂O and coated on DNP materials and after drying it was treated with 0.1-1.0% aqueous potassium dichromate to give the water insoluble water wettable surface which had even better corrosion resistance than the previous Example.

Although potassium dichromate solution is the preferred reagent for crosslinking of Gantrez S-95, there are other inorganic reagents which are capable of doing the same. As an example, aqueous solutions of aluminum salts (aluminum acetate and nitrate) were also tried successfully to crosslink the Gantrez and produce a water insoluble and water wettable surface.

Claims

1. Electroerosion recording material with improved corrosion resistance comprising: a flexible non-conductive support layer; a thin conductive layer on said support layer, said conductive layer capable of being removed in selected areas thereof by an electroerosion recording process, a conversion layer on said conductive layer, formed by the reaction of a dichromate with the conductive layer; and an overlayer of a protective lubricant composition above the conversion layer, said lubricant composition comprising conductive lubricant particles dispersed in a partially crosslinked, water insoluble, hydrophilic polymeric binder.
2. Material of claim 1 wherein the polymeric binder is a copolymer of maleic acid and methylvinylether.
3. Material of claim 2 wherein the copolymer is crosslinked with a dichromate.
4. Material of claim 3 wherein the crosslinking compound is potassium dichromate.

5. Material of claim 1 wherein the conductive particles are graphite particles.

6. Material of claim 1 wherein the support layer is a hydrophobic polymer such that, after electroerosion of the conductive layer, the material may be utilized in direct offset master applications.

7. Material of claim 1 further comprising a thin hard layer of cross-linked polymer between said support layer and said conductive layer, said layer serving to increase the resistance to scratching of said conductive layer during electroerosion recording.

8. Material of claim 7 wherein said thin hard layer is filled with silica particles.

9. Material of claim 1 wherein the overlayer density is from about 2 micrograms per square centimeter to about 10 micrograms per square centimeter.

10. Material of claim 1 wherein the non-conductive support layer is a polyester and the conductive layer is aluminum.

11. Material of claim 1 further comprising non-conductive lubricant particles in the overlayer.

12. A method for preparing electroerosion printing material comprising depositing a layer of lubricating top coat on an aluminum film/polyester substrate base, said top coat being a copolymer of maleic acid and methylvinylether, and crosslinking said top coat in situ with a dichromate.

Patentansprüche

1. Elektroerosions-Aufzeichnungsmaterial mit verbesserter Korrosionsbeständigkeit, das folgendes umfaßt:
eine flexible, nichtleitende Trägerschicht,
eine dünne, leitende Schicht auf der Trägerschicht, wobei ausgewählte Stellen dieser leitenden Schicht durch ein Elektroerosions-Aufzeichnungsverfahren entfernt werden können,
eine durch die Reaktion eines Dichromats mit der leitenden Schicht gebildete Konversionsschicht auf der leitenden Schicht, und
eine Deckschicht aus einer schützenden Gleitmittel-Zusammensetzung auf der Konversionsschicht, wobei die Gleitmittel-Zusammensetzung leitende Gleitmittel-Teilchen umfaßt, die in einem teilvernetzten, wasserunlöslichen, hydrophilen, polymeren Bindemittel dispergiert

sind.

2. Material gemäß Anspruch 1, wobei das polymere Bindemittel ein Copolymer aus Maleinsäure und Methylvinylether ist. 5
3. Material gemäß Anspruch 2, wobei das Copolymer mit einem Dichromat vernetzt ist.
4. Material gemäß Anspruch 3, wobei die vernetzende Verbindung Kaliumdichromat ist. 10
5. Material gemäß Anspruch 1, wobei die leitenden Teilchen Graphit-Teilchen sind. 15
6. Material gemäß Anspruch 1, wobei die Trägerschicht ein hydrophobes Polymer ist, so daß das Material nach der Elektroerosion der leitenden Schicht in Anwendungen als direkte Offsetmatrize verwendet werden kann. 20
7. Material gemäß Anspruch 1, das ferner eine dünne, harte Schicht aus vernetztem Polymer zwischen der Trägerschicht und der leitenden Schicht umfaßt, wobei diese Schicht dazu dient, die Kratzbeständigkeit der leitenden Schicht während der Elektroerosions-Aufzeichnung zu erhöhen. 25
8. Material gemäß Anspruch 7, wobei die dünne, harte Schicht mit Siliciumdioxid-Teilchen gefüllt ist. 30
9. Material gemäß Anspruch 1, wobei die Dichte der Deckschicht zwischen etwa 2 Mikrogramm pro Quadratzentimeter und etwa 10 Mikrogramm pro Quadratzentimeter beträgt. 35
10. Material gemäß Anspruch 1, wobei die nichtleitende Trägerschicht aus Polyester und die leitende Schicht aus Aluminium ist. 40
11. Material gemäß Anspruch 1, das ferner nichtleitende Gleitmittel-Teilchen in der Deckschicht umfaßt. 45
12. Verfahren zur Herstellung von Material für den Elektroerosionsdruck, das die Abscheidung eines Gleitmittelüberzugs auf einer Grundlage aus Aluminiumfilm/Polyestersubstrat, wobei der Überzug ein Copolymer aus Maleinsäure und Methylvinylether ist, sowie das Vernetzen des Überzugs in situ mit einem Dichromat umfaßt. 50

Revendications

1. Matériau d'enregistrement par électroérosion ayant une résistance à la corrosion améliorée

comprenant :

une couche support non conductrice flexible ;
une couche conductrice mince sur ladite couche support, ladite couche conductrice pouvant être enlevée dans des zones choisies, par un procédé d'enregistrement par électroérosion ;
une couche de conversion sur ladite couche conductrice, formée par la réaction d'un dichromate avec la couche conductrice ; et
une couche supérieure composée d'un lubrifiant protecteur déposé sur la couche de conversion, ledit lubrifiant comprenant des particules de lubrifiant conductrices dispersées dans un liant polymère hydrophile insoluble dans l'eau partiellement réticulée.

2. Matériau selon la revendication 1 dans lequel le liant polymère est un copolymère d'acide maléique et de méthyl-vinyl-éther.
3. Matériau selon la revendication 2 dans lequel le copolymère est réticulé avec un dichromate.
4. Matériau selon la revendication 3 dans lequel le composé de réticulation est du dichromate de potassium.
5. Matériau selon la revendication 1 dans lequel les particules conductrices sont des particules de graphite.
6. Matériau selon la revendication 1 dans lequel la couche support est un polymère hydrophobe tel que, après électroérosion de la couche conductrice, le matériau puisse être utilisé dans des applications d'offset direct.
7. Matériau selon la revendication 1 comprenant en outre une couche dure mince de polymère réticulé située entre ladite couche support et ladite couche conductrice, ladite couche servant à accroître la résistance aux éraflures de ladite couche conductrice durant l'inscription par électroérosion.
8. Matériau selon la revendication 7 dans lequel ladite couche dure mince est remplie de particules de silice.
9. Matériau selon la revendication 1 dans lequel la densité de la couche supérieure est comprise entre deux microgrammes par centimètre carré à dix microgrammes par centimètre carré.

10. Matériau selon la revendication 1 dans lequel la couche support non conductrice est en polyester et la couche conductrice est en alumi-

nium.

- 11.** Matériau selon la revendication 1 comprenant en outre des particules de lubrifiant non conducteur dans la couche supérieure. 5
- 12.** Un procédé de préparation de matériau d'impression par électroérosion comprenant le dépôt d'une couche de revêtement lubrifiant sur une base substrat en polyester/film d'aluminium, ladite couche de revêtement étant un copolymère d'acide maléique et de méthylvinyl-éther, et en réticulant ladite couche de revêtement in situ avec un dichromate. 10
- 15
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55

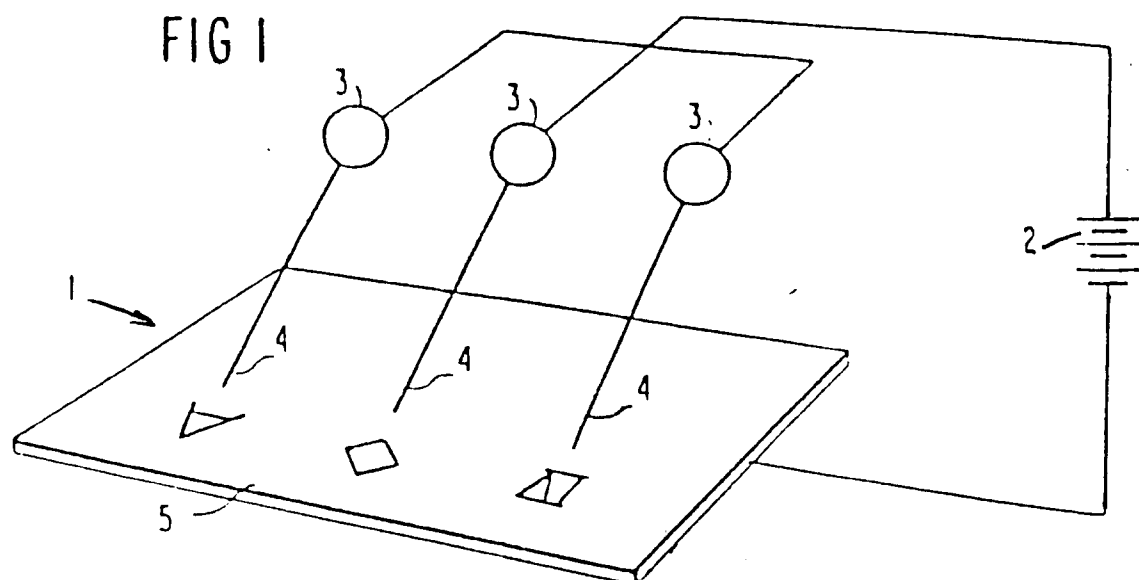


FIG. 2

