



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 385 688 B1

(12)

EUROPEAN PATENT SPECIFICATION

(49) Date of publication of patent specification: **03.05.95** (51) Int. Cl.⁶: **C09K 19/58, G02F 1/1337**

(21) Application number: **90302005.5**

(22) Date of filing: **26.02.90**

(54) **Ferroelectric liquid crystal composition and ferroelectric liquid crystal display device.**

(30) Priority: **27.02.89 JP 49573/89**

(43) Date of publication of application:
05.09.90 Bulletin 90/36

(45) Publication of the grant of the patent:
03.05.95 Bulletin 95/18

(84) Designated Contracting States:
CH DE FR GB LI NL

(56) References cited:

PATENT ABSTRACTS OF JAPAN, vol. 12, no. 431 (P-786)15November 1988/

PATENT ABSTRACTS OF JAPAN, vol. 3, no. 128 (C-62)24October1979

PATENT ABSTRACTS OF JAPAN, vol. 9, no. 078 (C-274)6April1985

JOURNAL OF APPLIED PHYSICS, vol. 47, no. 6, June 1976; S.BARRET et al., pp. 2375-2381/

MOLECULAR CRYSTALS AND LIQUID CRYSTALS, vol. 38, no. 1-4, 1977, MONTREUX (CH); J.D.MARGERUM, pp. 219-228

(73) Proprietor: **MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.**
1006, Kadoma
Kadoma-shi,
Osaka-fu 571 (JP)

(72) Inventor: **Onishi, Hiroyuki**
8-4-203, Tateishi-cho
Ikeda-shi,
Osaka-fu 563 (JP)
Inventor: **Johten, Kazuhiro**
18-26-28, Okayamate-cho
Hirakata-shi,
Osaka-fu 573 (JP)
Inventor: **Uemara, Tsuyoshi**
16-3-321, Joshoji-cho
Kadoma-shi,
Osaka-fu 571 (JP)
Inventor: **Sakurai, Takao**
1-1, Suzuki-cho,
Kawasaki-ku
Kawasaki-shi,
Kanagawa-ken 210 (JP)
Inventor: **Mikami, Naoko**
1-1, Suzuki-cho,
Kawasaki-ku
Kawasaki-shi,
Kanagawa-ken 210 (JP)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 385 688 B1

JOURNAL OF THE ELECTROCHEMICAL SOCIETY, vol. 124, 1977, MANCHESTER, NH (US);
H.S.LIM et al., pp. 1389-1394/

Inventor: **Yokota, Tadahiko**
1-1, Suzuki-cho,
Kawasaki-ku
Kawasaki-shi,
Kanagawa-ken 210 (JP)

⑦⁴ Representative: **Spencer, Graham Easdale et al**
A.A. Thornton & CO
Northumberland House
303-306, High Holborn
London WC1V 7LE (GB)

Description

The present invention relates to a liquid crystal composition and a liquid crystal display device having bistability, and especially relates to a ferroelectric liquid crystal composition and a ferroelectric liquid crystal display device.

These days, liquid crystal display devices have been widely used for both consumer equipment and office automation equipment such as portable TVs and laptop computers or the like, and now are successively replacing the CRT display devices. At present, the STN liquid crystal of double layer type utilizing a nematic liquid crystal is a main stream in the related market, but it has many problems with regard to response time, angle of view, and display capacity. On the contrary, ferroelectric liquid crystal has some excellent characteristics such as quick response and a large memory storage or the like which can not be found in the nematic liquid crystal. So, research and development about the ferroelectric liquid crystal have been made actively in order to produce a display of the next generation of large display capacity and with high definition.

Fig. 1 shows a schematic view of the ferroelectric liquid crystal. The ferroelectric liquid crystal has a layer structure usually called a smectic liquid crystal, and its liquid crystal molecules have such a structure that the molecules are tilted in the direction of a layer normal at a tilt angle θ . In Fig. 1, numeral 1 indicates a ferroelectric liquid crystal molecule, 2 indicates a cone, 3 (P) indicates a spontaneous polarization, 4 indicates a layer structure, and Z indicates a direction of a layer normal.

As shown in Fig. 1, the ferroelectric liquid crystal molecule can move freely on the cone (conical shape) tilted in the direction of the layer normal at θ degrees, and longitudinal directions of the molecules are specific in each of the layers, so that the molecules as a whole have a twisted configuration.

The ferroelectric liquid crystal molecule is an optically active liquid crystal molecule which is not a racemic modification, and has the spontaneous polarization 3 running in a direction perpendicular to the longitudinal direction of the molecule. Accordingly, the molecule rotates back and forth around the layer normal in 2θ degrees alternatively depending upon the direction of an applied electric field. According to these two states of the molecules, either the bright or the dark can be displayed with a polarizer.

Figs. 2-1 and 2-2 show display modes of the ferroelectric liquid crystal and changes of brightness. A numeral 5 indicates an upper surface of a glass substrate, and 6 indicates a lower surface of the glass substrate. In Fig. 2-1 (a), the electric field is applied in the direction from the lower substrate toward the upper substrate and all the spontaneous polarizations extend upward uniformly. In Fig. 2-1 (b), the electric field is applied from the upper substrate to the lower substrate, and all the spontaneous polarizations extend downward uniformly. Each state of the molecules will remain even if the electric field is cut off. As shown in Figs. 2-1 (a) and (b), idealistically perfect is such a switching between two uniform states in which all the long axis 1 of the molecules arranged from the top to the bottom extend in the same direction, but in practice the long axes of the molecules at the upper surface and at the lower surface are in a twisted position with each other by 2θ degrees as shown in Figs. 2-1 (c) and (d) affected by alignment layers and liquid crystal materials or the like, and the molecules therebetween are twisted with one another. This state is called 'twist state'. There is thus a switching between a twist state and another twist state, and another switching between a uniform state and a twist state, and in addition there is also a monostable state in which one uniform state becomes stable. Fig. 2-2 (a) shows applying voltages and changes of the brightness at the switchings between the uniform states, Fig. 2-2 (b) shows those between the twisted states, Fig. 2-2 (c) shows those between the uniform state and the twist state, and Fig. 2-2 (d) shows those at the monostable state. "o" shows the brightness just at applications of an electric field, and "x" shows the brightness during states of being stored. The brightness during the memory state is important at a practical working. In (a), the sufficient changes of the brightness can be achieved both at the voltage applications and during the memory state, but the changes of the brightness during the memory state are not sufficient at both sides in (b) and at one side in (c), and the brightness never changes in (d). As described just above, the twist state and the monostable state prevent the sufficient changes of the brightness and can not realize a favorable contrast.

There have been the following three problems about the conventional ferroelectric liquid crystal panel. The first is that it hardly has the switchings between the desirable uniform states and tends to have the switchings between the twist states or between the twist state and the uniform state so that it is difficult to achieve the favorable contrast. The second is that a deterioration of threshold characteristics occurs after leaving it in the memory state, namely one uniform state, for a long time. The third is that a reset pulse having a pulse width wider than a selecting pulse has to be applied when a matrix waveform is applied so that its picture plane becomes dazzling. Reasons of this phenomenon have not been found yet, but it is assumed to be because of ionic impurities. As for controlling the ionic impurities, there were examples

(Japanese Laid-Open Patent Publications No. 52-108385 and 54-82388) in which a variety of additives were tried to be added to a liquid crystal in order to prevent a deterioration of the liquid crystal caused by DC applications more than ten years ago when a DSM (dynamic scattering mode) was performed utilizing the nematic liquid crystal. But the ions do not have to be controlled in a TN mode and an STN mode utilizing the nematic liquid crystal of these days because the liquid crystal is purified sufficiently and is driven only by AC. A TFT presently used in a liquid crystal TV or the like has a problem concerning a voltage retention time, so that there is an example (Japanese Laid-Open Patent Publication No. 62-173438) in which minute particles having absorptivity are added to the liquid crystal in order to improve the voltage retention time, but it has a deterioration system different from that of the ferroelectric liquid crystal and this example is not effective to the ferroelectric liquid crystal.

As for controlling the ionic impurities in the ferroelectric liquid crystal, there has been a trial (Japanese Laid-Open Patent Publication No. 63-163426) to remove the ionic impurities by adding an inorganic metal to the liquid crystal. But the addition of these minute inorganic metallic particles brings about a dispersion of the metallic particles in the liquid crystal, and causes problems such as a disorder of a molecular alignment of the liquid crystal, a tendency that a crystallization can easily occur when maintaining the crystal at a low temperature using the particles as cores for the crystallization, and lowering of a resistivity, so that the ionic impurities can not be controlled effectively and it is difficult to keep favorable characteristics.


In order to prevent the deterioration of the threshold characteristics of the ferroelectric liquid crystal panel, there is another trial (U.S. Patent Application Serial No. 07/422,493 filed on October 17, 1989) in which a compound of a primary amine and of a secondary amine or an epoxy compound are added to the crystal, and this method can effectively prevent the deterioration. But there are still possibilities of having the twisted state because of its high reactivity.

An object of the present invention is to provide a ferroelectric liquid crystal panel of an excellent display capability wherein the panel shows switchings between favorable uniform states from beginning and there are neither a deterioration phenomenon of threshold characteristics even after a long storage nor dazzling.


According to one aspect of the present invention, there is provided a ferroelectric liquid crystal composition comprising a liquid crystal material having a ferroelectric liquid crystal phase, characterized by being added with an organic material which traps ions or lowers conductivity of the liquid crystal material, wherein said organic material is a chelate agent soluble in the liquid crystal material and having low reactivity with the liquid crystal material or an electron donor containing at least one of N, S and O atoms, soluble in the liquid crystal material and having low reactivity with the liquid crystal material.

The present invention also provides a ferroelectric liquid crystal display device wherein one of the above organic materials are dispersed on a surface of an alignment layer or in the alignment layer.


The organic material is an electron donor or a chelate agent except for those of primary and secondary amines and of an epoxy, and may be a heterocyclic compound which for example contains at least a nitrogen atom, an alcohol derivative, and an ether. As the ether, a compound having characteristics of the liquid crystal expressed in following formulas is desirable.



(In the formula, R indicates an alkyl group, and n and m indicate natural numbers.)



(In the formula, R indicates an alkyl group, l, m, and n indicate zero or natural numbers, o and p indicate natural numbers, at least any one of q, r, and s is a natural number not including zero, A and B indicate single bonds or COO, OCO, CH₂O, and CHCH, and



indicate ones out of a benzene ring, a pyrimidine ring, a pyridazine ring, a pyrazine ring, a pyridine ring, a cyclohexane ring, and a thiadiazole ring.

The above organic materials instead of inorganic metals are utilized as the material which traps the ions or which lowers the conductivity, and can trap the ions effectively according to a chelate effect and a hydrogen bond or the like in order to prevent lowering the resistivity. These materials also have a good compatibility (solubility) with the liquid crystal, so that there is no disorder of a molecular alignment and that the materials do not become cores of crystallization. Because molecular sizes of the organic materials are larger than those of the inorganic materials and can be freely chosen, influences of the ions can be effectively suppressed by lowering the mobility of the trapped ions.

According to a constitution just described above, trapped are the ions mixed in the liquid crystal from the beginning, produced later as the liquid crystal is being deteriorated, and introduced from glasses, over-coating materials, the alignment layers, and sealants, so that a deterioration of threshold characteristics caused by the ions can be prevented, and so that the liquid crystal display device having the excellent displaying capability can be achieved.

Fig. 1 is a diagrammatic view of a ferroelectric liquid crystal,

Fig. 2-1 is diagrammatic views of a display mode of the ferroelectric liquid crystal,

Fig. 2-2 is characteristic graphs of threshold characteristics at each display mode,

Fig. 3 is a diagrammatic view of an additive-added ferroelectric liquid crystal panel of the present invention,

Fig. 4 is a diagrammatic view of a common ferroelectric liquid crystal panel, and

Fig. 5 is explanation graphs of threshold characteristics evaluation waveforms and changes of the brightness.

In Fig. 3 is shown a diagrammatic view of a ferroelectric liquid crystal panel of the present invention. In Fig. 3, numeral codes 5 indicate glass substrates, 9 indicates transparent electrodes, 10 indicates insulating layers, 11 indicates alignment layers formed of organic layers or of inorganic layers, 12 indicates organic materials added to a liquid crystal layer of the present invention in order to trap ions or in order to lower a conductivity of the liquid crystal, and 13 indicates ionic impurities. The added organic materials 12 can be dispersed on the alignment layers 11 or in the alignment layers 11, and moreover the alignment layers 11 themselves can be composed of the organic materials 12.

As shown in the drawing, a ferroelectric liquid crystal composition and a ferroelectric liquid crystal display device using such liquid crystal composition contain an organic material which traps the ionic impurities existing in the liquid crystal layer, and thus can trap the ions effectively and/or can lower a conductivity. Examples of ways to trap the ions are shown below.

(1) To trap anions by means of hydrogen bonding with compounds having $\text{OH}^- \cdots$ Alcohol derivatives and polyhydric alcohol or the like.

(2) To trap metallic ions by means of crown ether or the like \cdots A crown ether and a thiocrown ether or the like.

(3) To trap cations by means of compounds including atoms (for example, N, S, and O) having a lone pair \cdots An ether and various kinds of a chelating agent or the like.

These are some examples of the ways of trapping the ions, and the ways of trapping the ions should not be limited to the above examples. Concrete examples of the organic materials to trap the ions are listed as follows:

The alcohol derivatives and the polyhydric alcohol such as a methanol, an ethylene glycol, and a triethylene glycol;

The chelating agent, the electron donor, and the heterocyclic compound such as an acetylacetone, a theonyltrifluoroacetone, a dibenzoylmethane, an alpha benzoin oxime, an O-oxyacetophenone, a 1-oxyantone, a pyromeconic acid, a tropolone, a quinone, an oxyquinone (such as an oxynaphthoquinone, a naphthazarin, an oxyanthraquinone, and an alizarin or the like), an oxyacid (a salicylic acid or the like), an oxyester (an acetoacetic ester), a diketone dioxime (a dimethylglyoxime), a 8-oxyquinoline, a 1-oxyacridine, a 10-oxybenzoquinoline, a 1-oxyphenazine, an oxyazobenzene, a nitrosonaphthol, an oxyquinoline N oxide, an amino acid, an anthranilic acid, a picolinic acid, a phenazine alpha carboxylic acid, a quinaldinic acid, a triazene, a buret, a formazane, a diphenylthiocarbazone, a dipyridil, a phenanthroline, a salicylaldehyde-oxyphenylimine, a luminol derivative, an oxyazocarboxylic acid, a terpyridil, an ammonia adiacetic acid, a bisalicylaldehyde ethylenediimine, a phthalocyanine, a porphin, a porphyrin, a trisalicylaldehyde diimine, a 1,8-bisalicylidenum amino 3,6-dithiaoctane, a cyclapentadienyl, an aldehyde, a ketone, an oxyketone, a phenol, a nitro compound, a carboxylic acid, an imine, a nitrile, an azo compound, a thioether, a thioketone, the heterocyclic compound, a carbonyl compound, and the ether.

These are some examples of the organic materials to trap the ions and/or to lower the conductivity of the liquid crystal by being added, and the present invention should not be limited to the above examples. Any such organic materials as the chelating agents having the low reactivity with the liquid crystal, the

electron donor, the alcohol derivatives, and the heterocyclic compound or the like can be used. The ionic impurities are trapped by adding these compounds, and the deterioration of the threshold characteristics or the like caused by the switchings between the twist states and between the uniform state and the twist state, by an uneven distribution of the ions under an influence of an internal electric field induced by a spontaneous polarization, and so on can be eliminated, so that the ferroelectric display device capable of displaying the excellent pictures can be achieved.

A constitution of the ferroelectric liquid crystal display panel, which has been made as the present example and which has been studied, is shown in Fig. 4. In Fig. 4, numeral codes 15 indicate polarizers, and 16 indicates spacers keeping a cell thickness at a constant length. The liquid crystal is applied a voltage by driving circuits 100 and 200 at a common and a segment sides. The present invention should not be limited to the ferroelectric liquid crystal display device of this type of constitution, and the polarizer can be one or none. An insulating layer can also be inserted under the transparent electrodes 9. A minimum constitution further requires substrates for both surfaces, transparent electrodes for applying an electric field, and a liquid crystal layer. The ferroelectric liquid crystal composition is filled in the panel of such constitution, and then the threshold characteristics, matrix characteristics, conditions of the molecular alignment, and the resistivity are measured. In Figs. 5 (a) and (b), an application waveform used for measuring the threshold characteristics (in (a)) and a typical changing process of the brightness (in (b)) are shown. 17 indicates a reset pulse which has a pulse width 4 times wider than that of a selecting pulse. 18 indicates a practical writing pulse for measuring the threshold, and this pulse varies from -30V to +30V. 19 indicates a nonselecting pulse which is kept at 2V while the measuring is performed. In Fig. 5 (b), 20 indicates a minimum (maximum) brightness at applications of the electric field when the selecting pulse 18 is applied, and corresponds to "o" in Fig. 2-2. 21 indicates the brightness at a memory condition after scanning 10000 lines, and corresponds to "x" in Fig. 2-2. In a cell which shows a fair switching between the uniform states, changes of the brightness at the memory condition, in other words, changes of "x" in Fig. 2-2 to the applied voltage are drastic and steep, and are sufficient as shown in Fig. 2-2 (a). As a matrix waveform, a waveform of 4 pulse method proposed by Wakita et al (National Technical Report Vol.33 No.1 P44 1987) is used. Taking into account dazzling, the pulse width of the reset pulse is made the same as that of the selecting pulse.

Example 1

The alignment layer made of an oblique evaporation layer of SiO is formed, by a vacuum evaporating apparatus, on surfaces of the upper and lower glass substrates which have the transparent electrodes fixed thereto. (An evaporation angle is 83 degree, and a layer thickness is 2000Å.) Then an oblique evaporation cell of thickness of 2 μm is formed between the upper and lower substrates so as to make directions of the evaporation at the upper and lower substrate parallel with each other. Ferroelectric liquid crystal composition added with quinoline at 0.05 to 5 Wt% is injected into this cell, and a comparison is made with one into which is injected the ferroelectric liquid crystal composition added with no quinoline. Liquid crystals used for the comparison are two, A and B, of different mixtures. Characteristics of the materials are shown as follows:

Liquid crystal A ---

Spontaneous polarization; 20 nC/cm², tilt angle 24°

Liquid crystal B ---

Spontaneous polarization; 19 nC/cm², tilt angle 20°

The state of the molecular alignment of the ferroelectric liquid crystal added with no quinoline is a twist state as a primary state no matter which kind the liquid crystal is. The threshold characteristics show only the switchings between the twist states in the liquid crystal A, but shows the fair switchings between the uniform states in the liquid crystal B. But when the driving pulse of 4 pulse method is applied at an actual matrix drive, only the switchings between the twist states in any kind of the liquid crystals are seen. In addition, the cell with the liquid crystal B, which shows the good threshold characteristics between the uniform states at beginning, starts showing only the switchings between the twist states after being left in one uniform state for a long time.

Next, the characteristics of the liquid crystal added with quinoline are examined, and the following improvements are achieved compared with the one with no quinoline:

- (1) Both the liquid crystals A and B have two uniform states as a primary molecular alignment state.
 (2) The threshold characteristics of the liquid crystal A show the switchings between the uniform states.
 (3) Both the liquid crystals A and B have the fair switchings between the uniform states when the driving waveform of 4 pulse method is applied at the matrix drive.
 5 (4) The resistivities of both the liquid crystals A and B becomes one order higher compared with the ones added with no quinoline. ($1.6 \times 10^{-10} \rightarrow 1.7 \times 10^{-11}$)
 (5) A deterioration of the threshold characteristics because of being left alone for a long time is eliminated.

The above effects do not especially depend upon an amount of addition. A ferroelectric liquid crystal
 10 display device using this liquid crystal composition added with quinoline shows good display characteristics without any dazzling for a long time.

Some experiments using the following additives instead of quinoline are also performed.

12 crown 4, 15 crown 5, 18 crown 6, ethyleneglycol dimethylether, triethleneglycol dimethylether, 4
 15 phenylpyrimidine, 8 oxiquinoline, 1. 10-phenanthroline, naphthoquinoline, and quinoxaline. A material having a structure similar to the liquid crystal, is the following compound:



In the formula, R stands for an alkyl group. If a compound of this kind is added to both the liquid
 crystals A and B at 1%, exactly the same effects as in the use of quinoline can be achieved.

Example 2

An organic alignment layer is applied on the upper and lower glass substrates having the transparent
 electrodes and is hardened, and then a surface thereof is rubbed in one axis. Then a rubbing cell of
 30 thickness of $2 \mu\text{m}$ is formed so that the directions of rubbing of the upper and lower substrates are not parallel. The cell is filled with the ferroelectric liquid crystal composition to which quinoline is added at 0.05 to 5 Wt%, and a comparison is made with one into which the ferroelectric liquid crystal composition is added and no quinoline is injected. The liquid crystal B is used. In the cell using the rubbing of the organic
 layer, being different from the oblique evaporation cell, the primary state of molecular alignment shows two
 35 uniform states without any additives and also shows the switchings between the uniform states no matter how wide the width of the reset pulse is. The resistivity is primarily high. However, one uniform state becomes stabilized after being kept in the same one uniform state for a few days, and a bistability disappears. On the contrary, when the 4 pulse waveform at the matrix drive is applied to the rubbing cell in
 which the liquid crystal B added with 0.05 to 5 Wt% quinoline has been filled and which is left in one
 40 uniform state for a week, the good switchings between the uniform states is observed just as observed at the beginning.

Same experiments using the following additives instead of quinoline are also performed.

12 crown 4, 15 crown 5, 18 crown 6, ethyleneglycol dimethylether, triethleneglycol dimethylether, 4
 45 phenylpyrimidine, 8 oxiquinoline, 1. 10-phenanthroline, naphthoquinoline, and quinoxaline. A material having a structure similar to the liquid crystal, is the following compound:



In the formula, R stands for an alkyl group. If a compound of this kind is added to the liquid crystal B at
 1%, exactly the same effects as in the use of quinoline can be achieved.

Example 3


An oblique evaporation layer is formed, by a vacuum evaporating apparatus, on surfaces of the upper and lower glass substrates which have the transparent electrodes fixed thereto. (An evaporation angle is 83 degree, and a layer thickness is 2000Å.) Then an oblique evaporation cell of thickness of 2 μm is formed between the upper and lower substrates so as to make directions of the evaporation of the upper and lower substrates parallel with each other. This cell is left alone in a closed container filled with vapor of quinoline for 2 hours, and quinoline is diffused on surfaces of an inorganic alignment layer made of SiO. Then the liquid crystals A and B are filled in the cells, and characteristics of this type of the cell are examined. This liquid crystal cell shows the following improvements compared with ones having no quinoline dispersed on the surfaces of the alignment layer.

- (1) Both the liquid crystals A and B have two uniform states as the primary molecular alignment state.
- (2) The threshold characteristics of the liquid crystal A show the switchings between the uniform states.
- (3) Both the liquid crystals A and B show the good switchings between the uniform states when the driving waveform of 4 pulse method is applied at the matrix drive.
- (4) The resistivities of both the liquid crystals A and B become one order higher compared with the ones added with no quinoline.
- (5) The deterioration of the threshold characteristics because of being left alone for a long time is eliminated.

A ferroelectric liquid crystal display device using this liquid crystal cell having quinoline diffused thereon shows good display characteristics for a long time.

Same experiments using the following additives instead of quinoline are also performed.

12 crown 4, 15 crown 5, 18 crown 6, ethyleneglycol dimethylether, triethyleneglycol dimethylether, 4 phenylpyrimidine, 8 oxiquinoline, 1. 10-phenanthroline, naphthoquinoline, and quinoxaline. A material having a structure similar to the liquid crystal, is the following compound:



(In the formula, R stands for an alkyl group.)

Among the above compounds, a compound of low volatility has to be heated to be vaporized, and a vapor of the compound is filled in the container, so that the vapor comes to contact with the surfaces of the alignment layer and the compound is diffused on the surfaces of the alignment layer. All of these can bring about the same effects as in the use of quinoline.

Example 4


An oblique evaporation layer is formed, by a vacuum evaporating apparatus, on surfaces of the upper and lower glass substrates which have the transparent electrodes fixed thereto. (An evaporating angle is 83 degree, and a layer thickness is 2000Å.) Then hexane having 1 - 10 Wt% of quinoline is spin-coated on the surface of these substrates. A solvent is removed later, and an oblique evaporation cell of 2 μm thickness is formed between the upper and lower substrates so that the directions of the oblique evaporation at the upper and lower ones become parallel with each other. Then the liquid crystals A and B are injected into the cells, and characteristics of this type of cell are studied. This liquid crystal cell has the following improvements compared with the ones having no quinoline diffused on the alignment layer's surfaces.

- (1) Both the liquid crystals A and B have two uniform states as the primary molecular alignment state.
- (2) The threshold characteristics of the liquid crystal A show the switchings between the uniform states.
- (3) Both the liquid crystals A and B show the good switchings between the uniform states when the driving waveform of 4 pulse method is applied at the matrix drive.
- (4) The resistivities of both the liquid crystals A and B become one order higher compared with the ones added with no quinoline.
- (5) The deterioration of the threshold characteristics because of being left alone for a long time is eliminated.

A ferroelectric liquid crystal display device using this liquid crystal cell having quinoline diffused thereon shows good display characteristics for a long time.

Same experiments using the following additives instead of quinoline are also performed.

12 crown 4, 15 crown 5, 18 crown 6, ethyleneglycol dimethylether, triethleneglycol dimethylether, 4 phenylpyrimidine, 8 oxiquinoline, 1. 10-phenanthroline, naphthoquinoline, and quinoxaline. A material having a structure similar to the liquid crystal, is the following compound:



(In the formula, R stands for an alkyl group.)

In addition, it is also possible to form the alignment layer using materials to which the above compounds are added. The effects are totally the same.

The present invention should not be limited to the present examples.

Claims


1. A ferroelectric liquid crystal composition comprising a liquid crystal material having a ferroelectric liquid crystal phase, characterized by being added with an organic material which traps ions or lowers conductivity of the liquid crystal material, wherein said organic material is a chelate agent soluble in the liquid crystal material and having low reactivity with the liquid crystal material or an electron donor containing at least one of N, S and O atoms, soluble in the liquid crystal material and having low reactivity with the liquid crystal material.

2. A ferroelectric liquid crystal composition according to claim 1, wherein said organic material is a heterocyclic compound.

3. A ferroelectric liquid crystal composition according to claim 1, wherein said organic material is an ether.


4. A ferroelectric liquid crystal composition according to claim 1, wherein said organic material is a crown ether.

5. A ferroelectric liquid crystal composition according to claim 1, wherein said organic material is an ether expressed by the following formula:




where R stands for an alkyl group, and n and m stands for natural numbers.

6. A ferroelectric liquid crystal composition according to claim 1, wherein said organic material is an ether expressed by the following formula:



where R stands for an alkyl group, each of l, m and n stands for 0 or a natural number, each of o and p stands for a natural number, at least one of q, r and s stands for a natural number and each of the others stands for 0 or a natural number, each of A and B stands for a single bond, COO, OCO, CH₂O or CHCH, and each of





stands for a benzene ring, a pyrimidine ring, a pyridazine ring, a pyrazine ring, a pyridine ring, a cyclohexane ring, or a thiadiazole ring.

7. A ferroelectric liquid crystal display device having a ferroelectric liquid crystal layer made of a ferroelectric liquid crystal composition according to any one of claims 1 through 6, comprising a pair of substrates which have been subjected to an alignment treatment and have voltage applying means, and said ferroelectric liquid crystal layer disposed between said pair of substrates.


8. A ferroelectric liquid crystal display device comprising a pair of substrates which have been subjected to an alignment treatment to form alignment layers thereon and have voltage applying means, and a ferroelectric liquid crystal layer made of a ferroelectric liquid crystal composition and disposed between said pair of substrates, characterized in that an organic material which traps ions or lowers conductivity of the liquid crystal material is diffused in said alignment layers, wherein said organic material is a chelate agent soluble in the liquid crystal material and having low reactivity with the liquid crystal material or an electron donor containing at least one of N, S and O atoms, soluble in the liquid crystal material and having low reactivity with the liquid crystal material.

9. A ferroelectric liquid crystal display device according to claim 8, wherein said organic material is a heterocyclic compound.

10. A ferroelectric liquid crystal display device according to claim 8, wherein said organic material is an ether.


11. A ferroelectric liquid crystal display device according to claim 8, wherein said organic material is a crown ether.

12. A ferroelectric liquid crystal display device according to claim 8, wherein said organic material is an ether expressed by the following formula:




where R stands for an alkyl group, and n and m stands for natural numbers.

13. A ferroelectric liquid crystal display device according to claim 8, wherein said organic material is an ether expressed by the following formula:




where R stands for an alkyl group, each of l, m and n stands for 0 or a natural number, each of o and p stands for a natural number, at least one of q, r and s stands for a natural number and each of the others stands for 0 or a natural number, each of A and B stands for a single bond, COO, OCO, CH₂O or CHCH, and each of



stands for a benzene ring, a pyrimidine ring, a pyridazine ring, a pyrazine ring, a pyridine ring, a cyclohexane ring, or a thiadiazole ring.


Patentansprüche

1. Ferroelektrische Flüssigkristall-Zubereitung mit einem Flüssigkristall-Material mit einer ferroelektrischen Flüssigkristall-Phase, dadurch gekennzeichnet, daß ihm ein organisches Material zugesetzt ist, das Ionen einfängt oder die Leitfähigkeit des Flüssigkristall-Materials erniedrigt, wobei das organische Material ein chelatisierendes Mittel, das in dem Flüssigkristall-Material löslich ist und eine niedrige Reaktivität gegenüber dem Flüssigkristall aufweist, oder ein Elektronendonator ist, der Wenigstens eines der Atome N, S und O enthält und der in dem Flüssigkristall-Material löslich ist und eine niedrige Reaktivität gegenüber dem Flüssigkristall aufweist.
2. Ferroelektrische Flüssigkristall-Zubereitung nach Anspruch 1, worin das organische Material eine heterocyclische Verbindung ist.
3. Ferroelektrische Flüssigkristall-Zubereitung nach Anspruch 1, worin das organische Material ein Ether ist.
4. Ferroelektrische Flüssigkristall-Zubereitung nach Anspruch 1, worin das organische Material ein Kronenether ist.
5. Ferroelektrische Flüssigkristall-Zubereitung nach Anspruch 1, worin das organische Material ein Ether ist, der durch die folgende Formel wiedergegeben wird:



worin R für eine Alkylgruppe steht und n und m für natürliche Zahlen stehen.

6. Ferroelektrische Flüssigkristall-Zubereitung nach Anspruch 1, worin das organische Material ein Ether ist, der durch die folgende Formel wiedergegeben wird:



worin R für eine Alkylgruppe steht, jeder der Indizes l, m und n für 0 oder eine natürliche Zahl steht, jeder der Indizes o und p für eine natürliche Zahl steht, wenigstens einer der Indizes q, r und s für eine natürliche Zahl steht und jeder der anderen Indizes für 0 oder eine natürliche Zahl steht, jeder der Reste A und B für eine Einfachbindung oder für -COO-, -OCO-, -CH₂O- oder -CHCH- steht und jeder der Reste



für einen Benzolring, einen Pyrimidinring, einen Pyridazinring, einen Pyrazinring, einen Pyridinring, einen Cyclohexanring oder einen Thiadiazolring steht.

7. Ferroelektrische Flüssigkristall-Anzeigevorrichtung mit einer ferroelektrischen Flüssigkristall-Schicht, die aus einer ferroelektrischen Flüssigkristall-Zubereitung nach einem der Ansprüche 1 bis 6 besteht, umfassend ein Paar Substrate, die einer Ausrichtungsbehandlung unterworfen wurden und Einrichtungen zum Anlegen einer Spannung aufweisen, wobei die ferroelektrische Flüssigkristall-Schicht zwischen dem Substrate-Paar angeordnet ist.
8. Ferroelektrische Flüssigkristall-Anzeigevorrichtung, umfassend ein Paar Substrate, die einer Ausrichtungsbehandlung unterworfen wurden und Einrichtungen zum Anlegen einer Spannung aufweisen, und eine aus einer ferroelektrischen Flüssigkristall-Zubereitung bestehende und zwischen dem Substrate-Paar angeordnete ferroelektrische Flüssigkristall-Schicht, dadurch gekennzeichnet, daß ein organisches Material, das Ionen einfängt oder die Leitfähigkeit des Flüssigkristall-Materials erniedrigt, in die


Ausrichtschichten diffundiert ist, wobei das organische Material ein chelatisierendes Mittel, das in dem Flüssigkristall-Material löslich ist und eine niedrige Reaktivität gegenüber dem Flüssigkristall aufweist, oder ein Elektronendonator ist, der wenigstens eines der Atome N, S und O enthält und der in dem Flüssigkristall-Material löslich ist und eine niedrige Reaktivität gegenüber dem Flüssigkristall aufweist.

9. Ferroelektrische Flüssigkristall-Anzeigevorrichtung nach Anspruch 8, worin das organische Material eine heterocyclische Verbindung ist.

10. Ferroelektrische Flüssigkristall-Anzeigevorrichtung nach Anspruch 8, worin das organische Material ein Ether ist.


11. Ferroelektrische Flüssigkristall-Anzeigevorrichtung nach Anspruch 8, worin das organische Material ein Kronenether ist.

12. Ferroelektrische Flüssigkristall-Anzeigevorrichtung nach Anspruch 8, worin das organische Material ein Ether ist, der durch die folgende Formel wiedergegeben wird:




worin R für eine Alkylgruppe steht und n und m für natürliche Zahlen stehen.

13. Ferroelektrische Flüssigkristall-Anzeigevorrichtung nach Anspruch 8, worin das organische Material ein Ether ist, der durch die folgende Formel wiedergegeben wird:



worin R für eine Alkylgruppe steht, jeder der Indizes l, m und n für 0 oder eine natürliche Zahl steht, jeder der Indizes o und p für eine natürliche Zahl steht, wenigstens einer der Indizes q, r und s für eine natürliche Zahl steht und jeder der anderen Indizes für 0 oder eine natürliche Zahl steht, jeder der Reste A und B für eine Einfachbindung oder für -COO-, -OCO-, -CH₂O- oder -CHCH- steht und jeder der Reste



für einen Benzolring, einen Pyrimidinring, einen Pyridazinring, einen Pyrazinring, einen Pyridinring, einen Cyclohexanring oder einen Thiadiazolring steht.

Revendications


1. Composition de cristal liquide ferroélectrique qui comprend un matériau de cristal liquide possédant une phase cristal liquide ferroélectrique, caractérisée en ce qu'il lui est ajoutée une matière organique qui piège les ions ou abaisse la conductivité du matériau de cristal liquide, où ladite matière organique est un agent chélatant soluble dans le matériau de cristal liquide et possédant une faible réactivité avec le matériau de cristal liquide ou un donneur d'électrons contenant au moins un parmi les atomes d'azote, de soufre et d'oxygène, soluble dans le matériau de cristal liquide et possédant une faible réactivité avec le matériau de cristal liquide.

2. Composition de cristal liquide ferroélectrique selon la revendication 1, où ladite matière organique est un composé hétérocyclique.

3. Composition de cristal liquide ferroélectrique selon la revendication 1, où ladite matière organique est un éther.

4. Composition de cristal liquide ferroélectrique selon la revendication 1, où ladite matière organique est un éther en couronne.


5 5. Composition de cristal liquide ferroélectrique selon la revendication 1, où ladite matière organique est un éther exprimé par la formule suivante :



où R représente un groupe alkyle, et les nombres n et m représentent des entiers naturels.

10

6. Composition de cristal liquide ferroélectrique selon la revendication 1, où ladite matière organique est un éther exprimé par la formule suivante :



où R représente un groupe alkyle, chacun des nombres l, m et n représentent zéro ou un entier naturel, chacun des nombres o et p représentent un entier naturel, au moins un des nombres q, r et s représente un entier naturel et chacun des autres représentent zéro ou un entier naturel, A et B représentent chacun une liaison simple, COO, OCO, CH₂O ou CHCH, et

20



25

représentent chacun un noyau benzène, un noyau pyrimidine, un noyau pyridazine, un noyau pyrazine, un noyau pyridine, un noyau cyclohexane ou un noyau thiadiazole.

30 7. Dispositif d'affichage à cristal liquide ferroélectrique qui possède une couche de cristal liquide ferroélectrique faite d'une composition de cristal liquide ferroélectrique selon l'une quelconque des revendications 1 à 6, comprenant une paire de substrats qui ont été soumis à un traitement d'alignement et comportent des moyens d'application de tension, ladite couche de cristal liquide ferroélectrique étant disposée entre lesdits deux substrats.

35

8. Dispositif d'affichage à cristal liquide ferroélectrique comprenant une paire de substrats qui ont été soumis à un traitement d'alignement destiné à former des couches d'alignement sur ceux-ci et qui possèdent des moyens d'application de tension, et une couche de cristal liquide ferroélectrique faite d'une composition de cristal liquide ferroélectrique et disposée entre lesdits deux substrats, caractérisé en ce qu'une matière organique qui piège les ions et abaisse la conductivité du matériau de cristal liquide est diffusée dans lesdites couches d'alignement, où ladite matière organique est un agent chélatant soluble dans le matériau de cristal liquide et possédant une faible réactivité avec le matériau de cristal liquide ou un donneur d'électrons contenant au moins l'un parmi les atomes d'azote, de soufre et d'oxygène, soluble dans le matériau de cristal liquide et possédant une faible réactivité avec le matériau de cristal liquide.

40

45


9. Dispositif d'affichage à cristal liquide ferroélectrique selon la revendication 8, où ladite matière organique est un composé hétérocyclique.

50 10. Dispositif d'affichage à cristal liquide ferroélectrique selon la revendication 8, où ladite matière organique est un éther.

11. Dispositif d'affichage à cristal liquide ferroélectrique selon la revendication 8, où ladite matière organique est un éther en couronne.


55

12. Dispositif d'affichage à cristal liquide ferroélectrique selon la revendication 8, où ladite matière organique est un éther exprimé par la formule suivante :



où R représente un groupe alkyle, et les nombres n et m représentent des entiers naturels.

- 5 **13.** Dispositif d'affichage à cristal liquide ferroélectrique selon la revendication 8, où ladite matière organique est un éther exprimé par la formule suivante :



15 où R représente un groupe alkyle, chacun des nombres l, m et n représentent zéro ou un entier naturel, chacun des nombres o et p représentent un entier naturel, au moins un des nombres q, r et s représente un entier naturel et chacun des autres représentent zéro ou un entier naturel, A et B représentent chacun une liaison simple, COO, OCO, CH₂O ou CHCH, et



représentent chacun un noyau benzène, un noyau pyrimidine, un noyau pyridazine, un noyau pyrazine, un noyau pyridine, un noyau cyclohexane ou un noyau thiadiazole.

25

30

35

40

45

50

55

FIG. 1

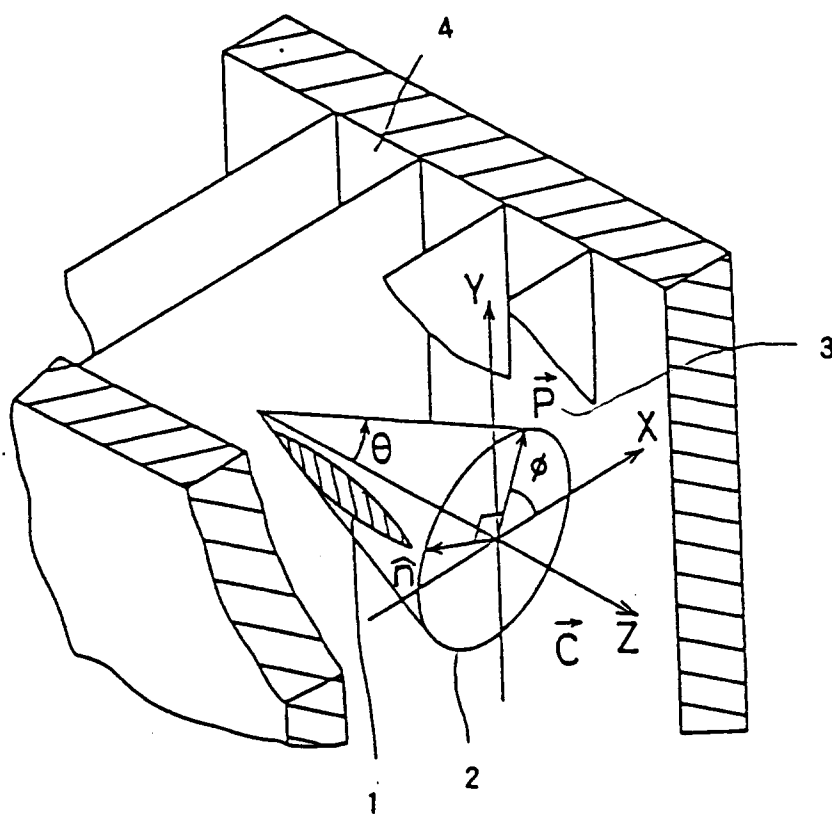


FIG. 2-1

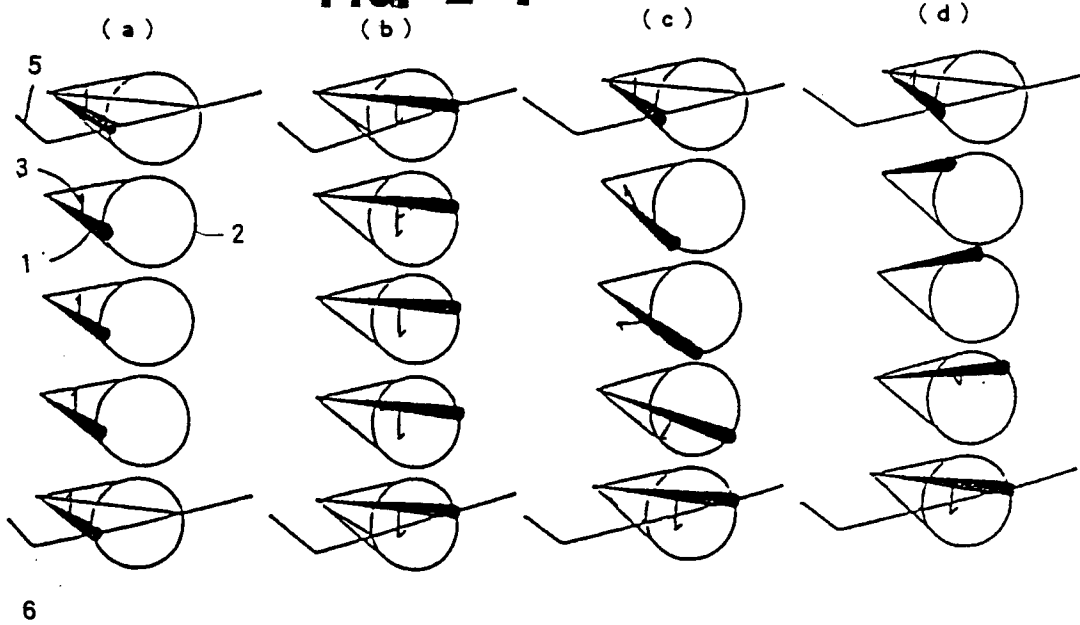


FIG. 2-2

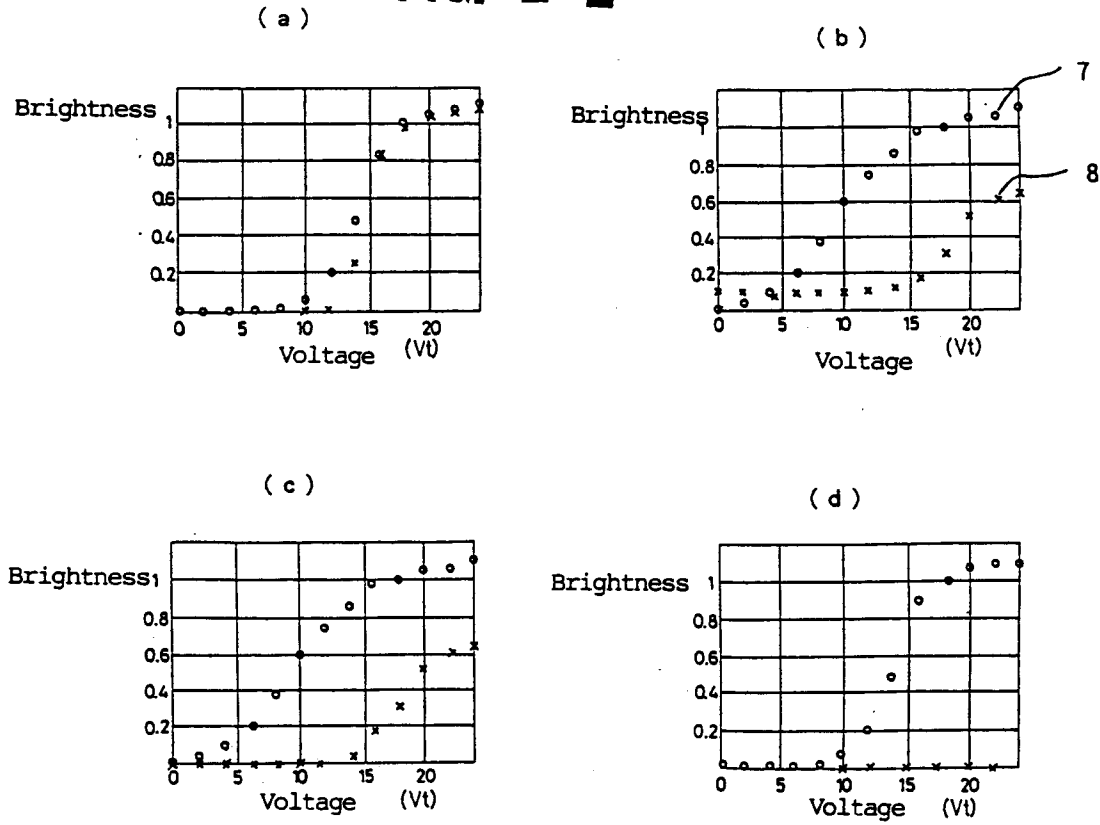


FIG. 3

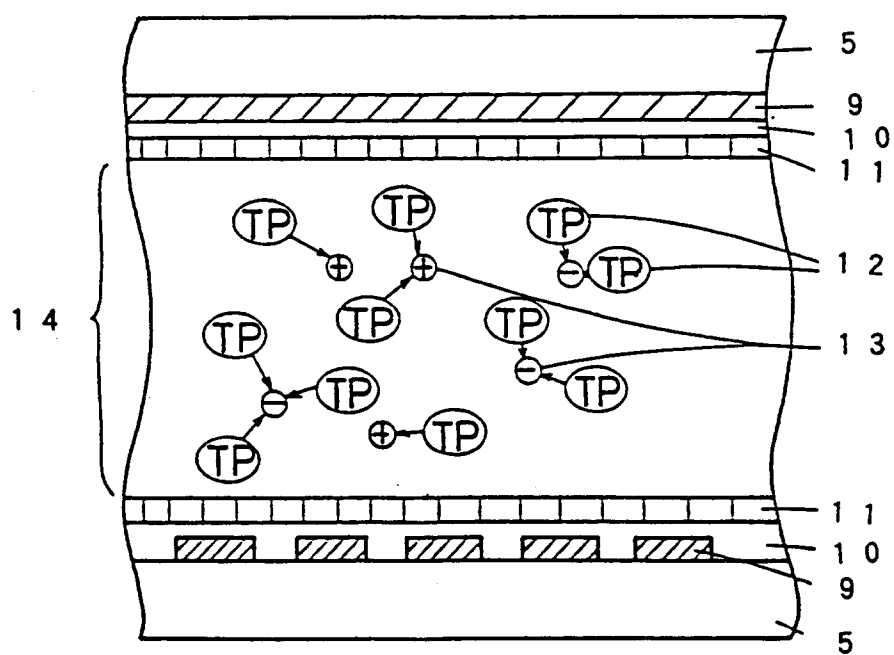


FIG. 4

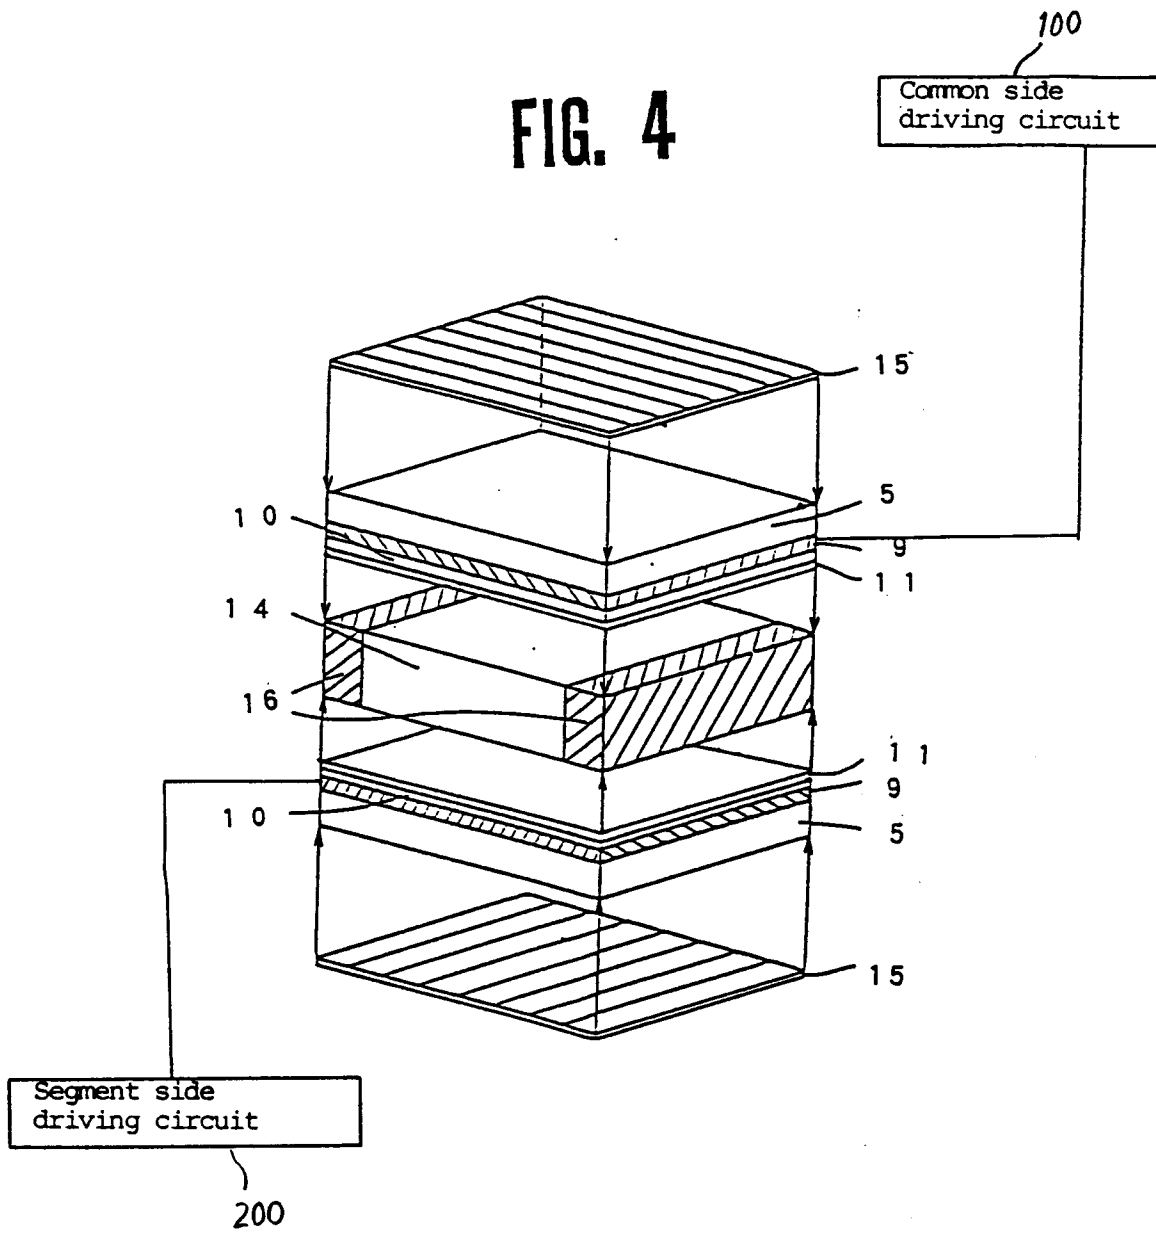


FIG. 5

