



(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 90307862.4

(51) Int. Cl.⁵: E06B 3/54

(22) Date of filing: 18.07.90


(30) Priority: 28.11.89 GB 8926886
 11.08.89 GB 8918395(43) Date of publication of application:
 13.02.91 Bulletin 91/07(84) Designated Contracting States:
 AT BE CH DE DK ES FR GR IT LI LU NL SE(71) Applicant: GLAZPART LTD
 Wildmere Road, Daventry Road Industrial
 Estate
 Banbury, Oxon, OX16 7XR(GB)(72) Inventor: Rhodes, David 2Higher Wardington
 Cottages
 Upper Wardington
 Banbury, Oxon OX17 1SP(GB)
 Inventor: Hanley, Kenneth Alfred Heathcote
 House
 Marsh Lane, Little Tew
 Chipley Norton Oxon, OX7 4JE(GB)
 Inventor: Hall, Kenneth
 28, Ridgley Close
 Warwick, CV34 5PD(GB)(74) Representative: Allard, Susan Joyce et al
 BOULT, WADE & TENNANT, 27 Furnival
 Street
 London EC4A 1PQ(GB)

(54) A panel assembly.

(57) A panel assembly comprising a panel (42) having a front face and a back face, a frame (36) surrounding the panel, first (48) and second (46) longitudinal wedge-shaped packing elements which are disposed between the frame and the panel and which include engaging means preventing the elements from moving down each other, the first packing element (48) being held against transverse movement with respect to the frame (36), the second packing element (46) having an upstanding portion (54) which faces the front face of the panel and being held against movement in a first direction, which first direction extends from the panel towards the upstanding portion of the second packing element, by engagement of a surface of the first packing element (48) with a surface of the second packing element (46), and the assembly including means preventing movement of the second packing element (46) in a second direction which is opposite to

the first direction.

FIG. 3.

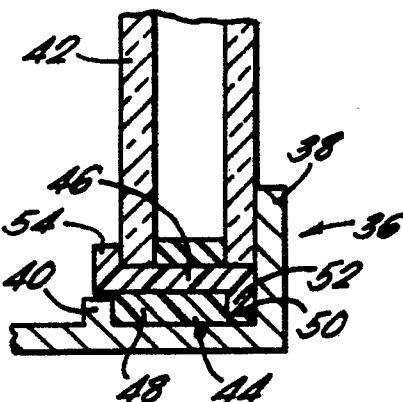

A PANEL ASSEMBLY

This invention relates to a panel assembly comprising a panel having a front face and a back face, a frame surrounding the panel, first and second longitudinal packing elements which are disposed between the frame and the panel and longitudinal sealing means engaging the frame and the panel, the first packing element being held against transverse movement with respect to the frame. The panel may be a single pane of glass or a sealed double - or triple-glazed unit, or a panel of wood, plastic or metal.

In known glazing assemblies, the frame has an upstanding wall on the inside - that is, on the side nearest the interior of a building to which the glazing assembly is to be fitted - and the glass panel will be fitted to the outside of this wall. Outside of the glass panel is an upstanding retaining wall. Since the glass panel has to be lifted over the retaining wall so as to be dropped into the channel between the two walls, there is clearance between the periphery of the glass panel and the frame. To take up this clearance, packing elements are fitted between the frame and the glass panel. In some cases, the packing elements are simply flat elements and in other cases the packing elements are co-operating pairs of wedge-shaped elements. A bead and sealing strip are fitted between the glass panel and the retaining wall.

The disadvantage with this assembly is that a burglar can lift off the bead and sealing strip using a tool such as a scraper and then remove the glass panel without too much difficulty.

The object of the invention is to provide a panel assembly in which removal of the panel is made more difficult and time consuming.

Accordingly, the present invention provides a panel assembly comprising a panel having a front face and a back face, a frame surrounding the panel, first and second longitudinal packing elements which are disposed between the frame and the panel and longitudinal sealing means engaging the frame and the panel, the first and second packing elements being wedge-shaped and including engaging means which prevent the elements from moving down each other, the first packing element being held against transverse movement with respect to the frame, the second packing element having an upstanding portion which faces the front face of the panel and is held against movement in a first direction which first direction extends from the panel towards the upstanding portion of the second packing element, by engagement with a surface of the first packing element with a surface of the second packing element, and means preventing movement of the second pack-

ing element in a second direction which is opposite to the first direction.

The packing elements are used in the normal manner to take up clearance between the frame and the panel.

The upstanding portion of the second packing element will be on the outside of a fitted glazing panel assembly and, with all the clearance between the frame and the panel taken up by the packing elements and access to the assembly only being from the outside, the panel cannot be removed from the outside without damaging, or destroying, the assembly.

Conveniently, the surfaces of the first and second packing elements which engage each other are provided by longitudinal walls confronting each other.

The two packing elements are wedge-shaped and include engaging means which prevent the elements from moving down each other. After the components of the assembly are in place, then the elements of each pair of wedge-shaped packing elements are moved with respect to one another so that all of the clearance between the frame and the panel is taken up.

The engaging means can be provided on the inclined opposed surfaces of the packing elements or on opposed surfaces of the elements facing in the first and second directions, and the engaging means may comprise a pawl and rack formation, or teeth.

Preferably, the means preventing movement of the second packing element in the second direction is removable and, typically, comprises a sealing means such as a beading engaging the back face of the panel. Advantageously, when the said means is removed, the second packing element is movable with respect to the first packing element in the second direction by a pre-determined distance to a position at which the engaging means is disengaged.

In practice, the removable means, the beading, would be on the inside ensuring that access could not be gained to the removable means from the outside. If the panel had to be removed or replaced for some reason, then the removable means would be removed, the engaging means would be disengaged and the second packing element of each pair would then be moved downwardly along the first packing element creating enough clearance between the panel and the frame for the panel to be removed and repaired or replaced.

The means preventing movement of the second packing element in the second direction may comprise a surface of the first packing element or

frame which faces in the first direction and a surface of the second packing element which faces in the second packing direction, the two surfaces facing each other. Conveniently, these surfaces are provided by longitudinal walls confronting each other.

The said engagement of the two packing elements may comprise a pawl and rack formation. Preferably, the first packing element is secured to the frame and has one or more pawls extending perpendicular to the plane of the frame. The panel is then offered up so that it sits on the first packing element. The second packing element has an upstanding portion for facing the panel and has the rack or racks. The second element is pushed in a direction perpendicular to the panel so that the or each pawl engages over the projections or teeth of the respective rack.

Preferably one of the packing elements and co-operates with a wedge-shaped third element to take up any remaining clearance.

Preferably, the frame and the first packing element have interengaging formations holding the first packing element against transverse movement with respect to the frame, which formations may comprise: a channel in the frame receiving the first packing element; a longitudinal groove in the frame receiving a longitudinal projection of the first packing element, or a bore in the frame receiving a stud of the first packing element. The first packing element may have a flexible projection which extends in the second direction and which is undercut and engages over an upstanding projection of the frame. Furthermore, the first packing element and the frame may have aligned bores and screws may be used to secure them together.

In the accompanying drawings:

Figure 1 is a diagrammatical section of a part of a known glazing panel assembly;

Figure 2 is a side view of two wedge-shaped packing elements;

Figure 3 is a diagrammatical section of part of another glazing panel assembly;

Figure 4 is a perspective view of the two co-operating wedge-shaped packing elements of the assembly of Figure 3;

Figures 5 and 6 are cross-sections on variations on the two co-operating packing elements of Figures 3 and 4;

Figures 7 and 8 show another two co-operating wedge-shaped packing elements having pawl and rack formations on their inclined opposed surfaces;

Figure 9 is a perspective exploded view of the components of one corner of a further glazing panel assembly, Figure 9 being a scrap view on IX-IX of the second packing element;

Figure 10 is a perspective exploded view of the

components of one corner of another glazing panel assembly, Figure 10A being a scrap view on X-X of the second packing element, and Figure 10B being an end view of the two packing elements together.

Figure 11 is a perspective view of a further two co-operating wedge-shaped packing elements, Figure 11A being an end view of the two packing elements;

Figure 12 is a cross-section of part of a glazing panel assembly, including beading, and incorporating the packing elements of Figure 11;

Figure 13 is a scrap perspective view showing a modification to the first packing element shown in Figure 11;

Figure 14 is a side view of a further two co-operating wedge-shaped packing elements, Figure 14A being a cross-sectional view along the line XIV-XIV Figure 14;

Figure 15 is a side view of a further two co-operating wedge-shaped packing elements, Figure 15A being a cross-sectional view along the line XV-XV of Figure 15; and

Figure 16 is a sketch cross-sectional view of an alternative way of locking two wedge-shaped packing elements together, Figure 16A being a perspective side view of the packing elements of Figure 16 applied to a corner of a glazing unit.

Figure 1 shows a known glazing panel assembly comprising a rectangular frame 20 having an upstanding inner wall 22 and an upstanding retaining wall 24. The retaining wall 24 may be an integral part of the frame 20. The two upstanding walls 22 and 24 form a channel for reception of a glass panel 26 which, in this case, is a sealed double-glazed unit. Since, when fitting the glass panel 26, it will have to be lifted over the retaining wall 24, there will be a clearance between the panel and the frame 20. To take up this clearance, packing in the form of flat packing elements 28 are arranged between the frame and the glass panel. In the region 30 between the retaining wall 24 and the glass panel 26, there would be beading and a sealing strip. These have been omitted in the interests of clarity in the drawings. The problem with this known assembly is that, once the beading and sealing strip have been removed, the glass panel 26 can be too easily removed.

Instead of using flat packing elements 28, Figure 2 shows two co-operating wedge-shaped packing elements 32 and 34. The element 34 is positioned, for example, at the bottom right hand corner of a glazing assembly, with the glass panel sitting on the top of the element 32. The element 32 is then moved up the element 34 so taking up the clearance. To prevent the element 32 from moving down the element 34, the inclined faces of the two

elements have transverse projections or ridges with a saw-tooth profile.

However, there is nothing to prevent the packing element 32 from being moved transversely with respect to the element 34 and so allowing removal of the panel.

Figure 3 shows a glazing panel assembly comprising a frame 36 with an upstanding inner wall 38 and an upstanding integral retaining wall 40, a glass panel 42 having a front face on the left of the drawing and a back face on the right and packing 44. The packing comprises two co-operating wedge-shaped packing elements 46 and 48 which are also shown in Figure 4. The lower or first packing element 48 is held in place between the two walls 38 and 40 or may be secured by, for example, being screwed to the frame. The lower element 48 has a recess 50 in its inclined surface and the upper or second element 46 has a projection 52 received in the recess. The upper element 46 also has an upstanding portion or wall 54 facing the front face of the glass panel. The inclined facing surfaces of the two elements 46 and 48 have co-operating transverse projections or ridges with a saw-tooth profile.

Movement of the upper element 46 in a direction perpendicular to the glass panel 42 is prevented by the projection 52 engaging in the recess 50. The upstanding wall 54 of the upper element 46 prevents the glass panel 42 from being removed from the frame, and the clearance is taken up by moving the upper wedge-shaped packing element 46 up and along the lower element 48, the saw-tooth formations preventing the upper element from moving down.

Figures 5 and 6 show two different pairs of co-operating wedge-shaped packing elements, 56 and 58, and 60 and 62 respectively illustrating different arrangements of projections and recesses.

Figure 7 and 8 show two further co-operating wedge-shaped packing elements 64 and 66. They differ from those shown in Figure 3 and 4 in that, instead of the co-operating saw-tooth ridges, they have a pawl and rack formation. The inclined face of the lower or first element 64 has two flats 68 between which there is a toothed rack 70. The inclined face of the upper or second element 66 has two sprung pawls 72 extending parallel to the glass panel when assembled. The teeth of the rack 70 and the heads of the sprung pawls 72 are shaped such that movement of the upper element 66 up and along the inclined face of the lower element 64 is possible, with the pawls moving into recesses 74 in the upper element as they ride up the teeth, whereas movement down in the other direction is prevented.

Figures 9 and 9A show a glazing panel assembly which comprises a frame 122, a glass panel

124, with a front face to the left and a back face to the right of the drawing, and two co-operating wedge-shaped packing elements 126 and 128 between the frame and the panel. The first packing element 128 is one of two identical elements joined together by a web 130 having a weakened region 132 allowing the elements to be bent relative to each other and arranged perpendicular to each other in a corner of the frame.

10 The frame 122 has pairs of parallel longitudinal grooves 134 at each corner of which only one pair is shown. The underside of each packing element 128 has two longitudinal projections 136 which are received in the grooves 134 so preventing transverse movement of the packing element with respect to the frame 122.

15 The lower and first packing element 128 has two longitudinally extending upstanding projections 138 on its upper surface which are spaced inwardly from the edges leaving two flats. The upper and second packing element 126 has two longitudinally extending depending projections 140 which lie outside of the projections 138 and sit on the flats of the lower element 128.

20 25 The upper and second element 126 also has two longitudinally extending and upstanding portions 142 facing the glass panel and forming a channel in which the glass panel 124 is received.

25 The co-operating inclined faces of the two packing elements 126 and 128 have a pawl and rack formation. The lower and first element 128 has three aligned and off-centre sprung pawls 144 which are positioned between the longitudinal projections 138 and have recesses into which the pawls can move. The upper element 126 has a toothed rack 146 formed on its under side which lies between and is spaced from the longitudinal projections 140, the teeth being clearly seen in the scrap view of Figure 9A. The head of each pawl 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500 505 510 515 520 525 530 535 540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625 630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715 720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805 810 815 820 825 830 835 840 845 850 855 860 865 870 875 880 885 890 895 900 905 910 915 920 925 930 935 940 945 950 955 960 965 970 975 980 985 990 995 1000 1005 1010 1015 1020 1025 1030 1035 1040 1045 1050 1055 1060 1065 1070 1075 1080 1085 1090 1095 1100 1105 1110 1115 1120 1125 1130 1135 1140 1145 1150 1155 1160 1165 1170 1175 1180 1185 1190 1195 1200 1205 1210 1215 1220 1225 1230 1235 1240 1245 1250 1255 1260 1265 1270 1275 1280 1285 1290 1295 1300 1305 1310 1315 1320 1325 1330 1335 1340 1345 1350 1355 1360 1365 1370 1375 1380 1385 1390 1395 1400 1405 1410 1415 1420 1425 1430 1435 1440 1445 1450 1455 1460 1465 1470 1475 1480 1485 1490 1495 1500 1505 1510 1515 1520 1525 1530 1535 1540 1545 1550 1555 1560 1565 1570 1575 1580 1585 1590 1595 1600 1605 1610 1615 1620 1625 1630 1635 1640 1645 1650 1655 1660 1665 1670 1675 1680 1685 1690 1695 1700 1705 1710 1715 1720 1725 1730 1735 1740 1745 1750 1755 1760 1765 1770 1775 1780 1785 1790 1795 1800 1805 1810 1815 1820 1825 1830 1835 1840 1845 1850 1855 1860 1865 1870 1875 1880 1885 1890 1895 1900 1905 1910 1915 1920 1925 1930 1935 1940 1945 1950 1955 1960 1965 1970 1975 1980 1985 1990 1995 2000 2005 2010 2015 2020 2025 2030 2035 2040 2045 2050 2055 2060 2065 2070 2075 2080 2085 2090 2095 2100 2105 2110 2115 2120 2125 2130 2135 2140 2145 2150 2155 2160 2165 2170 2175 2180 2185 2190 2195 2200 2205 2210 2215 2220 2225 2230 2235 2240 2245 2250 2255 2260 2265 2270 2275 2280 2285 2290 2295 2300 2305 2310 2315 2320 2325 2330 2335 2340 2345 2350 2355 2360 2365 2370 2375 2380 2385 2390 2395 2400 2405 2410 2415 2420 2425 2430 2435 2440 2445 2450 2455 2460 2465 2470 2475 2480 2485 2490 2495 2500 2505 2510 2515 2520 2525 2530 2535 2540 2545 2550 2555 2560 2565 2570 2575 2580 2585 2590 2595 2600 2605 2610 2615 2620 2625 2630 2635 2640 2645 2650 2655 2660 2665 2670 2675 2680 2685 2690 2695 2700 2705 2710 2715 2720 2725 2730 2735 2740 2745 2750 2755 2760 2765 2770 2775 2780 2785 2790 2795 2800 2805 2810 2815 2820 2825 2830 2835 2840 2845 2850 2855 2860 2865 2870 2875 2880 2885 2890 2895 2900 2905 2910 2915 2920 2925 2930 2935 2940 2945 2950 2955 2960 2965 2970 2975 2980 2985 2990 2995 3000 3005 3010 3015 3020 3025 3030 3035 3040 3045 3050 3055 3060 3065 3070 3075 3080 3085 3090 3095 3100 3105 3110 3115 3120 3125 3130 3135 3140 3145 3150 3155 3160 3165 3170 3175 3180 3185 3190 3195 3200 3205 3210 3215 3220 3225 3230 3235 3240 3245 3250 3255 3260 3265 3270 3275 3280 3285 3290 3295 3300 3305 3310 3315 3320 3325 3330 3335 3340 3345 3350 3355 3360 3365 3370 3375 3380 3385 3390 3395 3400 3405 3410 3415 3420 3425 3430 3435 3440 3445 3450 3455 3460 3465 3470 3475 3480 3485 3490 3495 3500 3505 3510 3515 3520 3525 3530 3535 3540 3545 3550 3555 3560 3565 3570 3575 3580 3585 3590 3595 3600 3605 3610 3615 3620 3625 3630 3635 3640 3645 3650 3655 3660 3665 3670 3675 3680 3685 3690 3695 3700 3705 3710 3715 3720 3725 3730 3735 3740 3745 3750 3755 3760 3765 3770 3775 3780 3785 3790 3795 3800 3805 3810 3815 3820 3825 3830 3835 3840 3845 3850 3855 3860 3865 3870 3875 3880 3885 3890 3895 3900 3905 3910 3915 3920 3925 3930 3935 3940 3945 3950 3955 3960 3965 3970 3975 3980 3985 3990 3995 4000 4005 4010 4015 4020 4025 4030 4035 4040 4045 4050 4055 4060 4065 4070 4075 4080 4085 4090 4095 4100 4105 4110 4115 4120 4125 4130 4135 4140 4145 4150 4155 4160 4165 4170 4175 4180 4185 4190 4195 4200 4205 4210 4215 4220 4225 4230 4235 4240 4245 4250 4255 4260 4265 4270 4275 4280 4285 4290 4295 4300 4305 4310 4315 4320 4325 4330 4335 4340 4345 4350 4355 4360 4365 4370 4375 4380 4385 4390 4395 4400 4405 4410 4415 4420 4425 4430 4435 4440 4445 4450 4455 4460 4465 4470 4475 4480 4485 4490 4495 4500 4505 4510 4515 4520 4525 4530 4535 4540 4545 4550 4555 4560 4565 4570 4575 4580 4585 4590 4595 4600 4605 4610 4615 4620 4625 4630 4635 4640 4645 4650 4655 4660 4665 4670 4675 4680 4685 4690 4695 4700 4705 4710 4715 4720 4725 4730 4735 4740 4745 4750 4755 4760 4765 4770 4775 4780 4785 4790 4795 4800 4805 4810 4815 4820 4825 4830 4835 4840 4845 4850 4855 4860 4865 4870 4875 4880 4885 4890 4895 4900 4905 4910 4915 4920 4925 4930 4935 4940 4945 4950 4955 4960 4965 4970 4975 4980 4985 4990 4995 5000 5005 5010 5015 5020 5025 5030 5035 5040 5045 5050 5055 5060 5065 5070 5075 5080 5085 5090 5095 5100 5105 5110 5115 5120 5125 5130 5135 5140 5145 5150 5155 5160 5165 5170 5175 5180 5185 5190 5195 5200 5205 5210 5215 5220 5225 5230 5235 5240 5245 5250 5255 5260 5265 5270 5275 5280 5285 5290 5295 5300 5305 5310 5315 5320 5325 5330 5335 5340 5345 5350 5355 5360 5365 5370 5375 5380 5385 5390 5395 5400 5405 5410 5415 5420 5425 5430 5435 5440 5445 5450 5455 5460 5465 5470 5475 5480 5485 5490 5495 5500 5505 5510 5515 5520 5525 5530 5535 5540 5545 5550 5555 5560 5565 5570 5575 5580 5585 5590 5595 5600 5605 5610 5615 5620 5625 5630 5635 5640 5645 5650 5655 5660 5665 5670 5675 5680 5685 5690 5695 5700 5705 5710 5715 5720 5725 5730 5735 5740 5745 5750 5755 5760 5765 5770 5775 5780 5785 5790 5795 5800 5805 5810 5815 5820 5825 5830 5835 5840 5845 5850 5855 5860 5865 5870 5875 5880 5885 5890 5895 5900 5905 5910 5915 5920 5925 5930 5935 5940 5945 5950 5955 5960 5965 5970 5975 5980 5985 5990 5995 6000 6005 6010 6015 6020 6025 6030 6035 6040 6045 6050 6055 6060 6065 6070 6075 6080 6085 6090 6095 6100 6105 6110 6115 6120 6125 6130 6135 6140 6145 6150 6155 6160 6165 6170 6175 6180 6185 6190 6195 6200 6205 6210 6215 6220 6225 6230 6235 6240 6245 6250 6255 6260 6265 6270 6275 6280 6285 6290 6295 6300 6305 6310 6315 6320 6325 6330 6335 6340 6345 6350 6355 6360 6365 6370 6375 6380 6385 6390 6395 6400 6405 6410 6415 6420 6425 6430 6435 6440 6445 6450 6455 6460 6465 6470 6475 6480 6485 6490 6495 6500 6505 6510 6515 6520 6525 6530 6535 6540 6545 6550 6555 6560 6565 6570 6575 6580 6585 6590 6595 6600 6605 6610 6615 6620 6625 6630 6635 6640 6645 6650 6655 6660 6665 6670 6675 6680 6685 6690 6695 6700 6705 6710 6715 6720 6725 6730 6735 6740 6745 6750 6755 6760 6765 6770 6775 6780 6785 6790 6795 6800 6805 6810 6815 6820 6825 6830 6835 6840 6845 6850 6855 6860 6865 6870 6875 6880 6885 6890 6895 6900 6905 6910 6915 6920 6925 6930 6935 6940 6945 6950 6955 6960 6965 6970 6975 6980 6985 6990 6995 7000 7005 7010 7015 7020 7025 7030 7035 7040 7045 7050 7055 7060 7065 7070 7075 7080 7085 7090 7095 7100 7105 7110 7115 7120 7125 7130 7135 7140 7145 7150 7155 7160 7165 7170 7175 7180 7185 7190 7195 7200 7205 7210 7215 7220 7225 7230 7235 7240 7245 7250 7255 7260 7265 7270 7275 7280 7285 7290 7295 7300 7305 7310 7315 7320 7325 7330 7335 7340 7345 7350 7355 7360 7365 7370 7375 7380 7385 7390 7395 7400 7405 7410 7415 7420 7425 7430 7435 7440 7445 7450 7455 7460 7465 7470 7475 7480 7485 7490 7495 7500 7505 7510 7515 7520 7525 7530 7535 7540 7545 7550 7555 7560 7565 7570 7575 7580 7585 7590 7595 7600 7605 7610 7615 7620 7625 7630 7635 7640 7645 7650 7655 7660 7665 7670 7675 7680 7685 7690 7695 7700 7705 7710 7715 7720 7725 7730 7735 7740 7745 7750 7755 7760 7765 7770 7775 7780 7785 7790 7795 7800 7805 7810 7815 7820 7825 7830 7835 7840 7845 7850 7855 7860 7865 7870 7875 7880 7885 7890 7895 7900 7905 7910 7915 7920 7925 7930 7935 7940 7945 7950 7955 7960 7965 7970 7975 7980 7985 7990 7995 8000 8005 8010 8015 8020 8025 8030 8035 8040 8045 8050 8055 8060 8065 8070 8075 8080 8085 8090 8095 8100 8105 8110 8115 8120 8125 8130 8135 8140 8145 8150 8155 8160 8165 8170 8175 8180 8185 8190 8195 8200 8205 8210 8215 8220 8225 8230 8235 8240 8245 8250 8255 8260 8265 8270 8275 8280 8285 8290 8295 8300 8305 8310 8315 8320 8325 8330 8335 8340 8345 8350 8355 8360 8365 8370 8375 8380 8385 8390 8395 8400 8405 8410 8415 8420 8425 8430 8435 8440 8445 8450 8455 8460 8465 8470 8475 8480 8485 8490 8495 8500 8505 8510 8515 8520 8525 8530 8535 8540 8545 8550 8555 8560 8565 8570 8575 8580 8585 8590 8595 8600 8605 8610 8615 8620 8625 8630 8635 8640 8645 8650 8655 8660 8665 8670 8675 8680 8685 8690 8695 8700 8705 8710 8715 8720 8725 8730 8735 8740 8745 8750 8755 8760 8765 8770 8775 8780 8785 8790 8795 8800 8805 8810 8815 8820 8825 8830 8835 8840 8845 8850 8855 8860 8865 8870 8875 8880 8885 8890 8895 8900 8905 8910 8915 8920 8925 8930 8935 8940 8945 8950 8955 8960 8965 8970 8975 8980 8985 8990 8995 9000 9005 9010 9015 9020 9025 9030 9035 9040 9045 9050 9055 9060 9065 9070 9075 9080 9085 9090 9095 9100 9105 9110 9115 9120 9125 9130 9135 9140 9145 9150 9155 9160 9165 9170 9175 9180 9185 9190 9195 9200 9205 9210 9215 9220 9225 9230 9235 9240 9245 9250 9255 9260 9265 9270 9275 9280 9285 9290 9295 9300 9305 9310 9315 9320 9325 9330 9335 9340 9345 9350 9355 9360 9365 9370 9375 9380 9385 9390 9395 9400 9405 9410 9415 9420 9425 9430 9435 9440 9445 9450 9455 9460 9465 9470 9475 9480 9485 9490 9495 9500 9505 9510 9515 9520 9525 9530 9535 9540 9545 9550 9555 9560 9565 9570 9575 9580 9585 9590 9595 9600 9605 9610 9615 9620 9625 9630 9635 9640 9645 9650 9655 9660 9665 9670 9675 9

ing longitudinal surfaces.

In a modification of the assembly of Figure 9, the upstanding portion 142 of the upper element 126 that would be on the inside may be dispensed with provided that there is some other abutment for the glass panel 124.

The arrangement shown in Figures 9 and 9A is a glazing panel assembly in the form in which it is assembled on site. For transport from the factory to the site the packing element 126 will be of a different shape and configuration and will not encompass the pronounced toothed racks 146 which cooperate with projections 138 of packing element 128 in order to prevent transverse movement of the two elements. However, light serrations may be used to temporarily lock the packing elements together.

Figures 10, 10A and 10B show a glazing panel assembly which comprises a frame 156, a glass panel 158 which has a front face to the right and a back face to the left of the drawing and two co-operating wedge-shaped packing elements 160 and 162 between the frame and the panel. The packing element 162 is one of two identical elements joined together by a web 164 having a weakened region 166 allowing the elements to be bent relative to each other and arranged perpendicular to each other in a corner of the frame.

The frame 156 has two blind bores 168 and the lower and first packing element 162 has two studs 170 on its underside for engagement in the bores.

The lower packing element 162 has one longitudinally extending upstanding projection 172 on its upper surface which is spaced inwardly a short distance from the right hand or front edge to leave a flat 174. The upper and second packing element 160 has three longitudinally extending depending projections 176, 178 and 180 which sit on the upper surface of the packing element. The projection 180 sits on the flat 174, the width of the projection being less than that of the flat.

The upper element 160 also has a longitudinally extending upstanding portion 182 which faces the front face of the glass panel 158 when the panel is seated on the upper surface of the upper element.

The co-operating inclined faces of the two packing elements 160 and 162 have a pawl and rack formation. The lower element 162 has three sprung and aligned pawls 184 which are offset to the left hand or back edge of the element and recesses into which the pawls can move. The upper element 160 has a toothed rack 186 formed on its underside, the teeth being clearly seen in the enlarged scrap view of Figure 10A. The basic construction and operation of the pawl and rack formation is the same as that shown in Figures 9 and 9A with the difference that the width of the rack in

Figure 10 is narrower.

When the glazing panel assembly is put together, the depending projection 176 of the upper packing element 160 is spaced from the left hand edge of the lower packing element 162 and sits close to the pawls 184; the depending projection 178 sits to the left of and is adjacent to the upstanding projection 172 of the lower packing element and the depending projection 180 sits on the flat 174 flush with the right hand edge of the lower packing element and spaced from the upstanding portion 172.

In this position, the pawls 182 and toothed rack 184 engage each other. Other elements of the assembly such as beading (not shown) on the left hand side engaging the frame 156 and the glass panel 158 hold the upper packing element 160 in position on the lower packing element 162 and the glass panel 158 in position on the upper packing element.

Movement of the upper packing element 160, with the glass panel 158, to the right in the direction of arrow 188 and with respect to the lower packing element 162 is prevented by contact by the depending projection 178 with the upstanding projection 172. Also the glass panel 158 cannot be moved in the direction of arrow 188 with respect to the upper packing element 160 because of the upstanding projection 182.

By removing the beading, the upper packing element 160, together with the glass panel 158, can be moved in the direction of arrow 190 perpendicular to the glass panel, whereupon the pawls 184 and toothed rack 186 disengage from each other. This allows the upper packing element 160 to be then slid down the lower packing element 162 and the glass panel 158 to be removed from the assembly. In a commercial or domestic glazing panel assembly, the direction of arrow 190 would be to the interior of the building, so that a burglar or thief could not gain access to the beading on the inside in order to remove the glass panel front the outside.

In a variation, the pawl and rack formation can be replaced by sets of teeth such as is shown in Figure 2 for example.

Figures 11 and 11A show two co-operating wedge-shaped packing elements for use in a glazing panel assembly and Figure 12 shows the assembly. The elements comprise a first packing element 192 which is one of a joined pair similar to that shown, for example, in Figure 10, and a second packing element 194 which has been turned round for reasons of clarity. The packing elements 192 and 194 have co-operating inclined surfaces, the inclined surface of the first packing element 192 having two longitudinally extending upstanding projections 196 and 198 which are spaced from the

longitudinal edges of the packing element and from each other. Each projection 196, 198 has teeth 200, 202 along the left hand side. The inclined surface itself has two sets of transversely extending teeth with a saw-tooth profile, one set 204 extending from the projection 196 to the left hand side of the packing element 192 and the other set 206 extending from the projection 198 to the right hand side of the packing element. The teeth 200, 202 are deeper than the teeth 204, 206 but have the same spacing and are aligned with them. The first packing element 192 also has a longitudinal portion 208 upstanding from the left hand edge with a projection 210 extending from its upper edge and to the left. The free left hand edge of the projection 210 has two adjoining levelled edges 212 and is undercut at 214.

The second packing element 194 has two longitudinal depending projections 216 and 218 which are adjacent to the left and right hand edges respectively. The surfaces of these projections 216 and 218 facing the first packing element 192 have transversely extending teeth 220 and 222 with a saw-tooth profile and depth corresponding to the teeth 204 and 206 on the inclined surface of the first packing element 192.

Between the two projections 216 and 218, spaced from them and from each other are two further longitudinal depending projections 224 and 226. Each projection 224, 226 has teeth 228, 230 along the right hand side corresponding in shape and size to the teeth 200 and 202 on the projections 196 and 198 of the first packing element 192. The teeth 228 and 230 have the same spacing and are aligned with the teeth 204 and 206 as with the first packing element 192.

The second packing element 194 also has an upstanding projection 232 extending along and adjacent to the right hand edge.

Figure 12 shows a frame 234, a double glazed panel unit 236 having a back face to the left and a front face to the right of the drawing, packing elements 192 and 194 which are disposed between the frame and the panel, and longitudinal beading. The frame 234 provides a flat seat 238 for the first packing element 192 and has an upstanding projection 240, the projection 210 of the first packing element 192 engaging over this projection. The panel 236 sits on the second packing element 194, with the upstanding portion 232 facing the front face of the panel. The beading includes a rubber beading 242 connected to the frame 234 and engaging the back face of the panel 236, a plastics beading 244 connected to the other side of the frame, and a rubber beading 246 connected to the plastics beading 244 and engaging the front face of the panel. During the assembly process, the first packing element 192 is fitted in position, the bevel-

led edges 212 of the projection 210 facilitating the insertion of the projection between the projection 240 of the frame and the portion supporting the beading 242. Then the second packing element 194 is placed on the first packing element 192 in the position shown in Figure 11A, with the teeth 200 and 202 of the first packing element not in engagement with the teeth 228 and 230 of the second packing element. However, the teeth 204 and 206 of the first packing element 192 are in engagement with the teeth 220 and 222 of the second packing element 194. The panel 236 is then lifted, from the right hand side, over the upstanding projection 232 and onto the second packing element 194.

The second packing element 194, with the glass panel 236, is then moved up the first packing element 192 with the teeth 204, 206 and 220, 222 holding the second packing element in place in case minor adjustments are required. When the clearance has been taken up, the second packing element 194 is then moved transversely to the right with respect to the first packing element 192 so that the teeth 200, 202 and 228 and 230 engage one another. Since these latter teeth are much deeper, further movement up or down the first packing element 192 is prevented. The rubber beading 242 is then fixed in place preventing the second packing element 194 from moving transversely and thus longitudinally. The beading 224 and 246 is then fixed in place.

If one assumes that the assembly of Figure 12 is, for example, for a house, then the interior of the house is on the left hand side. A person trying to enter the house from the outside (right hand side) by removing the glass panel 236 would not be able to do so even if they removed the exterior beading 244 and 246. This is because the glass panel 236 would have to be lifted over the upstanding portion 232 of the second packing element 194, and this is not possible because all clearances have been taken up by the packing elements 192 and 194.

However, if for some reason the owner of the premises or a person having a legitimate reason and access to the interior of the house wishes to have the glazing panel assembly disassembled, then the interior beading 242 is removed, the second packing element 194, with the glass panel 236, is moved transversely to the left with respect to the first packing element 192 so causing the teeth 200, 202 and 228, 230 to become disengaged. The second packing element 194 is then moved down the first packing element 192 with only a little difficulty since the teeth 204, 206 and 220, 222 are not deep.

Figure 13 shows a part view of a first packing element 248 similar to that shown in Figures 11, 11A and 12, in which the upstanding portion 250

and the projection 252 for engaging the frame has been modified by being divided into three longitudinally spaced portions. The middle portion 254 is of the same shape as that of Figure 11, whereas the two end portions 256 have a single upward bevelled edge 258 for engaging in a correspondingly shaped part of the frame.

Figures 14 and 14a illustrate a further two co-operating wedge-shaped packing elements which are engaged together in a different manner. The upper packing element 260 has hemispherical recesses 264 formed along its length. Lower packing element 262 has a similar single recess 266 formed therein. In use, the packing elements 260 and 264 are tightened together by the use of finger pressure and when they are tight a dowel 270, moulded with a handle 272, is pushed into the hole formed by the co-operation of one of the hemispherical recesses 264 and the single hemispherical recess on the lower packing element 262. The upper packing element 260 is provided with an upstanding wall 268 which is designed to prevent a glass panel positioned thereagainst being removed from the frame, and with a projection 274 which cooperates with a recess formed in lower packing element 262 to prevent the packing element 260 and 262 from being moved transversely with respect to one another.

Figures 15 and 15a illustrate another alternative manner in which two wedge-shaped packing elements may co-operate. Upper packing element 276 has a rack 280 formed in a recess along the outer edge thereof. Lower packing element 278 has a pawl 282 which is formed along the outer edge thereof. In use, the two wedges are tightened together and pawl 282 locks into an appropriate indent in rack 280. The pawl 282 is also provided with a handle 284 so that to remove the pawl from the rack the pawl is pressed down using the handle 284 and the wedges unlock.

Figure 16 illustrates a double glazed unit in which two panels of glass 290 are spaced apart by a spacer 292 set back from the ends of the glass panels 290. The resultant cavity is filled with mastic and while the mastic is still plastic an upper packing element 294 is pressed into the mastic bed. When the mastic sets the upper packing element 294 is secured to glass panels 290. The upper packing element 294 has a longitudinal channel 296 formed therein. Lower packing element 298 is provided with a longitudinal rib 300 which is adapted to co-operate with the longitudinal channel 296 formed in upper packing element 294. The upper packing element is also provided with upstanding walls 293 which bear against the outer faces of glass panels 290. Upper and lower packing elements 294 and 298 are of wedge-shaped configuration as is best seen from Figure 16a. As shown in

16a the upper packing element 296 may be a right angle moulding and it then acts as a permanent corner protector for the glass 290. As shown in Figure 16a there are two packing elements 298 which secure the upper packing element 294 in position at the corner of the frame.

Claims

10

1. A panel assembly comprising a panel (42) having a front face and a back face, a frame (36) surrounding the panel, first (48) and second (46) longitudinal packing elements which are disposed between the frame and the panel and longitudinal sealing means engaging the frame and the panel, the first (48) and second (46) packing elements being wedge-shaped and including engaging means which prevent the elements from moving down each other, characterized in that the first packing element (48) is held against transverse movement with respect to the frame (36), the second packing element (46) has an upstanding portion (54) which faces the front face of the panel and is held against movement in a first direction, which first direction extends from the panel towards the upstanding portion of the second packing element, by engagement of a surface of the first packing element (48) with a surface of the second packing element (46), and in that the assembly includes means preventing movement of the second packing element (46) in a second direction which is opposite to the first direction.

20

2. A panel assembly as claimed in claim 1, wherein the engaging means is provided on the inclined opposed surfaces of the first (48) and second (46) packing elements.

30

3. A panel assembly as claimed in claim 1 or claim 2 wherein the engaging means comprises a pawl (72) and rack (70) formation.

40

4. A panel assembly as claimed in claim 1 or claim 2 wherein the engaging means comprises teeth.

50

5. A panel assembly as claimed in any one of the preceding claims wherein the means (242) preventing movement of the second element in the second direction is removable.

60

6. A panel assembly as claimed in claim 5, wherein the means (242) comprises a sealing means engaging the back face of the panel.

70

7. A panel assembly as claimed in claim 5 or 6 wherein, when the said means (242) is removed, the second packing element (194) is movable with respect to the first packing element (192) in the second direction by a pre-determined distance to a position at which the engaging means is disengaged.

80

8. A panel assembly as claimed in any one of claims 1 to 4, wherein the means preventing move-

ment of the second packing element in the second direction comprises a surface fixed with respect to the first packing element or frame which faces in the first direction and a surface fixed with respect to the second packing element which faces in the second direction, the two surfaces facing each other.

9. A panel assembly as claimed in claim 8, wherein one of the packing elements co-operates with a wedge-shaped third element.

10. A panel assembly as claimed in any one of the preceding claims, wherein the frame (122) and the first packing element (128) have interengaging formations (134, 136) holding the first packing element (128) against transverse movement with respect to the frame (122).

11. A panel assembly as claimed in claim 10, wherein the formations comprise a channel (134) in the frame (122) receiving the first packing element (128).

12. A panel assembly as claimed in claim 10, wherein the formations comprise a longitudinal groove (134) in the frame (122) receiving a longitudinal projection (136) of the first packing element (128).

13. A panel assembly as claimed in claim 10, wherein the formations comprise a bore (168) in the frame (156) receiving a stud (170) of the first packing element (162).

14. A panel assembly as claimed in claim 10, wherein the first element (192) has a projection (210) which extends in the second direction and which is undercut and engages over an upstanding projection (240) of the frame (234).

5

10

15

20

25

30

35

40

45

50

55

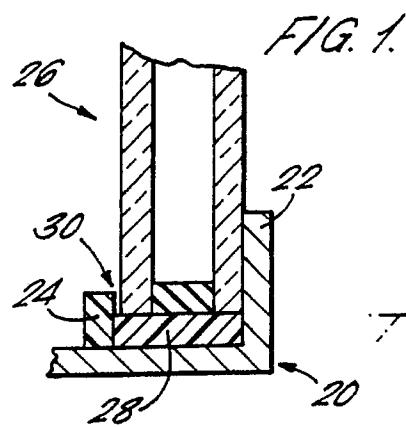


FIG. 2.

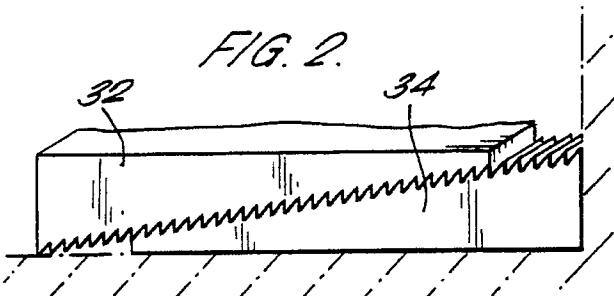


FIG. 4.

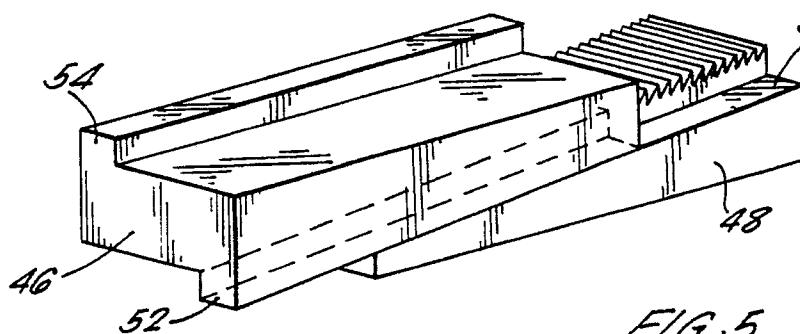


FIG. 3.

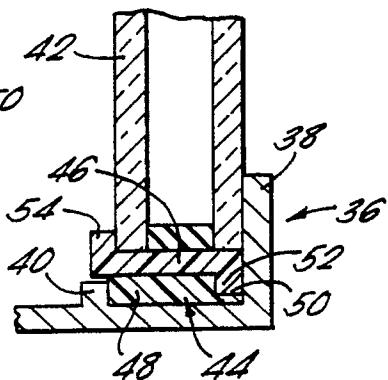


FIG. 5.




FIG. 6.

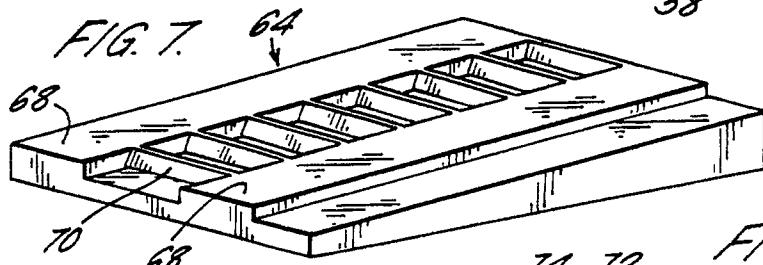



FIG. 8.

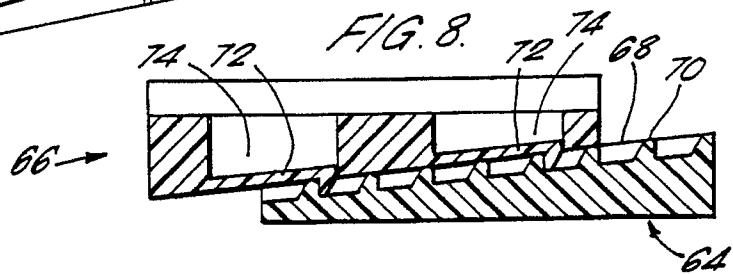


FIG. 9.

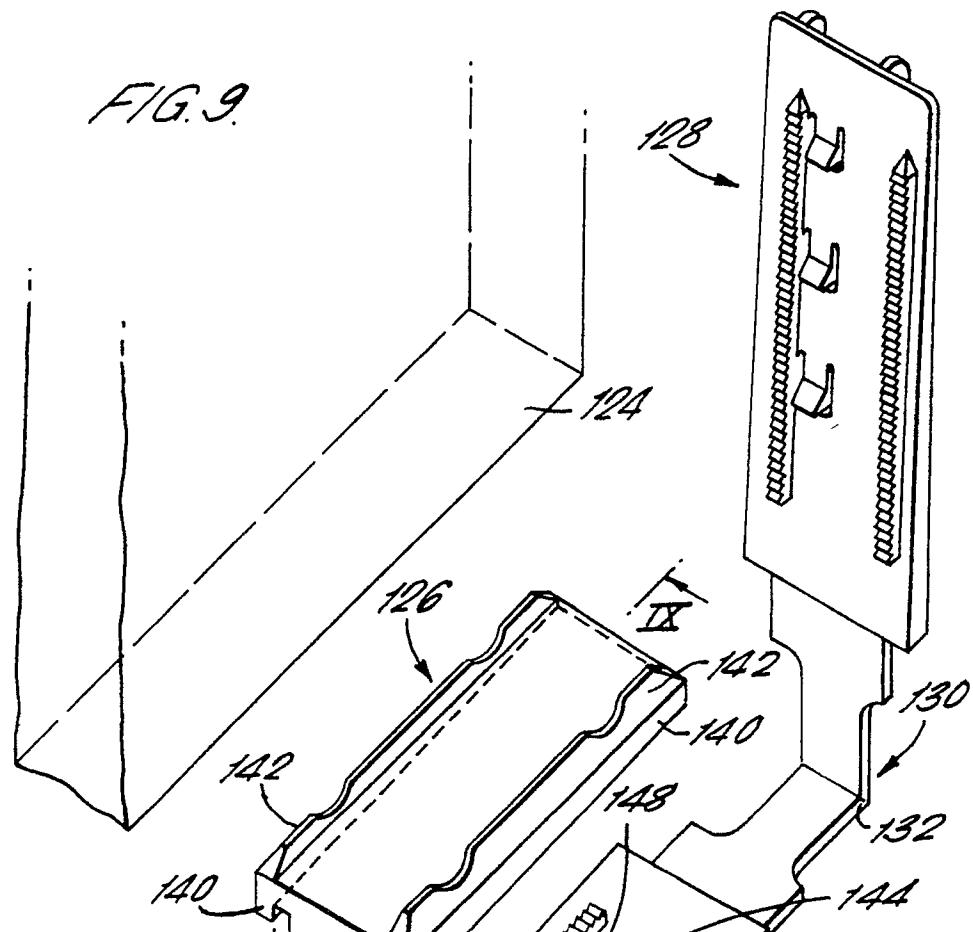


FIG. 9A.

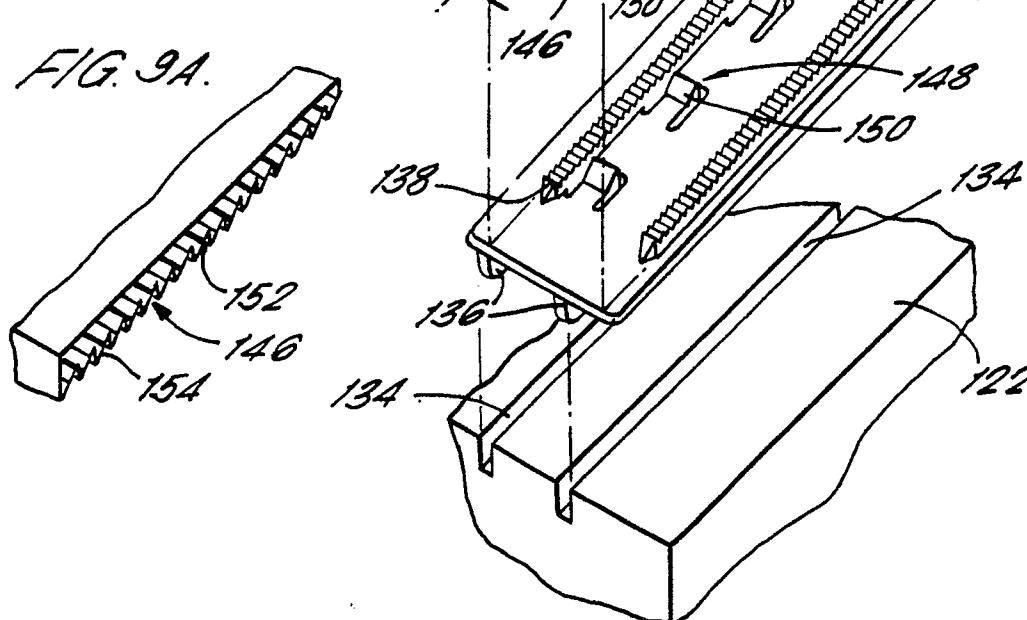
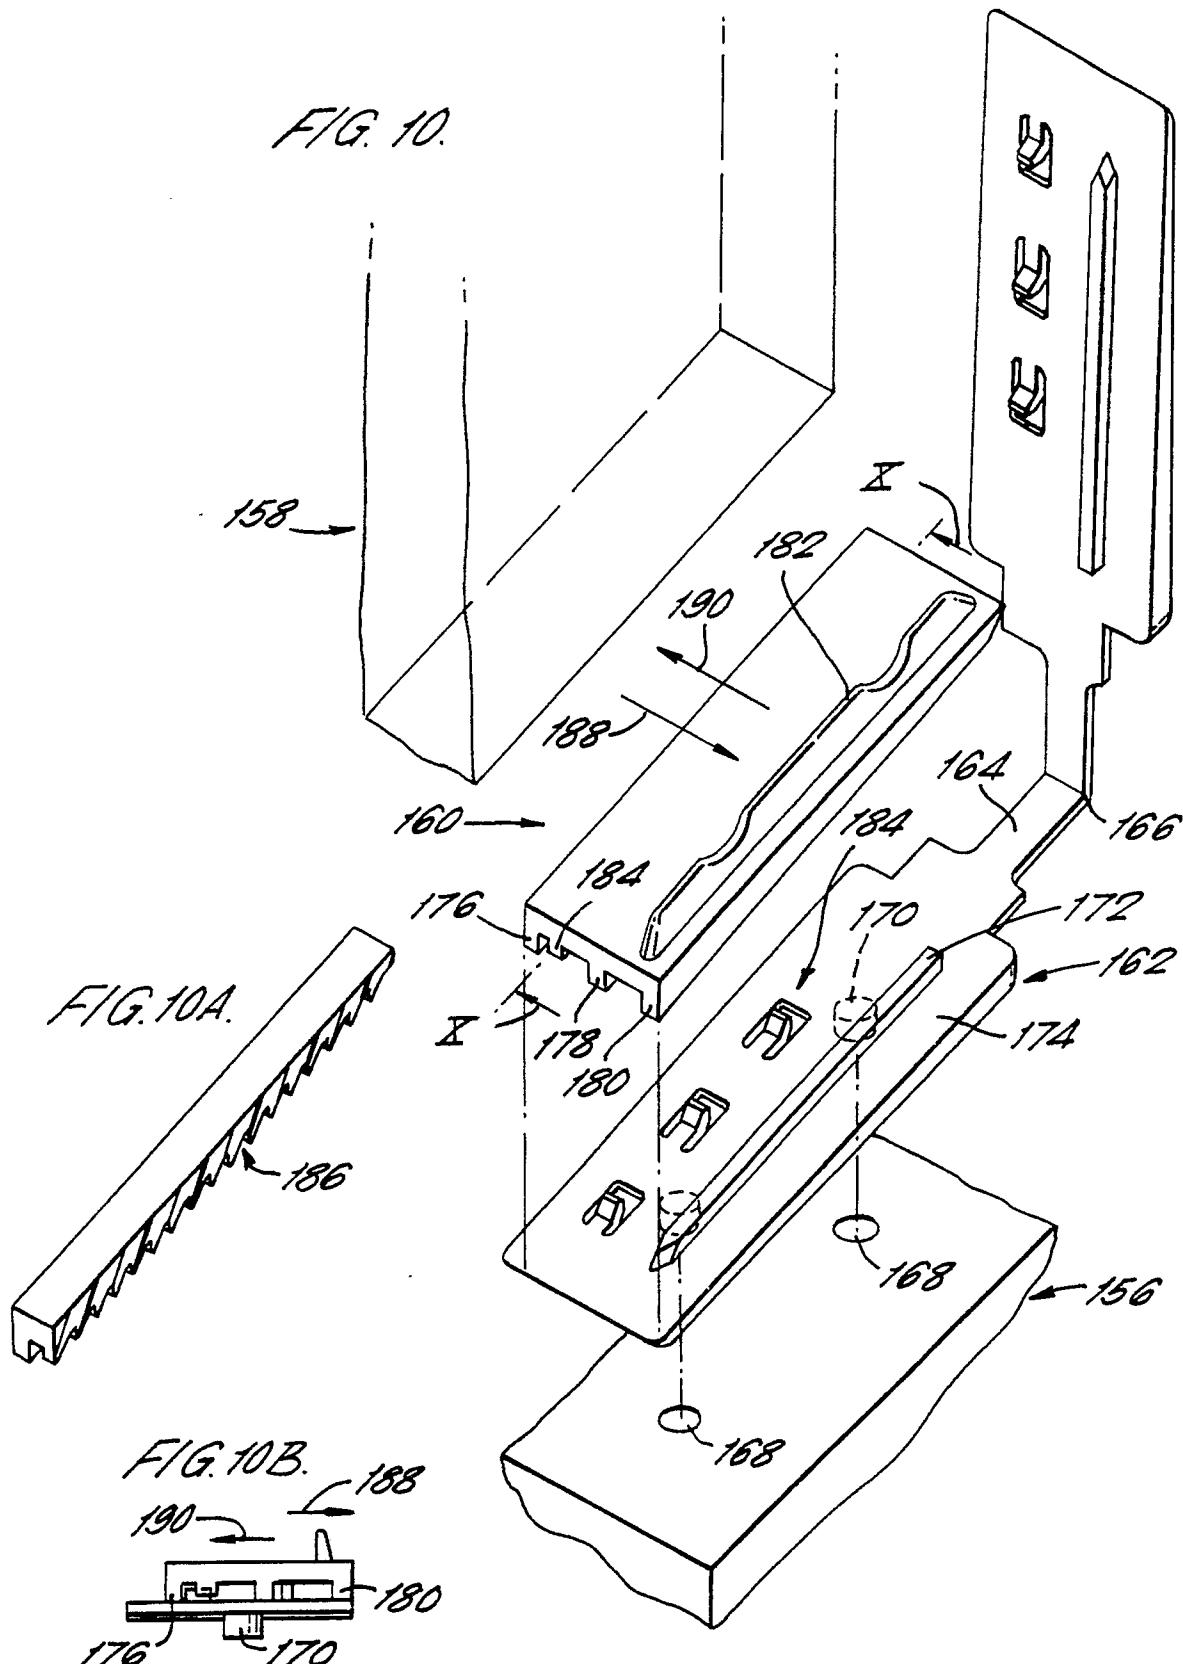


FIG. 10.



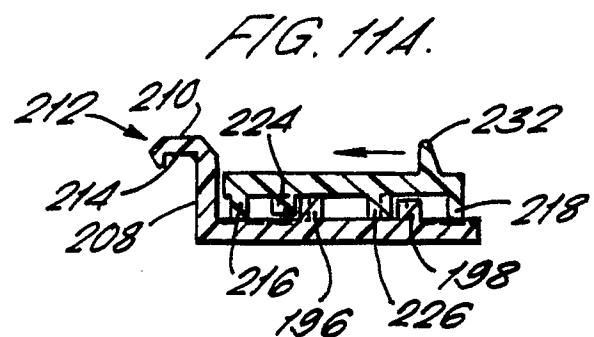
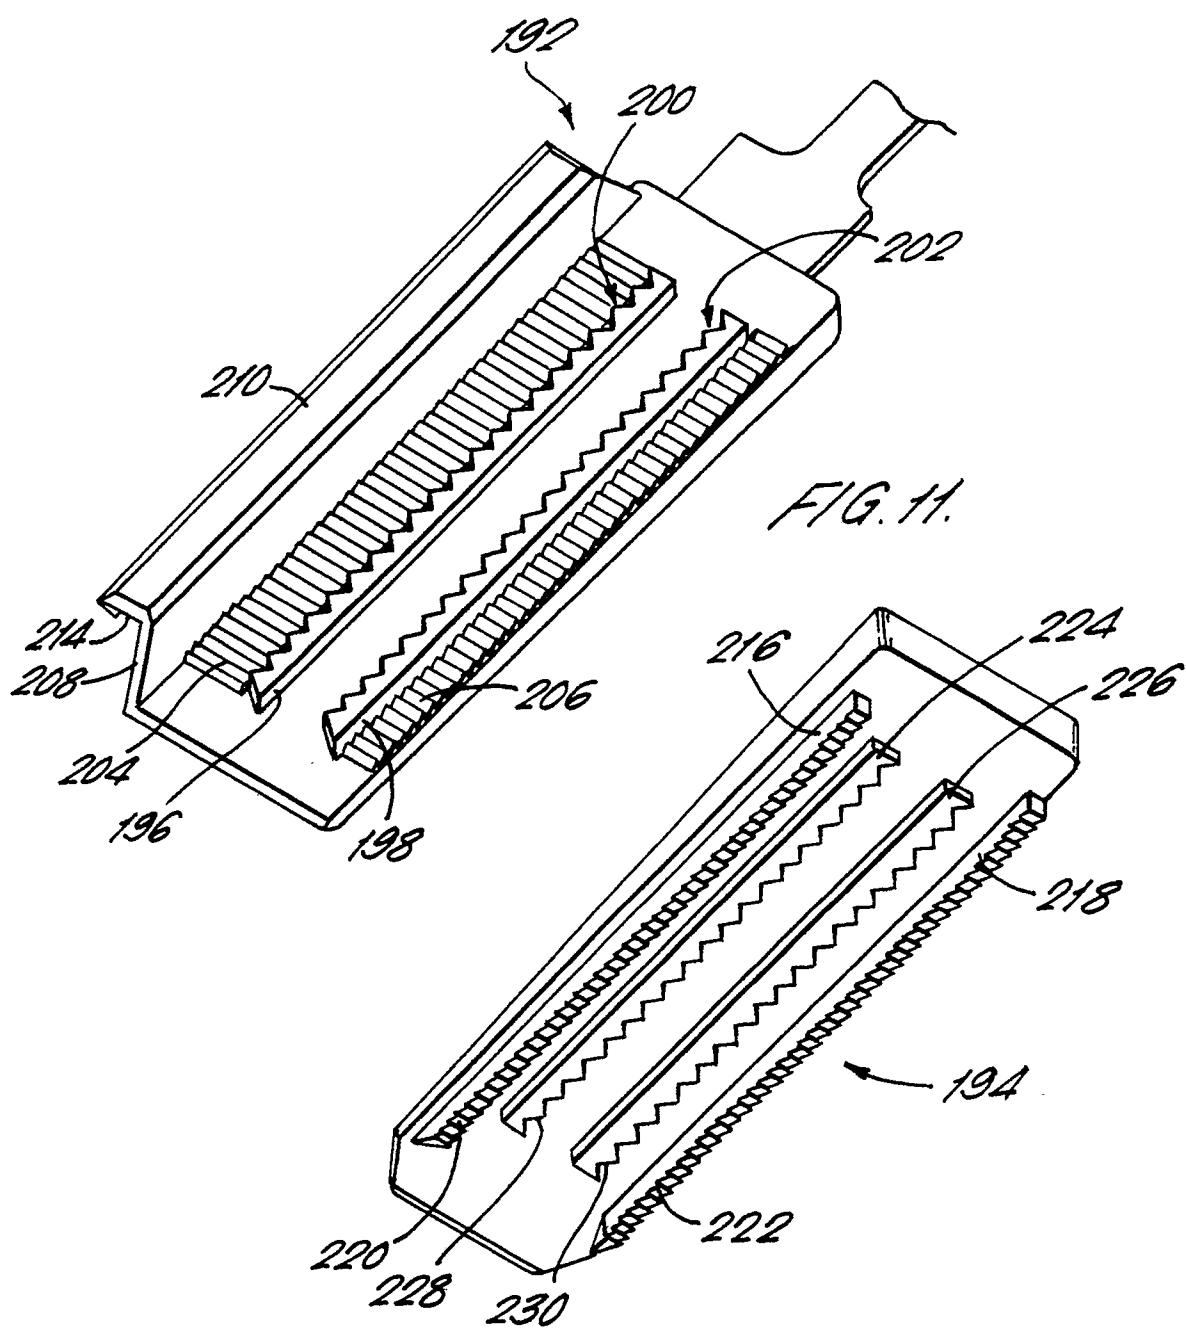


FIG. 12.

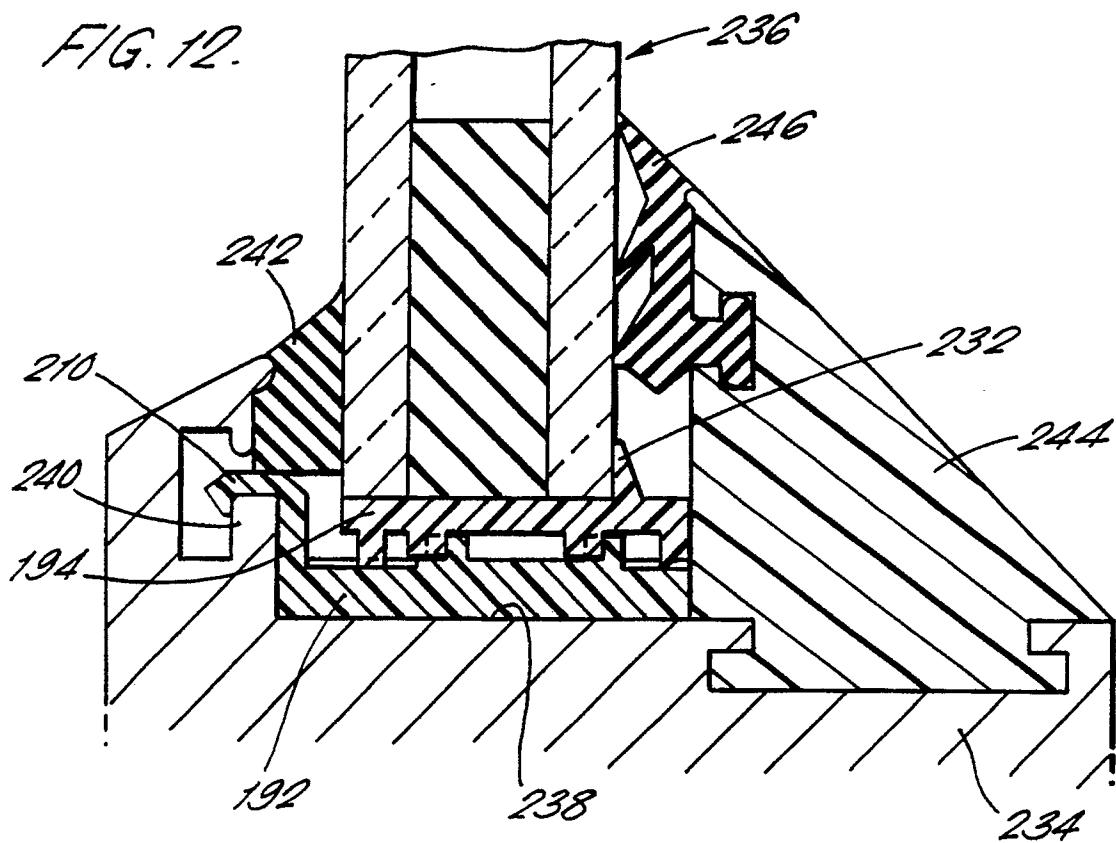


FIG. 13.

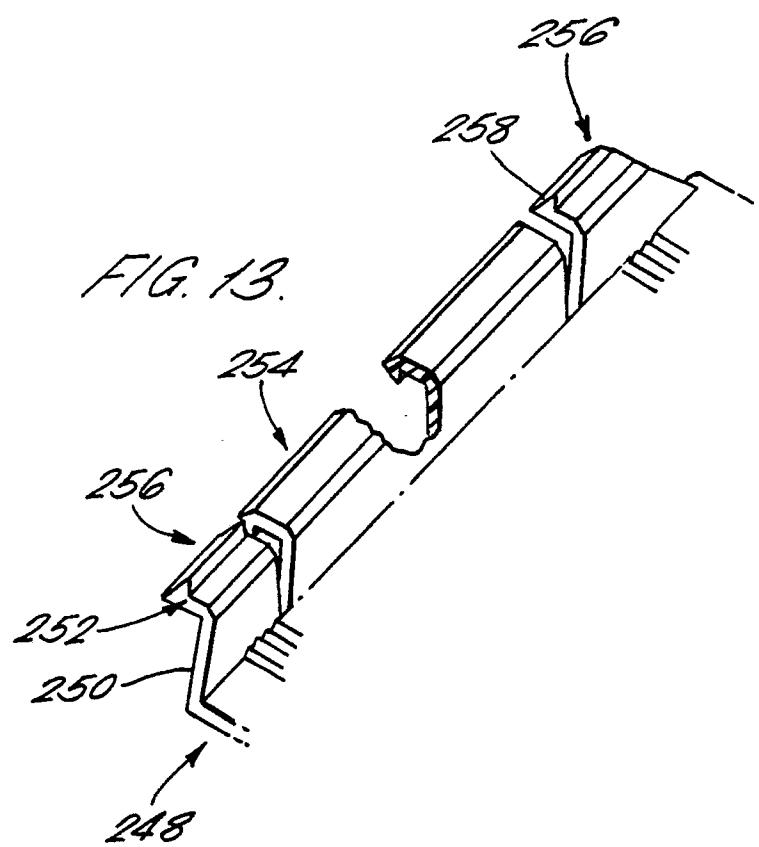


FIG. 14.

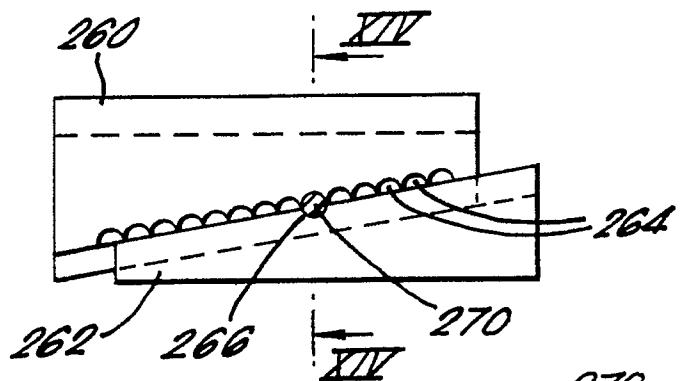


FIG. 14A.

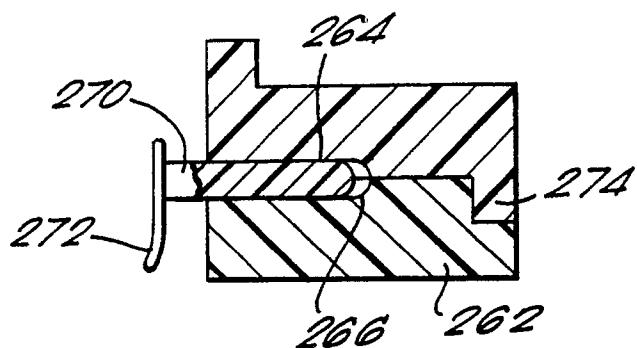


FIG. 15.

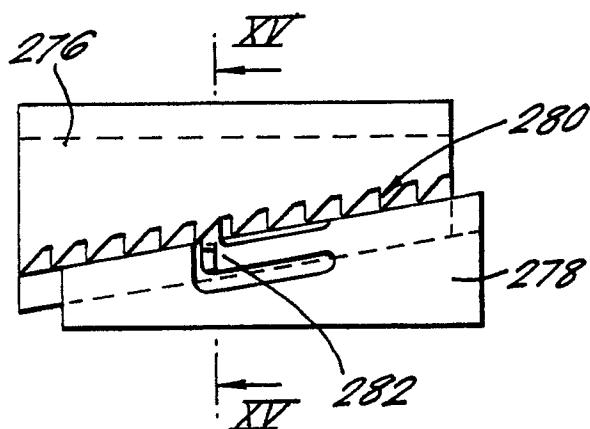


FIG. 15A.

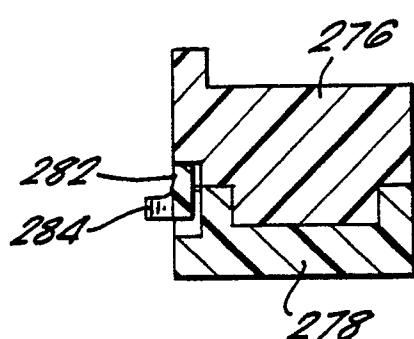


FIG. 16.



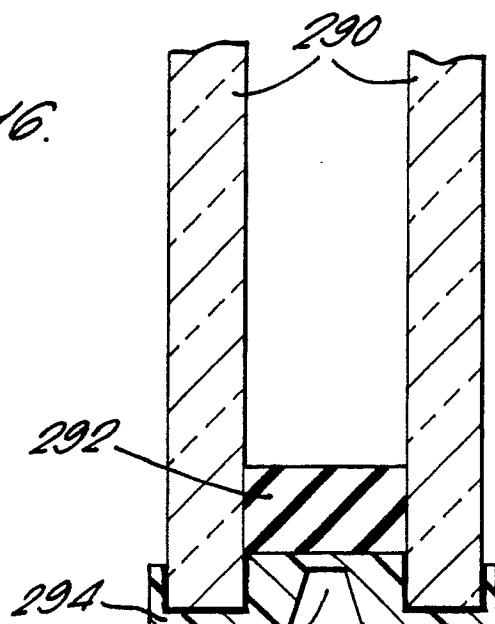


FIG. 16A.



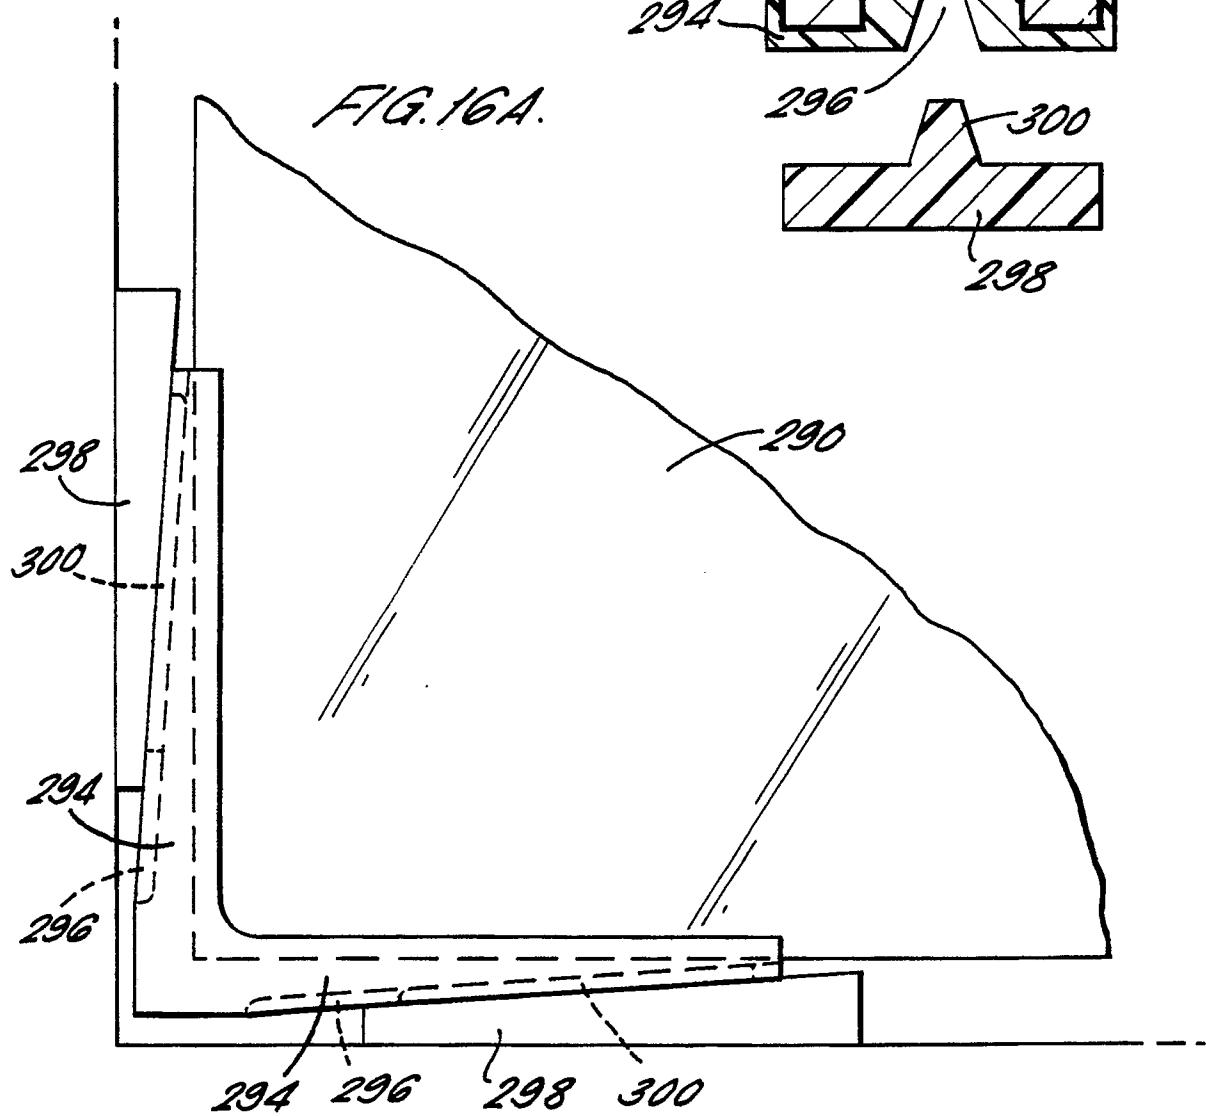

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X,Y,A	DE-A-3 236 226 (SCHMITZ) * page 9, line 1 - page 14, line 33; figures 1-9 *	1,2,4,8,9, 10,11,12, 13,14,6	E 06 B 3/54
Y	DE-U-8 811 065 (NIEMANN) * page 7, paragraph 2; figure 1 *	12	
Y,A	GB-A-1 147 673 (SCHÜRMANN) * page 2, lines 69 - 98; figures 9, 11 *	13,1,2,4, 10	
Y,A	GB-A-2 212 545 (CEGO) * page 9, paragraph 3 - page 13, paragraph 2 ** page 15, paragraph 4 - page 22, paragraph 1; figures 1-7 *	14,5,6	
A	US-A-3 836 118 (MEYER) * column 2, line 23 - column 3, line 65; figures 1-8 *	1,2,4,8	
A	GB-A-2 067 641 (HEWITT) * page 2, line 71 - page 3, line 108; figures 1-8 *	1,2,4,9, 10,13	
A	DE-A-2 940 075 (KÖNIG) * page 10, line 1 - page 13, line 5; figure *	1,10,13, 14	TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			E 06 B
The present search report has been drawn up for all claims			

Place of search	Date of completion of search	Examiner
The Hague	09 November 90	DEPOORTER F.
CATEGORY OF CITED DOCUMENTS		
X: particularly relevant if taken alone		E: earlier patent document, but published on, or after the filing date
Y: particularly relevant if combined with another document of the same category		D: document cited in the application
A: technological background		L: document cited for other reasons
O: non-written disclosure		
P: intermediate document		
T: theory or principle underlying the invention		&: member of the same patent family, corresponding document