(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number : **0 434 113 B1**

(12) # EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification : **02.03.94 Bulletin 94/09**

(51) Int. Cl.^{5} : **H01F 1/053**

(21) Application number : **90203171.5**

(22) Date of filing : **01.12.90**

(54) **Alloying low-level additives into hot-worked Nd-Fe-B magnets.**

(30) Priority : **19.12.89 US 453434**

(43) Date of publication of application : **26.06.91 Bulletin 91/26**

(45) Publication of the grant of the patent : **02.03.94 Bulletin 94/09**

(84) Designated Contracting States : **DE FR GB NL**

(56) References cited :
DE-A- 3 839 545
US-A- 4 881 985
US-A- 4 950 450
PATENT ABSTRACTS OF JAPAN vol. 13, no. 513 (E-847)(3861) 16 November 1989 & JP-1 208 813 (MATSUSHITA) 22 August 1989
PATENT ABSTRACTS OF JAPAN vol. 13, no. 97 (E-723)(3445) 7 March 1989 & JP-63 272 009

(56) References cited :
APPLIED PHYSICS LETTERS. vol. 56, no. 22, May 1990, NEW YORK US pages 2252 - 2254; C.D FUERST ET AL: 'Enhanced coercivities in die -upset Nd-Fe-B magnets with diffusion-alloyed additives (Zn,Cu, and Ni)'

(73) Proprietor : **GENERAL MOTORS CORPORATION**
General Motors Building 3044 West Grand Boulevard
Detroit Michigan 48202 (US)

(72) Inventor : **Brewer, Earl G.**
25263 Hayes
Warren, MI 48089 (US)
Inventor : **Fuerst, Carlon D.**
326 Dewey Street
Royal Oak, MI 48067 (US)

(74) Representative : **Denton, Michael John et al**
Patent Section 1st Floor Gideon House 28 Chapel Street
Luton Bedfordshire LU1 2SE (GB)

EP 0 434 113 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

This invention relates to a method for making permanent magnetic alloys. Particularly, this invention relates to permanent magnet alloys having high room temperature coercivity and to a method for forming such magnetic alloys as specified in the preamble of Claim 1, for example as disclosed in Patent Abstracts of Japan, Vol. 13, Number 97 (E-723)[3445], March 7, 1989 & JP-A-1 208 813.

Rapidly solidified neodymium, iron, boron (Nd-Fe-B) alloys yield high performance, essentially isotropic, permanent magnet materials whose principal component is a tetragonal $Nd_2Fe_{14}B$ phase. The ribbons or flakes produced by rapid solidification, i.e., melt-spinning, may be hot-worked by isostatically pressing at elevated temperatures to produce fully dense, or hot-pressed, magnets with essentially the same magnetic properties as the original ribbons. With further processing, specifically die-upsetting, magnetically-aligned magnets are produced with approximately 50 percent higher remanences (B_r) and approximately 200 percent higher energy products [$(BH)_{max}$] compared to the hot-pressed precursor material.

The process of magnetic alignment achieved during die-upsetting has been described as a diffusion slip mechanism which requires small grain sizes, approximately 50 nanometres, and a ductile grain boundary phase. The combination of small grain size and a ductile grain boundary phase allows an orientation of the c-axis of the grains to take place along the press direction during plastic deformation of the alloy. Since the c-axis is also the preferred orientation of the magnetization, the magnetic properties are enhanced along the pressed direction of the die-upset magnets.

Larger grains are deleterious to the alloy since they do not respond as well as small grains to the strains induced during die-upsetting, and accordingly remain randomly oriented, lowering the remanence and energy product of the alloy. In addition, whether aligned or not, larger grains are also associated with lower magnetic coercivities in these materials. It is therefore desirable to use lower processing temperatures and shorter times at those temperatures to limit grain growth within the alloy during the hot-working steps.

Another approach to limiting grain growth is to introduce into the alloy impurities or additives which collect in the grain boundaries. If the additive is foreign to the 2-14-1 phase present inside the grain it must migrate with the boundary as the grain grows in size, resulting in slower grain boundary movement, and thereby slowing grain growth.

Although relatively large concentrations, i.e., approximately 10 atomic percent, of a substituent are typically required in order to have a measurable effect on the intrinsic properties of the $Nd_2Fe_{14}B$ phase, much smaller additive levels, i.e., approximately 1 atomic percent, may have a substantial impact on the hard magnetic properties of a magnet. This is because the grain boundary phase, which plays a vital role in grain growth and domain wall pinning mechanisms, may be preferentially occupied by the additive creating a locally high concentration of that additive within the alloy.

Previous work has been performed on the effect of low-level additives in die-upset Nd-Fe-B magnets, where the composition of the magnets was given as $Nd_{14}Fe_{77}B_8M_1$. This previous work concluded that gallium, wherein M = Ga, provided the largest enhancement of the magnetic coercivity, approximately 21.1 kiloOersteds, as compared to the additive-free composition, wherein M = Fe, which had the lowest magnetic coercivity of approximately 7.6 kiloOersteds. Other additives have also enhanced the magnetic coercivity but to lesser degrees. However, the magnetic remanences reported for all of these magnets were lower than that of the additive-free magnet, by as much as 15 percent.

A method for making an alloy with permanent magnetic properties at room temperature is characterised by the features specified in the characterising portion of Claim 1.

At present, the state-of-the-art knowledge concludes that additives in the $Nd_2Fe_{14}B$-type magnets must be added into the alloy at the initial melting and casting of the ingot, prior to melt-spinning and hot-working. However, the method of the present invention introduces the additive into the magnetic alloy during a hot-pressing step, therefore permitting the additive and its concentration to be adjusted during this final step. The relatively low temperatures used in hot-working compared to either melt-spinning or sintering, probably would help limit the additive to the neodymium-rich grain boundaries where they would most likely affect grain growth and therefore magnetic coercivity.

Thus, what is needed is a method for making permanent magnetic alloys wherein the additive is introduced into the alloy prior to the hot-working steps.

It is an object of the present invention to provide a $Nd_2Fe_{14}B$-type magnetic alloy.

It is a further object of this invention that such a magnetic alloy be formed by a method wherein the metal additive is introduced into the magnetic alloy immediately prior to a hot-working step.

In accordance with a preferred embodiment of this invention, these and other objects and advantages are accomplished as follows.

The applicants are the first to diffusion-alloy a metal additive into a magnetic alloy during hot-working, thus

permitting the additive and its concentration, and correspondingly, the magnetic properties, to be adjusted during this final processing step. The relatively low temperatures used in hot-working, as compared to other techniques, such as melt-spinning or sintering, helps limit the additives to the neodymium-rich grain boundaries where they are most likely to effect grain growth and thus magnetic coercivity. The elemental additives are introduced into the alloy by first stirring a fine powder of the additive into the crushed, rapidly solidified ribbons prior to hot-pressing of the alloy. Pure elements were used, however it is foreseeable that compounds may also be used, as well as other techniques for adding the additive such as plating or spraying techniques.

Eleven metal elemental additives have been determined to diffuse thoroughly through the Nd-Fe-B magnets thereby resulting in an alloy having homogeneous magnetic properties throughout, these additives being cadmium, copper, gold, iridium, magnesium, nickel, palladium, platinum, ruthenium, silver and zinc. Other elemental additives were also tested, however they tended to only diffuse over short distances (approximately 100 micrometres) and/or react with the Nd-Fe-B matrix to form intermetallic phases.

A primary inventive feature of this invention is the diffusion-alloying of zinc, in concentrations ranging from approximately 0.1 weight percent to approximately 10 weight percent, throughout the Nd-Fe-B magnets. Two other powdered additives, copper and nickel, both at approximately 0.5 weight percent, were also successfully diffusion-alloyed into the Nd-Fe-B alloys with this technique. The resulting magnetic alloys are characterized by enhanced magnetic properties as compared to conventionally formed Nd-Fe-B magnets. For instance, the addition of these individual elements to the rapidly solidified ribbons enhanced the magnetic coercivity of the alloy by as much as 100 percent when the magnetic alloys were die-upset.

Other objects and advantages of this invention will be better appreciated from a detailed description thereof, which follows.

The invention and how it may be performed are hereinafter particularly described with reference to the accompanying drawings, in which:

Figures 1A, 1B and 1C illustrate various magnetic properties in relation to the weight percent zinc in die-upset Nd-Fe-B magnets;

Figures 2A and 2B illustrate the demagnetization curves for two die-upset magnets, (a) a Nd-Fe-B alloy containing approximately 0.5 weight percent zinc and (b) an additive-free Nd-Fe-B alloy, measured parallel and perpendicular to the press direction; and

Figure 3 illustrates the demagnetization curves for three die-upset Nd-Fe-B magnets each containing approximately 0.5 weight percent of an additive, measured parallel to the press direction.

Crushed ribbon flakes of rapidly solidified material having an approximate composition of $Nd_{13.7}Fe_{81.0}B_{5.3}$ were used as the starting material. The rapidly solidified ribbons were formed using conventional techniques wherein first a mixture is formed of neodymium, iron and boron, then the constituents are melted to form a homogeneous melt, and lastly the homogeneous mixture is rapidly quenched at a rate sufficient to form ribbons of an alloy having a very fine crystalline microstructure. Hot-pressed magnets were formed from these ribbons by crushing these ribbons, adding the requisite quantity of metal additive to the crushed ribbons and then heating the resultant mixture quickly to about 750°-800°C in a vacuum and pressing isostatically at approximately 100 MegaPascals. Die-upset magnets were produced by pressing these hot-pressed precursors in an oversized die at 750°C until their original height was reduced by approximately 60 percent. Graphite dies were used in both hot-working steps, and boron nitride was used as a die-wall lubricant.

The magnets were sliced with a high-speed diamond saw, yielding both (1) cross-sections for microscopy analysis and (2) 50 milligram cubes for demagnetization measurements on a vibrating sample magnetometer (VSM). All samples were pre-magnetized in a pulsed field of 120 kiloOersteds (kOe) and then measured with the VSM in directions parallel and perpendicular to the pressed direction. A self-demagnetization factor of one-third was used to correct for the geometry of the sample. Unless otherwise indicated, the values given throughout this specification for magnetic remanence (B_r), magnetic coercivity (H_{ci}) and magnetic energy product [$(BH)_{max}$] of the magnetic alloy will always refer to the direction parallel to the pressing. Densities of the alloys were also measured using the standard water displacement technique.

The powdered elemental additives used were characterized by a fine particle size, i.e., less than 75 micrometres for zinc, less than 45 micrometres for the copper and manganese, and less than 10 micrometres for the nickel. The powdered elemental additives were individually added to the rapidly solidified and crushed Nd-Fe-B ribbons by weight. Therefore, for example, 1 weight percent zinc additive corresponds to a mixture containing about 1 weight percent powdered zinc and 99 weight percent crushed Nd-Fe-B ribbons.

Die-upset Nd-Fe-B magnets were formed from the hot-pressed precursors containing the various elemental additives as described by the method above. The densities and magnetic properties of die-upset, zinc-containing magnets are summarized in Table I.

Table I. The density and magnetic properties of die-upset Nd-Fe-B magnets formed from hot-pressed Nd-Fe-B precursors containing diffusion-alloyed zinc. The magnetic properties were measured parallel and (perpendicular) to the press direction.

Zinc wt%	Density g/cc	B_r kG	$(BH)_{max}$ MGOe	H_{ci} kOe
0.0	7.57	12.1 (3.5)	30.9 (2.3)	7.9 (10.2)
0.1	7.62	12.3 (3.4)	34.1 (2.1)	10.9 (9.8)
0.2	7.60	12.2 (3.6)	33.4 (2.5)	14.0 (11.6)
0.5	7.58	12.0 (3.6)	32.4 (2.2)	15.3 (11.2)
0.8	7.57	11.9 (3.7)	31.4 (2.6)	15.8 (12.6)
1.0	7.60	11.7 (4.1)	30.6 (3.2)	13.6 (12.8)
2.5	7.58	11.5 (3.8)	25.6 (2.6)	7.4 (9.2)
5.0	7.55	11.0 (4.2)	22.4 (2.7)	7.8 (7.7)
10	7.56	9.2 (3.9)	9.7 (0.8)	3.7 (2.1)

From the results tabulated in Table I, it is apparent that the optimum amount of zinc additive within the Nd-Fe-B precursors is about 0.5 to 0.8 weight percent, which corresponds to the results shown in Figures 1A, 1B and 1C, and in Figures 2A and 2B. Figures 1A, 1B and 1C illustrate various magnetic properties versus weight percent zinc in die-upset Nd-Fe-B magnets. In particular, Figure 1A shows coercivity (H_{ci}) vs. weight percent zinc; Figure 1B shows remanence (B_r) vs. weight percent zinc; and Figure 1C shows energy product [$(BH)_{max}$] vs. weight percent zinc. For comparison purposes, the corresponding magnetic properties of the zinc-free Nd-Fe-B magnet are indicated with dashed lines in each Figure.

As shown in Figures 1A and 1B, for the Nd-Fe-B magnets having approximately 0.5-0.8 weight percent zinc, the magnetic coercivities of 15.3 and 15.8 kOe respectively, were double that of the additive-free magnet, 7.9 kOe. At higher concentrations the gain in magnetic coercivity was reversed, and all magnetic properties deteriorated markedly with additions of approximately 10 weight percent zinc. The 0.5 weight percent zinc and zinc-free magnets have essentially the same remanence, Br = 12 kG, and energy product, $(BH)_{max}$ = 31-32 MGOe.

In addition, as shown in Figures 2A and 2B, the knee of the demagnetization curve occurred at proportionally larger reverse fields in the zinc-containing magnets. Figures 2A and 2B illustrate the demagnetization curves for die-upset Nd-Fe-B magnets. Figure 2A containing about 0.5 weight percent zinc, and Figure 2B being zinc-free. Measurements were made parallel (par.) and perpendicular (perp.) to the press direction. Again, for comparative purposes, a vertical dashed line is provided corresponding to the parallel direction magnetic coercivity measurement of the 0.5 weight percent zinc-containing Nd-Fe-B magnet.

Figure 3 illustrates the demagnetization curves for three different die-upset Nd-Fe-B magnets each containing 0.5 weight percent of a different additive: copper (solid line), nickel (dashed line) and manganese (dotted line). Measurements were made parallel to the press direction. As with zinc, the addition of copper and nickel powders at approximately 0.5 weight percent also increased the coercivity of the die-upset Nd-Fe-B magnet, to 14.0 and 12.1 kOe, respectively. In contrast manganese powder was also used as an additive, but had no measurable effect on the coercivity, H_{ci} = 7.6 kOe. The copper-containing magnet had a larger magnetic remanence, B_r = 12.7 kG, than magnets containing zinc, nickel or manganese, wherein the magnetic remanence equalled approximately 12 kG. However this was most likely due to variations in press conditions and not the additive.

To locate the position of the added elements within the Nd-Fe-B magnetic alloy, electron microprobe analysis was used to examine the polished surface of the hot-worked samples containing respectively approxi-

mately 0.5 weight percent zinc, copper, nickel and manganese. It was determined that nearly all of the zinc powder had reacted with the ribbon matrix. However, some of the zinc was present within an inter-ribbon, or grain boundary phase, with an approximate composition of $Zn_4Nd_{31}Fe_{65}$. The zinc may also have been present in other less obvious intermetallic phases within the boundary regions. However most of the zinc diffused into the ribbons, or grains, themselves. Yet, due to the small quantity of additive, the ribbons, or grains, are believed to be primarily made up of the tetragonal $Nd_2Fe_{14}B$ phase.

Copper and nickel diffused throughout the magnet in a manner similar to zinc. However, the diffusion of manganese, approximately 0.5 weight percent, was limited to a region within 100-200 micrometers of the original grains of powdered additive. Without the ability to diffuse, manganese was less able to influence the coercivity of the magnet.

Zinc levels varied from ribbon to ribbon and showed a strong correlation with neodymium levels. Zinc was more concentrated in ribbons which were also richer in neodymium. The variation in neodymium concentrations was probably due to production processes since this pattern was also observed in the zinc-free magnet. It is presumed that the zinc diffused into the intergranular boundaries within the ribbons which are neodymium-rich, and since neodymium-rich ribbons should have a greater volume percent of this boundary phase, a greater percentage of the zinc would collect in these ribbons.

It should be noted that gallium, which has resulted in the largest coercivity enhancement when added to an ingot, was difficult to obtain and handle as a powder because of its low melting temperature. However, initial tests with a coarse gallium powder revealed that although it diffused into nearby ribbons, the bulk of the gallium was tied up as intermetallic phases, and, just as with the manganese, adding the gallium did not alter significantly the magnetic coercivity of the alloy.

Diffusion-alloying has been shown to be an effective process of introducing low-level additives into hot-worked Nd-Fe-B magnets. Although similar magnetic coercivities have been previously obtained by adding elements to the initial ingot, diffusion-alloying during hot-working permits the final chemistry of the magnet and, more specifically, the grain boundaries to be determined during the final processing steps. Elements which diffuse into the matrix, such as zinc, copper and nickel, enhance the coercivity by as much as 100 percent in die-upset Nd-Fe-B magnetic alloys. The coercivity was less affected by elements which did not diffuse readily, such as manganese. At optimum levels, approximately 0.5-0.8 weight percent, the additives did not diminish the magnetic remanence or the magnetic energy product of the alloy.

Whilst the invention has been described in terms of preferred embodiments, it is apparent that other forms could be adopted by one skilled in the art, such as by substituting compound powder additives for elemental powder additives, or by substituting any of the eleven elements believed to diffuse thoroughly through the Nd-Fe-B magnetic alloys, i.e., cadmium, copper, gold, iridium, magnesium, nickel, palladium, platinum, ruthenium, silver and zinc, or by modifying the heating and processing temperatures to promote diffusion within the grain boundaries of the alloy. In addition, it is foreseeable that other methods may be used to introduce the additive into the rapidly solidified Nd-Fe-B alloy, such as by using wet chemical plating techniques which would result in homogeneous ionic deposition of the additive on the surface of the individual ribbons, or by plasma or metal spraying techniques. Accordingly the scope of the present invention is to be determined only by the following claims.

Claims

1. A method for making an alloy with permanent magnetic properties at room temperature comprising the steps of: forming a mixture of neodymium, iron and boron; melting the mixture to form a homogeneous melt; rapidly quenching said homogeneous melt at a rate which will form an alloy having a very fine crystalline microstructure; adding a metal additive to said alloy to form a mixture; heating said mixture; and applying pressure to said heated mixture to consolidate it to near full density in a non-oxidising atmosphere, characterised in that the metal additive is an elemental additive of either cadmium, copper, gold, iridium, magnesium, nickel, palladium, platinum, ruthenium, silver or zinc, and is added in quantities of up to one weight percent of said mixture; and the mixture of said alloy and metal additive is heated to a temperature between 750°C and 800°C during said hot-pressing step to diffusion-alloy the metal additive into the alloy.

2. A method for making an alloy with permanent magnetic properties at room temperature according to claim 1,in which the method also includes the step of further working said consolidated alloy to induce additional magnetic anisotropy therein, said consolidated alloy having a magnetic coercivity of at least 10,000 Oersteds.

3. A method for making an alloy with permanent magnetic properties at room temperature according to claim 1, in which the metal additive is a powdered metal comprising zinc, copper or nickel.

4. A method for making an alloy with permanent magnetic properties at room temperature according to claim 1, in which the metal additive comprises 0.5 to 0.8 weight percent of powdered zinc, and the alloy mixture is consolidated to near full density by isostatically applying a pressure of about 100 MegaPascals to said heated alloy mixture.

5. A method for making an alloy with permanent magnetic properties at room temperature according to claim 4, in which the method includes the step of further working said consolidated alloy by pressing it at about 750°C for a duration sufficient to reduce the original height of said consolidated alloy by about 60 percent, so as to induce additional magnetic anisotropy therein.

6. A method for making an alloy with permanent magnetic properties at room temperature according to claim 1, in which about 0.5 weight percent powdered copper is added to said alloy; and a pressure of about 100 MegaPascals is isostatically applied to said heated alloy mixture to consolidate it to near full density.

7. A method for making an alloy with permanent magnetic properties at room temperature according to claim 6, in which the method includes the step of further working said consolidated alloy by pressing it at about 750°C for a duration sufficient to reduce the original height of said consolidated alloy by about 60 percent, so as to induce additional magnetic anisotropy therein.

8. A method for making an alloy with permanent magnetic properties at room temperature according to claim 1, in which about 0.5 weight percent powdered nickel is added to said alloy; and a pressure of about 100 MegaPascals is isostatically applied to said heated alloy mixture to consolidate it to near full density.

9. A method for making an alloy with permanent magnetic properties at room temperature according to claim 8, in which the method includes the step of further working said consolidated alloy by pressing it at about 750°C for a duration sufficient to reduce the original height of said consolidated alloy by about 60 percent, so as to induce additional magnetic anisotropy therein.

10. A mixture suitable for forming an alloy with permanent magnetic properties at room temperature resulting from a method according to claim 1, said mixture comprising a powdered alloy of neodymium, iron and boron characterised by a very finely crystalline microstructure, and up to one weight percent of a powdered metal chosen from cadmium, copper, gold, iridium, magnesium, nickel, palladium, platinum, ruthenium, silver or zinc.

Patentansprüche

1. Ein Verfahren zur Herstellung einer Legierung mit permanentmagnetischen Eigenschaften bei Raumtemperatur, das die Schritte umfaßt, daß: eine Mischung von Neodym, Eisen und Bor gebildet wird; die Mischung geschmolzen wird, um eine homogene Schmelze zu bilden; die homogene Schmelze mit einer Rate schnell abgeschreckt wird, welche eine Legierung mit einer sehr feinen kristallinen Mikrostruktur bilden wird; ein Metallzusatzstoff zu der Legierung zugesetztwird, um eine Mischung zu bilden; die Mischung erhitzt wird; und Druck auf die erhitzte Mischung angelegt wird, um sie zu nahezu vollständiger Dichte in einer nicht oxidierenden Atmosphäre zu verdichten, dadurch gekennzeichnet, daß der Metallzusatzstoff ein elementarer Zusatzstoff von entweder Cadmium, Kupfer, Gold, Iridium, Magnesium, Nickel, Palladium, Platin, Ruthenium, Silber oder Zink ist, und in Mengen von bis zu 1 Gew-% der Mischung zugesetzt wird; und die Mischung der Legierung und des Metallzusatzes auf eine Temperatur zwischen 750° und 800°C während des Warmpreßschrittes geheizt wird, um den Metallzusatzstoff in die Legierung hinein diffusionszulegieren.

2. Ein Verfahren zur Herstellung einer Legierung mit permanentmagnetischen Eigenschaften bei Raumtemperatur nach Anspruch 1, in welchem das Verfahren auch den Schritt umfaßt, daß die verdichtete Legierung weiter bearbeitet wird, um eine zusätzliche magnetische Anisotropie dorthinein zu induzieren, wobei die verdichtete Legierung eine magnetische Koerzitivkraft von mindestens 10.000 Oersted hat.

3. Ein Verfahren zur Herstellung einer Legierung mit permanentmagnetischen Eigenschaften bei Raumtem-

peratur nach Anspruch 1, in welchem der Metallzusatzstoff ein pulverisiertes Metall ist, das Zink, Kupfer oder Nickel umfaßt.

4. Ein Verfahren zur Herstellung einer Legierung mit permanentmagnetischen Eigenschaften bei Raumtemperatur nach Anspruch 1, in welchem der Metallzusatzstoff 0,5 bis 0,8 Gew.-% von pulverisiertem Zink umfaßt und die Legierungsmischung auf nahezu volle Dichte verdichtet wird, indem isostatisch ein Druck von ungefähr 100 MegaPascal auf die erhitzte Legierungsmischung angelegt wird.

5. Ein Verfahren zur Herstellung einer Legierung mit permanentmagnetischen Eigenschaften bei Raumtemperatur nach Anspruch 4, in welchem das Verfahren den Schritt einschließt, daß die verdichtete Legierung weiter bearbeitet wird, indem sie bei ungefähr 750°C für eine hinreichende Dauer gepreßt wird, um die ursprüngliche Höhe der verdichteten Legierung um ungefähr 60 % zu verringern, um so zusätzliche magnetische Anisotropie dorthinein zu induzieren.

6. Ein Verfahren zur Herstellung einer Legierung mit permanentmagnetischen Eigenschaften bei Raumtemperatur nach Anspruch 1, in welchem ungefähr 0,5 Gew.-% pulverisiertes Kupfer der Legierung zugefügt wird; und ein Druck von ungefähr 100 MegaPascal isostatisch auf die erhitzte Legierungsmischung angelegt wird, um sie zu nahezu voller Dichte zu verdichten.

7. Ein Verfahren zur Herstellung einer Legierung mit permanentmagnetischen Eigenschaften bei Raumtemperatur nach Anspruch 6, in welchem das Verfahren den Schritt umfaßt, daß die verdichtete Legierung weiter bearbeitet wird, indem sie bei ungefähr 750°C für eine Dauer gepreßt wird, die hinreichend ist, um die ursprüngliche Höhe der verdichteten Legierung um ungefähr 60 % zu verringern, um so eine zusätzliche magnetische Anisotropie dorthinein zu induzieren.

8. Ein Verfahren zur Herstellung einer Legierung mit permanentmagnetischen Eigenschaften bei Raumtemperatur nach Anspruch 1, in welchem ungefähr 0,5 Gew.-% pulverisiertes Nickel der Legierung zugefügt werden; und ein Druck von ungefähr 100 MegaPascal isostatisch auf die erhitzte Legierungsmischung angelegt wird, um sie zu nahezu vollständiger Dichte zu verdichten.

9. Ein Verfahren zur Herstellung einer Legierung mit permanentmagnetischen Eigenschaften bei Raumtemperatur nach Anspruch 8, in welchem das Verfahren den Schritt umfaßt, daß die verdichtete Legierung weiter bearbeitet wird, indem sie bei ungefähr 750°C für eine Dauer gepreßt wird, die hinreichend ist, um die Originalhöhe der verdichteten Legierung um ungefähr 60 % zu verringern, um so eine zusätzliche magnetische Anisotropie dorthinein zu induzieren.

10. Eine Mischung, die geeignet ist, eine Legierung mit permanentmagnetischen Eigenschaften bei Raumtemperatur zu bilden, die aus einem Verfahren nach Anspruch 1 resultiert, worin die Mischung eine pulverisierte Legierung von Neodym, Eisen und Bor umfaßt, gekennzeichnet durch eine sehr fein kristalline Mikrostruktur und bis zu einem Gew.-% eines pulverisierten Metalls, das aus Cadmium, Kupfer, Gold, Iridium, Magnesium, Nickel, Palladium, Platin, Ruthenium, Silber oder Zink gewählt wird.

Revendications

1. Méthode de fabrication d'un alliage ayant des propriétés magnétiques permanentes à température ambiante, méthode comprenant les étapes suivantes : on prépare un mélange de néodyme, de fer et de bore; on fond le mélange pour obtenir un fondu homogène; on trempe rapidement ce fondu homogène à une vitesse donnant un alliage présentant une microstructure cristalline très fine; on ajoute un additif métallique à cet alliage pour obtenir un mélange; on chauffe ce mélange; et on applique une pression, sous une atmosphère non-oxydante, à ce mélange chauffé, pour le consolider presque jusqu'à sa pleine densité; laquelle méthode est caractérisée en ce que l'additif métallique est un additif élémentaire parmi le cadmium, le cuivre, l'or, l'iridium, le magnésium, le nickel, le palladium, le platine, le ruthénium, l'argent ou le zinc, et que cet additif est ajouté en quantités allant jusqu'à un pourcent en poids dudit mélange; et en ce que le mélange dudit alliage et de l'additif métallique est chauffé jusqu'à une température comprise entre 750 et 800°C pendant ladite étape de pressage à chaud, pour allier par diffusion l'additif métallique à l'alliage.

2. Méthode de fabrication d'un alliage ayant des propriétés magnétiques permanentes à température am-

biante, selon la revendication 1, laquelle méthode comprend également l'étape consécutive de travail dudit alliage consolidé pour y induire encore une anisotropie de ses propriétés magnétiques, l'alliage consolidé ayant une coercivité magnétique d'au moins 10 000 Oersteds.

3. Méthode de fabrication d'un alliage ayant des propriétés magnétiques permanentes à température ambiante, selon la revendication 1, dans laquelle l'additif métallique est une poudre d'un métal parmi le zinc, le cuivre et le nickel.

4. Méthode de fabrication d'un alliage ayant des propriétés magnétiques permanentes à température ambiante, selon la revendication 1, dans laquelle l'additif métallique comprend de 0,5 à 0,8 % en poids de poudre de zinc, et le mélange d'alliage est consolidé presque jusqu'à sa pleine densité en appliquant isostatiquement une pression d'environ 100 MegaPascals sur ledit mélange d'alliage chauffé.

5. Méthode de fabrication d'un alliage ayant des propriétés magnétiques permanentes à température ambiante, selon la revendication 4, laquelle méthode comprend l'étape consécutive de transformation dudit alliage consolidé en le soumettant à une pression, à environ 750°C, pendant une période de temps suffisante pour réduire sa hauteur de départ d'environ 60 %, de manière à y induire en outre une anisotropie de ses propriétés magnétiques.

6. Méthode de fabrication d'un alliage ayant des propriétés magnétiques permanentes à température ambiante, selon la revendication 1, dans laquelle environ 0,5 % en poids de poudre de cuivre est ajouté audit alliage, et une pression d'environ 100 MegaPascals est appliquée isostatiquement sur ledit mélange d'alliage chauffé, pour le consolider presque jusqu'à sa pleine densité.

7. Méthode de fabrication d'un alliage ayant des propriétés magnétiques permanentes à température ambiante, selon la revendication 6, laquelle méthode comprend l'étape consécutive de transformation dudit alliage consolidé en le soumettant à une pression, à environ 750°C, pendant une période de temps suffisante pour réduire sa hauteur de départ d'environ 60 %, de manière à y induire en outre une anisotropie de ses propriétés magnétiques.

8. Méthode de fabrication d'un alliage ayant des propriétés magnétiques permanentes à température ambiante, selon la revendication 1, dans laquelle environ 0.5 % en poids de poudre de nickel est ajouté audit alliage, et une pression d'environ 100 MegaPascals est appliquée isostatiquement sur ledit mélange d'alliage chauffé, pour le consolider pratiquement jusqu'à sa pleine densité.

9. Méthode de fabrication d'un alliage ayant des propriétés magnétiques permanentes à température ambiante, selon la revendication 8, laquelle méthode comprend l'étape consécutive de transformation dudit alliage consolidé en le soumettant à une pression, à environ 750°C, pour une période de temps suffisante pour réduire sa hauteur de départ d'environ 60 %, de manière à y induire une anisotropie de ses propriétés magnétiques.

10. Mélange approprié pour réaliser un alliage ayant des propriétés magnétiques permanentes à température ambiante et obtenu par une méthode selon la revendication 1, lequel mélange comprend un alliage en poudre de néodyme, de fer et de bore, caractérisé par une microstructure cristalline très fine, et jusqu'à 1 % en poids d'une poudre d'un métal choisi parmi le cadmium, le cuivre, l'or, l'iridium, le magnésium, le nickel, le palladium, le platine, le ruthénium, l'argent et le zinc.

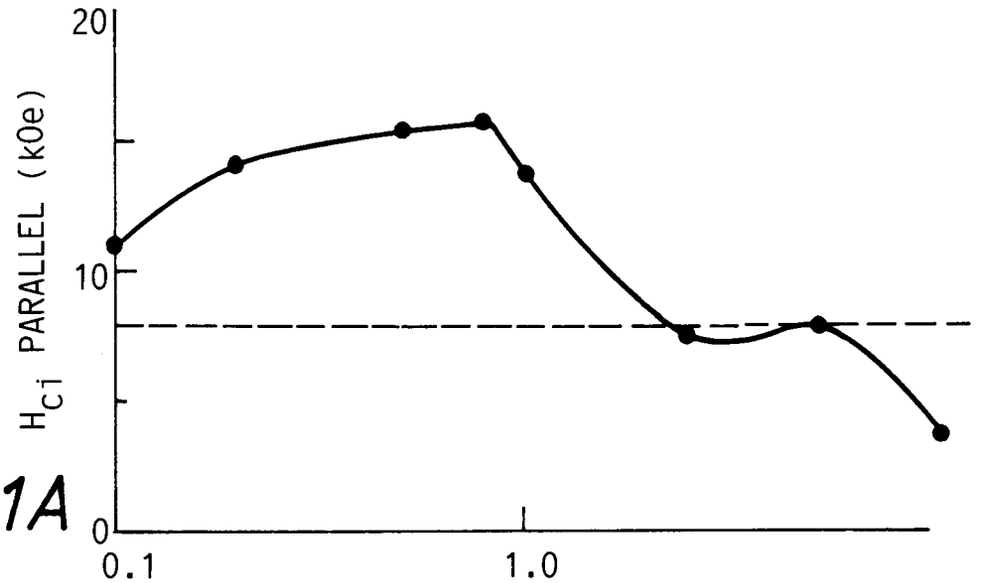


Fig.1A

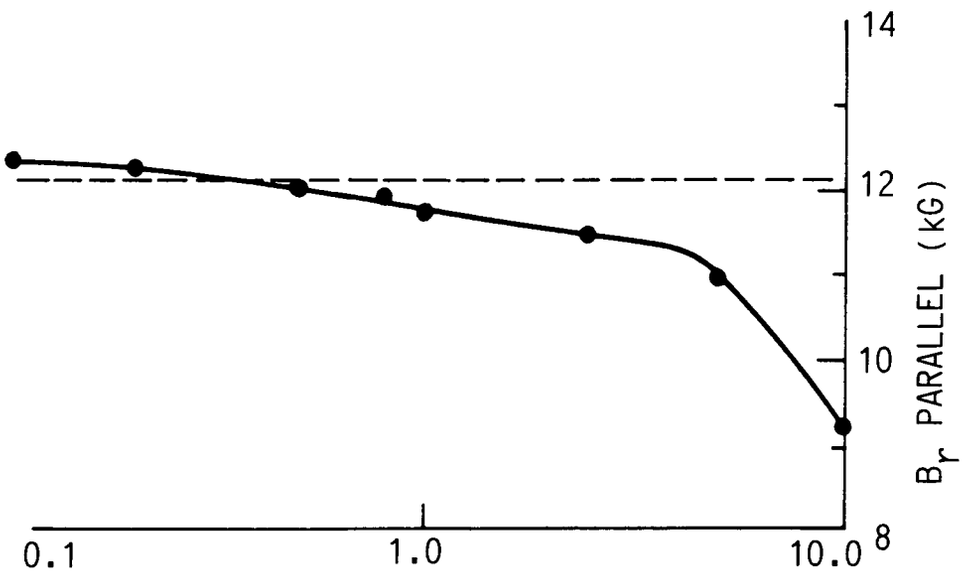


Fig.1B

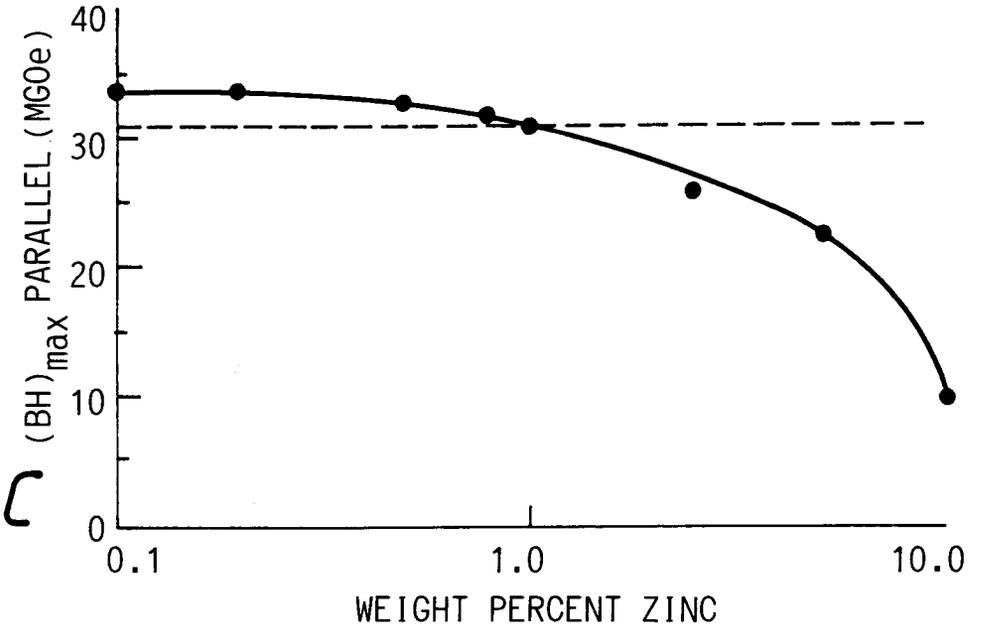

40
30
20
10
0
$(BH)_{max}$ PARALLEL (MGOe)
0.1
1.0
10.0
WEIGHT PERCENT ZINC

Fig.1C

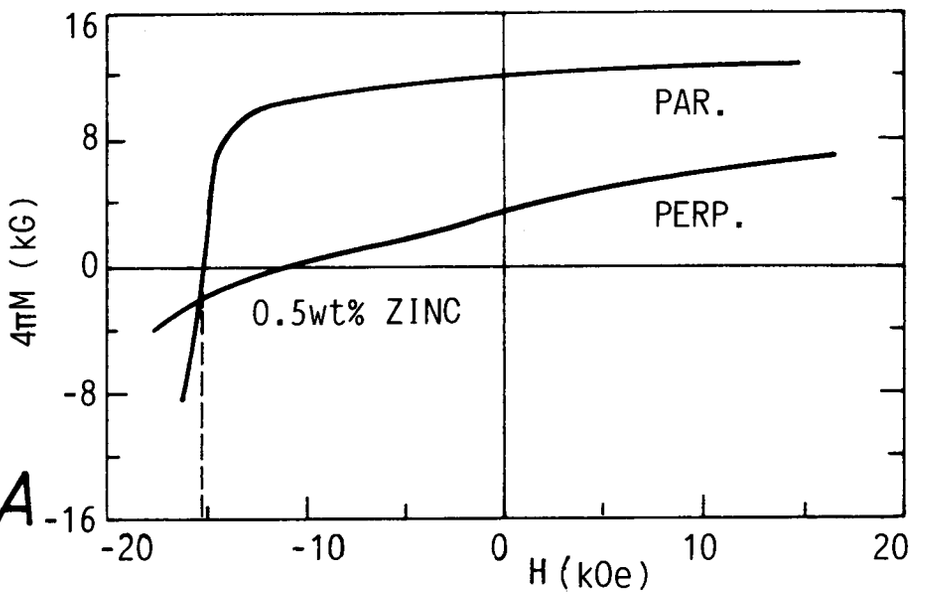

16
8
0
-8
-16
4πM (kG)
PAR.
PERP.
0.5wt% ZINC
-20
-10
0
10
20
H (kOe)

Fig.2A

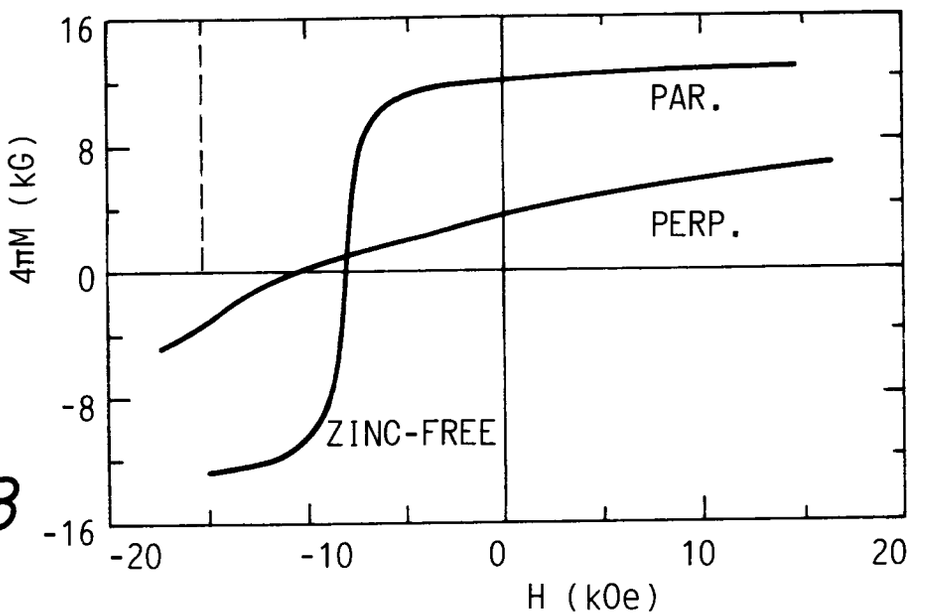

16
8
0
-8
-16
4πM (kG)
PAR.
PERP.
ZINC-FREE
-20
-10
0
10
20
H (kOe)

Fig.2B

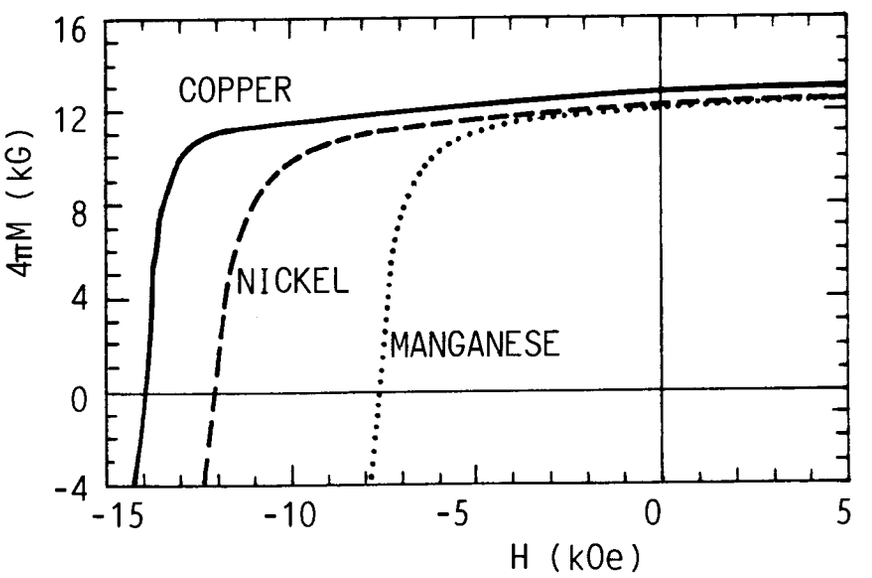

16
12
8
4
0
-4
4πM (kG)
COPPER
NICKEL
MANGANESE
-15
-10
-5
0
5
H (kOe)

Fig.3