

19



Europäisches Patentamt
European Patent Office
Office européen des brevets



11 Publication number:

0 434 232 B1

12

EUROPEAN PATENT SPECIFICATION

49 Date of publication of patent specification: **26.07.95** 51 Int. Cl.⁸: **B65H 3/04**

21 Application number: **90312768.6**

22 Date of filing: **23.11.90**

54 **Paper feed arrangement.**

30 Priority: **18.12.89 US 454661**

43 Date of publication of application:
26.06.91 Bulletin 91/26

45 Publication of the grant of the patent:
26.07.95 Bulletin 95/30

84 Designated Contracting States:
DE FR GB IT

56 References cited:
DE-C- 979
US-A- 1 976 788
US-A- 4 312 503
US-A- 4 431 175

73 Proprietor: **Hewlett-Packard Company**
P.O. Box 10301
3000 Hanover Street
Palo Alto
California 94303-0890 (US)

72 Inventor: **Jackson, Larry A.**
2315 SE 149th Street
Vancouver, WA 98684 (US)
Inventor: **Rasmussen, Steve O.**
9517 NE Pinecreek Street
Vancouver, WA 98664 (US)

74 Representative: **Colgan, Stephen James et al**
CARPMAELS & RANSFORD
43 Bloomsbury Square
London WC1A 2RA (GB)

EP 0 434 232 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

This invention relates to a paper-feed arrangement for incorporation into the structure of a printer and the like. The term "paper" used herein in the specification and claims is intended to mean and embrace any functionally similar sheet-like printing medium.

While paper-handling (picking and feeding) mechanisms have been around for many years, the technology continues to "search" for improvements in various areas, two of which include achieving greater and greater compactness, and higher and higher paper-pick/feed (single sheet at a time) reliability.

Accordingly, a general and important aim of the present invention is to provide a novel paper-feed arrangement which addresses these two issues in ways which offer some significant advances.

From US-A-4 312 503, a paper-feed arrangement according to the preamble of claim 1 is known.

According to the present invention, there is provided a paper-feed arrangement with a reduced overall depth for incorporation in a printer and the like comprising:

paper-storage hopper structure including a discharge zone enabling picking of the top sheet of paper in a stack in the hopper, and

a broad-expanse, power driven, travelling pick belt disposed adjacent said discharge zone trained around a drive roller displaced laterally downstream from said zone and an idler roller disposed over the zone operable, with paper stored in said hopper structure to pick such paper through the action of generally rectangular, broad-area facial contact with the same, characterised in that the drive roller has one diameter and said idler roller has another diameter which is a small fraction of said one diameter, said pick belt, where it is trained over said drive roller, vertically spanning an extent which straddles the plane containing such a top sheet, and where it is trained over said idler roller, spanning a vertical extent which is a small fraction of said first-mentioned extent.

As a result of the low-profile training of the belt structure, an overall "vertical" depth, from the upper run of the belt structure to the base of the hopper, is achieved which is significantly less than that achieved in prior art arrangements where relatively high-profile pick roller structure is employed overlying the discharge end of a hopper. Further, broad-expanse, essentially rectangular, facial contact with a sheet of paper enhances picking reliability.

According to a preferred embodiment of the invention, there is provided, in a region down-

stream from the hopper's discharge end, an expanse of frictioning material, such as cork, which faces a run in the overlying belt structure. The materials chosen for the belt structure (plural belts) and for the frictioning expanse are such that the coefficient of friction expected between the belt and paper exceeds that expected between paper and the frictioning expanse, with the latter coefficient of friction exceeding that expected between two contacting sheets of paper. A consequence of this construction is that what might be thought of as a differentiated friction separation zone exists immediately downstream from the discharge end of a hopper, wherein, should more than one sheet of paper be picked initially from the hopper, a separation will occur, with the result that only the top sheet will actually travel into the downstream intended paper path.

These and other aims and advantages that are attained by the invention will become more fully apparent as the description which now follows is read in conjunction with the accompanying drawings, in which:-

Fig. 1 is a somewhat simplified perspective view of an otherwise conventional computer-driven printer, such as an ink-jet printer, which incorporates a paper-feed arrangement constructed in accordance with the present invention

Fig. 2 is a simplified side section illustrating the details of the proposed paper-feed arrangement. Fig. 3 is a fragmentary, simplified, top plan view further illustrating the arrangement of Fig. 2, and highlighting regions where broad-expanse paper contact occurs during operation of the arrangement; and

Fig. 4 takes, essentially, the same point of view as Fig. 2, and illustrates how, according to the invention, several papers (three) picked simultaneously are separated in a separation zone located downstream from where initial picking takes place. In this figure, the separation zone is artificially expanded in order to clarify what happens to paper in the zone.

Fig. 1 is included herein to provide an illustration of a typical setting wherein the arrangement proposed by the present invention has particular utility. In particular, this perspective view illustrates a conventional ink-jet, computer-driven printer 8 in which, as will be explained, the components of the present invention are incorporated.

Turning attention now, then, to Figs. 2 and 3, illustrated generally at 10 is a paper-feed arrangement incorporated in printer 8, and constructed in accordance with the present invention. Included are a paper-storage hopper structure, or hopper, 12 (Fig. 2) including a discharge zone shown generally at 12a. Hopper 12 and its discharge zone are, essentially, conventional in construction. Shown

stored as a stack in hopper 12 is a collection of sheets of paper 14 ready to be picked and fed for printing in the printer.

Immediately downstream from discharge zone 12a is a ramp structure 16 on the upper surface of which is suitably attached an expanse of cork 18, which is also referred to herein as frictioning means.

Overlying the organization so far described are three, laterally distributed, power-driven belts 20, 22, 24 which are also referred to herein collectively as broad-expanse, power-driven, traveling pick means. As can be seen particularly in Fig. 2 the left ends of the belts in this figure are trained in low-profile reverse bends over a rotatably mounted, elongated idler 26. This idler extends over discharge zone 12a at a location whereby a substantial under-facial expanse of each belt directly overlies and contacts the top sheet of paper stored in hopper 12. In the embodiment now being described, the vertical distance, shown at A in Fig. 2, between the top of each belt and the top of paper stacked in the hopper is approximately 0.95 cm (3/8-inches).

Driving the belts during a picking/feeding operation is an elongate drive roller 28 which closely overties ramp structure 16 some distance downstream from discharge zone 12a. This drive roller is positioned in such a manner that the undersides of runs of the belts extending from the base of the drive roller directly overlie and tend to contact the top surface of cork expanse 18. This region is referred to herein as a separation zone.

From the description which has been given so far, it should be readily apparent that the proposed belt pick/feed approach results in substantial, generally quadrilinear area-contact engagement with paper. In Fig. 3, underlying each of the belts in dash-dot lines, there are indications given at 30, 32, 34 of the contact areas provided. This feature which is offered by the use of belts is very distinct from prior art approaches where power-driven pick rollers typically offer extremely low-area line contact with paper.

With, and looking again just at Fig. 2, the drive roller and idler configured and relatively sized as shown it should be apparent that the overall height of the entire structure including the drive rollers and the hopper structure can be held to a minimum. And this, of course, is considered to be an important advantage. For example, reducing the height referred to allows for the offering of a very compact printer structure wherein two paper storage hoppers for handling different sizes of paper can be employed. Alternatively, other elements may be employed with a single hopper or the printer may simply be shorter.

According to another important feature of the invention, the material chosen for the belts, typically natural rubber, and that, typically cork, chosen for the frictioning expanses which underlie the belts where they extend over the ramp structure, have been chosen to provide a special differentiated coefficient of friction situation which further leads to enhanced picking and feeding reliability (one sheet at a time).

Turning attention to Fig. 4, there is illustrated a situation where, with operation of the belts, three sheets of paper have initially been picked from the stack in the hopper. The differentiated coefficient of friction consideration just mentioned is one wherein the expected coefficient of friction between the contacting faces of two sheets of paper is less than that expected between the face of a sheet of paper and cork expanses 18, with the latter being less than that coefficient of friction which is expected between the belts and the face of a sheet of paper. The paper/paper coefficient of friction is also referred to herein as PP, that between paper and cork expanses 18 as PF, and that between the belts and paper as PB.

What occurs as a consequence of this differentiated coefficient of friction situation is that where, as is shown in Fig. 4, plural sheets are picked, the sheets will tend to separate easily in the separation zone immediately downstream from discharge zone 12a. In the specific case illustrated, the bottom one of the three picked sheets becomes initially caught by the cork to allow the intermediate-picked sheet to slide over and then become caught, with the desired top sheet continuing to be fed appropriately by the belts.

It should thus be apparent how the two issues of compactness and pick/feed (single sheet at a time) reliability are successfully addressed by the arrangement proposed by the present invention.

The above-described invention is applicable to any situation where paper is being picked and fed into a device such as a printer.

Claims

1. A paper-feed arrangement with a reduced overall depth for incorporation in a printer (8) and the like comprising:
 - paper-storage hopper structure (12) including a discharge zone (12a) enabling picking of the top sheet of paper (14) in a stack in the hopper, and
 - a broad-expanse, power driven, travelling pick belt (20,22,24) disposed adjacent said discharge zone (12a) trained around a drive roller (28) displaced laterally downstream from said zone (12a) and an idler roller (26) disposed over the zone (12a) operable, with paper (14)

stored in said hopper structure (12) to pick such paper through the action of generally rectangular, broad-area facial contact with the same, characterised in that the drive roller (28) has one diameter and said idler roller (26) has another diameter which is a small fraction of said one diameter, said pick belt (20,22,24), where it is trained over said drive roller (28), vertically spans an extent which straddles the plane containing such a top sheet (14), and where it is trained over said idler roller (26), spans a vertical extent which is a small fraction of said first-mentioned extent.

2. An arrangement as claimed in claim 1 which further comprises a stationary expanse of frictioning means (18) facing a run in said belt (20,22,24) downstream from said discharge zone (12a), adapted for facial contact with a sheet of paper (14) picked by the pick belt (20, 22, 24).
3. An arrangement as claimed in claim 2 which is designed in such manner that the nominal coefficients of friction expected to exist between paper and belt PB, between paper and paper PP, and between paper and frictioning means PF are different, with PF exceeding PP, and PB exceeding PF.

Patentansprüche

1. Eine Papierzuführanordnung mit einer reduzierten Gesamttiefe zum Einbau in einen Drucker (8) und dergleichen, mit folgenden Merkmalen:
einer Papierspeicher-Magazinstruktur (12), die eine Entladungszone (12a) einschließt, die das Aufgreifen des obersten Blatts Papier (14) eines Stapels in dem Magazin ermöglicht, und einem weitflächigen, Leistungs-betriebenen, beweglichen Aufnahmeriemen (20, 22, 24), der benachbart zu der Entladungszone (12a) angeordnet ist und um eine Antriebsrolle (28), die bezüglich der Zone (12a) lateral in die Bewegungsrichtung verschoben ist, und eine Leitrolle (26), die betriebsfähig über der Zone (12a) angeordnet ist, geführt ist, wobei Papier (14) in der Magazinstruktur (12) gespeichert ist, um ein solches Papier durch die Aktion einer im allgemeinen rechteckigen, breitflächigen Flächenberührung mit demselben aufzugreifen, dadurch gekennzeichnet, daß die Antriebsrolle (28) einen Durchmesser aufweist und die Leitrolle (26) einen weiteren Durchmesser aufweist, der ein kleiner Bruchteil des einen Durchmessers ist, wobei der Aufgreifriemen (20, 22, 24) dort, wo er um die

Antriebsrolle (28) geführt ist, in vertikaler Richtung eine Ausdehnung überspannt, die die Fläche überspannt, die ein solches oberstes Blatt (14) einschließt, und dort, wo er um die Leitrolle (26) geführt ist, eine vertikale Ausdehnung überspannt, die ein kleiner Bruchteil der erstgenannten Ausdehnung ist.

2. Eine Anordnung gemäß Anspruch 1, die ferner eine stationäre ausgedehnte Fläche einer Reibungseinrichtung (18) aufweist, die einem Verlauf des Riemen (20, 22, 24) in Bewegungsrichtung hinter der Entladungszone (12a) gegenüberliegt und für eine Flächenberührung mit einem Blatt Papier (14), das von dem Aufnahmeriemen (20, 22, 24) aufgegriffen wird, angepaßt ist.
3. Eine Anordnung gemäß Anspruch 2, die auf eine solche Art und Weise entworfen ist, daß die nominellen Reibungskoeffizienten, die erwartungsgemäß zwischen Papier und Riemen PB, Zwischen Papier und Papier PP und zwischen Papier und Reibungseinrichtung PF existieren, unterschiedlich sind, wobei PF größer als PP und PB größer als PF ist.

Revendications

1. Agencement d'alimentation en papier présentant une profondeur globale réduite prévu pour une incorporation dans une imprimante (8) et autre, comprenant :
une structure de réserve de stockage de papier (12) incluant une zone de décharge (12a) permettant la saisie de la feuille de papier supérieure (14) dans une pile placée dans la réserve ; et
une courroie de saisie mobile entraînée par moteur à large plage (20, 22, 24) disposée de manière à être adjacente à ladite zone de décharge (12a) entraînée autour d'un rouleau d'entraînement (28) déplacé latéralement en aval par rapport à ladite zone (12a) et par un galet fou (26) disposé sur la zone (12a) qui fonctionne, tandis que le papier (14) est stocké dans ladite structure de réserve (12), pour saisir ce papier par l'intermédiaire de l'action d'un contact facial sur une zone large généralement rectangulaire avec celui-ci, caractérisé en ce que le rouleau d'entraînement (28) présente un certain diamètre et ledit galet fou (26) présente un autre diamètre qui est une faible fraction dudit premier diamètre, ladite courroie de saisie (20, 22, 24), dans sa partie qui est entraînée sur ledit rouleau d'entraînement (28), s'étend verticalement sur une étendue qui englobe le plan contenant une telle feuille supé-

rieure (14), et dans sa partie qui est entraînée sur ledit galet fou (26), s'étend sur une étendue verticale qui est une faible fraction de ladite première étendue mentionnée.

- 5
2. Agencement selon la revendication 1, comprenant en outre une extension fixe de moyens de friction (18) qui fait face à une portion de ladite courroie (20, 22, 24) en aval de ladite zone de décharge (12a), conçue pour un contact facial avec une feuille de papier (14) saisie par la courroie de saisie (20, 22, 24). 10
3. Agencement selon la revendication 2, lequel est conçu de telle sorte que les coefficients de friction nominaux que l'on s'attend à voir exister entre le papier et la courroie PB, entre le papier et le papier PP ainsi qu'entre le papier et le moyen de frottement PF sont différents, PF étant supérieur à PP et PB étant supérieur à PF. 15 20

25

30

35

40

45

50

55

5

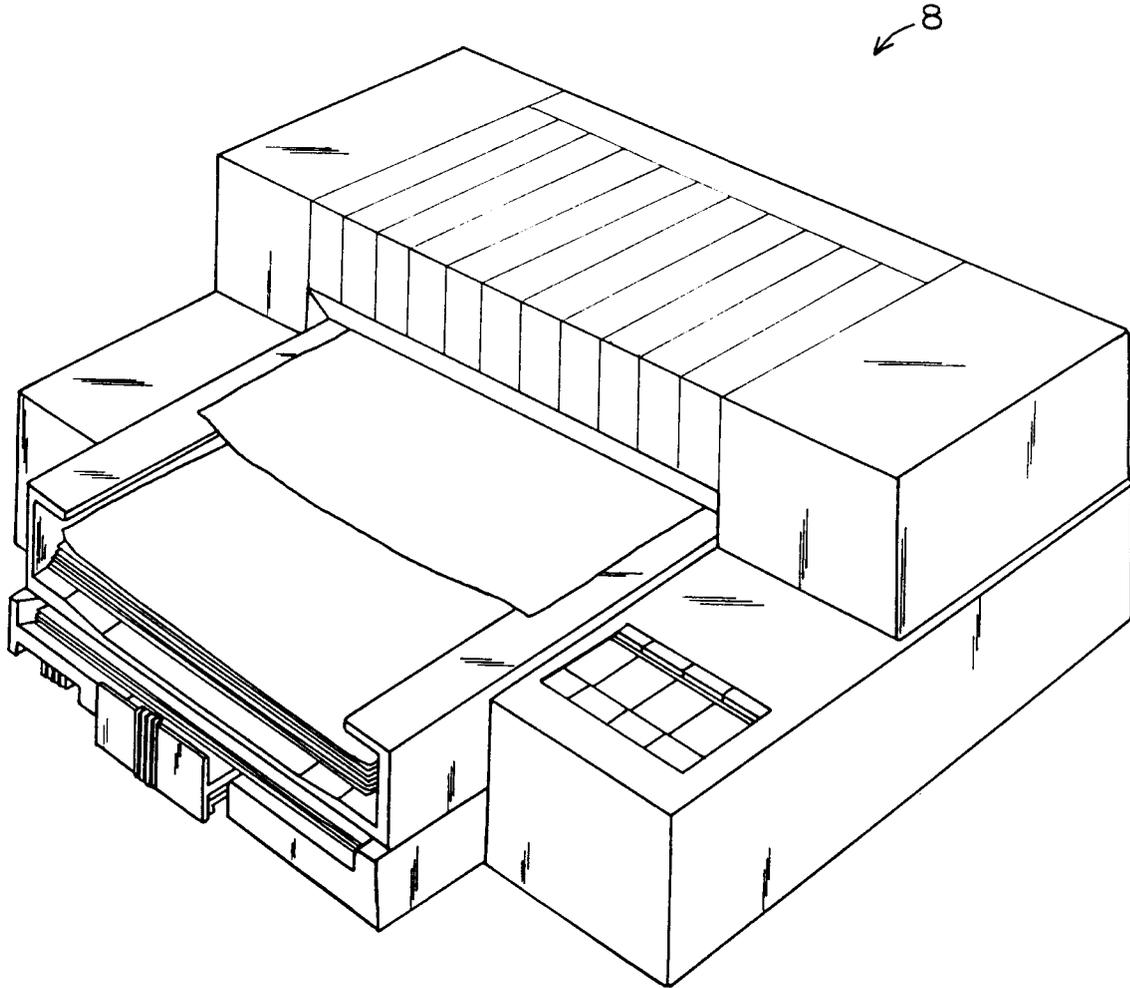


FIG.1

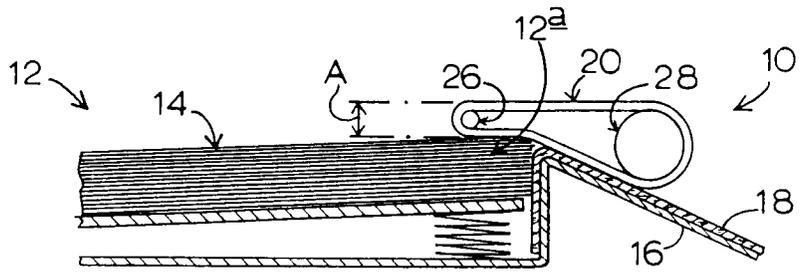


FIG. 2

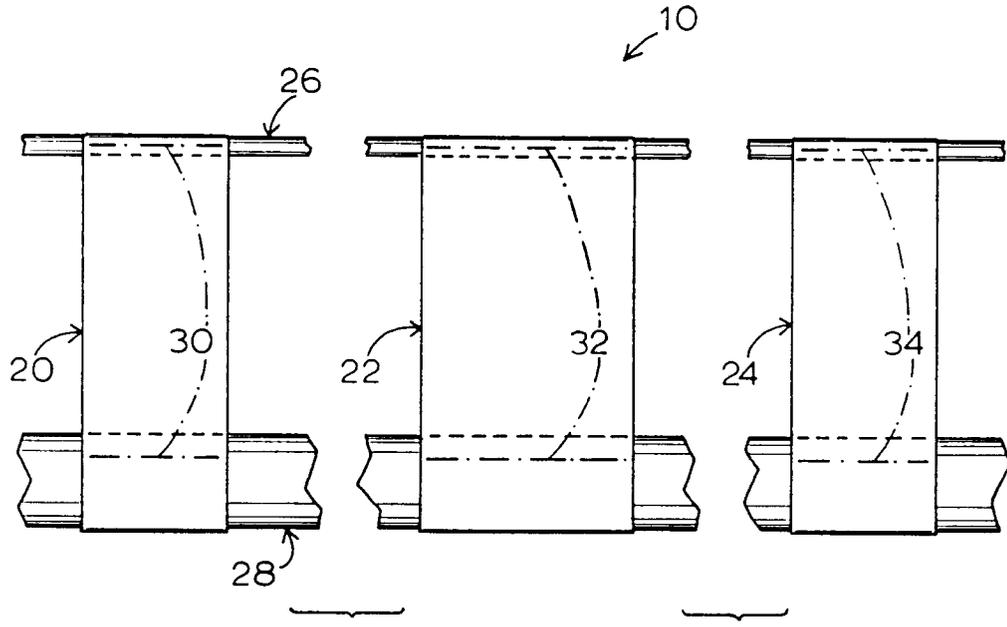


FIG. 3

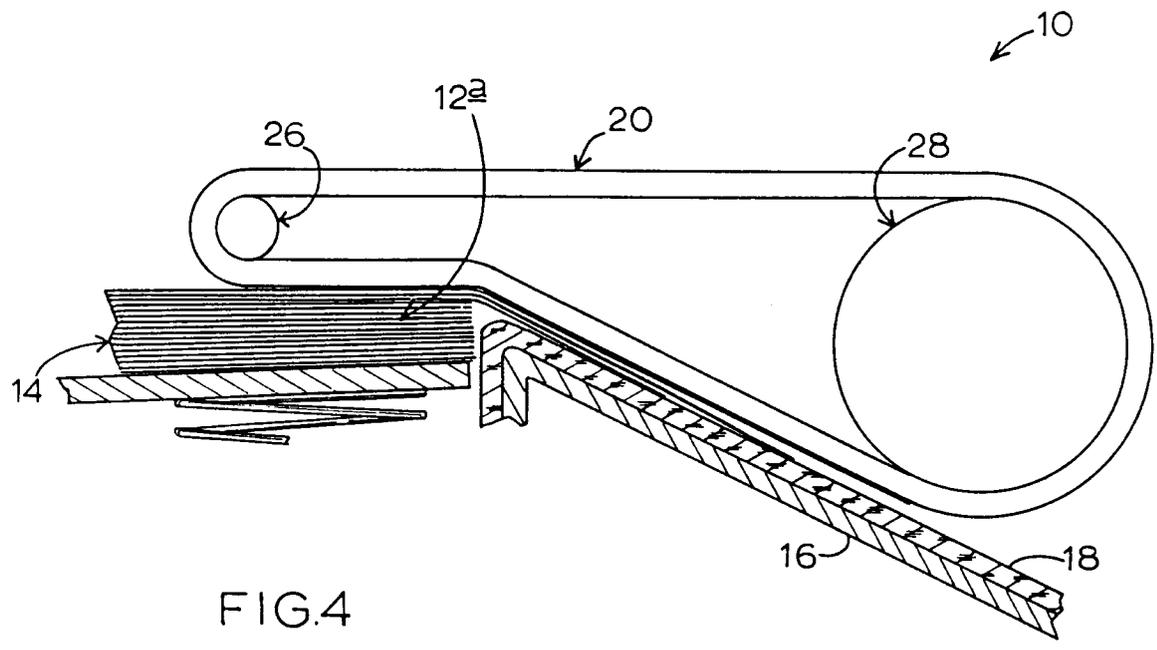


FIG. 4