



⑪ Publication number : **0 436 503 A1**

⑫ **EUROPEAN PATENT APPLICATION**

⑳ Application number : **91200006.4**

⑤① Int. Cl.⁵ : **B28B 13/06**

㉔ Date of filing : **02.01.91**

③① Priority : **29.12.89 NL 8903198**

④③ Date of publication of application :
10.07.91 Bulletin 91/28

⑥④ Designated Contracting States :
BE DE DK ES FR GB IT NL SE

⑦① Applicant : **HUBERT SNEEK**
MACHINEFABRIEK B.V.
Prof. Zernikestraat 2
NL-8606 JV Sneek (NL)

⑦② Inventor : **Bleeker, Hotze, Cornelis**
Ussenstraat 120
5345 HW Oss (NL)

⑦④ Representative : **Boelsma, Gerben Harm, Ir. et al**
Octrooibureau Polak & Charlouis Laan Copes
van Cattenburch 80
NL-2585 GD Den Haag (NL)

⑤④ **A method and device for discharging brick mouldings from moulding trays.**

⑤⑦ The invention relates to a method for discharging brick mouldings from moulding trays (11), wherein moulding trays (11) filled with mouldings are tilted and the mouldings are released from the inverted trays (11) and received on a carrying pallet (12). According to the invention the release of the moulding is taking place by admitting — through openings in the bottom (21) of the moulding trays (11) and during a short period of time — air under increased pressure into the moulding trays (11) containing the mouldings.

The invention also provides a mouth piece (16) designed to be placed on the outer side of bottom (21) of a moulding tray (11) and adapted to be connected to a source to increased air pressure, as well as a moulding tray especially for use when applying the above method.

EP 0 436 503 A1

A METHOD AND DEVICE FOR DISCHARGING BRICK MOULDINGS FROM MOULDING TRAYS

The invention relates to a method for discharging brick mouldings from moulding trays, wherein moulding trays filled with mouldings are tilted and the mouldings are released from the tilted moulding trays and are received on a carrying pallet.

Such a method is making part of a well-known method for working a supply of clay to mouldings adapted for firing of e.g. bricks having the so-called hand mould structure. With this method use is made of equipment, provided with a press of the type which forms the clay into lumps and deposits these lumps into moulding trays on an endless conveying means mounted for intermittent passing under the press, said conveying means passing the moulding trays across a device for trimming the filled moulding trays, there being further provided a station wherein the filled moulding trays are tilted, a station wherein the mouldings are discharged from the moulding trays onto carrying pallets supplied to said station, a station for washing, drying and sanding of the empty moulding trays and a station for tilting the moulding trays back into the filling position.

With the method according to the invention more specifically that part of the whole process is involved, which is carried out in the station where the mouldings are discharged from the inverted moulding trays onto carrying pallets supplied to this station. With the method used so far the release of the mouldings from the inverted moulding trays is taking place by vibration and more particularly by causing a vibration plate which is put into vibration by means of a vibration motor to act upon the upwardly facing bottom of the inverted moulding trays. A disadvantage of this discharging method, as encountered in practice is that the time passing between the start of the vibration and the moment of release of the moulding may vary to a rather large extent in dependence of the various type of clay to be worked, whereas the extent of sanding and the degree of humidity of the sand used thereby may be of influence as well. Frequently it appears to be impossible to effect this way of releasing in the available period of time (e.g. in the order of one second) within a complete cycle. By supplying more vibration power more certainty would be obtained with respect to the release, in time, of the mouldings. The generation of more powerful vibrations, however, also results in a substantial increase of the mechanical load of the entire equipment. Moreover this would lead to unacceptable high noise level within the moulding device.

It is an objective of the invention to contribute to a more effective way of discharging of brick mouldings from moulding trays, thereby avoiding the objections inherent to the vibration method above referred to.

In accordance with the invention this objective is

achieved in that the release of the moulding is taking place by admitting — via opening in the bottom of the moulding trays and during a short period of time — air under increased pressure into the moulding trays containing the mouldings.

5 It has been found that in this way an immediate and silent release of the mouldings can be effected by means of air of a relatively low pressure, without any affection of the moulding by the air under pressure. Differences as indicated hereinabove with respect to
10 various kinds of clay are playing a negligible role.

According to the invention use may be made of the circumstance, that moulding trays of the type under consideration often have slits in the moulding tray bottom, through which air may escape to allow
15 the deposited clay lumps to sag out.

The use of air under pressure as release means is commonly known in other technical fields. These well-known applications, however, in general relate to ejecting more or less inflexible, finished articles or arti-
20 cles of a relatively easily releasing shape.

The invention also relates to an auxiliary device for discharging brick mouldings from the moulding trays in brick moulding equipment. The device according to the invention is characterized by a cap-shaped
25 mouth piece adapted to be placed with its mouth into sealing contact with the bottom of a moulding tray and designed to be connected to a source of increased air pressure.

The invention will be hereinafter further explained by way of example with reference to the drawing.

Fig. 1 is a perspective view of equipment, in which single moulding trays (i. e. moulding trays which are capable of containing one brick moulding) are successively displaced across a number of work-
35 ing stations ;

fig. 2 shows a cross-section through a detail relating to the auxiliary device according to the invention ;

fig. 3 is a cross-sectional view of the bottom of a moulding tray in a specific embodiment, adapted for use with the method according to the inven-
40 tion ;

fig. 4 shows a cross-section of a moulding tray as represented in fig. 3 in the position for release and fig. 5 shows a cross-section of a modification of the moulding tray embodiment shown in fig. 3 and
45 4.

The equipment shown in fig. 1 comprises a turntable 1, having a mounting ring supported by legs 2 and covered on the upper side by a removable cover
50 3, a supporting ring 5 for the moulding tray supports 6 being suspended by said mounting ring 4 in a rotary manner (not further shown). The supporting ring 5 is toothed at its inner circumference (not shown), the

teeth of which mate with a drive gear, the rotary movement of which is taken off from a central drive motor.

The moulding tray supports 7 are rotatably mounted to the supporting ring 5 about axes 8 and provided with a pair of rollers 9 at the outer circumference, said rollers running over a guide rail 10 extending along the outer circumference of the turntable so as to normally hold the moulding tray supports 7 in their horizontal position. The guide rail 10 is locally interrupted in connection with a tilting movement of the moulding tray supports which will be hereinafter further described.

A moulding tray 11 is removably fixed in each moulding tray support 7. In the example shown moulding trays are used, which are provided with a single moulding cavity for one moulding. The turntable may be moved stepwise in the direction of arrow I and comprises e. g. twelve fixed circumferential positions, in which the turntable is kept stationary during e. g. one second after each rotational step, while the stepwise displacement is taking place in e. g. two seconds.

In the drawing each of the twelve moulding trays and moulding tray supports respectively is taking one of the said fixed circumferential positions.

Of particular importance for the present invention is the discharge position indicated at 15, in which the respective moulding tray 11 is positioned with its filling opening facing downwards in order to drop the moulding onto the pallet 12 supplied underneath.

13 designates a sill extending diametrically under the turntable 1 and adapted for supplying empty pallets 12 across the same from one side (i. e. from the right as seen in fig. 1). The position indicated at 14 and preceding the discharge position 15 is also of importance.

In position 14 the respective moulding tray support has to be tilted in a quick manner, so that the respective moulding tray will enter into the discharge station 15 in a substantially horizontal (but inverted) position. For a detailed description of the respective tilting mechanism reference is made to the not pre-published Dutch patent application 8901769 (corresponding with European Patent Application 90202549.3).

In the discharge station 15 there is provided a cap-shaped mouth piece 16 which in the example shown is supported by supporting arms 17 that are pivotally fastened to the mounting rail 4, the mouth piece chamber 18 (vide fig. 2) of said mouth piece being provided with means for connection to a source of increased pressure not further shown in the drawing. Normally, i. e. during the displacement phase of the moulding tray support, the downwardly facing mouth opening 19 of the mouth piece 16 is positioned at a certain distance straight over the discharge position. Around the edge of the mouth opening 19 a strip 20 of a compressible sealing material is provided.

As soon as an inverted, loaded moulding tray 11 has come to a stillstand within the discharge station

15, the supporting arms 17 will be actuated in a manner not further shown in the drawing so as to cause the mouth piece 16 to engage the bottom of the respective moulding tray. The edge of the mouth opening 19 fits on a narrow marginal portion of the upwardly facing moulding tray bottom 21, in which the air passage slots 22 are provided. The sealing material 20 provides for an effective sealing between the moulding tray bottom 21 and the edge of the mouth opening 19 of the mouth piece 16. A short release of the air under pressure from the pressurized air source will suffice to cause the moulding to become released from the respective moulding cavity under the pressure of the air entering into the moulding cavity through the slot 22. In practice a pressure of no more than 2 bar has been found sufficient to secure a release within the relative short period of time which is available for this purpose. It will be clear, that in a similar manner a plurality of mouldings may be simultaneously released from moulding trays containing a plurality of moulding cavities, by means of a correspondingly extended mouth piece which may be divided into compartments corresponding with said moulding cavities, if desired.

The invention is also applicable with brick moulding equipment of a different type, with which e. g. the moulding trays are transported in a vertically oriented path and in which the moulding trays are tilted in a different way.

The method according to the invention may also be successfully applied for discharging from a moulding tray of non-sanded mouldings which are destined for the manufacture of bricks having a so-called "Wasserstrich structure".

Fig. 3 shows a special type of moulding tray 11a as used for making mouldings for bricks, which are provided with a so-called "frog" in one of the broad faces. Usually the purpose of such a "frog" is to keep the so-called "drying volume" of the brick — although thicker, wide or longer than normal — equal to that of a brick of the usual size. Said "frog" is obtained by providing on the bottom 21a of the moulding tray 11a an insert or rise 24. A so formed moulding tray 11a, 21a is — after a slight adaptation — particularly suitable for use when applying the method of discharging according to the invention. The required adaptation is obtained by fastening the insert or rise 24 onto the inner of the moulding tray bottom 21a with a limited movability in vertical direction rather than being fastened fixedly as known so far. In addition to that a (central) opening 25 is provided in the area of the bottom 21a which is positioned opposite the insert or rise 24 and which may fulfil the function of the openings 22 in the embodiment of fig. 2.

In the normal position, with the filling opening of the mould facing upwardly (fig. 3), the insert 24 engages the moulding tray bottom 21a into direct contact so that the required clearance, in the order of 1

mm, is located (practically) entirely on the side of the heads 26 of the fastening screws 27. In the position the moulding tray 11a, 21a can be filled in the normal way. When inverting the moulding tray 11a, 21a (which is covered by a pallet upon filling) the insert 24 will become released from the moulding tray bottom (21a), so that air under increased pressure which is supplied through a mouth piece 28 placed around the opening 25 on the outer side of the bottom 21a may rapidly spread across a substantial area of the upper face of the moulding, thereby creating a substantially uniform ejecting pressure, which secures an effective release of the moulding from the moulding tray 11a, 21a.

The advantage of the embodiment of fig. 3 in comparison with that of fig. 2 is to be seen in the substantially smaller mouth piece, which may be pressed onto the moulding tray bottom with substantially less effort.

Fig. 5 shows still another practical embodiment of a moulding tray which is adapted for use when applying the manner of discharging according to the invention. In this case a substantially wide opening 25' is provided on a central location of the generally flat moulding tray bottom 21b, said opening being, on the inner side of the bottom 21b, covered by a plate element 29, which is permeable to air but impervious to clay, said plate element being preferably formed of wire gauze, the mesh of which is in the order of 1 mm. The plate element 29 has its circumferential edge portion sunk into the inner bottom surface and may be fixed as by an adhesive. The plate element may be held in a separate annular frame, if desired, so that it can be interchanged in an easy way. It has been found, that there is an effective release of the clay from the wire gauze when inverting the mould and that also in this embodiment a uniform ejection pressure is built up over the moulding to be released, when a mouth piece 28 connected to a source of increased air pressure (until about 2 bar) is placed around the opening 25'.

Claims

1. A method for discharging brick mouldings from moulding trays, wherein moulding trays filled with mouldings are tilted and the mouldings are released from the tilted moulding trays and are received on a carrying pallet, characterized in that the release of the moulding is taking place by admitting — via openings in the bottom of the moulding trays and during a short period of time — air under increased pressure into the moulding trays containing the mouldings.
2. An auxiliary device for discharging brick mouldings from the moulding trays in brick moulding equipment, characterized by a cap-shaped

mouth piece adapted to be placed with its mouth into sealing contact with the bottom of a moulding tray and designed to be connected to a source of increased air pressure.

3. A device according to claim 2, characterized in that a strip of compressible sealing material is applied on the edge of the mouth opening of the mouth piece.
4. A device according to claim 2-3, characterized in that the mouth piece chamber is divided into a plurality of compartments which are each corresponding with a moulding cavity of a multiple moulding tray.
5. A moulding tray adapted for use when applying the method of claim 1, said moulding tray having at least one moulding cavity for a moulding and provided in its bottom with at least one venting opening, characterized in that venting opening is covered on the inner side of the bottom by an element which is permeable to air but impervious to clay.
6. A moulding tray according to claim 5, characterized in that the venting opening is covered by an insert which is fixed to the bottom surface with a certain vertical play.
7. A moulding tray according to claim 5, characterized in that the venting opening is covered by perforated plate element.
8. A moulding tray according to claim 7, characterized in that the plate element is formed of wire gauze having a mesh in the order of 1 mm.

5

10

15

20

25

30



35

40

45

50

55

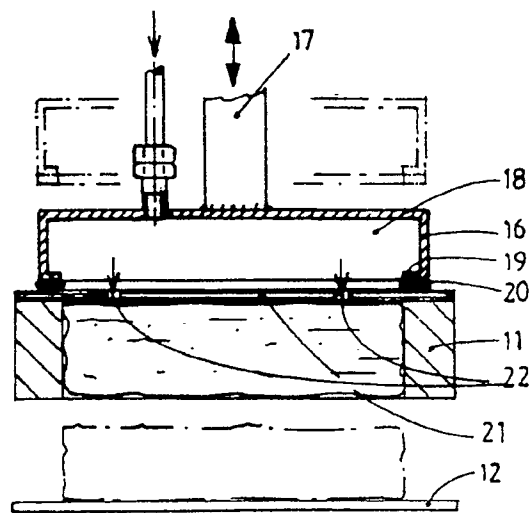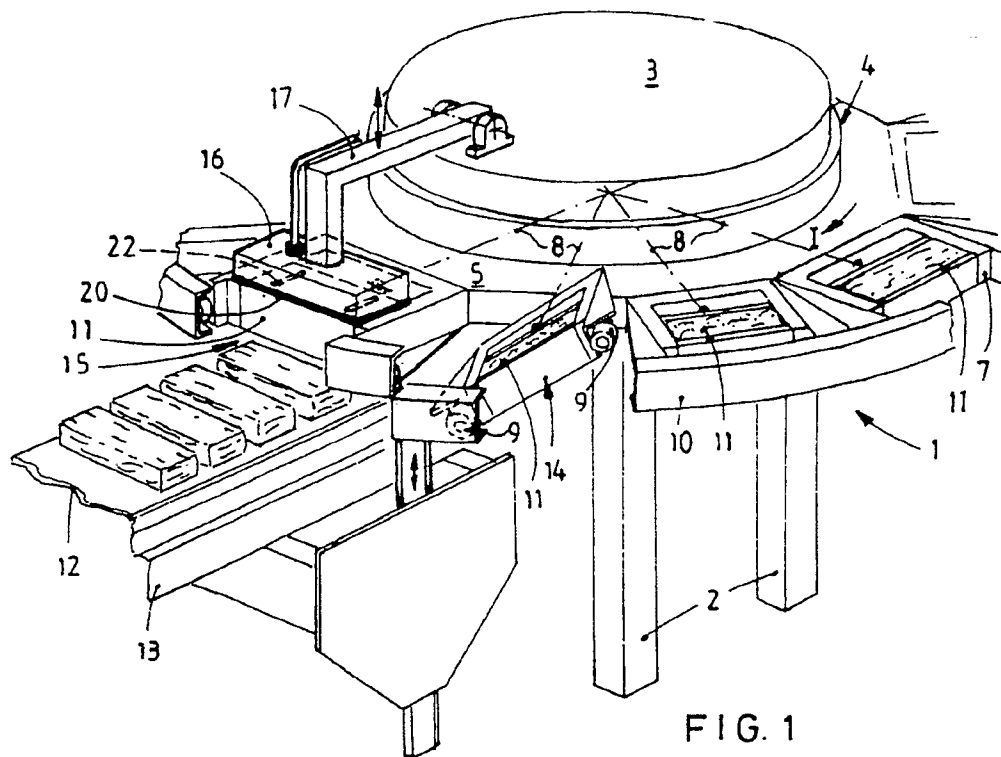

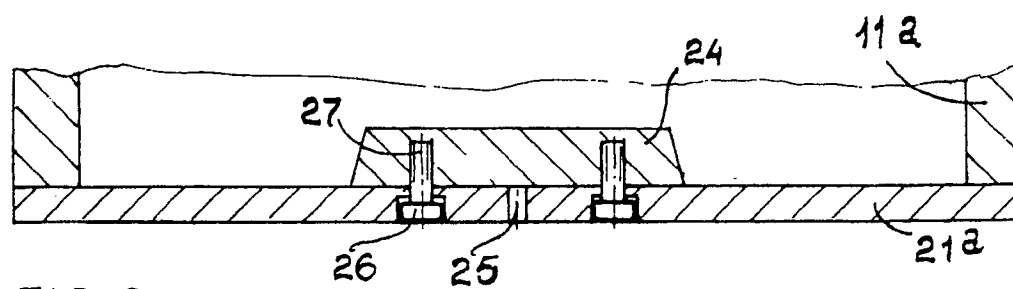


FIG. 3

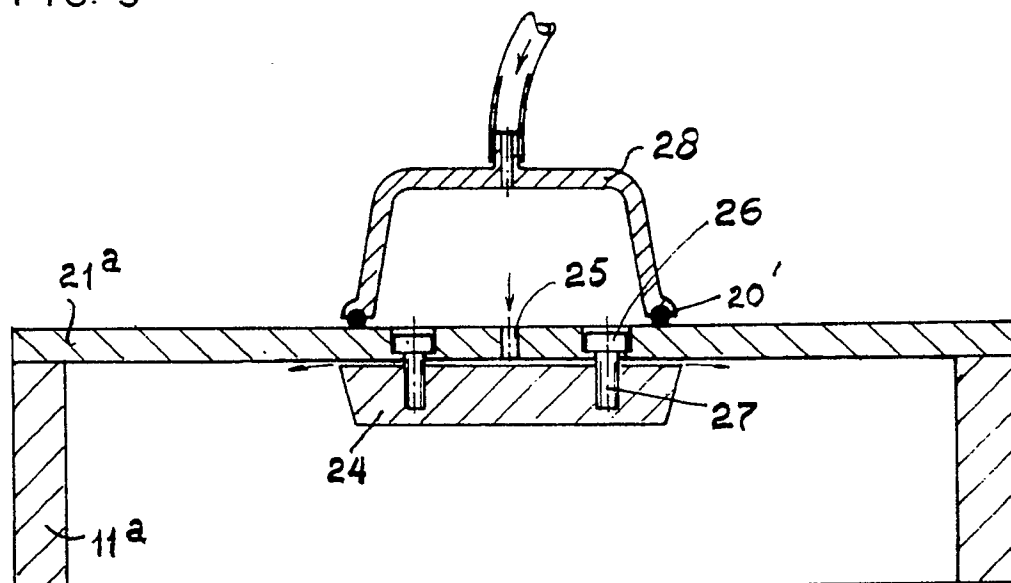


FIG. 4

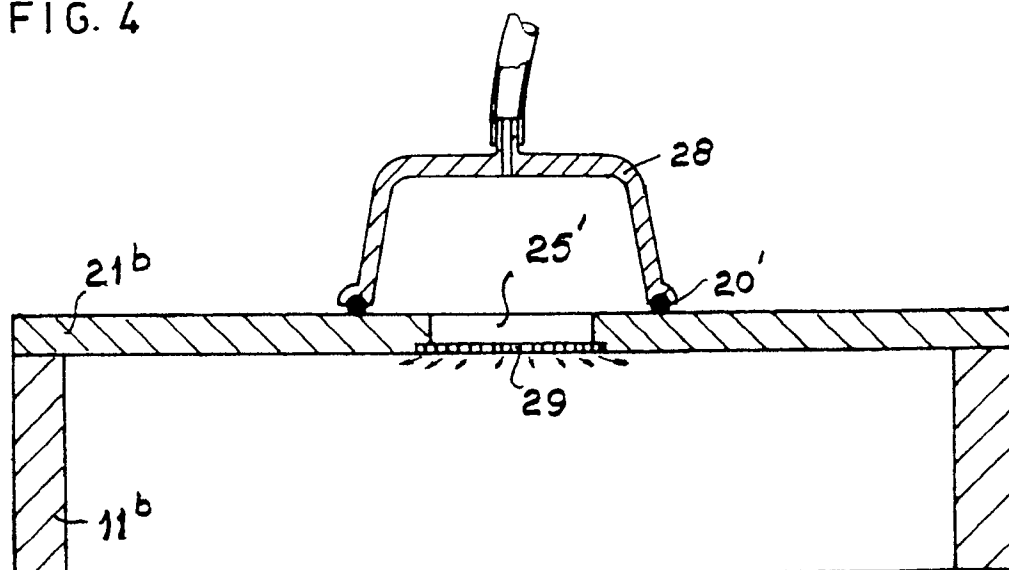


FIG. 5



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 91 20 0006

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A	FR-A-1 364 675 (LE MATERIEL CERAMIQUE MODERNE S.A.) * Page 2, right-hand column, lines 26-42; figures 5,6 *	1-3	B 28 B 13/06
A	FR-A-2 348 029 (J. TOCCO) * The whole document *	1-3	
A	DE-C- 803 757 (H.J. BÖYNG) * The whole document *	1-3	
A	EP-A-0 204 683 (R. MEISEL) * The whole document *	1,2	
A	DE-A-3 234 284 (R. HEMPELMANN) * The whole document *	1-3	
A	BE-A- 365 506 (BETON ET MOLLITH S.A.) * The whole document *	1-4	
A	US-A-2 850 785 (J.F. RUSHING) * The whole document *	5,7,8	TECHNICAL FIELDS SEARCHED (Int. Cl.5)
A	US-A-2 276 558 (E.F. ZUBER) * The whole document *	5,6	B 28 B
A	FR-A- 332 564 (H. VALETTE) * The whole document *	5,6	
A	US-A-2 772 467 (P.M. MUSPRATT) * The whole document, in particular figures 11-13 *	5,7,8	
A	NL-A-6 600 027 (N.V. KERAMISCHE INDUSTRIE "St. JORIS") * The whole document *		
-/-			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 04-04-1991	Examiner GOURIER P.A.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.92 (P0401)



European Patent
Office

EUROPEAN SEARCH REPORT

Page 2

Application Number

EP 91 20 0006

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 5)
A	US-A-1 454 165 (H.W.B. GRAHAM) * The whole document *		

T	EP-A-0 408 150 (HUBERT SNEEK MACHINEFABRIEK B.V.) * The whole document *		

			TECHNICAL FIELDS SEARCHED (Int. Cl. 5)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 04-04-1991	Examiner GOURIER P.A.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, has published on, or after the filing date D : document cited in the application L : document cited for other reasons Δ : member of the same patent family, corresponding document			

EPO FORM 1503 03.12 (P0401)