

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 441 146 B1

(12)

EUROPEAN PATENT SPECIFICATION(45) Date of publication of patent specification: **07.06.95** (51) Int. Cl.⁶: **C01B 17/16**(21) Application number: **91100605.4**(22) Date of filing: **18.01.91**

(54) **Process for converting carbon disulfide to hydrogen sulfide in hydrogen sulfide/carbon disulfide mixtures.**

(30) Priority: **29.01.90 US 472003**
26.11.90 US 617821

(43) Date of publication of application:
14.08.91 Bulletin 91/33

(45) Publication of the grant of the patent:
07.06.95 Bulletin 95/23

(64) Designated Contracting States:
BE DE DK FR GB IT NL SE

(56) References cited:
EP-A- 0 218 153
WO-A-82/00632
DE-A- 2 817 937
US-A- 3 752 877
US-A- 4 404 180

(73) Proprietor: **ATOCHEM NORTH AMERICA, INC.**
Three Parkway
Philadelphia,
Pennsylvania 19102 (US)

(72) Inventor: **Schatz, George Robert**
224 Dayleview Road
Berwyn, Pennsylvania 19312 (US)

(74) Representative: **Kraus, Walter, Dr. et al**
Patentanwälte Kraus, Weisert & Partner
Thomas-Wimmer-Ring 15
D-80539 München (DE)

EP 0 441 146 B1


Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description**Field of the Invention**


5 The invention relates generally to a process for converting carbon disulfide (CS₂) to hydrogen sulfide (H₂S) by hydrolysis. In particular, the invention relates to a two stage process wherein H₂S and CS₂ are manufactured by the reaction of natural gas and excess sulfur in a first stage, and CS₂ is then converted to additional H₂S by hydrolysis of the CS₂ in a second stage.

10 Background of the Invention

The manufacture of H₂S from the reaction of natural gas (i.e., primarily methane) and sulfur is known. The reaction products (H₂S, CS₂ and unreacted sulfur) are formed when methane and excess sulfur are converted at elevated temperature according to the reaction of equation (I):



A one-step process for manufacturing H₂S from natural gas, sulfur and steam is also known. The components are all combined to form H₂S and carbon dioxide (CO₂) according to the reaction of equation (II):




Major disadvantages of the one-step process of equation (II) include:

(1) The subsequent removal of unreacted sulfur from the other reaction co-products is often difficult. Removal of unreacted sulfur by solidification and remelting, in downstream condensers, is often incomplete, resulting in equipment plugging.

(2) The process fails to provide a means for condensing and recycling excess water. As a result, the excess water is limited to the amount of water vapor that leaves with the vapor reaction products (usually about a 25 wt.% excess). This condition produces fairly high quantities of COS (e.g., 0.58 wt.%) in the H₂S/CO₂ reaction product stream.

(3) The process increases equipment corrosion due to the presence of water vapor at elevated temperature (i.e., 1150 °F/621 °C). The process does not provide a way of reducing the reaction temperature to a value where corrosion is minimized (i.e., 700 °F/371 °C).

Once the reaction of equation (I) takes place, H₂S may be recovered from its gaseous mixture with CS₂ by converting CS₂ to additional H₂S in a fixed bed hydrolysis reactor. It is possible by hydrolysis with steam to convert almost all of the CS₂ (to a total concentration of up to 6 volume percent CS₂) found in the gaseous mixture consisting mostly of H₂S. The conversion takes place according to the reaction of equation (III):



A catalyst is often used in the fixed bed hydrolysis reactor to catalyze the above reaction. The hydrolysis reaction is highly exothermic and takes place in the absence of oxygen. Reactor outlet temperatures well in excess of 700 °F/371 °C are possible. However, in situations where the CS₂ concentration is often in excess of 6 volume percent, the above-identified hydrolysis process is not workable since large excesses of water are required to control the hydrolysis reaction outlet temperature. Moreover, the small amounts of sulfur

which are formed in CS₂ hydrolysis must be subsequently removed in order to avoid equipment plugging.

Clearly what is needed is a process capable of converting CS₂ to additional H₂S in a H₂S/CS₂ mixture which does not have the disadvantages inherent in the prior art. The process should permit substantially complete conversion of CS₂ to H₂S under conditions which minimize COS formation, energy expenditures, and equipment plugging. Conversion should take place where high concentrations of CS₂ are present within the H₂S (>>6 vol.% CS₂). In particular, conversion of CS₂ to H₂S by hydrolysis should be conducted under conditions where a relatively low temperature (i.e., 700 °F/371 °C) is maintained at the outlet of the hydrolysis reactor so that the reactor also converts COS to additional H₂S and so that equipment corrosion is minimized.

Other objects and advantages of the present invention will become apparent to those skilled in the art with reference to the attached drawing and the description of the invention which hereinafter follows.

Summary of the Invention

A process for converting CS₂ to H₂S by hydrolysis is provided. In general, the invention relates to a one stage process for converting CS₂ to H₂S by hydrolysis comprising the steps of:

- (a) combining CS₂ or a H₂S/CS₂ mixture containing on a mole basis from about 6% to about 100% CS₂, with water to form a feed mixture;
- (b) converting a substantial portion of the CS₂ in the mixture by hydrolysis to a hydrolysis reaction vapor product comprising H₂S, CO₂, sulfur and unconverted CS₂; and
- (c) cooling the hydrolysis reaction vapor product to form a H₂S/CO₂ vapor phase and a sour water condensate phase;
- (d) separating the H₂S/CO₂ vapor phase from the sour water condensate phase; and
- (e) recycling sour water from the sour water condensate phase to the feed mixture.

In another aspect, the invention relates to a two stage process comprising the steps of:

- (a) reacting natural gas with excess sulfur at elevated temperature to form a H₂S/CS₂ reaction product comprising H₂S, CS₂ and unreacted sulfur;
- (b) removing the unreacted sulfur from the H₂S/CS₂ reaction product to form a desulfurized H₂S/CS₂ mixture containing on a mole basis from about 6% to about 100% CS₂;
- (c) combining the desulfurized H₂S/CS₂ mixture with water to form a feed mixture;
- (d) converting a substantial portion of the CS₂ in the feed mixture by hydrolysis to a hydrolysis reaction vapor product comprising H₂S, CO₂, sulfur and unconverted CS₂;
- (e) cooling the hydrolysis reaction vapor product to form a H₂S/CO₂ vapor phase and a sour water condensate phase;
- (f) separating the H₂S/CO₂ vapor phase from the sour water condensate phase; and
- (g) recycling sour water from the sour water condensate phase to the feed mixture.

According to a preferred embodiment, the sour water condensate phase, following separation from the H₂S/CO₂ vapor phase, is further processed according to the steps of:

- mixing the sour water condensate with additional CS₂ to form a sour water phase and a CS₂ phase containing dissolved sulfur;
- separating the sour water phase from the CS₂ phase; and
- recycling the sour water phase to the H₂S/CS₂ mixture in step (a), above.

According to yet another preferred embodiment, the step of cooling the hydrolysis reaction vapor product to form the H₂S/CO₂ vapor phase and sour water vapor condensate phase comprises:

- (i) cooling the hydrolysis reaction vapor product in a first cooling step to a temperature greater than the solidification point of sulfur; and
- (ii) cooling the vapor product in a second cooling step to a temperature no lower than about 30 °C to form a H₂S/CO₂ vapor phase and sour water condensate phase.

Most preferably, the hydrolysis reaction vapor product is cooled in the first cooling step by passing the vapor product into heat exchange contact with the process feed mixture, which mixture comprises H₂S, CS₂ and sour water condensate.

As used herein, "sour water" means water which contains some soluble H₂S therein. By "unadulterated water" is meant substantially pure water, as distinguished from sour water. As used herein, "substantially desulfurized" means removing the major portion of unreacted sulfur from a reaction product. As used herein, "substantially sulfur-free" means removing all or substantially all sulfur from a product. And as used herein, "solidification point of sulfur" means the temperature at which liquid sulfur starts to become solid.

Brief Description of the Figure

Figure 1 is a schematic illustration of an embodiment of the process of the invention.

5 Detailed Description of the Invention

Referring to Figure 1, a preferred embodiment of the inventive process is schematically shown. The invention may be used as a one-stage process wherein CS₂ is converted to H₂S by hydrolysis. Alternatively, the invention may be used as a two-stage process wherein H₂S and CS₂ are initially formed from the reaction of natural gas and sulfur, and CS₂ is thereafter converted to additional H₂S by hydrolysis.


The one-stage process involves the conversion of CS₂ to H₂S by hydrolysis of a substantial portion of the CS₂. A preferably substantially desulfurized H₂S/CS₂ mixture 24, containing from about 6 to about 100 mol% CS₂, is combined with water, such as recycled sour water 54, to form a feed mixture 26. The feed mixture 26 is advantageously maintained at a pressure of about 49 psig (3.4 kg/cm²), for example, in order to create sufficient back pressure for driving the remaining steps of the conversion process. It has been found that a feed mixture pressure of about 49 psig (3.4 kg/cm²) produces a pressure of about 35 psig (2.5 kg/cm²) at the H₂S vapor outlet downstream once the pressure drop across the system has occurred. However, the pressure selected is not critical to the invention. The feed mixture 26 is advantageously maintained at a temperature of about 132 °F (55.5 °C), for example, so that it may function as a heat sink downstream.

Thereafter, the feed mixture 26 is passed through a CS₂ reactor economizer 30 which heats the feed mixture to a temperature of about 234 °F (112 °C), for example. The economizer 30 acts as a heat exchanger wherein the feed mixture 26 is heated by a hydrolysis reaction vapor product stream 40, described in more detail later. Conversely, vapor product stream 40 is cooled, such as by being placed in heat exchange relationship with feed mixture 26. The volume of feed mixture 26 which is passed through economizer 30 is controlled by a by-pass stream 28. The greater the volume of feed mixture 26 which is by-passed around economizer 30, the smaller the temperature rise of feed mixture 26 and the smaller the temperature depression of vapor product stream 40. In this manner, the temperature of vapor product stream 40 can be maintained at a desired value by regulating the volume of feed mixture 26 that is by-passed around economizer 30 through by-pass stream 28.



Make-up water 32, which is substantially unadulterated, is advantageously added to the heated feed mixture 26 to form a hydrolysis reactor feed 33. The amount of make-up water added is that which is necessary to replace (1) the water consumed through reaction with CS₂ and (2) the water lost with removal of the H₂S/CO₂ vapor product. The particular amount required is determined primarily by the system capacity, and may be readily determined by those skilled in the art. Deionized water is preferably used to minimize the amount of impurities that may be introduced into feed mixture 26.

The hydrolysis reactor feed 33 is advantageously preheated by at least one feed heater 34 in order to raise the temperature of the reactor feed 33 to at least about 360 °F (182 °C). The hydrolysis reaction will not occur below this temperature. Preferably, the hydrolysis reactor feed 33 is preheated to about 390 °F (199 °C). The preheated reactor feed 36 is sent to a fixed bed CS₂ hydrolysis reactor 38 which contains an alumina-based catalyst. Such catalysts are known to those skilled in the art. For example, Alcoa F-200 and H-152 activated alumina manufactured by Alcoa Chemicals Division, Pittsburgh, PA may be used as suitable hydrolysis catalysts.

The hydrolysis reactor 38 provides a hydrolysis reaction vapor product 40 comprising H₂S, CO₂, unreacted H₂O, small amounts of sulfur and unconverted CS₂ according to the following reaction of equation (IV):

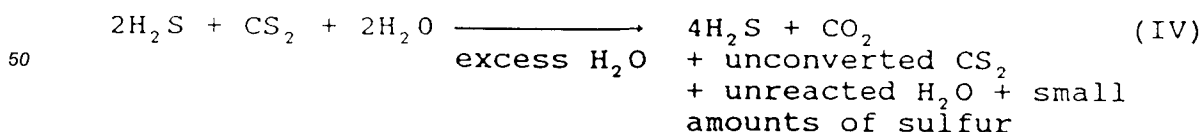

The hydrolysis reaction is extremely exothermic and if not suitably controlled will initiate side reactions that produce greater amounts of COS and sulfur. In particular, even at temperatures of about 700 °F (371 °C), small amounts of sulfur are produced according to the following reactions:



However, by maintaining the vapor product stream 40 leaving hydrolysis reactor 38 at a temperature no higher than about 750 °F (399 °C), preferably no higher than about 700 °F (371 °C), COS formation is minimized. Thus, the temperature of the hydrolysis reaction is advantageously maintained in the range of
 10 from about 360 °F (182 °C) to about 750 °F (399 °C), preferably from about 390 °F (199 °C) to about 700 °F (371 °C).

The hydrolysis reactor 38 is used to convert a substantial portion (i.e., greater than 95 weight percent of the CS₂) to H₂S. Typically, substantial conversion of CS₂ to H₂S is possible where CS₂ is present within the H₂S/CS₂ mixture from about 6 to about 100 mole percent. The weight percentage of unconverted CS₂ can
 15 be controlled by varying the space velocity of the reactor. Those skilled in the art understand space velocity to mean the ratio of the volumetric feed rate to the designed volume of the reactor. Space velocity as shown in the subsequent examples is defined as follows:

$$\text{CS}_2 \text{ Molar Space Velocity} = F_i C_{iF} / V_R$$

20

where

F_i = the volumetric feed rate to the reactor per day.

V_R = the volume of the reactor expressed as kilograms of catalyst.

C_{iF} = the concentration of CS₂ in the feed as moles of CS₂ per unit volume.

25

After the hydrolysis vapor product stream 40 is formed, it is cooled to form a H₂S/CO₂ vapor phase and a sour water condensate phase. Accordingly, vapor product stream 40 may be cooled in a first cooling step to a temperature greater than the solidification point of sulfur, and then cooled in a second cooling step to a temperature no lower than about 30 °C to form a H₂S/CO₂ vapor phase and sour water condensate phase.

With this object in mind, vapor product stream 40 is thus cooled for a first time by passage through
 30 economizer 30. As set forth above, feed mixture 26 is used as a heat sink to cool the hydrolysis vapor product stream 40. The vapor product stream 40 should not be cooled in economizer 30 to the point where the small amounts of sulfur contained in the vapor product begin to solidify. Solidification of the sulfur may cause economizer plugging. Since the melting point of elemental sulfur is approximately 248 °F (120 °C), the vapor product stream 40 should be maintained slightly above this temperature to ensure that the sulfur
 35 does not begin to solidify in economizer 30. Preferably, vapor product stream 40 is cooled to a temperature in the range of from about 248 °F (120 °C) to about 300 °F (149 °C), preferably from about 248 °F to about 260 °F (127 °C), in economizer 30.

The cooled vapor product 40 is then passed through one of two air cooled condensers 42a and 42b which are arranged in parallel. These condensers advantageously cool the vapor product 40 for a second
 40 time to a temperature from about 86 °F (30 °C) to about 140 °F (60 °C) in order to form a partial condensate from the water which is unreacted by hydrolysis and remains in vapor product 40. Preferably, the vapor product 40 is cooled for the second time to about 119 °F (48 °C). Since 119 °F (48 °C) is below the melting point of elemental sulfur (i.e., 248 °F/120 °C), the air cooled condensers 42a and 42b are arranged in parallel so that if one condenser happens to plug from the accumulation of solid sulfur, the other condenser
 45 can be put into service to cool vapor product 40 while the inoperative condenser is maintained off stream to be cleaned.

Thereafter, the twice-cooled vapor product is collected in a sour water separator 44 in order to form a discrete vapor phase 46 comprising H₂S and CO₂, which is saturated with water, and a discrete sour water condensate phase 48 comprising unreacted H₂O and small amounts of solid sulfur particles. Unreacted CS₂
 50 may be present in either phase, although it is more likely that it will remain in the H₂S/CO₂ vapor phase 46. Sour water separator 44 is advantageously in the form of a large holding tank which facilitates the phase separation of the H₂S/CO₂ vapor phase 46 from the sour water condensate phase 48. The H₂S/CO₂ vapor phase is recovered as a top product and preferably sent to dryers for water removal and to a distillation column (not shown) in order to separate H₂S from CO₂. Procedures for separating H₂S from CO₂ are known
 55 to those skilled in the art and need not be described herein. The solid sulfur particles contained in the sour water condensate 48 are generally present at a concentration of about 220 ppm and range in size from about 3 microns to fairly large particles.

Sour water condensate 48 is pumped to a decanter 52 through an inline mixer 50 where the sour water condensate is separated into a CS₂ bottom layer containing dissolved sulfur and an upper substantially sulfur-free sour water layer. Just before inline mixer 50, additional CS₂ is added to the sour water condensate 48 through reflux stream 51. Preferably, the amount of CS₂ added is sufficient to obtain a sour water/CS₂ weight ratio of from about 25:1 to about 1:4. The temperature should be below the boiling point of CS₂, 46°C. The additional CS₂ completely dissolves the solid sulfur particles which are present in the sour water condensate phase 48. The upper substantially sulfur-free sour water layer is drawn off from decanter 52 as sour water stream 54, recycled and combined with the substantially desulfurized H₂S/CS₂ mixture 26 as hereinbefore described. The CS₂ bottom layer, containing dissolved sulfur from decanter 52, is sent via stream 64 to a sulfur removal device, such as sulfur knock-out tower 16, for further sulfur removal and recovery. Procedures for recovering sulfur from CS₂ are known to those skilled in the art and are described more fully below.


By recycling a large quantity of sour water 54 to be mixed with the desulphurized H₂S/CS₂ mixture 26, the overall temperature rise across the hydrolysis reactor 38 can be minimized (e.g., about 310°F/154°C). In effect, the recycled sour water stream 54 acts as a heat sink which regulates the outlet temperature of the vapor product stream 40 thereby minimizing COS formation and equipment corrosion. Typically, with an H₂S/CS₂ mixture 26 containing 2 moles H₂S per mole of CS₂, the reactor outlet temperature can be maintained at about 700°F (371°C) by using an "R" value (total moles of water fed to the hydrolysis reactor per mole of CS₂ fed) of about 7.2. The total amount of water fed to the reactor comprises the combination of the sour water stream 54 and make-up water stream 32. Therefore, sufficient water should be added as make-up water stream 32 to ensure that the total water fed to the reaction is 7.2 moles per mole of CS₂. Moreover, COS formation, corrosion and equipment plugging are minimized by recycling a large quantity of sour water 26 upstream of the hydrolysis reactor 38 to act as a heat sink.

A reactor outlet temperature below 700°F may be obtained by establishing an R value greater than 7.2, assuming the H₂S/CS₂ molar feed ratio remains at 2:1. For a mixture comprising 100% CS₂, the R value for maintaining a 700°F reactor outlet temperature is 9.6. Determination of the appropriate R value for a particular H₂S/CS₂ reactor feed ratio and target outlet temperature is readily determinable by those skilled in the art. For a reactor feed comprising from about 6 to about 100 mol% CS₂, the R value may typically range from about 2.5 to about 30, for outlet temperatures from 500° to 750°F. An R value of 2.5 corresponds to a 25% water molar excess over the stoichiometric water:CS₂ feed ratio of 2:1. An R value of 30 corresponds to a reactant feed comprising 100% CS₂, and a reactor outlet temperature of 500°F. R values outside the recommended range may be selected, depending on the targeted outlet temperature.

The above-described process provides substantially complete CS₂ conversion to H₂S under conditions where a relatively low temperature rise (i.e., 310°F/154°C) occurs across the hydrolysis reactor 38. This is made possible by regulating the amount of excess water added for hydrolysis. The problems inherent in the prior art are substantially overcome.

In another aspect of the invention, the process may be used as a two-stage process wherein H₂S and CS₂ are initially formed in a first stage elevated temperature reactor 10 from the reaction of heated natural gas 2 (i.e., substantially methane) and vaporized sulfur 4. The second stage of the process relates to the conversion of CS₂ to H₂S in the manner previously described.

According to the first stage, natural gas 2 and vaporized sulfur 4 are mixed to form stream 6 prior to entering reactor 10. Advantageously, the mixture forming stream 6 enters reactor 10 at a temperature of about 1253°F (678°C) and a pressure of about 58 psig (4.0 kg/cm²), for example. It has been found that a pressure of 58 psig (4.0 kg/cm²) provides a back-pressure which is sufficient to drive the two stage process so that the pressure of the H₂S/CO₂ vapor 46 leaving the system is maintained at about 35 psig (2.5 kg/cm²). However, the pressure selected is not critical to the invention. The first stage H₂S/CS₂ reaction is set forth in equation (VIII) as follows:



According to the reaction equation, 2 moles of H₂S are formed for every one mole of CS₂. Typically, the reactor co-products leave reactor 10 at about 1100°F (593°C).

The reactor co-products from reactor 10 are then cooled to, e.g., about 300°F (149°C) by at least one effluent cooler 12. The major portion of the unreacted sulfur contained in the reaction co-product is removed

from the remaining $\text{H}_2\text{S}/\text{CS}_2$ by decantation in a liquid sulfur receiver 14 and subsequent scrubbing with a reflux steam of CS_2 in a packed sulfur knock-out tower 16. Preferably, the reaction product entering sulfur knock-out tower 16 is maintained at about 300°F (149°C) and about 53 psig (3.7 kg/cm^2). The removed sulfur is drained by gravity and recycled to a sulfur feed tank for reuse in reactor 10.

Advantageously, the desulfurized $\text{H}_2\text{S}/\text{CS}_2$ mixture 18 leaves tower 16 at about 183°F (84°C) and 52 psig (3.7 kg/cm^2). The desulfurized $\text{H}_2\text{S}/\text{CS}_2$ mixture 18 leaving the sulfur knock-out tower 16 is passed through an air cooled condenser 20 in order to condense a portion of the CS_2 contained therein and then into a sulfur tower reflux drum 22. Advantageously, the temperature of the $\text{H}_2\text{S}/\text{CS}_2$ mixture held in reflux drum 22 is maintained at about 143°F (62°C). The condensed portion of CS_2 in reflux drum 22 is recycled to the sulfur knock-out tower 16 through stream 66 and to the sour water condensate stream 48 through stream 51. The portion of the desulfurized $\text{H}_2\text{S}/\text{CS}_2$ mixture within the reflux drum 22 which has not condensed is drawn off as a desulfurized $\text{H}_2\text{S}/\text{CS}_2$ top product stream 24 and combined with recycled sour water stream 54 to form feed mixture 26 as substantially described above. Feed mixture 26 is then treated under conditions as substantially described above, in order to convert CS_2 to additional H_2S .

The following four non-limiting examples are intended to illustrate the practice of the invention. Each example utilizes a different hydrolysis reactor CS_2 molar space velocity. While each of the four CS_2 molar space velocities utilized is acceptable for carrying out the inventive hydrolysis reaction process, a CS_2 molar space velocity of 185.5 gram moles CS_2 per kilogram catalyst per day (Example 1) is preferred. It should be noted that substantial conversion of CS_2 to additional H_2S is particularly preferred, since CS_2 generally interferes in synthesis reactions where H_2S is one of the reactants.

Example 1

A feed mixture of CS_2 (1.11 gram moles/hour), water (8.66 gram moles/hour) and H_2S (2.22 gram moles/hour) was heated to $390\text{--}400^\circ\text{F}$ and passed through Alcoa H-152 catalyst at a CS_2 molar space velocity of 185.5 gram moles CS_2 per kilogram catalyst per day. The reaction pressure was controlled at 60 psig (4.2 kg/cm^2) and a reaction temperature of 699°F (370°C) was maintained near the top of the catalyst bed. The reactor effluent was cooled to 117°F (47°C) and the condensed sour water was separated from the product vapor. Under these conditions the conversion of CS_2 was essentially quantitative with an average molar product vapor composition of 0.01% CS_2 ; 0.04% COS; 1.11% H_2O ; 77.14% H_2S and 19.14% CO_2 . The sulfur, carbon and overall mass balances were 97.6%, 97.0% and 99.2% respectively. Some elemental sulfur was observed in the condensed sour water in the form of a fine suspension which eventually settled in the form of flakes.

Example 2

A feed mixture of CS_2 (1.09 gram moles/hour), water (8.72 gram moles/hour) and H_2S (2.22 gram moles/hour) was heated to 463°F and passed through Alcoa H-152 catalyst at a CS_2 molar space velocity of 364.3 gram moles CS_2 per kilogram catalyst per day. The reaction pressure was controlled at 60 psig (4.2 kg/cm^2) and a reaction temperature of 702°F (372°C) was maintained near the top of the catalyst bed. The reactor effluent was cooled to 101°F (38°C) and the condensed sour water was separated from the product vapor. Under these conditions the conversion of CS_2 was essentially quantitative with an average molar product vapor composition of 0.02% CS_2 ; 0.04% COS; 0.5% H_2O ; 78.57% H_2S and 19.56% CO_2 . The sulfur, carbon and overall mass balances were 98.6%, 99.3% and 99.1% respectively. Some elemental sulfur was observed in the condensed sour water in the form of a fine suspension which eventually settled in the form of flakes.

Example 3

A feed mixture of CS_2 (2.23 gram moles/hour), water (16.98 gram moles/hour) and H_2S (4.45 gram moles/hour) was heated to 442°F (228°C) and passed through Alcoa H-152 catalyst at a CS_2 molar space velocity of 743.3 gram moles CS_2 per kilogram catalyst per day. The reaction pressure was controlled at 60 psig (4.2 kg/cm^2) and a reaction temperature of 698°F (370°C) was maintained in the middle of the catalyst bed. The reactor effluent was cooled to 97°F (36°C) and the condensed sour water was separated from the product vapor. Under these conditions 97.49% of the CS_2 was converted and the average molar product vapor composition analyzed 0.50% CS_2 ; 0.06% COS; 0.46% H_2O ; 78.46% H_2S and 19.8% CO_2 . The sulfur, carbon and overall mass balances were 100.3%, 102.4% and 98.8% respectively. Some elemental sulfur was observed in the condensed sour water in the form of a fine suspension (particle size distribution 4-43

microns) which eventually settled in the form of flakes. The amount of sulfur present was 0.018 grams per gram mole of CS₂ feed.

Example 4

A feed mixture of CS₂ (3.33 gram moles/hour), water (25.91 gram moles/hour) and H₂S (6.77 gram moles/hour) was heated to 403 °F (206 °C) and passed through Alcoa H-152 catalyst at a CS₂ molar space velocity of 1110 gram moles CS₂ per kilogram catalyst per day. The reaction pressure was controlled at 60 psig (4.2 kg/cm²) and a reaction temperature of 698 °F (370 °C) was maintained near the top of the catalyst bed. The reactor effluent was cooled to 109 °F (43 °C) and the condensed sour water was separated from the product vapor. Under these conditions 96.36% of the CS₂ was converted and the average molar product vapor composition analyzed 0.73% CS₂; 0.07% COS; 0.47% H₂O; 77.03% H₂S and 19.3% CO₂. The sulfur, carbon and overall mass balances were 97.1%, 100.1% and 99% respectively. Some elemental sulfur was observed in the condensed sour water in the form of a fine suspension which eventually settled in the form of flakes.

The operating conditions in the foregoing description of Figure 1 are for illustration only, and should not be construed as limiting the scope of the invention.

Claims

1. A process for converting CS₂ to H₂S by hydrolysis comprising the steps of:
 - (a) combining CS₂, or a H₂S/CS₂ mixture containing on a mole percent basis from about 6% to about 100% CS₂, with water to form a feed mixture;
 - (b) converting a substantial portion of the CS₂ in the mixture by hydrolysis to a hydrolysis reaction vapor product comprising H₂S, CO₂, sulfur and unconverted CS₂;
 - (c) cooling the hydrolysis reaction vapor product to form a H₂S/CO₂ vapor phase and a sour water condensate phase;
 - (d) separating the H₂S/CO₂ vapor phase from the sour water condensate phase; and
 - (e) recycling sour water from the sour water condensate phase to the feed mixture in (a).
2. A process according to claim 1 wherein the water forming the feed mixture further comprises unadulterated water added to the feed mixture.
3. A process according to claim 1 or 2 comprising the further steps of
 - (f) mixing the sour water condensate with additional CS₂ to form a sour water phase and a CS₂ phase containing dissolved sulfur;
 - (g) separating the sour water phase from the CS₂ phase; and
 - (h) recycling the sour water phase to the CS₂ or H₂S/CS₂ mixture in step (a).
4. A process according to claims 1 to 3 wherein the step of cooling the hydrolysis reaction vapor product to form the H₂S/CS₂ vapor phase and sour water condensate phase comprises:
 - (i) cooling the hydrolysis reaction vapor product in a first cooling step to a temperature greater than the solidification point of sulfur; and
 - (ii) cooling the vapor product in a second cooling step to a temperature no lower than about 30 °C to form a H₂S/CO₂ vapor phase and sour water condensate phase.
5. A process according to claims 1 to 4 wherein the sour water phase formed in step (f) is substantially sulfur-free.
6. A process according to claims 1 to 5 wherein the CS₂ is converted to the hydrolysis reaction vapor product in a fixed bed hydrolysis reactor containing a catalyst.
7. A process according to claim 6 wherein the catalyst comprises activated alumina.
8. A process according to claims 4 to 7 wherein the hydrolysis reaction vapor product is cooled in the first cooling step to a temperature within the range of from about 120 °C to about 149 °C.

9. A process according to claim 8 wherein the hydrolysis reaction vapor product is cooled in the first cooling step to a temperature within the range of from about 120 ° C to about 127 ° C.
10. A process according to claims 4 to 9 wherein the hydrolysis reaction vapor product is cooled in the first cooling step by passing the vapor product into heat exchange contact with the feed mixture of step (a).
11. A process according to claims 8 to 10 wherein the hydrolysis reaction vapor product is cooled in the second cooling step to a temperature within the range of from about 30 ° C to about 60 ° C.
12. A process according to claim 3 further comprising the step of recycling the CS₂ phase to a sulfur removal device.
13. A process according to claim 2 further comprising the step of preheating the feed mixture and added water to a temperature of about 199 ° C before converting a substantial portion of the CS₂ to H₂S by hydrolysis.
14. A process according to claim 3 wherein the CS₂ is converted to H₂S by hydrolysis at a temperature up to about 371 ° C.
15. A process for converting CS₂ to H₂S by hydrolysis in a H₂S/CS₂ mixture comprising the steps of:
 - (a) reacting natural gas with excess sulfur at elevated temperature to form a H₂S/CS₂ reaction product comprising H₂S, CS₂ and unreacted sulfur;
 - (b) removing the unreacted sulfur from the H₂S/CS₂ reaction product to form a desulfurized H₂S/CS₂ mixture containing on a mole percent basis at least about 6% CS₂;
 - (c) combining the desulfurized H₂S/CS₂ mixture with water to form a feed mixture;
 - (d) converting a substantial portion of the CS₂ in the feed mixture by hydrolysis to a hydrolysis reaction vapor product comprising H₂S, CO₂, sulfur and unconverted CS₂;
 - (e) cooling the hydrolysis reaction vapor product to form a H₂S/CO₂ vapor phase and a sour water condensate phase;
 - (f) separating the H₂S/CO₂ vapor phase from the sour water condensate phase; and
 - (g) recycling sour water from the sour water condensate phase to the feed mixture in (c).
16. A process according to claim 15 wherein the H₂S/CS₂ reaction product contains about two moles of H₂S per mole of CS₂.
17. A process according to claim 15 further comprising adding unadulterated water to the feed mixture formed in step (c).
18. A process according to claim 15 comprising the further steps of
 - (h) mixing the sour water condensate with additional CS₂ to form a sour water phase and a CS₂ phase containing dissolved sulfur;
 - (i) separating the sour water phase from the CS₂ phase; and
 - (j) recycling the sour water phase to the H₂S/CS₂ mixture in step (c).
19. A process according to claims 15 to 18 wherein the step of cooling the hydrolysis reaction vapor product to form the H₂S/CO₂ vapor phase and sour water condensate phase comprises;
 - (i) cooling the hydrolysis reaction vapor product in a first cooling step to a temperature greater than the solidification point of sulfur; and
 - (ii) cooling the vapor product in a second cooling step to a temperature no lower than about 30 ° C to form a H₂S/CO₂ vapor phase and sour water condensate phase.
20. A process according to claims 15 to 19 wherein the CS₂ is converted in a fixed bed hydrolysis reactor containing a catalyst.
21. A process according to claim 20 wherein the catalyst comprises activated alumina.
22. A process according to claims 19 to 20 wherein the hydrolysis reaction vapor product is cooled in the first cooling step to a temperature within the range of from about 120 ° C to about 149 ° C.

23. A process according to claim 22 wherein the hydrolysis reaction vapor product is cooled in the first cooling step to a temperature within the range of from about 120 ° C to about 127 ° C.
24. A process according to claim 22 or 23 wherein the vapor product is cooled in the second cooling step to a temperature within the range of from about 30 ° C to about 60 ° C.
25. A process according to claim 19 wherein the hydrolysis reaction vapor product is cooled in the first cooling step by passing the vapor product into heat exchange contact with the feed mixture of step (c).
26. A process according to claim 15 further comprising the step of recycling the CS₂ phase to a sulfur removal device.
27. A process according to claim 17 further comprising the step of preheating the feed mixture and added water up to a temperature of about 199 ° C before converting a substantial portion of the CS₂ by hydrolysis.
28. A process according to claim 18 wherein the CS₂ is converted by hydrolysis at a temperature up to about 371 ° C.

Patentansprüche

1. Verfahren zur Umwandlung von CS₂ in H₂S durch Hydrolyse, dadurch **gekennzeichnet**, daß die folgenden Stufen durchgeführt werden:
 - (a) Vermischen von CS₂ oder einem H₂S/CS₂-Gemisch, welches auf Mol-Prozent-Basis von etwa 6 bis etwa 100 % CS₂ enthält, mit Wasser unter Bildung eines Beschickungsgemisches;
 - (b) Umwandlung eines wesentlichen Teils des CS₂ in dem Gemisch durch Hydrolyse in ein Hydrolysereaktionsdampfprodukt, welches H₂S, CO₂, Schwefel und nicht-umgesetztes CS₂ enthält;
 - (c) Abkühlen des Hydrolysereaktionsdampfproduktes unter Bildung einer H₂S/CO₂-Dampfphase und einer sauren Wasserkondensatphase;
 - (d) Trennung der H₂S/CO₂-Dampfphase von der sauren Wasserkondensatphase; und
 - (e) Recyclisieren des sauren Wassers von der sauren Wasserkondensatphase in das Beschickungsgemisch von (a).
2. Verfahren nach Anspruch 1, dadurch **gekennzeichnet**, daß das Beschickungsgemisch weiter reines Wasser enthält, welches zu dem Beschickungsgemisch zugegeben wurde.
3. Verfahren nach Anspruch 1 oder 2, dadurch **gekennzeichnet**, daß die weiteren Stufen durchgeführt werden:
 - (f) Mischen des sauren Wasserkondensats mit zusätzlichem CS₂ unter Bildung einer sauren Wasserphase und einer CS₂-Phase, welche gelösten Schwefel enthält;
 - (g) Trennung der sauren Wasserphase von der CS₂-Phase; und
 - (h) Recyclisierung der sauren Wasserphase in das CS₂- oder H₂S/CS₂-Gemisch der Stufe (a).
4. Verfahren nach einem der Ansprüche 1 bis 3, dadurch **gekennzeichnet**, daß die Kühlstufe des Hydrolysereaktionsdampfproduktes unter Bildung der H₂S/CS₂-Dampfphase und der sauren Wasserkondensatphase
 - (i) Kühlen des Hydrolysereaktionsdampfproduktes in einer ersten Kühlstufe auf eine Temperatur, die höher ist als der Verfestigungspunkt des Schwefels; und
 - (ii) Kühlen des Dampfproduktes in einer zweiten Kühlstufe auf eine Temperatur, die nicht niedriger ist als etwa 30 ° C, unter Bildung einer H₂S/CO₂-Dampfphase und einer sauren Wasserkondensatphase umfaßt.
5. Verfahren nach einem der Ansprüche 1 bis 4, dadurch **gekennzeichnet**, daß die bei der Stufe (f) gebildete saure Wasserphase im wesentlichen schwefelfrei ist.
6. Verfahren nach einem der Ansprüche 1 bis 5, dadurch **gekennzeichnet**, daß das CS₂ in das Hydrolysereaktionsdampfprodukt in einem Hydrolysereaktor, der einen Katalysator mit stationärer Schicht enthält, umgewandelt wird.

7. Verfahren nach Anspruch 6, dadurch **gekennzeichnet**, daß der Katalysator aktiviertes Aluminiumoxid umfaßt.
8. Verfahren nach einem der Ansprüche 4 bis 7, dadurch **gekennzeichnet**, daß das Hydrolysereaktionsdampfprodukt in der ersten Kühlstufe auf eine Temperatur innerhalb des Bereiches von etwa 120 ° C bis etwa 149 ° C abgekühlt wird.
9. Verfahren nach Anspruch 8, dadurch **gekennzeichnet**, daß das Hydrolysereaktionsdampfprodukt in der ersten Kühlstufe auf eine Temperatur innerhalb des Bereiches von etwa 120 ° C bis etwa 127 ° C abgekühlt wird.
10. Verfahren nach einem der Ansprüche 4 bis 9, dadurch **gekennzeichnet**, daß das Hydrolysereaktionsdampfprodukt in der ersten Kühlstufe abgekühlt wird, indem das Dampfprodukt in Wärmeaustauschkontakt mit dem Beschickungsgemisch der Stufe (a) gebracht wird.
11. Verfahren nach einem der Ansprüche 8 bis 10, dadurch **gekennzeichnet**, daß das Hydrolysereaktionsdampfprodukt in der zweiten Kühlstufe auf eine Temperatur innerhalb des Bereichs von etwa 30 ° C bis etwa 60 ° C abgekühlt wird.
12. Verfahren nach Anspruch 3, dadurch **gekennzeichnet**, daß weiterhin die Stufe durchgeführt wird, bei der die CS₂-Phase in eine Schwefelentfernungsvorrichtung recycliert wird.
13. Verfahren nach Anspruch 2, dadurch **gekennzeichnet**, daß weiter die Stufe durchgeführt wird, daß das Beschickungsgemisch vorerhitzt wird, und daß dann Wasser bei einer Temperatur von etwa 199 ° C zugegeben wird, bevor ein wesentlicher Teil des CS₂ in H₂S durch Hydrolyse überführt wird.
14. Verfahren nach Anspruch 3, dadurch **gekennzeichnet**, daß das CS₂ in H₂S durch Hydrolyse bei einer Temperatur bis zu etwa 371 ° C überführt wird.
15. Verfahren zur Umwandlung von CS₂ in H₂S durch Hydrolyse in einem H₂S/CS₂-Gemisch, dadurch **gekennzeichnet**, daß die folgenden Stufen durchgeführt werden:
 - (a) Umsetzung von Erdgas mit überschüssigem Schwefel bei erhöhter Temperatur unter Bildung eines H₂S/CS₂-Reaktionsproduktes, welches H₂S, CS₂ und nicht-umgesetzten Schwefel enthält;
 - (b) Entfernung des nicht-umgesetzten Schwefels aus dem H₂S/CS₂-Reaktionsprodukt unter Bildung eines entschwefelten H₂S/CS₂-Gemisches, welches auf Mol-Prozent-Basis mindestens etwa 6 % CS₂ enthält;
 - (c) Vermischen des entschwefelten H₂S/CS₂-Gemisches mit Wasser unter Bildung eines Beschickungsgemisches;
 - (d) Umwandlung eines wesentlichen Anteils des CS₂ in dem Beschickungsgemisch durch Hydrolyse in ein Hydrolysereaktionsdampfprodukt, welches H₂S, CO₂, Schwefel und nicht-umgesetztes CS₂ enthält;
 - (e) Kühlen des Hydrolysereaktionsdampfprodukts unter Bildung einer H₂S/CO₂-Dampfphase und einer sauren Wasserkondensatphase;
 - (f) Trennung der H₂S/CO₂-Dampfphase von der sauren Wasserkondensatphase; und
 - (g) Recyclisieren des sauren Wassers von der sauren Wasserkondensatphase in das Beschickungsgemisch von (c).
16. Verfahren nach Anspruch 15, dadurch **gekennzeichnet**, daß das H₂S/CS₂-Reaktionsprodukt etwa zwei Mol H₂S pro Mol CS₂ enthält.
17. Verfahren nach Anspruch 15, dadurch **gekennzeichnet**, daß weiter reines Wasser zu dem bei der Stufe (c) gebildeten Beschickungsgemisch zugegeben wird.
18. Verfahren nach Anspruch 15, dadurch **gekennzeichnet**, daß weiter die folgenden Stufen durchgeführt werden:
 - (h) Mischen des sauren Wasserkondensats mit zusätzlichem CS₂ unter Bildung einer sauren Wasserphase und einer CS₂-Phase, welche gelösten Schwefel enthält;
 - (i) Trennung der sauren Wasserphase von der CS₂-Phase; und

(j) Recyclisieren der sauren Wasserphase zu dem $\text{H}_2\text{S}/\text{CS}_2$ -Gemisch der Stufe (c).

19. Verfahren nach einem der Ansprüche 15 bis 18, dadurch **gekennzeichnet**, daß die Kühlstufe des Hydrolysereaktionsdampfprodukts unter Bildung der $\text{H}_2\text{S}/\text{CO}_2$ -Dampfphase und der sauren Wasserkondensatphase
5
 (i) Kühlen des Hydrolysereaktionsdampfprodukts in einer ersten Kühlstufe auf eine Temperatur, die höher ist als der Verfestigungspunkt des Schwefels; und
 (ii) Kühlen des Dampfprodukts in einer zweiten Kühlstufe auf eine Temperatur, die nicht niedriger ist als etwa 30°C , unter Bildung einer $\text{H}_2\text{S}/\text{CO}_2$ -Dampfphase und einer sauren Wasserkondensatphase
10 umfaßt.
20. Verfahren nach einem der Ansprüche 15 bis 19, dadurch **gekennzeichnet**, daß das CS_2 in einem Hydrolysereaktor, der einen Katalysator in stationärer Schicht enthält, umgewandelt wird.
- 15 21. Verfahren nach Anspruch 20, dadurch **gekennzeichnet**, daß der Katalysator aktiviertes Aluminiumoxid umfaßt.
22. Verfahren nach einem der Ansprüche 19 oder 20, dadurch **gekennzeichnet**, daß das Hydrolysereaktionsdampfprodukt in einer ersten Kühlstufe auf eine Temperatur innerhalb des Bereiches von etwa
20 120°C bis etwa 149°C abgekühlt wird.
23. Verfahren nach Anspruch 22, dadurch **gekennzeichnet**, daß das Hydrolysereaktionsdampfprodukt in der ersten Kühlstufe auf eine Temperatur innerhalb des Bereiches von etwa 120°C bis etwa 127°C abgekühlt wird.
25
24. Verfahren nach einem der Ansprüche 22 oder 23, dadurch **gekennzeichnet**, daß das Dampfprodukt in der zweiten Kühlstufe auf eine Temperatur innerhalb des Bereiches von etwa 30°C bis etwa 60°C abgekühlt wird.
- 30 25. Verfahren nach Anspruch 19, dadurch **gekennzeichnet**, daß das Hydrolysereaktionsdampfprodukt in der ersten Kühlstufe abgekühlt wird, indem das Dampfprodukt in Wärmeaustauschkontakt mit dem Beschickungsgemisch der Stufe (c) gebracht wird.
26. Verfahren nach Anspruch 15, dadurch **gekennzeichnet**, daß als weitere Stufe die CS_2 -Phase in eine Schwefelentfernungsvorrichtung recycliert wird.
35
27. Verfahren nach Anspruch 17, dadurch **gekennzeichnet**, daß als weitere Stufe das Beschickungsgemisch vorerhitzt wird und Wasser bis zu einer Temperatur von etwa 199°C zugegeben wird, bevor ein wesentlicher Anteil des CS_2 durch Hydrolyse umgewandelt wird.
40
28. Verfahren nach Anspruch 18, dadurch **gekennzeichnet**, daß das CS_2 durch Hydrolyse bei einer Temperatur bis zu etwa 371°C umgewandelt wird.

Revendications

- 45 1. Procédé pour transformer du CS_2 en H_2S par hydrolyse, comprenant les étapes consistant :
 (a) à mélanger du CS_2 , ou un mélange $\text{H}_2\text{S}/\text{CS}_2$ contenant, en pourcentage molaire, environ 6 % à environ 100 % de CS_2 , avec de l'eau pour former un mélange d'alimentation ;
 (b) à transformer une partie importante du CS_2 dans le mélange par hydrolyse en un produit de
50 réaction d'hydrolyse sous forme de vapeur comprenant du H_2S , du CO_2 , du soufre et du CS_2 non transformé ;
 (c) à refroidir le produit de réaction d'hydrolyse sous forme de vapeur pour former une phase vapeur de $\text{H}_2\text{S}/\text{CO}_2$ et une phase de condensat d'eau acide ;
 (d) à séparer la phase vapeur de $\text{H}_2\text{S}/\text{CO}_2$ de la phase de condensat d'eau acide ; et
55 (e) à recycler l'eau acide de la phase de condensat d'eau acide au mélange d'alimentation en (a).
2. Procédé suivant la revendication 1, dans lequel l'eau utilisée pour la formation du mélange d'alimentation comprend en outre de l'eau pure ajoutée au mélange d'alimentation.

3. Procédé suivant la revendication 1 ou 2, comprenant les étapes supplémentaires consistant
(f) à mélanger le condensat d'eau acide à une quantité supplémentaire de CS₂ pour former une phase d'eau acide et une phase de CS₂ contenant du soufre dissous ;
(g) à séparer la phase d'eau acide de la phase de CS₂ ; et
5 (h) à recycler la phase d'eau acide au CS₂ ou au mélange H₂S/CS₂ dans l'étape (a).
4. Procédé suivant les revendications 1 à 3, dans lequel l'étape de refroidissement du produit de réaction d'hydrolyse sous forme de vapeur pour former la phase vapeur de H₂S/CS₂ et la phase de condensat d'eau acide comprend :
10 (i) le refroidissement du produit de réaction d'hydrolyse sous forme de vapeur dans une première étape de refroidissement à une température supérieure au poids de solidification du soufre ; et
(ii) le refroidissement du produit sous forme de vapeur dans une seconde étape de refroidissement à une température non inférieure à environ 30 ° C pour former une phase vapeur de H₂S/CO₂ et une phase de condensat d'eau acide.
15
5. Procédé suivant les revendications 1 à 4, dans lequel la phase d'eau acide formée dans l'étape (f) est pratiquement dépourvue de soufre.
6. Procédé suivant les revendications 1 à 5, dans lequel le CS₂ est transformé en le produit de réaction d'hydrolyse sous forme de vapeur dans un réacteur d'hydrolyse à lit fixe contenant un catalyseur.
20
7. Procédé suivant la revendication 6, dans lequel le catalyseur comprend de l'alumine activée.
8. Procédé suivant les revendications 4 à 7, dans lequel le produit de réaction d'hydrolyse sous forme de vapeur est refroidi dans la première étape de refroidissement à une température comprise dans l'intervalle d'environ 120 ° C à environ 149 ° C.
25
9. Procédé suivant la revendication 8, dans lequel le produit de réaction d'hydrolyse sous forme de vapeur est refroidi dans la première étape de refroidissement à une température comprise dans l'intervalle d'environ 120 ° C à environ 127 ° C.
30
10. Procédé suivant les revendications 4 à 9, dans lequel le produit de réaction d'hydrolyse sous forme de vapeur est refroidi dans la première étape de refroidissement en faisant passer le produit sous forme de vapeur en contact d'échange de chaleur avec le mélange d'alimentation de l'étape (a).
35
11. Procédé suivant les revendications 8 à 10, dans lequel le produit de réaction d'hydrolyse sous forme de vapeur est refroidi dans la seconde étape de refroidissement à une température comprise dans l'intervalle d'environ 30 ° C à environ 60 ° C.
- 40 12. Procédé suivant la revendication 3, comprenant en outre l'étape de recyclage de la phase de CS₂ à un dispositif de séparation de soufre.
13. Procédé suivant la revendication 2, comprenant en outre l'étape de préchauffage du mélange d'alimentation et de l'eau ajoutée à une température d'environ 199 ° C avant transformation d'une partie importante du CS₂ en H₂S par hydrolyse.
45
14. Procédé suivant la revendication 3, dans lequel le CS₂ est transformé en H₂S par hydrolyse à une température allant jusqu'à environ 371 ° C.
- 50 15. Procédé de transformation de CS₂ en H₂S par hydrolyse dans un mélange H₂S/CS₂, comprenant les étapes consistant :
(a) à faire réagir du gaz naturel avec du soufre en excès à température élevée pour former un produit de réaction H₂S/CS₂ comprenant du H₂S, du CS₂ et du soufre n'ayant pas réagi ;
(b) à éliminer le soufre n'ayant pas réagi du produit de réaction H₂S/CS₂ pour former un mélange H₂S/CS₂ désulfuré, contenant, en pourcentage molaire, au moins environ 6 % de CS₂ ;
55 (c) à mélanger le mélange H₂S/CS₂ désulfuré à de l'eau pour former un mélange d'alimentation ;
(d) à transformer une partie importante du CS₂ dans le mélange d'alimentation par hydrolyse en un produit de réaction d'hydrolyse sous forme de vapeur comprenant du H₂S, du CO₂, du soufre et du

CS₂ non transformé ;

(e) à refroidir le produit de réaction d'hydrolyse sous forme de vapeur pour former une phase vapeur de H₂S/CO₂ et une phase de condensat d'eau acide ;

(f) à séparer la phase vapeur de H₂S/CO₂ de la phase de condensat d'eau acide ; et

5 (g) à recycler l'eau acide de la phase de condensat d'eau acide au mélange d'alimentation en (c).

16. Procédé suivant la revendication 15, dans lequel le produit de réaction H₂S/CS₂ contient environ deux moles de H₂S par mole de CS₂.

10 17. Procédé suivant la revendication 15, comprenant en outre l'addition d'eau pure au mélange d'alimentation formé dans l'étape (c).

18. Procédé suivant la revendication 15, comprenant les étapes supplémentaires consistant

15 (h) à mélanger le condensat d'eau acide à une quantité supplémentaire de CS₂ pour former une phase d'eau acide et une phase de CS₂ contenant du soufre dissous ;

(i) à séparer la phase d'eau acide de la phase de CS₂ ; et

(j) à recycler la phase d'eau acide au mélange H₂S/CS₂ dans l'étape (c).

20 19. Procédé suivant les revendications 15 à 18, dans lequel l'étape de refroidissement du produit de réaction d'hydrolyse sous forme de vapeur pour former la phase vapeur de H₂S/CO₂ et la phase de condensat d'eau acide comprend :

(i) le refroidissement du produit de réaction d'hydrolyse sous forme de vapeur dans une première étape de refroidissement à une température supérieure au point de solidification du soufre ; et

25 (ii) le refroidissement du produit sous forme de vapeur dans une seconde étape de refroidissement à une température non inférieure à environ 30 °C pour former une phase vapeur de H₂S/CO₂ et une phase de condensat d'eau acide.

20. Procédé suivant les revendications 15 à 19, dans lequel le CS₂ est transformé dans un réacteur d'hydrolyse à lit fixe contenant un catalyseur.

30 21. Procédé suivant la revendication 20, dans lequel le catalyseur comprend de l'alumine activée.

22. Procédé suivant les revendications 19 et 20, dans lequel le produit de réaction d'hydrolyse sous forme de vapeur est refroidi dans la première étape de refroidissement à une température comprise dans l'intervalle d'environ 120 °C à environ 149 °C.

23. Procédé suivant la revendication 22, dans lequel le produit de réaction d'hydrolyse sous forme de vapeur est refroidi dans la première étape de refroidissement à une température comprise dans l'intervalle d'environ 120 °C à environ 127 °C.

40 24. Procédé suivant la revendication 22 ou 23, dans lequel le produit sous forme de vapeur est refroidi dans la seconde étape de refroidissement à une température comprise dans l'intervalle d'environ 30 °C à environ 60 °C.

45 25. Procédé suivant la revendication 19, dans lequel le produit de réaction d'hydrolyse sous forme de vapeur est refroidi dans la première étape de refroidissement par passage du produit sous forme de vapeur en contact d'échange de chaleur avec le mélange d'alimentation de l'étape (c).

50 26. Procédé suivant la revendication 15, comprenant en outre l'étape de recyclage de la phase de CS₂ à un dispositif de séparation du soufre.

27. Procédé suivant la revendication 17, comprenant en outre l'étape de préchauffage du mélange d'alimentation et de l'eau ajoutée jusqu'à une température d'environ 199 °C avant transformation d'une partie importante du CS₂ par hydrolyse.

55 28. Procédé suivant la revendication 18, dans lequel le CS₂ est transformé par hydrolyse à une température allant jusqu'à environ 371 °C.

