



12

EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification :
21.09.94 Bulletin 94/38

51 Int. Cl.⁵ : **G09F 11/14**

21 Application number : **91102323.2**

22 Date of filing : **19.02.91**

54 **A display apparatus.**

Divisional application 93116171.5 filed on
19/02/91.

30 Priority : **05.03.90 JP 51763/90**

43 Date of publication of application :
11.09.91 Bulletin 91/37

45 Publication of the grant of the patent :
21.09.94 Bulletin 94/38

84 Designated Contracting States :
DE GB IT

56 References cited :
DE-A- 2 044 028

73 Proprietor : **Japan Tobacco Inc.**
2-1 Toranomom, 2-Chome
Minato-Ku Tokyo 105 (JP)

72 Inventor : **Mima, Yoshinobu, c/o Japan**
Tobacco Inc.
Akashi Machine Factory,
111, Ohkubocho
Akashi-shi, Hyogo 674 (JP)

74 Representative : **Reinhard, Skuhra, Weise**
Postfach 44 01 51
D-80750 München (DE)

EP 0 445 569 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a display apparatus according to the preamble of the claim.

A display apparatus according to the preamble of the claim is known from DE-A-2 044 028.

Prior Art

It is desired that the display apparatus installed in the display chamber of vending machines change its advertising sign over time to provide effective advertisement of goods or to show a number of goods successively.

A display apparatus currently available that meets the above requirements is disclosed in the Japanese Patent Preliminary Publication No. Showa 63-316293.

In this display apparatus, a plurality of display plates are arranged in front of a fixed display board in such a manner that they are each pivotable 180 degrees about shafts provided at the upper and lower ends thereof. When the display plates rotate and stop at one rotation limit position, an advertising sign on the front surfaces of the display plates is shown. When the display plates rotate in the reverse direction and reach the opposite rotation limit position, another advertising sign on the back of the display plates is shown. When the display plates rotate halfway and stop at the middle between the two rotation limit positions, the display plates are directed parallel to the line of sight of a person looking at the display apparatus, so that the signboard behind the display apparatus can be seen through. Therefore, this display apparatus can show three kinds of advertising signs.

This apparatus, however, has the following drawbacks.

(1) When the display plates are directed almost parallel to the line of sight of a person looking at the display apparatus, the signboard or display board behind can be seen. But, since the display board is covered or masked to the extent of the thickness of the display plates, a clear vision of the display board is not obtained.

(2) The signboard is covered at its front by the display plates and is fitted at the top with a support member that rotatably supports the shafts of the display plates. This construction makes it difficult to replace the signboard behind the display plates.

SUMMARY OF THE INVENTION

This invention has been accomplished to elimin-

ate the above-mentioned drawback and its objective is to provide a display apparatus in which each of the display plates is easy to see, in which a part of the display plates can be replaced with ease, and in which three or more advertising signs can be displayed, offering a multi-sign display capability.

The above mentioned object is solved according to the features of claim 1.

The display apparatus of the above construction works as follows.

As the endless drive member is driven, the plurality of display plates arranged on the specified region of the drive member are also driven. When the display plates are stopped in front of the stationary display board, the advertising sign on the front of the display plates are shown.

Next, the drive member is driven again. When the display plates move past a first guide member located at one end of the circulating path of the drive member, they are not rotated but kept facing in the same direction. Thus, the display plates, after having passed the first guide member, enter the rear part of the circulating path of the drive member, with their front surfaces facing toward the inside of the circulating path. In this condition, the advertising sign on the stationary display board is shown.

Further, when the display plates move past the other end of the circulating path of the drive member, they are rotated a half-turn by a second guide member so that the front surfaces of the display plates continue to face toward the inside of the circulating path. Therefore, when the display plates are stopped again in front of the stationary display board, the back surfaces of the display plates are shown. In this way, while the drive member is rotated a complete turn, three kinds of advertising signs are displayed.

The stationary display board installed inside the drive member can easily be replaced from above as there is no obstruction hindering the upward movement of the board.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1 through 5 represent embodiments of this invention; of which

Figure 1 is a perspective view showing the outline of a display apparatus as a first embodiment of this invention;

Figure 2 is an elevational view of a drive system that rotates a drive member;

Figure 3 is a plan view showing the outline of the display apparatus;

Figure 4 is a perspective view showing the display apparatus when display plates are moving past a first guide member; and

Figure 5 is a perspective view showing the display apparatus when display plates are moving past a second guide member.

PREFERRED EMBODIMENTS OF THE INVENTION

Embodiments of this invention will be described by referring to the accompanying drawings.

Figure 1 is a perspective view showing the outline of a display apparatus; Figure 2 is an elevational view of a drive system that powers a drive member; and Figure 3 is a plan view showing the outline of the display apparatus.

In Figure 2, an output shaft 1a of a drive motor 1 is securely fitted with a sprocket 2. A drive shaft 4 which is supported at its ends by two bearings 3, 3 is securely fitted with a sprocket 5. A chain 6 is wound on the sprocket 2 and the sprocket 5.

The drive shaft 4 has drive wheels 7 and 8 securely attached to the upper and lower parts thereof, the drive wheels 7, 8 being formed as a sprocket. A driven shaft 10 supported by two bearings 9, 9 is disposed parallel to the drive shaft 4 and has driven wheels 11, 12 securely fitted thereto, the driven wheels 11, 12 being formed as a sprocket. An endless chain 13 is wound on and extended between the drive wheel 7 and the driven wheel 11 and another endless chain 14 is wound on the drive wheel 8 and the driven wheel 12.

As the drive motor 1 rotates in the forward direction, the drive shaft 4 is rotated in the direction of arrow R in Figure 3 causing a drive member 15 made up of two endless chains 13, 14 to rotate in the same direction R.

As shown in Figure 1, each of display plates 18 is comprised of: a panel portion 16 formed of a rectangular plate material and having display surfaces at the front and the back to show advertising signs; and shaft portions 17 provided to the upper and lower ends of the panel portion 16.

As shown in Figure 3, a display window 19 is provided in front of the drive member 15 and is attached with a transparent panel 20. Over a specified area of the drive member 15 (almost equal to the width of the display window 19), the two endless chains 13, 14 making up the drive member 15 are provided with a plurality of support pieces 21 that project from the side thereof. The support pieces 21 are each formed with a hole, in which the shaft portion 17 of each display plate 18 is rotatably supported.

In this specified area of the drive member 15 a plurality of display plates 18 are arranged side by side with little gap.

The shaft portion 17 has a first projection 22 that projects almost perpendicular to the panel portion 16 and a second projection 23 that projects almost parallel to the panel portion 16 (see Figure 1).

A first guide member 24 is provided on the left side of the circulating travel path of the drive member 15. The first guide member 24 consists of: a first cam 25 that is located outside the circulating path of the

drive member 15 to guide the first projections 22 of the shaft portions 17; and a second cam 26 that is located inside the circulating path of the drive member 15 to guide the second projections 23 of the shaft portions 17. Since the first guide member 24 guides the first projections 22 and the second projections 23 in such a way as to prevent them from turning, the display plates 18 are kept in the same attitude while passing the left end of the circulating path of the drive member 15.

At the right end of the circulating path of the drive member 15 there is provided a second guide member 27. The second guide member 27 consists of a disc-shaped cam installed inside the circulating path of the drive member 15. The second projection 23 is guided by the second guide member 27 to rotate a half turn, so that when the display plate 18 moves past the right end of the circulating path of the drive member 15, the display plate 18 is swiveled to show the back of the panel portion 16.

Inside the drive member 15 is installed a stationary display board 28. The stationary display board 28 can be mounted and dismounted by making use of a space above the drive member 15.

Now, the operation of the display apparatus of the above construction will be explained.

As shown in Figures 1 and 3, when the display plates 18 stop at the front part of the circulating path close to the transparent panel 20, an advertising sign on the front of each display plate 18 can be seen through the transparent panel 20.

Next, as the drive member 15 is driven in the direction of arrow R, the display plates 18 move past the left end of the drive member 15. Since the first and second projections 22 and 23 are guided by the first guide member 24 as mentioned earlier, the front surface of each display plate 18 faces toward the inside of the drive member 15 (see Figure 4).

When all the display plates 18 have passed the left end of the drive member 15, the drive member 15 is stopped. Now, an advertising sign on the stationary display board 28 can be seen through the transparent panel 20.

Then, the drive member 15 is again driven in the direction of arrow R. When the display plates 18 pass the right end of the drive member 15, each of the second projections 23 is guided by the second guide member 27 to rotate a half turn, so that when the display plates 18 stop at the front part of the circulating path close to the transparent panel 20, another advertising sign at the back of the display panels 18 can be seen through the transparent panel 20.

In this way, three kinds of advertising signs are displayed successively over time. Because the stationary display board 28 can easily be dismounted, the advertising effect can be enhanced by replacing, as required, the existing display board 28 with another board 28 having a desired advertising sign.

Advantages of the Invention

With the above-mentioned construction, this invention offers the following advantages.

(1) Since there is no obstruction in front of the display plates, a clear view of the advertising sign is obtained.

(2) The display apparatus has a structure that allow easy replacement of the stationary display board, which in turn permits multiple advertising signs to be displayed.

These advantages all contribute to enhancing the advertising effect.

Claims

1. A display apparatus comprising: a drive shaft (4) having drive wheels (7, 8) secured thereto; a driven shaft (10) having driven wheels (11, 12) secured thereto; an endless drive member (15) rotatably wound on the drive wheels (7, 8) and the driven wheels (11, 12); a plurality of display plates (18), each consisting of a plate-like panel portion (16) having display surfaces on the front and back thereof and shaft portions (17) provided at the upper and lower ends of the panel portion and rotatably supported by the drive member (15); a first guide means (24) provided at one end of a circulating path of the drive member (15) for preventing the display plates (18) from turning; and a second guide means (27) provided at the other end of the circulating path of the drive member (15) for guiding and rotating the display plates (18) a half turn, **characterized in that:** first and second projections (22, 23) project from the shaft portions (17) of the display plates (18); said display plates (18) are arranged on a specified region on the drive member (15); said first guide means (24) includes cams (25, 26) for guiding the first and second projections (22, 23) while preventing them from turning; said second guide means (27) includes a cam for guiding and rotating the second projections (23) a half turn; and a stationary display board (28) is installed inside the circulating path of the drive member (15).

Patentansprüche

1. Eine Anzeigenvorrichtung, welche aufweist: eine Antriebswelle (4) mit daran befestigten Antriebsrädern (7, 8); eine Abtriebswelle (10) mit daran befestigten Abtriebsrädern (11, 12); ein Endlosantriebselement (15), welches drehfähig um die Antriebsräder (7, 8) und die Abtriebsräder (11, 12) herumgeführt ist; eine Vielzahl Anzeige-

täfelchen (18), von denen jedes aus einem plattenartigen Tafelabschnitt (16) welcher Anzeigeflächen auf seiner Vorder- und Rückseite aufweist, und aus durch das Antriebselement (15) drehbar gelagert Wellenabschnitten (17) besteht, welche aus den oberen und unteren Enden des Tafelabschnittes vorgesehen sind; eine erste Führungseinrichtung (24), welche an einem Ende des Umlaufweges des Führungselementes (15) vorgesehen ist, um die Anzeigentäfelchen (18) an einer Drehung zu hindern und eine zweite Führungseinrichtung (27), welche am anderen Ende des Umlaufweges des Antriebselementes (15) vorgesehen ist, um die Anzeigentäfelchen (18) in einer Halddrehung zu führen und zu drehen,

dadurch gekennzeichnet,

daß erste und zweite Vorsprünge (22, 23) von dem Wellenabschnitt (17) der Anzeigentäfelchen (18) vorstehen, daß die Anzeigentäfelchen (18) in einem vorbestimmten Bereich auf dem Antriebselement (15) angeordnet sind, daß die erste Führungseinrichtung (24) Nockenelemente (25, 26) zur Führung der ersten und zweiten Vorsprünge (22, 23) besitzt, während sie diese daran hindert, sich zu drehen; und daß die zweite Führungseinrichtung (27) ein Nockenelement zur Führung und Drehung der zweiten Vorsprünge (23) um eine Halbdrehung besitzt und eine feststehende Anzeigetafel (28) innerhalb des Umlaufweges des Antriebselements (15) angebracht ist.

Revendications

1. Dispositif d'affichage, comprenant un arbre menant (4), sur lequel sont fixées des roues menantes (7, 8) ; un arbre mené (10), sur lequel sont fixées des roues menées (11, 12) ; un élément d'entraînement sans fin (15) enroulés en rotation sur les roues menantes (7, 8) et les roues menées (11, 12) ; plusieurs plaques d'affichage (18), constituées chacune d'une partie de panneau (16) en forme de plaque, comportant des surfaces d'affichage sur ses faces avant et arrière et des tronçons d'arbre (17) disposés aux extrémités supérieure et inférieure de la partie de panneau et portés d'une manière rotative par l'élément d'entraînement (15) ; un premier moyen de guidage (24), disposé à l'une des extrémités d'une trajectoire de circulation de l'élément d'entraînement (15) et servant à empêcher les plaques d'affichage (18) de tourner ; et un second moyen de guidage (27) disposé à l'autre extrémité de la trajectoire de circulation de l'élément d'entraînement (15) et servant à guider et faire tourner d'un demi-tour les plaques d'affichage (18), caractérisé en ce que des premières et des

secondes saillies (22, 23) s'étendent à partir des tronçons d'arbre (17) des plaques d'affichage (18), en ce que les plaques d'affichage (18) sont disposées dans une zone déterminée sur l'élément d'entraînement (15), en ce que le premier moyen de guidage (24) comprend des cames (25, 26) servant à guider les premières et les secondes saillies (22, 23), tout en les empêchant de tourner, en ce que le second moyen de guidage (27) comprend une came servant à guider et faire tourner d'un demi-tour les secondes saillies (23) et en ce qu'un tableau d'affichage fixe (28) est disposé à l'intérieur de la trajectoire de circulation de l'élément d'entraînement (15).

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

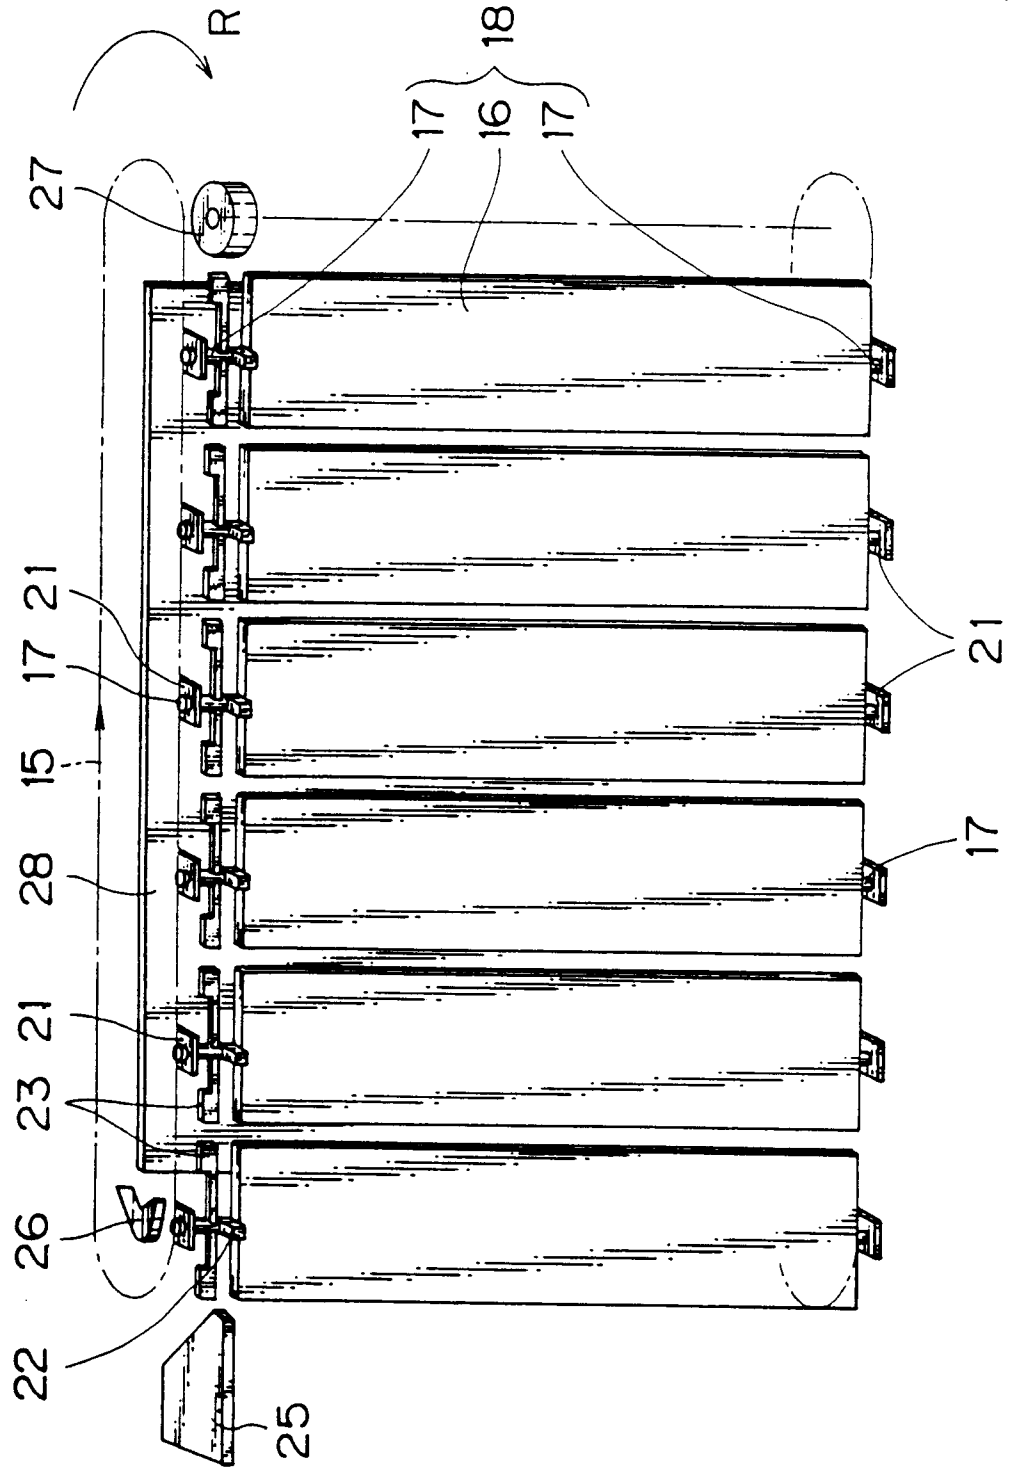


FIG. 2

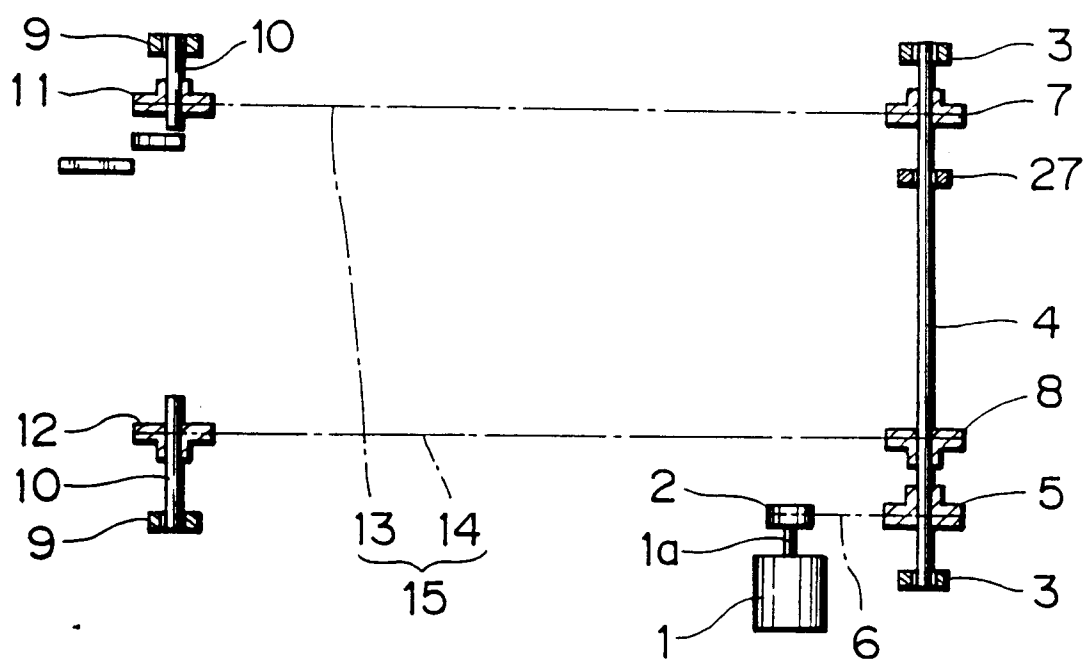


FIG. 3

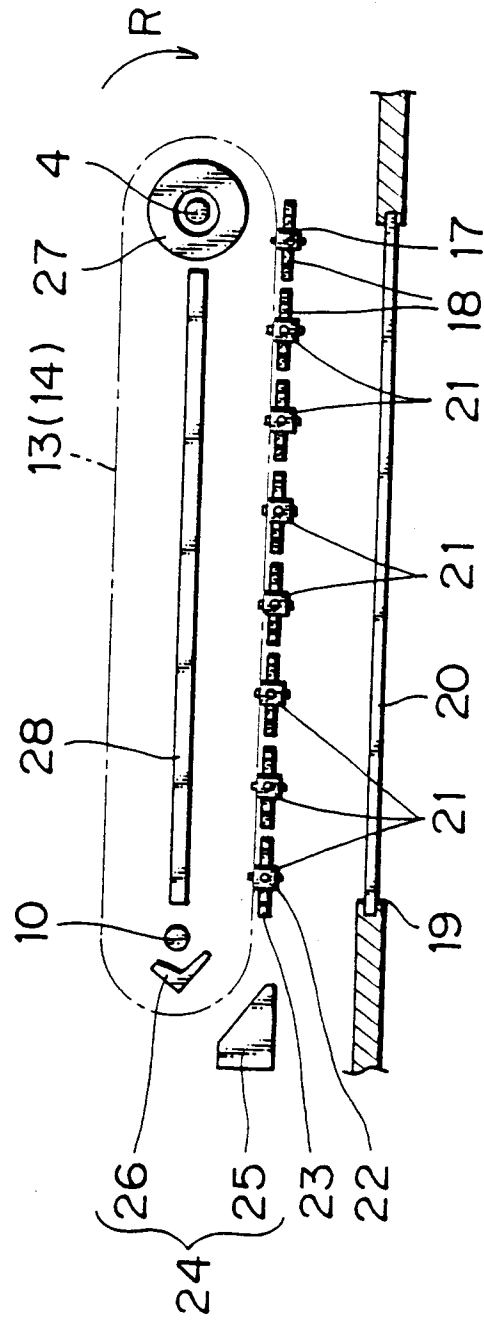


FIG. 4

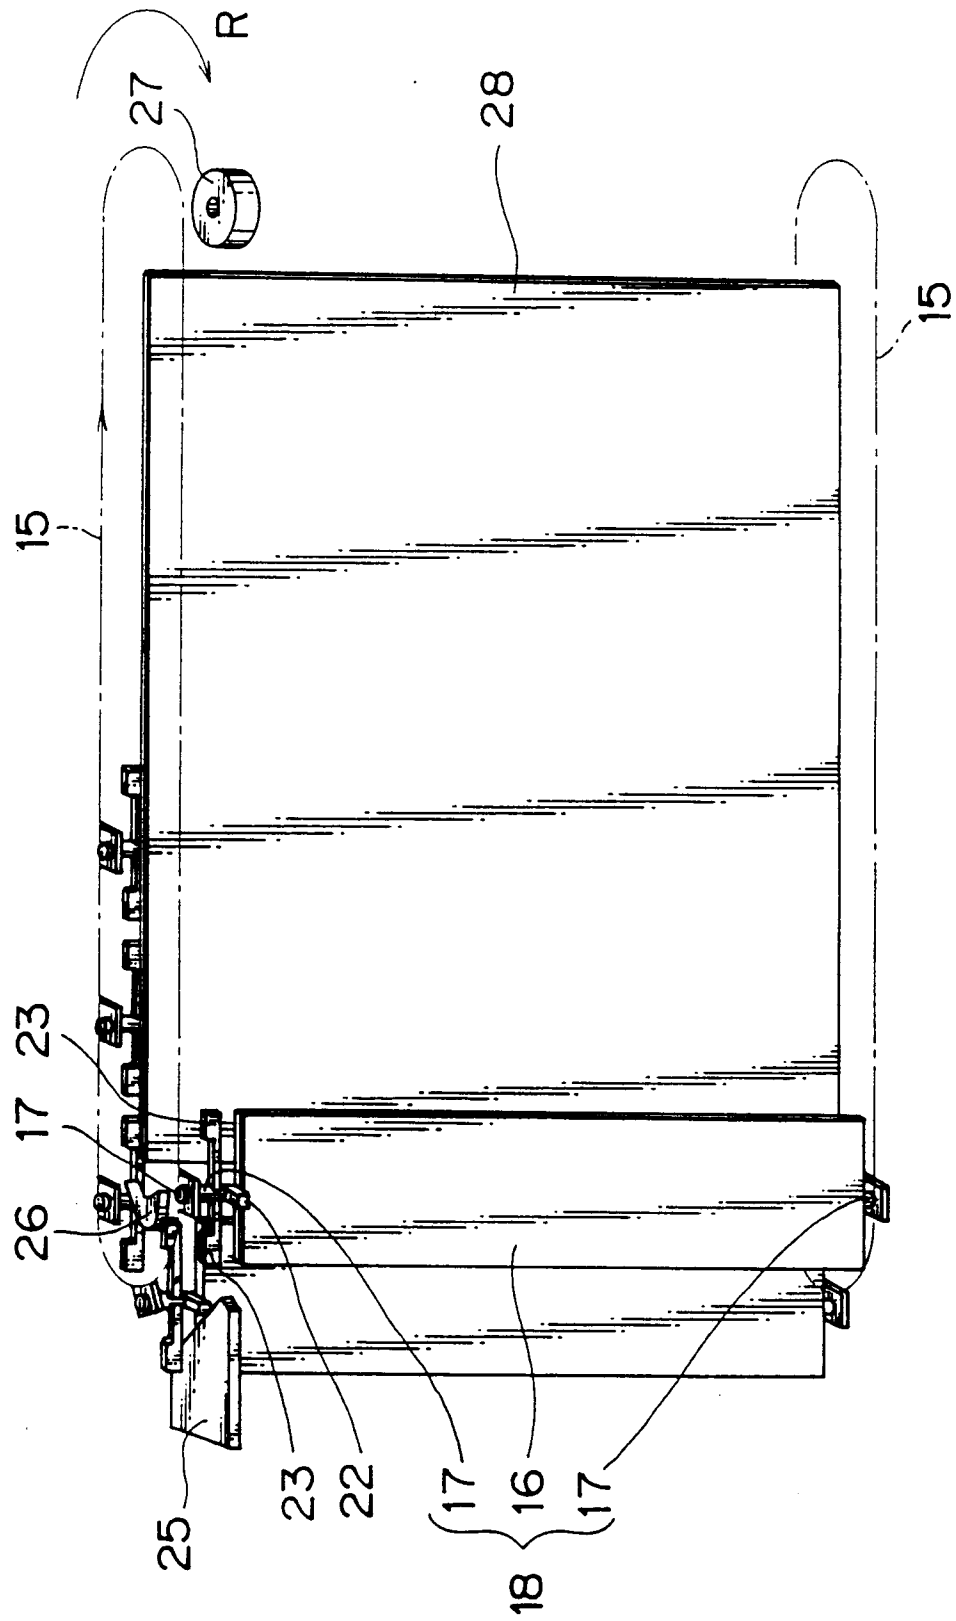


FIG. 5

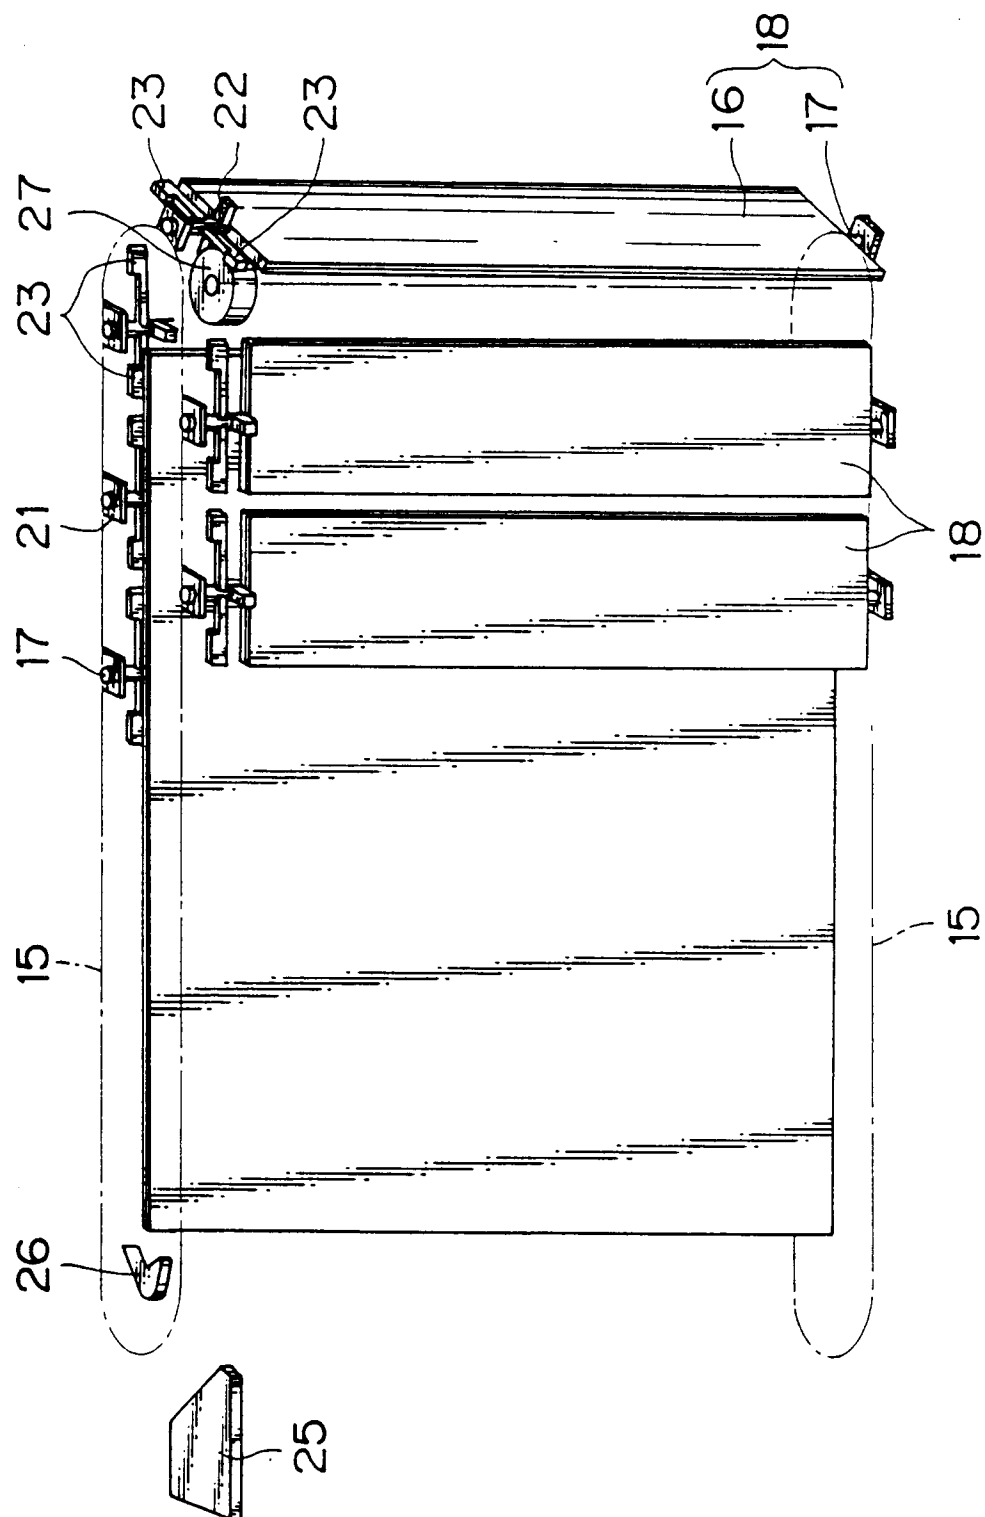


FIG. 6

