



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number : **0 453 172 A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **91303172.0**

(51) Int. Cl.⁵ : **B65D 77/06**

(22) Date of filing : **10.04.91**

(30) Priority : **11.04.90 JP 95574/90**

(43) Date of publication of application :
23.10.91 Bulletin 91/43

(84) Designated Contracting States :
DE FR GB IT

(71) Applicant : **DAI NIPPON INSATSU KABUSHIKI KAISHA**
1-1, Ichigaya-Kagacho 1-chome, Shinjuku-ku Tokyo-To (JP)


(72) Inventor : **Sasaki, Yasuyuki, c/o Dai Nippon Insatsu K.K.**
1-1, Ichigaya-Kagacho 1-chome Shinjuku-ku, Tokyo-to (JP)

(74) Representative : **Nicholls, Michael John et al J.A. Kemp & Co., 14, South Square, Gray's Inn London WC1R 5EU (GB)**

(54) **Liquid container and mouth thereof.**

(57) A liquid container has a flexible bag (12) and a path forming member (17) for forming a liquid path communicated with a mouth (13) which has a restricted path for permitting the liquid to flow out of the mouth slowly. The bag (12) may be an inner to a rigid box (11).

FIG. 1

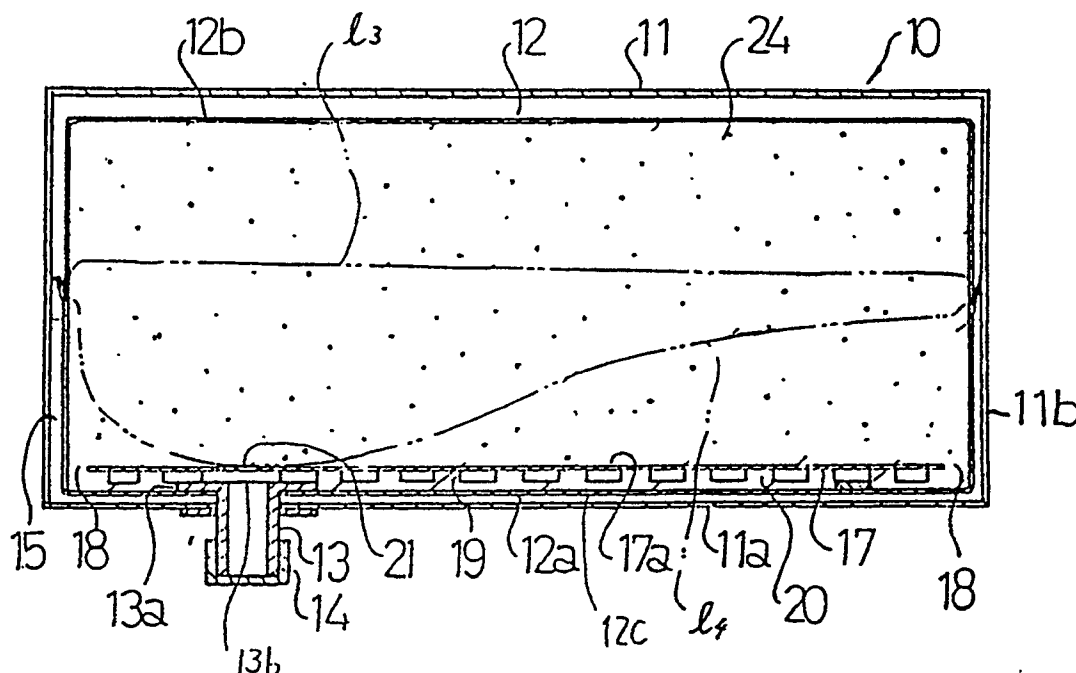

EP 0 453 172 A2

This invention relates to a liquid container and its mouth, and more particularly to a liquid container of bag-in-box type in which a flexible bag for containing a liquid having a high viscosity is accommodated in an outer hard box and a mouth fixed to the liquid container for filling and taking the liquid into and out of the liquid container therethrough. There has appeared a bag-in-box in which a flexible inner bag for containing a liquid such as juice, syrup, beer or ink is accommodated in an outer box made of hard material such as cardboard, plastic and the like. A pump is connected to a mouth of the bag-in-box to take liquid contents out of the flexible inner bag.

However, when the liquid contents are sucked out, the inner flexible bag is deformed to be apt to close the mouth thereof thereby make impossible taking out of liquid contents any more. In the case of liquid having a high viscosity such as ink or adhesive, this phenomenon occurs prominently.

Further, such a bag-in-box is normally set upside down, that is, with the mouth directed downwardly. When the pump is connected to the mouth to suck the liquid contents out of the inner bag, a cap fixed to the mouth is disconnected therefrom to expose an inner plug with a membrane for closing the liquid path of the mouth. A connector on the side of the pump is connected to the mouth, and a projection formed in the connector breaks the membrane to open the path for the liquid contents. The structure of the mouth increases its cost because the inner plug and the projection for breaking the membrane of the inner plug are necessary.

It is an object of this invention to provide a liquid container from which liquid contents can be taken out sufficiently with a small amount of the remaining liquid contents therein.

It is another object of this invention to provide a mouth for permitting liquid contents with a high viscosity to flow slowly therethrough.

According to one aspect of this invention, there is provided a liquid container for containing a liquid therein such as juice, syrup, ink, adhesive and the like which comprises: an outer box having at least one flat wall; a flexible inner bag accommodated in the outer box; a mouth fixed to the inner bag so as to be projected outwardly of the outer box from the flat wall of the outer box; and a path forming member provided on a flat wall provided along the flat wall of the outer box in the inner bag so as to over the mouth therewith for ensuring a liquid path between the flat wall of the inner bag and a deformed portion of the inner bag.

According to another aspect of this invention, there is provided a liquid container for containing a liquid such as juice, syrup, ink, adhesive and the like which comprises: a flexible bag for containing the liquid therein; a mouth fixed to the bag so as to be projected outwardly of the bag; and a path forming member provided in the bag so as to cover the mouth

therewith for ensuring a liquid path between a portion of the bag near the mouth and a deformed portion of the bag which is deformed when the liquid is sucked out.

According to still another aspect of this invention, there is provided a mouth provided on a container for containing a liquid with a high viscosity for flowing the liquid into and out of the container, which comprises: a main body fixed to the container for containing the liquid and having a restricted path inside thereof for flowing the liquid with a high viscosity out of the mouth; and a cap detachably provided on the mouth to close and open the mouth.

Further objects, features and other aspects of this invention will be understood from the following detailed description of the preferred embodiment of this invention with reference to the drawings.

In the accompanying drawings:

FIG. 1 is a longitudinally sectional view of a bag-in-box according to this invention;

FIG. 2 is a cross sectional view of the bag-in-box shown in FIG. 1;

FIG. 3 is a perspective view of the bag-in-box shown in FIGS. 1 and 2;

FIG. 4 is a perspective view of a path forming plate accommodated in an inner bag of the bag-in-box;

FIG. 5 is a plan view of a path forming plate showing another embodiment thereof;

FIG. 6 is a perspective view of the path forming plate shown in FIG. 5;

FIG. 7 is a perspective view of a center portion of the path forming plate shown in FIG. 6;

FIG. 8 is a longitudinally sectional view of a bag-in-box showing another embodiment thereof;

FIG. 9 is a longitudinally sectional view of a mouth fixed to the bag-in-box;

FIG. 10 is a plan view of the mouth shown in FIG. 9;

FIG. 11 is a longitudinally sectional view of the mouth showing a state wherein a connector is connected to the mouth; and

FIG. 12 is a longitudinally sectional view of a conventional bag-in-box.

As conducive to a full understanding of the nature and utility of the present invention, a brief consideration of a typical liquid container will be first presented below with reference to FIG. 12.

FIG. 12 shows a so-called bag-in-box 100 for containing liquid such as juice, syrup, ink, adhesive or the like. The box 100 comprises an outer hard box 101 formed of paper, cardboard, plastic or the like and a flexible inner bag 102 accommodated in the outer box 101 and formed of plastic film or the like. A mouth 103 is fixed to a part of the inner bag 102 so as to be projected outwardly from the outer box 101. The mouth 103 is connected to a connector 104 when the liquid contents are taken out of the inner bag 102 by a pump (not

shown). As the liquid contents are taken out therefrom, the inner bag 102 is deformed so that the volume of the inner bag 102 is decreased.

However, when the liquid contents are simply sucked from the inner bag 102 by the pump, the liquid contents are partially sucked to be apt to form wrinkles on the inner bag 102. Further, a part of the inner bag 102 can tightly contact the bottom of the inner bag 102 before the liquid contents are totally taken out thereby to leave a part of the liquid contents in the inner bag 102. Especially, in the case of a liquid having a high viscosity such as ink, and adhesive, this problem often occurs.

That is, in such a case, the liquid such as ink does not flow smoothly in the inner bag 102 to reach the mouth 13 easily when the ink is sucked out of the inner bag 102. Therefore, the ink near the mouth 103 is mainly sucked, the upper portion of the flexible inner bag 102 is deformed as indicated by a dotted line ℓ 1, resulting in closing the mouth 103 in a state wherein a large amount of ink is left in the inner bag 102 or resulting in that the bottom and the upper portion of the inner bag 102 contact partially near the mouth 103 together with each other to obstruct the flow of the remaining ink.

In addition, the bag-in-box 100 is normally used in an upside down manner. When the connector 104 is connected to the lower end of the mouth 103, a cap 105 is disconnected from the mouth 103. An inner plug 106 is inserted into the mouth 103 to prevent the liquid such as ink from flowing out when the cap 106 is disconnected therefrom. The inner plug 106 has a membrane 107 which is broken by a projection 108 formed in the connector 104 when the connector 104 is connected to the mouth 103.

This invention is made to provide a liquid container, for liquid such as juice, syrup, ink, adhesive or the like, whose liquid contents can be almost completely taken out therefrom and which has an inexpensive mouth with a relatively simple structure to enable liquid contents to flow out through the mouth.

A preferred embodiment of this invention will now be explained.

In FIGS. 1, 2 and 3, a liquid container 10 for containing a liquid 24 having a high viscosity such as ink, adhesive or other viscous liquids comprises a rectangular outer box 11 made of hard material and an inner flexible bag 12 accommodated in the outer box 11. A mouth 13 is fixed to the inner bag 12, and the lower end of the mouth 13 is closed by a cap 14. The mouth 13 is also fixed to the outer box 11 so as to be projected from its flat bottom surface 11a. The inner bag 12 has a lower portion 12a and an upper portion 12b. The lower portion 12a to which the mouth 13 is fixed is held by a proper adhesive means, e.g., a double-sided adhesive tape 15, to the bottom flat surface 11a of the outer box 11 and the side flat surface 11b thereof whereby a flat bottom surface 12c of the inner bag 12

is formed along the flat bottom surface 11a of the outer box 11. Instead of the adhesive tape, an adhesive such as hot-melt may be used. The upper portion 12b of the inner bag 12 is freely accommodated in the outer box 11. In this manner, if the lower portion 12a of the inner bag 12 is fixed to the inner wall of the outer box 11, the upper portion 12b of the inner bag 12 is only deformed in a state wherein the joint portion between the lower and upper portions 12a, 12b is held on the inner intermediate surface of the outer box 11 when ink is filled into and taken from the inner bag 12. Therefore, the stable deformation of the inner bag 12 is ensured and the remaining amount of ink accommodated in each bag-in-box manufactured becomes even.

The outer box 11 and the inner bag 12 may be made of known various materials. For example, as the outer box 11, paper, corrugated cardboard, plastic, metal and the like may be used, and, as the inner bag 12, a single layer film, a laminated film formed of the same material or a laminated film formed of combination of plastic and paper, or combination of plastic, paper, metallic film and the like may be used. Moreover, the mouth 13 may be a plastic molding product.

In the inner bag 12 is accommodated a path forming plate 17 for maintaining a path of ink especially when the ink is taken out of the inner bag 12 in such a manner that the opening of the mouth 13 is covered therewith. The path forming plate 17 is disposed along the bottom walls 11a, 12c of the outer box 11 and the inner bag 12, and fixed, at a plurality of positions, to the bottom flat wall 12c of the inner bag 12.

The size of the path forming plate 17 is not limited, but an area slightly less than that of the flat bottom wall 12c of the inner bag 12 is preferable as shown in FIGS. 1 and 2. The path forming plate 17 is also disposed so as to form an ink path 18 between the periphery of the plate 17 and the bottom corners of the inner bag 12.

As shown enlarged in FIG. 4, the path forming plate 17 comprises a flat base 17a and a number of projections 19 formed at predetermined intervals, which are projected in one direction from the flat base 17a. The plate 17 is, as shown in FIGS. 1 and 2, disposed in the inner bag 12 so that the projections 19 are directed downwardly to ride on the flange 13a of the mouth 13 and the bottom wall 12c of the inner bag 12, and some projections 19 are adhered to the inner bag 12. In this embodiment, the plate 17 is adhered by heat to the inner bag 12 at four corners thereof and at two positions of the center portion thereof in a spot-like manner.

At a position of the plate 17, corresponding to the mouth 13 is provided a flat portion 17a without the projections 19 to facilitate passing of ink through the mouth 13. In this manner, a lattice-like path 20 for permitting ink to pass therethrough is formed between

the plate 17 and the bottom wall 12c of the inner bag 12. The ink path 20 permits ink to pass therethrough toward the mouth 13 when the ink in the inner bag 12 is sucked out. In order to take ink out of the inner bag 12 as much as possible, a large ink path is preferable. However, in order to decrease amount of the remaining ink in the inner bag 12 as much as possible, a small ink path is preferable because a certain amount of ink is always left in the ink path 20 after the ink is sucked from the inner bag 12. In view of these points, the size of the ink path 20 is determined. For example, the height and width of the ink path 20 are determined at 2 to 3 mm and 3 to 5 mm, respectively.

The path forming plate 17 has, as shown in FIG. 4, a main liquid opening 21 formed at a position corresponding to the mouth 13, and a plurality of supplementary small liquid openings 22 formed at positions corresponding to the lattice-like ink path 20. The material and manufacturing method of the plate 17 are not limited, and it is preferable to manufacture the plate 17 through plastic-molding. In FIG. 4, a number of recesses 23 are formed, corresponding to the projections 19, on the upper surface of the plate 13. However, as the remaining ink is stagnant in the recesses 23 after the sucking of ink, it is desirable to close the recesses 23 with film, sheet or the like, a plurality of holes 23a may be formed on the side walls of the recesses 23 to communicate the recesses 23 with the ink path 20. An ink path forming plate with a flat base without recesses may be formed through injection molding.

The operation of the container 10 will now be explained.

As shown in FIGS. 1 and 2, when the inner bag 12 is filled with ink, the upper portion 12b is expanded as indicated by a solid line to accommodate ink sufficiently. When the ink in the inner bag 12 is taken out therefrom, the ink mainly passes through the large main liquid opening 21 of the base portion 17a to enter the mouth 13. In addition to the large liquid opening 21, the ink passes through the ink path 18 at the periphery of the plate 17 and the small supplementary openings 22 to enter the ink path 20 then to reach the opening of the mouth 13. Therefore, the ink is taken out through a large region in the inner bag 12. When the ink is sucked, the upper portion 12b is deformed downwardly with its upper surface being kept almost horizontally as indicated by a dotted line 13. The ink can be thus almost completely sucked out from the inner bag 12.

In addition, even if the upper portion 12b of the inner bag 12 is deformed distortedly in such a manner that a part of the upper portion 12b is lowered partially to close the large main liquid opening 21 of the plate 17, the ink in the inner bag 12 can be sucked out through the ink path 20 between the plate 17 and the bottom wall 12c of the inner bag 12 because the opening 13b of the mouth 13 is not closed by the lowered

part of the upper portion 12b. Accordingly, until most of the upper portion 12b tightly contacts the upper surface of the plate 17, the ink can be sucked out thereby to enable almost all of ink to be taken out of the inner bag 12.

In this embodiment, the ink is sucked out through a wide region in the inner bag 12, and the inner bag 12 is accommodated so that its lower portion 12a is fixed to the inner wall of the outer box 11 and that its upper portion 12b can be only deformed. Therefore, the upper portion 12b can be deformed stably to enable the ink of every bag-in-box manufactured to be taken out with a small amount of the remaining ink.

FIGS. 5 and 6 show another embodiment of a path forming plate 30. The plate 30 has, as a whole, a rectangular shape, and a flat base portion 30a and a number of square projections 31 disposed at predetermined intervals on the flat base portion 30a. At the center of the base portion 30a is provided a large main liquid opening 32 for permitting the ink in the inner bag 12 to pass therethrough, and around the large main liquid opening 32 is provided a circular recessed path 33 from which liquid path 34 is extended in the four directions. Further, the plate 30 has a lattice-like liquid path 35 on the almost whole surfaces of the plate 30 except the center portion 30b of the base portion 30a. The circular recessed path 33 is defined by four deformed projections 36 separated from each other, each of which has an arched wall 36a surrounding the large opening 32. Further, a number of supplementary liquid openings 37 are formed at a plurality of crossing points of the lattice-like liquid path 35 on the almost whole surface of the base portion 30a except the center portion 30b thereof. The supplementary openings 37 comprise a number of cross-shaped openings 37a, a number of three-branch-shaped openings 37b provided along the periphery of the plate 30, and four L-shaped openings 37c provided at the four corners of the plate 30. The formation of the supplementary openings 37 ensures that the ink in the inner bag 12 can be sucked evenly from the whole area of the path forming plate 30. The projections 31, 36 may be closed in the same manner as those of the plate 17 to prevent the ink from being stagnant therein. The plate 30, shown in FIG. 5, has the large main opening 32 at the center thereof, and the mouth 13 is, as shown in FIG. 8, projected outward from the center positions of the inner bag 12 and the outer box 11. If the large main opening 32 is formed at the center of the plate 30, the ink can be taken out uniformly or evenly from the whole region in the inner bag 12. Further, the plate 30 occupies most of the bottom surface of the inner bag 12 and, therefore, most of ink in the inner bag 12 can be taken out.

In the above embodiment, the bag-in-box 10 is disposed upside down so as to direct the mouth 13 downwardly, but the bag-in-box 10 is not necessarily disposed upside down. That is, the bag-in-box 10 may

be disposed laterally and uprightly. Even in these cases, the ink in the inner bag 12 can be sucked out because of a sucking force of the pump. The plates 17, 30 have a number of openings 22, 37 at positions corresponding to the ink paths 20, 35, respectively. However, those openings 22, 37 are not necessarily provided, and the ink may be sucked from the peripheral space of the plates 17, 30 into the respective ink paths 20, 35. In contrast, the plates 17, 30 may have a size to completely cover the bottom wall of the inner bag 12 so as not to flow the ink from the peripheral space into their respective ink paths 20, 35 in a state wherein only the openings 22, 37 permit the ink to pass therethrough.

The flow of ink can be controlled by determination of the positions and number of the openings 22, 37 to form a desirable flow pattern of ink. In addition, the lower portion 12a of the inner bag 12 is not necessarily adhered to the inner wall of the outer box 11, and the inner bag 12 may be simply accommodated in the outer box 11. The shape of the outer box 11 can be arbitrarily selected. For example, a cylindrical shape may be selected.

The type of the inner bag 12 is not limited to a pouch with four sides sealed as shown in FIGS. 1, 2 and 8, and a stand pack or a gazette type bag may be used.

The above embodiments can be adapted for a liquid container for containing other liquids in addition to ink.

The mouth of the bag-in-box may be formed in the following manner. The following mouth is suitable for taking out therethrough a liquid with a relatively high viscosity such as ink, adhesive, enrichment juice, enrichment syrup and the like.

In FIGS. 9 and 10, a mouth 40 comprises a main body 41 formed in a step manner, an engaging ring 42 screw-engaged with a root portion of the main body 41, and a cap 43 screw-engaged with the distal end of the main body 41. The main body 41 comprises a flange 41a adhered to the inner bag 12, a large diameter portion 41b having a male screw for engaging with the engaging ring 42 at its outer circumferential surface, a small diameter portion 41c having a male screw for engaging with the cap 43 at its circumferential surface and a plurality of tongue pieces 44 extended inwardly from the step portion 41d formed between the large and small diameter portions 41b, 41c so as to form a restricted path 45. Each tongue piece 44 is thinly formed to be elastically deformed, and it has, e.g., a thickness of 0.4 mm. The area of the path 45 is so determined that a liquid having a high viscosity does not instantly flow out of the path 45 when the mouth 40 is directed downwardly. That is, as shown in FIG. 11, when the mouth 40 is directed downwardly, the liquid contents in the inner bag 12 flow down while forming a liquid drip 50 to come out of the mouth 40. The area of the path 45 is so deter-

mined that it takes 2 or 3 seconds until the drop 50 comes out of the mouth 40. For example, in the case of ink having a viscosity of 50 to 400 poises, it is preferable that the diameter d of a center path defined by the distal ends of the tongue pieces 44 is 1 to 4 mm, and the width of a plurality of spaces extended radially from the center path is 0.1 to 2 mm. The main body 41 of the mouth 40 is integrally manufactured by injection molding of resin such as polyethylene.

The bag 12 is adhered to the flange 41a of the main body 41 by heat sealing or the like. However, the flange 41a may be inserted so that the inner surface of the inner bag 12 is adhered to the front surface of the flange 41a.

The engaging ring 42 has a flange 42a abutting against the outer surface of the outer box 11, an operating portion 42b formed separately from the flange 42a and held by fingers when the ring 42 is fastened or released, and a reinforcing rib 42c for reinforcing the operating portion 42b. The main body 41 of the mouth 40 is reliably fixed to the outer box 11 in such a manner that the ring 42 is screw-engaged with the male screw of the main body 41 to put the outer box 11 between the flange 41a of the main body 41 and the flange 42a of the ring 42. The ring 42 and the cap 43 are also manufactured by injection molding of resin.

The operation of the mouth 40 will now be explained.

First, the flange 41a of the main body 41 is adhered to the inner bag 11 so as to project the main body 41 outwardly from the inside of the outer box 11, and the ring 42 is screw-engaged with the male screw of the main body 41 thereby to fix the mouth 40 to the outer box 11. A liquid is poured into the inner bag 12 through the mouth 40. At this time, the liquid flows into the inner bag through the restricted path 45 provided by the tongue pieces 44 while deforming them elastically by liquid pressure to expand the restricted path 45. This enables prompt filling of the liquid. Further, a filling nozzle for filling the liquid into the inner bag 12 may be formed so that a part of the filling nozzle pushes the tongue pieces to expand the restricted path 45 when the nozzle is engaged with the mouth 40. After the liquid is filled into the inner bag 12, the mouth 40 is covered with the cap 43. With this state, the bag-in-box 10 is transported and stored.

When the liquid is taken out of the bag-in-box 10, the cap 43 is disconnected from the mouth 40, and a connector 60 connected to a pump is connected to the mouth 40. Thus, the liquid is sucked out by the operation of the pump. When the mouth 40 is connected to the connector 60, the bag-in-box 10 is placed upside down to connect the mouth 40 with the connector 60 from the above. At this time, if the mouth 40 is directed downwardly in a state wherein the cap 43 is disconnected therefrom, the liquid in the inner bag 12 is going to flow out through the restricted path 45.

However, as the area of the path 45 is small, the liquid flows downwardly while forming the liquid drop 50. Therefore, the liquid does not flow out of the mouth 40 for a relatively short time until the mouth 40 is connected with the connector 60. After the connector 60 is connected to the mouth 40, the liquid is sucked out by the pump. At this time, each tongue piece 44 is curved downwardly by the suction force to expand the restricted path 45.

The connector 60 may be formed so as to have a long projection 61a so that the long projections 61a pushes upwardly the tongue pieces 44 to expand the restricted path 45 when the connector 60 is engaged with the mouth 40.

In the above embodiment, the restricted path 45 is formed of a plurality of elastically deformed tongue pieces 44, and, however, a circular path, an elliptic path, groove-like path and the like may be simply formed. If the path 45 is formed of the elastic tongue pieces, the pass resistance of the liquid is decreased because of the expansion of the path 45 by the elastic deformation of the tongue pieces. The engaging ring 42 is not necessarily provided, and the mouth 45 may be simply projected from the outer box 11. The above mouth can be adapted for other boxes in addition to the bag-in-box 10.

Claims

1. A liquid container which comprises:
 - (a) an outer box (11);
 - (b) a flexible inner bag (12) accommodated in the outer box (11);
 - (c) a mouth (13) fixed to the bag (12) so as to project outwardly from a wall of the outer box (11); and
 - (d) a path forming member (17) provided in the bag (12) so as to cover the mouth therewith for maintaining a liquid path out of the mouth (13) as the bag (12) deforms.
2. A liquid container according to claim 1 wherein the outer box (11) has a flat wall (16) from which the mouth (13) projects, the bag (12) has a flat portion (12a) against the flat wall (11a) around the mouth (13) and the path forming member (17) overlies the flat portion (12a) to provide the liquid path between the flat portion and the rest of the bag.
3. A liquid container according to claim 2, wherein the mouth (13) is provided at the centre of the flat wall of the outer box (11).
4. A liquid container according to any one of the preceding claims, wherein an approximately half portion of the inner bag (12) is fixed to the outer box (11).
5. A liquid container according to any one of the preceding claims, wherein the path forming member (17) is sized to cover most of the said wall of the box (11a) so as to form a liquid path (18) between periphery of the path forming member and the inner bag.
6. A liquid container which comprises:
 - (a) a flexible bag (12) for containing the liquid therein;
 - (b) a mouth (13) fixed to the bag so as to project outwardly of the bag; and
 - (c) a path forming member (17) provided in the bag so as to cover the mouth to maintain a liquid path through the mouth as the bag deforms with removal of liquid.
7. A liquid container according to any one of the preceding claims, wherein the path forming member (17) has a number of projections (19) provided at predetermined intervals, and is accommodated in the bag (12) with the projections (19) directed toward the wall (12a) of the bag (12) so as to form a lattice-like liquid path (20).
8. A liquid container according to claim 7, wherein the path forming member (17) is formed by injection molding, a number of recesses (23) being formed corresponding to the projections (19), at least one opening (23a) to communicate each recess with the lattice-like liquid path (20) being provided.
9. A liquid container according to claim 7, wherein the path forming member (17) is formed by injection molding, a number of recesses (23) being formed corresponding to the projections (19), the recesses being covered with a film member.
10. A liquid container according to any one of the preceding claims, wherein the path forming member (17) has a main liquid opening (21) at a position corresponding to the mouth (13).
11. A liquid container according to claim 10, wherein the path forming member (17) has a plurality of supplementary openings (22) for communicating the lattice-like liquid path (20) with an upper space over the path forming member (17) in the bag.
12. A liquid container according to claim 11, wherein the supplementary openings (22) are provided at crossing points of the lattice-like liquid path.
13. A liquid container according to claim 10, 11 or 12

wherein a circular liquid path is formed around the main liquid opening (32) by projections (36) each having an arched surface.

14. A liquid container according to any one of the preceding claims, wherein the mouth (13) has inside a restricted path so that a liquid with a high viscosity flows out slowly. 5
15. A liquid container according to claim 14, wherein the path is restricted by a plurality of elastic tongue pieces (44) projecting radially inwardly from an inner wall (41c) of the mouth. 10
16. A mouth (40) for a container for containing a liquid with a high viscosity, for allowing liquid to flow into and out of the container and which comprises: 15
(a) a main body (41) to be fixed to the container for containing the liquid and having a restricted liquid flow path (45) inside thereof; 20
and
(b) a cap (43) detachably provided on the mouth to close and open the mouth (40).
17. A mouth according to claim 16, wherein the restricted path (45) is formed of a plurality of elastic tongue pieces (44) projecting radially from an inner wall of the mouth (41c). 25
18. A mouth according to claim 16, wherein the main body (41) has a flange (41a) to be attached to the container and a male screw (41b) provided on outer circumferential surface of the main body, an engaging ring (42) engaging with the male screw whereby the container wall is, in use, between the 30
flange and an end face of the engaging ring (42). 35

40

45

50

55

FIG. 1

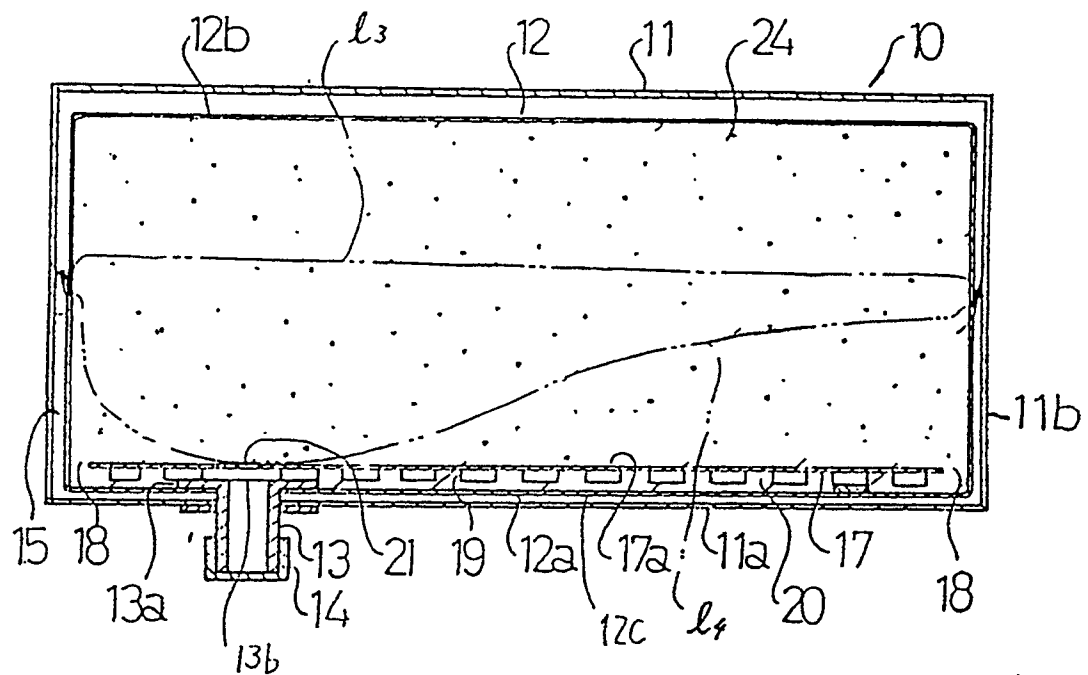


FIG. 2

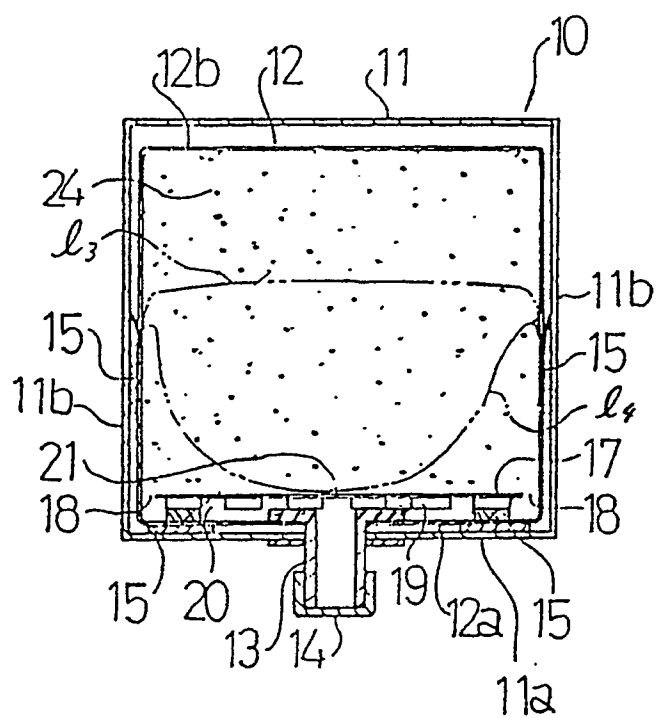


FIG. 3

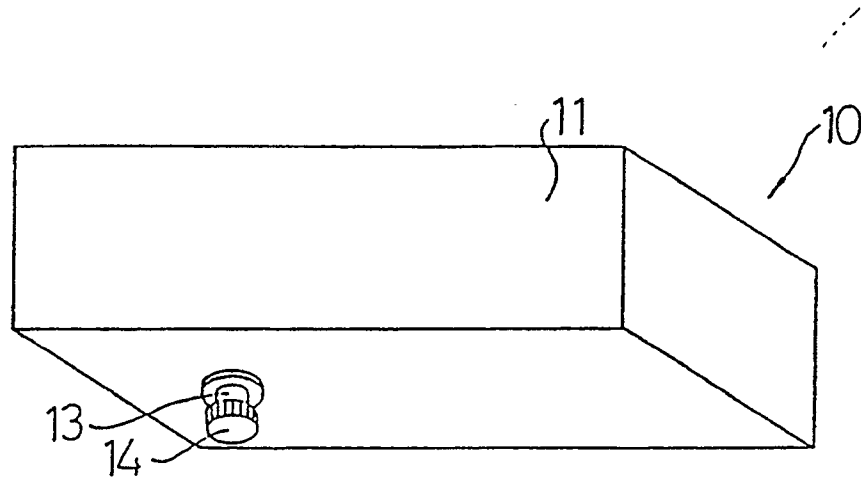


FIG. 4

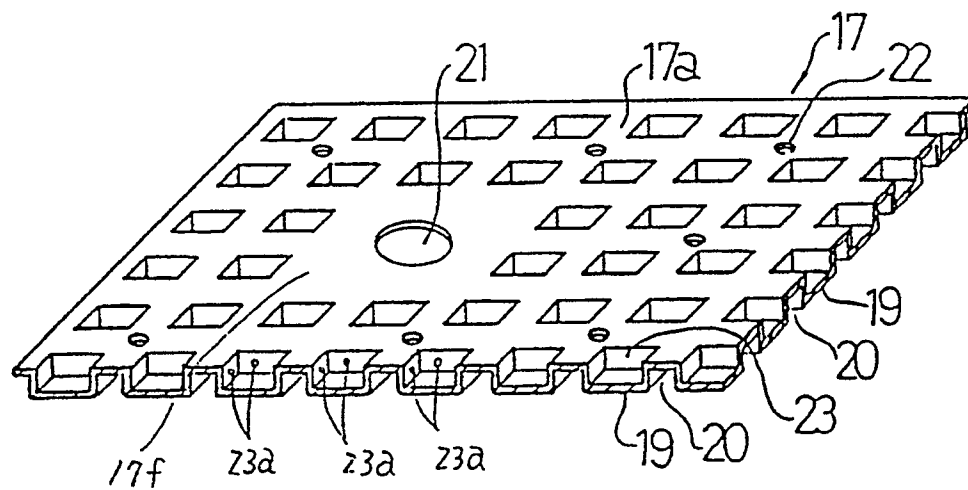


FIG. 5

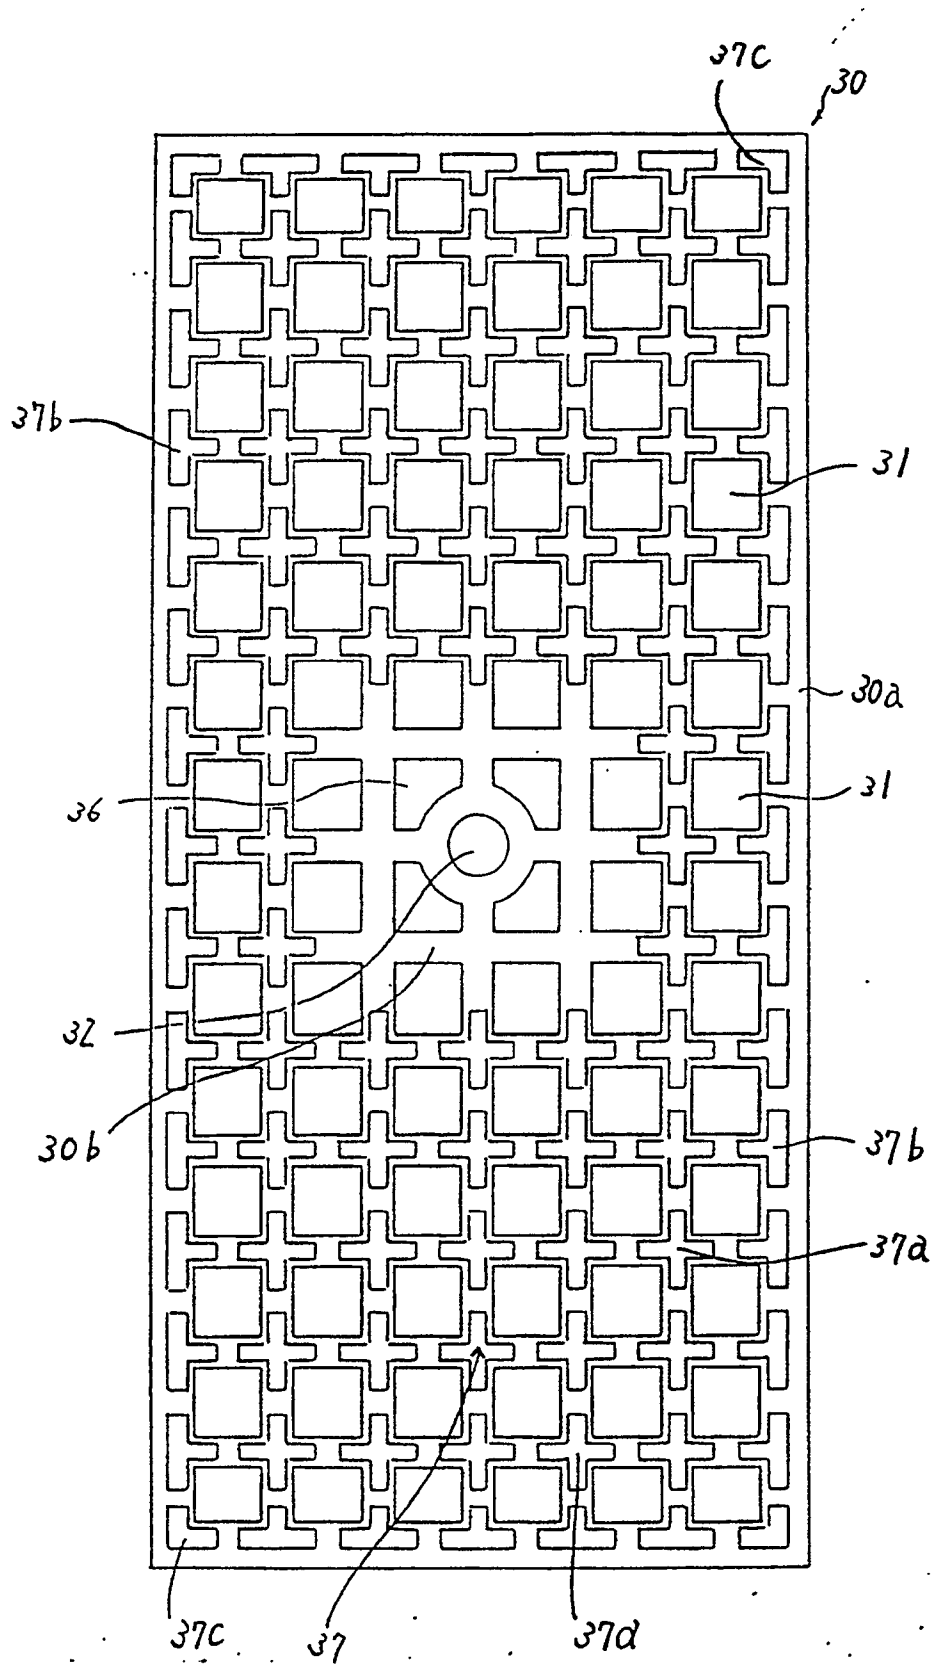


FIG. 6

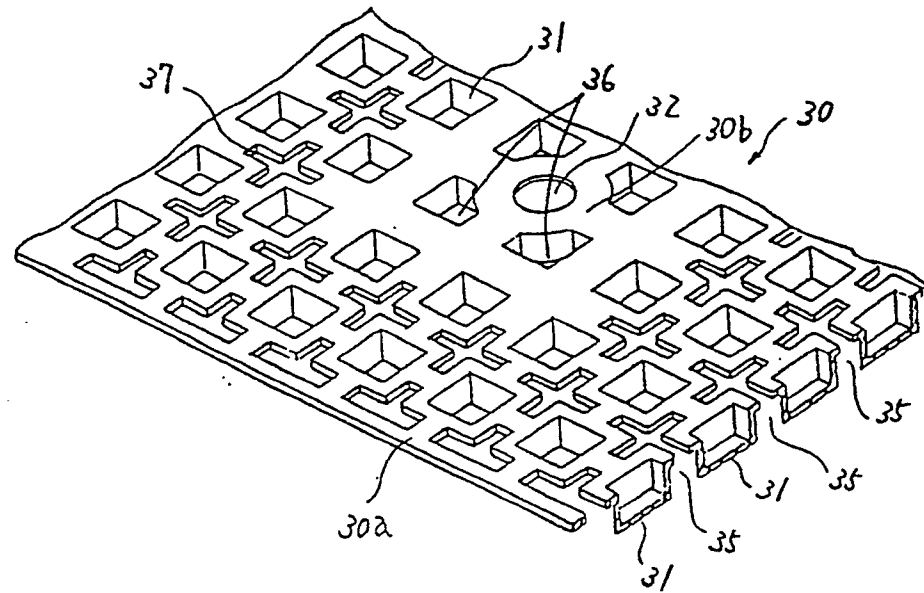


FIG. 8

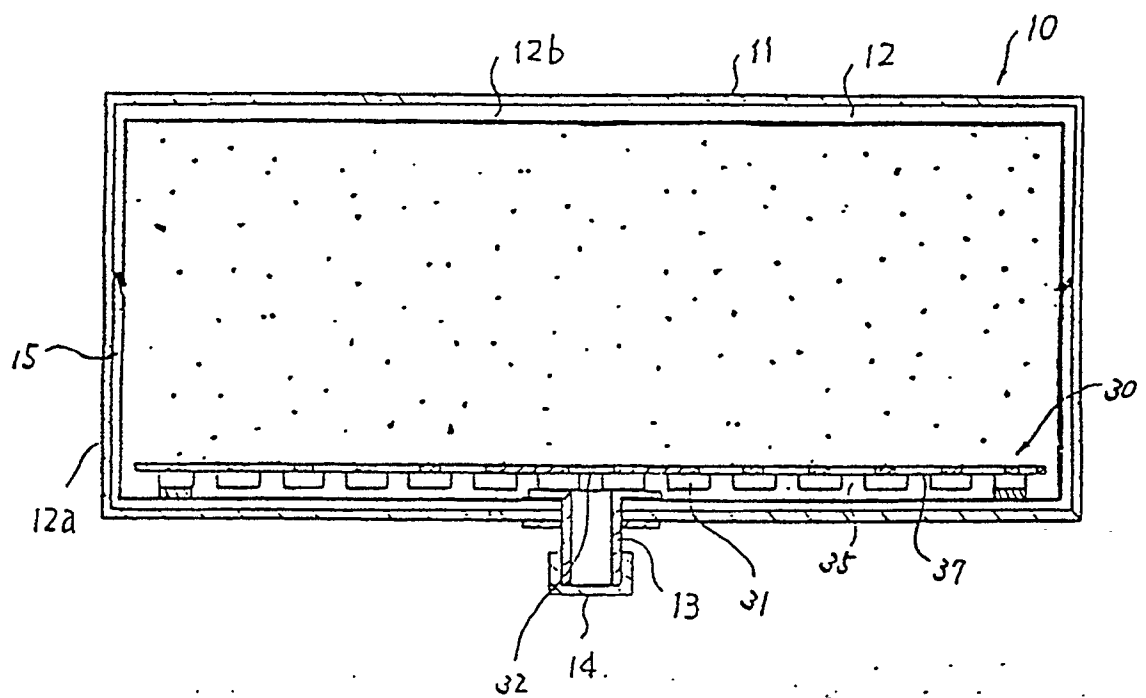


FIG. 7

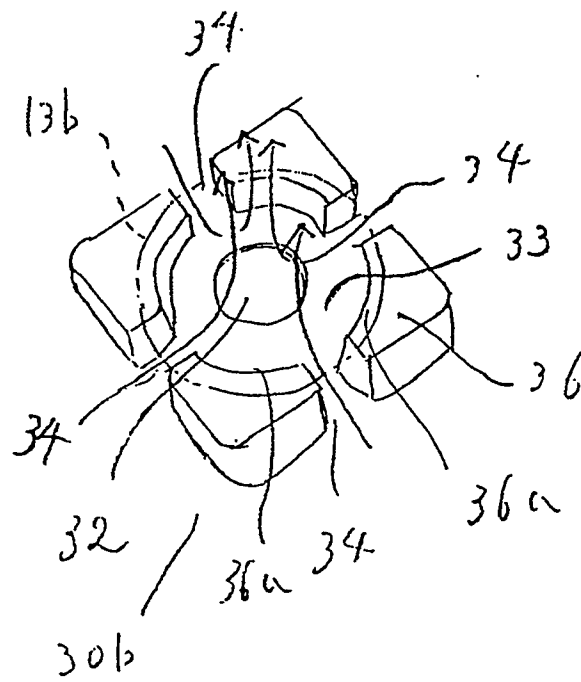


FIG. 9

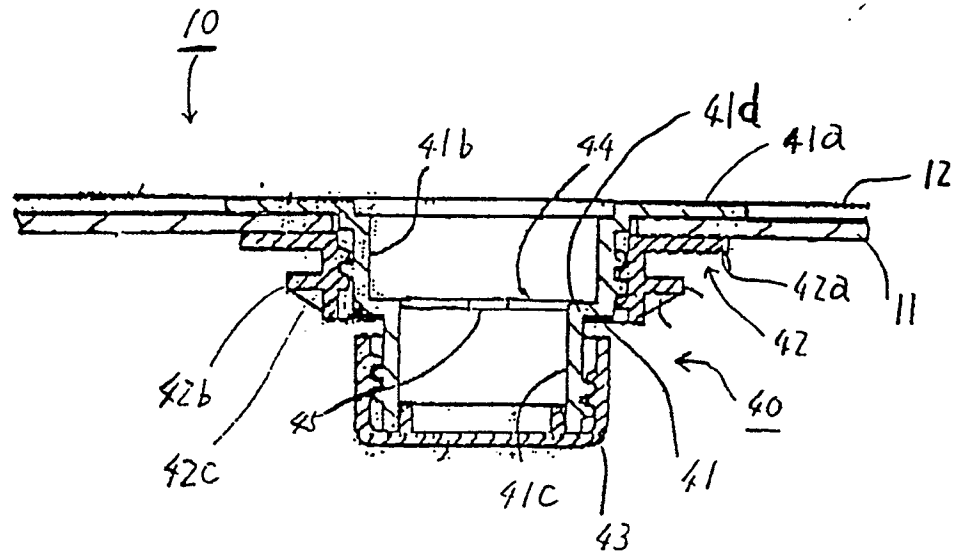


FIG. 10

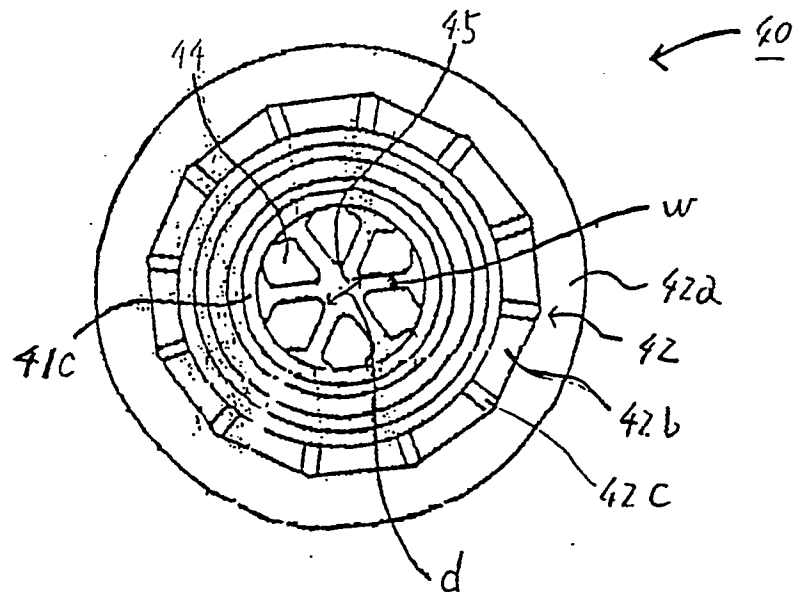


FIG. 11

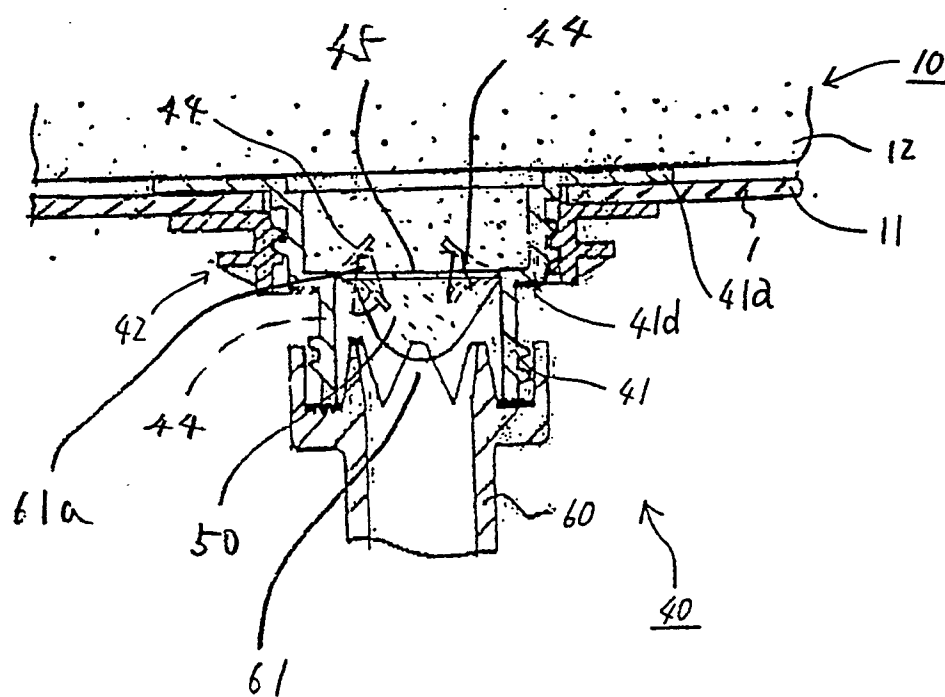


FIG. 12
PRIOR ART

