



EUROPEAN PATENT SPECIFICATION

Date of publication of patent specification :
13.09.95 Bulletin 95/37

Int. Cl.⁶ : **G03D 3/10**

Application number : **91110063.4**

Date of filing : **19.06.91**

Dental x-ray film developing machine.

Priority : **20.06.90 JP 159910/90**
06.11.90 JP 298974/90
08.04.91 JP 160182/91

Proprietor : **NIX COMPANY LTD.**
11-9, Hongo 6-chome
Bunkyo-ku Tokyo 113 (JP)

Date of publication of application :
27.12.91 Bulletin 91/52

Inventor : **Tanaka, Hiroyuki**
52-7, Tomiokanishi 7-chome
Kanazawa-ku, Yokohama, Kanagawa 236 (JP)

Publication of the grant of the patent :
13.09.95 Bulletin 95/37

Representative : **Klingseisen, Franz, Dipl.-Ing.**
et al
Patentanwälte,
Dr. F. Zumstein,
Dipl.-Ing. F. Klingseisen,
Bräuhäusstrasse 4
D-80331 München (DE)

Designated Contracting States :
DE FR GB IT SE

References cited :
DE-A- 1 497 420
FR-A- 1 149 784
US-A- 4 853 729

EP 0 462 592 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The invention relates to a dental X-ray film developing machine according to the preamble of claim 1.

A developing machine of this kind is disclosed in DE-A-1 497 420. A mechanism is provided for automatically engaging and disengaging a film holder with an arm, wherein wires with a film attached thereto are set in advance at predetermined locations. A plurality of radially extending rods are caused to move upwardly so that each wire with a film attached thereto is brought into engagement with hooks formed at the free end portions of the adjacent rods. As a result, the wire is held between the adjacent rods. Downward-movement of the rods releases the wire and film from the rods. The engagement and disengagement is synchronized with the downward- and upward-movements of the rods which cause the film to be immersed in the treatment solution and then pulled out of the treatment solution.

A variety of automatic developing machines has heretofore been proposed in order to perform the development easily without labor, for example, as described in assignee's U.S. Patent 4,853,729 issued August 1, 1989. The automatic developing machine of the above U.S. patent will be described with reference to some of the accompanying drawings.

FIG. 1 is a plan view of the dental X-ray film developing machine. FIG. 2 is a cross-sectional view taken along line II-II of FIG. 1. In these drawings, numeral 1 indicates the developing machine. There are shown a circular bottom wall 2a, a cylindrical outer peripheral wall 2b provided upright from the peripheral edge of the bottom wall 2a, and a cylindrical inner peripheral wall 2c provided at a predetermined interval inside the outer peripheral wall 2b. An annular and groove-like space is formed by the bottom wall 2a, outer peripheral wall 2b and inner peripheral wall 2c. Designated at symbols 3a,3b,3c,3d are partition walls provided radially between the outer peripheral wall 2b and inner peripheral wall 2c. The individual partition walls 3a-3d are arranged at predetermined intervals. owing to the provision of the partition walls 3a-3d, the annular space is divided in four compartments 4a,4b,4c,4d.

Numeral 5 indicates a motor mounted on the bottom wall 2a inside a cylindrical space formed by the bottom wall 2a and inner peripheral wall 2c. The drawings also illustrate a rotary shaft 6 connected to the motor 5 either directly or via a reducing gear unit, not shown, an arm 7 fixed at one end thereof on the rotary shaft 6 and extending radially from the rotary shaft 6, and a suspending portion 7a formed in the opposite, namely, free end of the arm 7. The free end, namely, the suspending portion 7a of the arm 7 is positioned above the annular space and approximately at midpoint between the outer peripheral wall 2b and the inner peripheral wall 2c. Designated at symbols

8a,8b,8c are plugs closing their corresponding discharge openings formed through lower parts of the peripheral outer walls 2b of the respective compartments 4a,4b,4c. Numeral 10 indicates a holder as a film-mounting member, which is adapted to support a dental X-ray film thereon. The structure of the holder 10 will next be described with reference to FIGS. 3(A) and 3(B) which are a plan view of the holder shown in FIG. 2 and a cross-sectional view taken along line III(B)-III(B) of FIG. 3(A), respectively.

The holder 10 is composed of a stem portion 10a, a hole 10b formed through one end portion of the stem portion 10a, and a film-mounting portion 10c formed at the other end portion of the stem portion 10a. The film-mounting portion 10c is bifurcated as is depicted in FIG. 3(A), and slots 10d,10d are formed in inner edges of the bifurcated branches, respectively, as is shown in FIG.3 (B). By inserting both sides of a dental X-ray film F into the corresponding slots 10d,10d from the free end of the film-mounting portion 10c, the dental X-ray film F is supported on the holder 10.

A description will next be made of development processing making use of the developing machine 1 with reference to an operation schematic illustrated in FIG. 4 in which the individual compartments provided in the toroidal arrangement are shown in a manner developed on a planar sheet. Upon development processing, as is illustrated in FIG. 4, the compartments 4a,4b and a following compartment (not shown) are filled with a developer S_1 , a fixer S_2 and a washing liquid (not shown) respectively, but the compartment 4d is left as a space. The exposed X-ray film F is taken out of a dental X-ray film pack and is fitted in the slots 10d,10d of the holder 10 so as to support the film F. As is illustrated in FIG. 2, the hole 10b of the holder 10 is fitted on the hook of the suspending portion 7a of the arm 7 so that the holder 10 is suspended from the free end of the arm 7. As will be described subsequently, the arm 7 is set to assume the position shown in FIG. 1, namely, the position close to the partition wall 3a of the compartment 4a. The dental X-ray film F is therefore immersed in the developer S_1 when the holder 10 is suspended initially from the suspending portion 7a as described above.

When the motor 5 is driven immediately in the above state, the rotary shaft 6 of the motor 5 rotates so that the free end of the arm 7 starts moving approximately along the angular center line of the compartment 4a. As a result, the dental X-ray film F mounted on the film-mounting portion 10c of the holder 10 is also caused to move through the developer S_1 . In the course of this movement, the development of the dental X-ray film F is carried out.

When the dental X-ray film F approaches the partition wall 3b, the film-mounting portion 10c of the holder 10 is brought into contact with the tilted surface 2a₁ formed on the bottom wall 2a of the compartment

4a. As the arm 7 moves, the holder 10 is pivoted upwardly about the suspending portion 7a by the tilted surface 2a₁ and eventually rides on the partition wall 3b in a state as indicated by broken lines. When the arm 7 moves further, the film-mounting portion 10c moves on the partition wall 3b and then rides over the partition wall 3b. At this moment, the holder 10 is allowed to pivot downwardly about the suspending portion 7a, whereby the film-mounting portion 10c is dropped in the fixer S₂ in the compartment 4b to immerse the dental X-ray film F in the fixer S₂. The dental X-ray film F is thereafter caused to move through the fixer S₂ to conduct its fixing as the arm 7 moves.

In exactly the same manner, the dental X-ray film F moves into the compartment 4c so that the dental X-ray film F enters a washing liquid. While moving through the washing liquid, its washing is conducted. The dental X-ray film F then moves from the compartment 4c into the compartment 4d. While the dental X-ray film F passes through the compartment 4d, any washing liquid still remaining on the surfaces of the dental X-ray film F are allowed to drop.

After the film F has passed through the compartment 4d, the holder 10 is detached from the arm 7 and the dental X-ray film F is removed from the film-mounting portion 10c of the holder 10. The development processing of the dental X-ray film F has now been completed, so that an X-ray picture of a tooth is shown there.

The above developing machine 1 is suitable for easily developing the exposed dental X-ray film F by a dentist or his assistant in his office. Desirably, the developing machine 1 therefore has small overall dimensions and can be handled easily.

With the construction of the above developing machine 1, replacement of the processing solutions requires advance placement of catch pans below the plugs 8a-8c respectively, and, after pulling out the plugs 8a-8c, it is necessary to wait until the processing solutions are discharged completely. The handling of the developing machine is therefore rather cumbersome.

When development processing is performed using the above developing machine 1, a dentist or the like is required to pick up the holder 10, to fit the hole 10b on the suspending portion 7a of the arm 7 and, after completion of the development, to detach the holder 10 from the arm. The developing machine 1 therefore requires substantial labor in its handling. Further, the developing machine 1 requires stopping of the arm 7 after every full turn to detach the holder 10 with the exposed film F from the arm 7 and then to suspend from the arm 7 another holder with an unexposed film mounted thereon. The developing machine 1 cannot therefore be rotated continuously, leading to the drawback that the work efficiency of development processing is poor.

An object of the present invention is to overcome

the above-described problems or drawbacks of the conventional art and to provide a dental X-ray film developing machine which permits easy replacement of processing solutions and automated, continuous development processing.

This object is achieved by the features in the characterizing part of claim 1. The tanks are removably arranged along a peripheral wall of the housing. One of the tanks contains a developer, and another one of the tanks contains a final processing solution. The film-holder-inserting portion is located before the developer-containing tank relative to the turning direction of the arm so that the film holder with the film mounted thereon can be positioned at a point where the film holder can be brought into engagement with the arm which is being driven. The film-holder-detaching means serves to detach the film holder from the arm and is located after the final-processing-solution-containing tank relative to the turning direction of the arm.

When the motor is driven, the arm is caused to progressively rotate and, at the film-holder-inserting portion, engages the film holder. The arm continuously rotates with the film holder kept in engagement with the arm, so that the film holder is separated from the film-holder-inserting portion and is held in a state suspended from the arm. As the arm rotates, the film mounted on the film holder successively passes through the developing tank and a fixing tank so that development processing is carried out. When the rotation of the arm proceeds further, the film holder is brought into contact with the film-holder-detaching means and is detached from the arm, whereby the film holder drops onto a predetermined position. When the processing solutions have been deteriorated and their replacement by fresh ones is needed, the tanks are removed and tanks containing fresh processing solutions, respectively, are placed instead.

The dental X-ray film developing machine according to the present invention permits automated attachment and detachment of the film holder to and from the arm which is rotating and moving. The labor and time required for the attachment and detachment can therefore be obviated. In addition, the handling has been much simplified. Since the attachment and detachment of the film holder can be automatically conducted in a continuous manner as mentioned above, it is no longer necessary to stop the rotation of the arm for the attachment and detachment of the film holder so that the work efficiency of developing processing can be improved. Further, the removable arrangement of the tanks in the housing can facilitate replacement of processing solutions.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present invention will become appa-

rent from the following description and the appended claims, taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a plan view of a conventional developing machine;
 FIG. 2 is a cross-sectional view taken along line II-II of FIG. 1;
 FIG. 3(A) is a side view of a holder;
 FIG. 3(B) is a cross-sectional view taken along line IIIB-IIIB of FIG. 3(A);
 FIG. 4 is an operation schematic of the developing machine shown in FIGS. 1 and 2;
 FIG. 5 is a side view of a dental X-ray film developing machine according to a first embodiment of the present invention;
 FIG. 6 is a plan view of the developing machine of FIG. 5;
 FIG. 7 is a perspective view of one of tanks shown in FIG. 6;
 FIG. 8 is a cross-sectional view taken along line VIII-VIII of FIG. 7;
 FIG. 9 is a cross-sectional view of the tank of FIG. 7, in which the tank is in a state fixed in the developing machine;
 FIG. 10 is a plan view of fixing portions of the tank of FIG. 7;
 FIG. 11 is a cross-sectional view taken along line XI-XI of FIG. 10;
 FIG. 12 is a cross-sectional view taken along line XII-XII of FIG. 10;
 FIG. 13 is a fragmentary perspective view of another specific example of the tank shown in FIGS. 5 and 6;
 FIG. 14 is a cross-sectional view of the tank of FIG. 13;
 FIG. 15 is a plan view of a film holder suitable for use in the developing machine of FIGS. 5 and 6;
 FIG. 16(A) is a side view of the film holder of FIG. 15;
 FIG. 16(B) is similar to FIG. 16(A) but illustrates another example of film holder;
 FIG. 17 is a side view of the film holder of FIG. 15 as viewed in the direction of arrow XVII in FIG. 15;
 FIG. 18 is a plan view of a film-holder-inserting box provided in the developing machine of FIG. 5 and 6;
 FIG. 19 is a cross-sectional view taken along line XIX-XIX of FIG. 18;
 FIG. 20 is a cross-sectional view of a film-holder-detaching portion provided in the developing machine of FIGS. 5 and 6;
 FIG. 21 is an operation schematic of the film-holder-detaching portion depicted in FIG. 20;
 FIG. 22 is a plan view of another film holder suitable for use in a dental X-ray film developing machine according to a second embodiment of the present invention;
 FIG. 23 is a side view of the film holder of FIG. 22;

FIG. 24 is a plan view of a film-holder-inserting box provided in the developing machine according to the second embodiment of the present invention;

FIG. 25 is a cross-sectional view taken along line XXV-XXV of FIG. 24;

FIG. 26 is a fragmentary cross-sectional view of the developing machine according to the second embodiment of the present invention;

FIG. 27 is a plan view of a cam shown in FIG. 26; and

FIG. 28 is a cross-sectional view of a film-holder-detaching portion illustrated in FIG. 26.

DETAILED DESCRIPTION OF THE INVENTION AND PREFERRED EMBODIMENTS

Referring first to FIGS. 5 and 6, the dental X-ray film developing machine according to the first embodiment of the present invention will be described. In each of these drawings, numeral 19 indicates the developing machine. There are also shown a film-mounting and placing portion 20, a development processing portion 30 and a take-out portion 40, all of which have a cylindrical shape. The film-mounting and placing portion 20 is formed of a housing 21, and includes two holes 22 opened in the housing 21, a film-mounting stage 23 and a film-placing opening 24. It is to be noted that only one of the holes 22 is visible in FIG. 5 and the other hole is formed on an opposite side and is hence not visible in FIG. 5. The development processing portion 30 is formed of a housing 31 and includes a motor 32, a motor cover 33, a motor shaft 34, an arm 35 connected to the motor shaft 34 and tanks 36. Further, the take-out portion is formed of a housing 41, and includes a film transfer path 42 and a box 43 having a handle 44. Designated at numerals 45, 46 and 47 are a film-holder-detaching portion, a detaching projection, and an opening of the film transfer path 42, respectively. Incidentally, letter H indicates a heater pad fixed on the motor cover 33.

Details of the construction of each tank in the first embodiment shown in FIGS. 5 and 6 will be described first with reference to FIGS. 7, 8 and 9, in which numeral 36 indicates the tank. The tank contains a developer, a fixer, a washing liquid or the like (a developer S_1 in FIG. 8). Designated at numeral 361 is a cover film closing an opening of the tank 36. The cover film is peelably bonded to an upper face of an edge of the opening. Symbols 361a, 361b indicate tabs formed at both ends of the cover film 361 to facilitate its peeling.

As is apparent from FIG. 7, the tank 36 is constructed in a curved shape. The radius of curvature of the tank substantially conforms with that of the housing 31. As is illustrated in FIG. 9, the width W of the tank 36 is set at a dimension much smaller compared with the depth d of the tank 36. Further, design-

nated at numerals 311 and 312 in FIG. 9 are a bottom wall of the housing 31 and a tank-fixing, upright wall extending upright from the bottom wall 311, respectively. In FIG. 7, symbols 36a₁, 36b₁ are lugs which are provided on lower parts of the tank 36 and are used to fix the tank 36. As is clearly envisaged from FIG. 9, similar lugs are provided on an opposite wall of the tank 36. As will be described subsequently, owing to the provision of these lugs, insertion of the tank 36 between the housing 31 and the upright wall 312 makes it possible to fix the tank 36 in a state anchored on the housing 31 as shown in FIGS. 5 and 6. When a need arises for the replacement of the processing solution during the use, it is only necessary to take out the tank 36, to fix another tank with fresh processing solution filled therein, to hold the tab 361a or 361b of the cover film 361 of the latter tank, and then to peel off the cover film to expose the processing solution.

The fixing mechanism for the tank 36 will next be described with reference to FIGS. 10 to 12, in which numerals 31, 311 and 312 indicate the above-described housing, bottom wall and upright wall, respectively. Designated at symbols 31a₁, 31b₁ are vertical grooves formed in an inner wall of the housing 31, while symbols 31a₂, 31b₂ indicate horizontal grooves which, as is illustrated in FIG. 12, are formed in continuation with the vertical grooves 31a₁, 31b₁ and extend at right angles relative to the vertical grooves 31a₁, 31b₁, respectively. Similarly, symbols 312a₁, 312b₁ designate vertical grooves formed in an inner surface (as viewed from the side of the tank) of the upright wall 312 while symbols 312a₂, 312b₂ indicate horizontal grooves formed at right angles relative to the vertical grooves 312a₁, 312b₁, respectively. Designated at symbols 31a₃, 312a₃ are holding slots formed in upper edges of the housing 31 and the upright wall 312.

To fix the tank 36, the tank 36 is inserted between the housing 31 and the upright wall 312 while the four lugs of the tank 36 are maintained in engagement with their corresponding vertical grooves 31a₁, 31b₁, 312a₁, 312b₁. When the tank 36 has reached the bottom, the tank 36 is pushed in the direction of arrow A in FIG. 10 so that the respective lugs are caused to enter their corresponding horizontal grooves 31a₂, 31b₂, 312a₂, 312b₂. This state is shown in cross-section in FIG. 9. A suitable holding rod (not shown) is finally fitted in the holding slots 31a₃, 312a₃, whereby the tank 36 is prevented from moving in a direction opposite to arrow A and is hence arranged in a state fixed at the exact position. After the tank 36 has been positioned and fixed as described above, the cover film 361 is pulled upwards at either one of the tabs so that the cover film 361 is peeled off from the tank 36. As a result, the processing solution in the tank 36 is exposed to permit entry of the film holder therein. Removal of the tank 36 is carried out by an operation opposite to the above-described fixing operation.

FIGS. 13 and 14 illustrates another specific ex-

ample of the tank fixing mechanism, in which elements either identical or equivalent to certain elements shown in FIGS. 7 and 9 are identified by like reference numerals or symbols and their description is omitted herein. Further, in FIGS. 13 and 14, elements corresponding to certain elements shown in FIGS. 7 and 9 are identified by like reference numerals or symbols plus a prime ('').

Designated at symbols 36a₁', 36a₂' are lugs. Unlike the lugs 36a₁, 36a₂ in the above example, these lugs 36a₁', 36a₂' are provided on upper parts of the tank 36. Symbols 31P, 312P are flanges formed on upper ends of the housing 31 and upright wall 312, respectively. Symbols 31a₂', 312a₂' designate horizontal grooves defined by the flanges 31P, 312P, respectively. Although not shown in the drawings, each of the flanges 31P, 312P defines similar vertical grooves to those depicted in FIGS. 10-12.

The specific example shown in FIGS. 13-14 is different from the preceding example only in that the lugs 36a₁', 36a₂' are formed on the upper parts rather than the lower parts of the tank 36 and the vertical grooves and horizontal grooves are not directly formed in the housing 31 and the upright wall 312 but are formed in the flanges 31P, 312P on their upper ends. By the flanges 31P, 312P, the tank 36 is kept suspended from the flanges 31P, 312P when arranged and fixed in the developing machine. The manner of arrangement and fixing of the tank in this specific example is the same as the preceding example so that its description is omitted.

A description will next be made of film holders suitable for use in the developing machine according to the first embodiment. These film holders correspond to the conventional holder 10 depicted in FIGS. 3(A) and 3(B). In FIGS. 15, 16(A), 16(B) and 17, numeral 50 indicates the film holders. There are also illustrated a stem portion 51 of each film holder, a hook portion 52 formed at one end of the stem portion 51, and film-holding portions 53a, 53b extending out in the form of bifurcated branches from the other end of the stem portion 51. Designated at symbols 54a, 54b are free end portions of the individual film-holding portions 53a, 53b. Incidentally, the stem portion 51 is inclined relative to the film-holding portions 53a, 53b and protrudes out by a predetermined distance beyond an imaginary longitudinal axis extending through either one of the film-holding portions 53a, 53b (the film-holding portion 53b in the illustrated example). Both the film holders 50 are bent as a whole as illustrated in FIGS. 16(A) and 16(B). Their radius r of curvature is the same as that of the housing 31 and tank 36. Film-holding claws 55a₁, 55a₂, 55a₃ are formed at the free end 54a as shown in FIGS. 15 and 17. By these claws, the film F is held on the film holder 50. Similar film-holding claws are formed at the free end 54b and also at base portions of the respective film-holding portions 53a, 53b. Symbol 51a which appears in FIG. 16(B) is

a thin-walled portion formed between the stem portion 51 and the film-holding portions 53a,53b. Where the width W (see FIG. 9) of the tank 36 is narrow and/or the radius of curvature of each tank 36 is small, movement of the film holder 50 in the tank 36 may press the film holder against an inner wall of the tank 36 so that smooth movement of the film holder 50 may be prevented. The thin-walled portion 51a is formed to avoid such a trouble. The film holder 50 has flexibility as its thickness is small at the thin-walled portion 51a. Even when the film holder 50 is pressed against the inner wall of the tank 36, the film holder 50 is allowed to flex at the thin-walled portion 51a so that movement of the film holder 50 is not prevented.

The film holder 50 with the film F held thereon is then placed in the film-placing opening 24 shown in FIGS. 5 and 6 and its hook portion 52 engages the arm 35 which is connected to the motor shaft 34 and is being rotated. As a result, the film holder 50 advances through the tanks 36 so that the film F held thereon is developed. At the film-holder-detaching portion 45 shown in FIG. 6, the engagement between the film holder and the arm 35 is released at the film holder take-out portion 45 illustrated in FIG. 6. The film holder is then taken out of the box 43.

Referring next to FIGS. 18 to 21, a description will hereinafter be made of the mechanism for the engagement/disengagement between the film holder 50 and the arm 35.

A film-holder-inserting box shown in FIGS. 18 and 19 forms the film-holder-placing opening 24 of the film-mounting and placing portion 20 illustrated in FIGS. 5 and 6, while a film-holder-detaching portion depicted in FIGS. 20 and 21 corresponding to the film-holder-detaching portion 45 shown in FIG. 6.

The construction of the film-holder-inserting box will be described first with reference to FIGS. 18 and 19, in which numeral 240 indicates the film-holder-inserting box 240. The film-holder-inserting box 240 is constructed of the housing 21 as one of side walls, a side wall 241 as the other side wall, said side wall opposing the housing 21 and having the same curved shape as the housing 21, a wall 242 connecting the side wall 241 and the housing 21 to each other, guide walls 243a,243b, a bottom wall 244, a film-holder-placing opening 245 formed in an upper part, and a cut-off portion 264 formed by cutting off the bottom wall 244. In FIG. 19, designated at numeral 35 is an arm which can undergo similar rotation as that depicted in FIGS. 5 and 6, and arrow B indicates the direction of movement of the arm 35. Numeral 50 indicates the film holder shown in FIGS. 15-17. In the illustrated embodiment, three film holders are shown in a state stacked one over another.

The construction of the film-holder-detaching portion will next be described with reference to FIGS. 20 and 21, in which elements identical to those shown in FIGS. 5 and 6 are identified by like numerals or

symbols. The film-holder-detaching portion 45 is constructed of the detaching portion 46 provided on the housing 31 of the development processing portion 30, the opening 47 formed through the bottom wall 311 of the housing 31 at a location underneath the detaching portion 46, and the transfer path 42 provided inside the housing 41 of the take-out portion 40 and communicating the opening 47 to the box 43. Designated as numeral 421 are guide walls arranged on opposite sides of the transfer path 42, while designated as numeral 422 is a light-shielding plate covering the transfer path 42. The detaching projection 46 is positioned at a predetermined point in the range of transfer of the film holder after completion of the development processing.

Operation of the dental X-ray film developing machine according to the first embodiment of the present invention will next be described together with operation of the development processing. Upon development processing, the developer tank 36 and the fixer tank 36 are arranged along the housing 31 as illustrated in FIG. 6. Arrangement and positioning of the respective tanks 36 and peeling-off of the cover films 361 have already been described above. In this state, an exposed dental X-ray film pack is inserted in the housing 21 of the film-mounting and placing portion 20. An operator inserts both hands into the housing through the two holes 22 formed in the housing 21 (an arm cover for shielding light is provided between each hole 22 and its corresponding hand). The X-ray film F is taken out of the dental X-ray film pack and, using the film mounting stage 23, the X-ray film F is mounted on the film holder 50. The film holder with the film F mounted thereon is placed in the direction indicated in FIG. 19 into the film-holder-inserting box 240 through the film-holder-placing opening 245. The film holder 50 so placed is supported on the bottom wall 244 so that the hook portion 52 downwardly protrudes from the cut-off portion 246 and is located in a path of the arm 35. Incidentally, in the case illustrated in FIG. 19, three film holders 50 are inserted one over another.

When the motor 32 is driven and the arm 35 progressively advances in direction indicated by arrow B in FIG. 19, the arm 35 is brought into engagement with the hook portion 52 of the film holder 50, said hook portion 52 protruding in the advancing path of the arm 35, so that the arm 35 continues its advancing movement while dragging the film holder 50. This movement of the film holder 50 takes place while slightly pushing the overlying, other film holders 50 upwardly. As soon as the free end 54b of the film-holding portion 53b separates from the bottom wall 244, the film holder 50 turns counterclockwise about the arm 35 whereby the film holder 50 is brought into a state such that the film holder 50 is suspended at the hook portion 52 from the arm 35. As the arm 35 advances, the film holder 50 passes through the individual tanks 36

as in the conventional developing machines so that development and fixing are carried out successively. Since the film holder 50 is curved as described above, it can smoothly pass through the tanks 36 without any problem despite of the curved configuration of the tanks even if the tanks 36 has a small width. After the film holder 50 has been pulled out of the film-holder-inserting box 240 by the arm 35 as described above, the next film holder 50 which was sitting on the film holder 50 so pulled out is positioned on the bottom wall 244 and awaits arrival of the next arm 35.

When the development processing has been completed and the film holder 50 has reached the film-holder-detaching portion 45, the hook portion 52 is brought into contact with the detaching projection 46 fixed on the housing 31 as shown in FIG. 21. As the arm 35 advances further, the engagement between the film holder 50 and the arm 35 is released because the hook portion 52 is maintained in contact with the detaching projection 46. Accordingly, the film holder 50 drops by its own weight and slides down into the box 43 through the opening 47 and the transfer path 42 (see FIG. 20). Filling of water in the box 43 permits omission of the washing tank. The box 43 is drawn out and the film holder 50 is taken out. The X-ray film F is then removed from the film holder 50. The development processing of the X-ray film F has now been completed so that an X-ray picture of a tooth is shown there.

It is to be noted that inclination of the step portion of the film holder is not essential. When the bottom wall of the film-holder-inserting box is constructed aslant, the hook portion is still allowed to extend into the path of movement of the arm.

As has been described above, the present embodiment permits automated attachment and detachment of each film holder to and from the rotating arm. This has made it possible to save the labor and time required for the attachment and detachment, and has also facilitated the handling substantially. Since the attachment and detachment of each film holder can be conducted automatically as described above, it is no longer required to stop rotation of the arm for the purpose of such detachment and attachment so that the work efficiency of development processing can be improved. Further, the curved configurations of the tanks and film holders allow to reduce the overall dimensions and the use of the removable tanks facilitates replacement of the processing solutions. Furthermore, the opening of each tank is closed by a cover film so that the tank itself can be handled with ease and its processing solution can be protected from deterioration.

In the above-described embodiment, the arm 35 is fixed on the shaft 34 of the motor 32 and the arm 35 engages the hook portion 52 of the film holder 50. The engagement of the arm 35 and the film holder 50 is however not limited to the construction described

above but can be achieved by other constructions. For example, the arm 35 can be constructed in such a way that the arm can selectively extend or retreat in the radial direction of the cylindrical housing 31, the arm 35 is driven with its free end fitted in a through-hole formed in one end of the film holder 50 during development processing, and the free end of the arm 35 is released from the through-hole after completion of the development processing. This construction will hereinafter be described. Firstly, the shape of each film holder useful for the above construction will be described with reference to FIGS. 22 and 23, and the structure of a film-holder-inserting box also useful in the above construction will be described with reference to FIG. 24 and 25. Thereafter, a detaching mechanism for the arm 35 and the film holder 50 will be described with reference to FIGS. 26 and 27, and the structure of a releasing portion for the arm 35 will be described with reference to FIG. 28.

Referring now to FIGS. 22 and 23, elements either identical or equivalent to those shown in FIGS. 15, 16(A) and/or 16(B) are identified by like numerals or symbols and their description is omitted herein. Numeral 50 indicates a film holder. Designated at symbol 52H is a through-hole formed in a free end of a stem portion 51. There are also shown grooves 56 formed in film-holding portions 53a, 53b and a stem portion 51, respectively. Similarly to FIG. 16(B), depending on the width of each tank and the length of its radius of curvature, a thin-walled portion can be formed in the stem portion 51 on the side of the film-holding portions 53a, 53b although this thin-walled portion is omitted in the drawings. The film holder 50 with a film F mounted thereon is placed in the above-described film-placing opening 24. The arm 35 which is rotating together with the motor shaft 34 enters the through-hole 52H of the film holder 50, whereby the film holder 50 is caused to pass through the individual tanks 36 while being dragged by the arm 35. As a result, the film F is subjected to development processing. Finally, the arm 35 is pulled out at the film-holder-detaching portion 45 and the film holder 50 is then taken out of the box 43.

A description will next be made of the film-holder-inserting box into which the film holder 50 is inserted through the film-placing opening 24 to place the film holder 50 therein. Referring to FIGS. 24 and 25, elements either identical or equivalent to those shown in FIGS. 18 and 19 are indicated by like numerals or symbols and their description is omitted herein. Designated at numeral 240 is the film-holder-inserting box. Designated at numerals 247 are ribs on which the grooves 56 of the film holder 50 shown in FIG. 23 are fitted. In the embodiment depicted in FIG. 25, three film holders 50 are stacked one over another. In this case, the grooves 56 of only the lowermost film holder 50 are not fitted on the ribs 247. Further, the through-hole 25H of the lowermost film holder 50 is

exposed into the interior of the housing 31.

With reference to FIGS. 26 and 27, a description will now be made of the mechanism for inserting the arm 35 into the through-hole 52H of the film holder 50 and pulling it out. Elements either identical or equivalent to those shown in FIGS. 5-19 are indicated by like numerals or symbols and their description is omitted herein. Symbol 34B indicates a bearing for the shaft 34 of the motor 32. An arm support 34H is constructed in the form of a disk. The arm support 34H is located above the motor cover 33 and is fixed on the shaft 34 of the motor 32, whereby the arm support 34H rotates together with the shaft 34. Designated at symbols 34H₁, 34H₂, 34H₃ are pendants which support the arm 35 underneath the arm support 34H. These pendants 34H₁, 34H₂, 34H₃ are arranged at radial intervals as viewed in the direction of the radius of the arm support 34H. Although not shown in the drawings, plural set of such pendants are provided at predetermined angular intervals. Each of the pendants 34H₁, 34H₂, 34H₃ supports the arm 35 movably in the direction of the radius of the arm support 34H.

There are also illustrated a spring seat 351 formed on the arm 35, a rod 352 provided on the arm 35, a roller 353 attached to a free end portion of the rod 352, and a spring 354 arranged between the spring seat 351 and the pendant 34H₂. The rod 352 and the roller 353 together make up a cam follower.

Symbol 33C indicates a cam formed on the upper surface of the motor cover 33. The configuration (contour) of the cam 33C is illustrated in FIG. 27. The cam 33C includes an arm-retreating region 33C₁, an arm-extending region 33C₂ and a maximum spring-compressing region 33C₃.

Operation of this embodiment will next be described. When the motor 32 rotates, the arm support 34H also rotates. Thus, the arm 35 supported on the arm support 34H also rotates. As a result of the rotation of the arm 35, the roller 353 also rotates and moves while being maintained in contact with the cam 33C under the biasing force of the spring 354. Assume that the roller 353 is now located in the region 33C₃ of the cam 33C. Since the roller 353 has moved toward the shaft 34 by compressing the spring 354, the arm 35 is located at the most retreated position (i.e., pulled-in position). As the rotation proceeds further, the roller 353 enters the region 33C₂ of the cam 33C so that the roller 353 moves away from the shaft 34. As a consequence, the arm 35 is allowed to extend leftwards as viewed in FIG. 26. The region 33C₂ is set such that, when the arm 35 is extended as described above, the position of the free end of the arm 35 exactly coincides with the position of the through-hole 52H of the lowermost film holder 50 placed in the film-holder-inserting box 240.

As a result of insertion of the arm 35 into the through-hole 52H, the film holder 50 is brought into engagement with the arm 35 and is moved together

with the arm 35. As the arm 35 advances, the film holder 50 passes through the processing solutions in the individual tanks as in the conventional machine so that developing, fixing and washing are conducted. Since the film holder 50 is curved as described above, the film holder 50 can smoothly pass through the tanks 36 without problem despite of their curved configuration even when these tanks 36 have a narrow width. The film holders 50 stacked in the film-holder-inserting box 240 successively move downwards as the lowermost film holder 50 is brought into engagement with the arm 35 and is pulled out. Even when the lowermost film holder 50 is pulled out, the remaining film holders 50 however do not tilt owing to the fitting of the grooves 56 on the ribs 247. As a result, the remaining film holders 50 can also be pulled out smoothly. After the lowermost film holder 50 has been pulled out, the next film holder awaits arrival of the next arm 35.

When the development processing has been completed and the roller 353 has entered the region 33C₁ of the cam 33C, the roller 353 again moves toward the shaft 34 and, as a consequence, the arm 35 also moves rightwards as viewed in FIG. 26. As a result, the arm 35 is separated from the through-hole 52H of the film holder 50 so that the film holder 50 drops. The detaching mechanism for the film holder 50 will next be described with reference to FIG. 28.

In FIG. 28, elements identical to those depicted in FIGS. 5, 6, 26 and 27 are identified by like numerals or symbols and their description is omitted herein. In FIG. 28, there are shown the bottom wall 311 of the housing 31, a detaching wall 312 extending upright from a part of the bottom wall 311, a space 313 defined between the detaching wall 312 and the housing 31, the bottom wall 411 of the housing 41, and the light-shielding plate 422 covering the transfer path 42.

The detaching mechanism is constructed such that, when the development processing has been completed and the roller 353 has entered the region 33C₁ of the cam 33C, the film holder 50 kept in engagement with the arm 35 is located inside the space 313. When the arm moves rightwards in this state as described above, the film holder 50 is stopped by the detaching wall 312 and the arm 35 is pulled out of the through-hole 52H. As a result, the film holder 50 drops by its weight and slides down into the box 43 through the through-hole 52H and the transfer path 42. Filling of a washing liquid in the box 43 permits omission of the washing tank. The box 43 is drawn out and the film holder 50 is taken out. The X-ray film F is then removed from the film holder 50. The development processing of the X-ray film F has now been completed so that an X-ray picture of a tooth is shown there.

In the description of the second embodiment described above, the arm support was formed in a disk-

like shape by way of example. It may be formed in any shape as long as the arm can be supported. For example, the arm support may be rods fixed on the shaft of the motor, the number of said rods being equal to the number of arms. It is not essential to form each film folder in such a curved configuration. It is not absolutely necessary to provide the cam on the motor cover. An additional plate can be provided to support the cam. Further, it is not essential to use the roller as the member maintained in contact with the cam. Any suitable contact member (i.e., cam follower) can be used.

The dental X-ray film developing machine according to the second embodiment can bring about the same advantages as the developing machine of the first embodiment and, in addition, can also bring about the advantage that the engagement between the arm and the film holder can be ensured further.

In the above description of the first and second embodiments, three film holders were placed one over another in the film-holder-inserting box, by way of example. The film-holder-inserting box can however be formed to place only one film holder or, depending on the height of the housing 31, four or more film holders. Each tank was formed with substantially the same radius of curvature as the tank, by way of example. The configuration of each tank is however not necessary limited to it. Each tank may have a straight portion as long as its width permits.

Claims

1. A dental X-ray film developing machine having a housing (21,31,41) with a symmetry axis, a motor (32) fixed on the housing, an arm (35) rotatably driven by the motor around said symmetry axis, and a film holder (50) for being brought into detachable engagement with the arm (35) whereby development processing of a film (F) mounted on the film holder (50) is conducted while the film holder (50) makes a full turn within the housing (21,31,41), comprising:

a plurality of tanks (36) arranged along a peripheral wall of the housing (21,31,41), one of said tanks containing a developer, and another one of said tanks containing a final processing solution;

a film-holder-inserting portion (240) located before the developer-containing tank (36) relative to the turning direction of the arm (35) so that the film holder (50) with the film (F) mounted thereon can be positioned at a point where the film holder (50) can be brought into engagement with the arm (35) which is being driven; and

a means (45,33C₁) for detaching the film holder (50) from the arm (35), said film-holder-detaching means being located after the final-

processing-solution-containing tank (36) relative to the turning direction of the arm (35), characterized in that the housing (21,31,41) is cylindrical, in that the tanks (36) are removably arranged, and in that the film-holder-insertion portion (240) is arranged to bring the film holder (50) into engagement with the arm (35) by only rotating the arm around said symmetry axis.

2. The machine of claim 1, wherein a side wall of each tank (36), said side wall opposing the peripheral wall of the housing (21,31,41) when arranged in the developing machine, is formed with a radius of curvature conforming with that of the peripheral wall of the housing, and the width (W) of tank (36) is much smaller than the depth (d) of the tank.

3. The machine of claim 2, wherein each tank (36) has an opening which is covered by a removable film (361).

4. The machine of claim 2, wherein each tank (36) is attached to the housing (21,31,41) by means of a tank-positioning structure formed on a side of the housing (21,31,41).

5. The machine of claim 4, wherein the tank-positioning structure comprises at least one lug formed on the tank (36) and a like number of groove formed in the housing (21,31,41), whereby the lug can be fitted in the groove.

6. The machine of claim 1, wherein the film-holder-inserting portion (240) is provided along the peripheral wall of the housing (21,31,41), defines an opening for inserting the film holder (50) there-through, and has a bottom wall (244) for supporting the film holder (50) and a cut-off portion (246); and, when the film holder (50) is supported on the bottom wall (244), the cut-off portion allows one end of the film holder (50) to be located at the point where the one end of the film holder can engage the arm (35) and also permits release of the film holder (50) from the film-holder-inserting portion (240).

7. The machine of claim 6, wherein the film-holder-inserting portion (240) has a vertical depth sufficient to permit insertion of at least one of the film holder (50).

8. The machine of claim 1, wherein the film holder (50) comprises a stem portion (51) having two ends, a hook portion (52) formed at one end of the stem portion (51) and engageable with the arm (35), and a film-mounting portion (54a,54b) formed at the other end of the stem portion (51)

and permitting fitted insertion of the film (F) therein.

9. The machine of claim 1, wherein the film holder (50) comprises a stem portion (51) having two ends, a through-hole (52H) formed in one end of the stem portion (51) and engageable with the arm (35), and a film-mounting portion (53a,53b, 54a,54b) formed at the other end of the stem portion (51) and permitting fitted insertion of the film (F) therein.
10. The machine of claim 8 or 9, wherein the stem portion (51) has substantially the same curvature as the peripheral wall of the housing (21,31,41).
11. The machine of claim 8 or 9, wherein at least one thin-walled portion (51a) is formed in the stem portion (51) on a side of the film-mounting portion.
12. The machine of claim 8 or 9, wherein the film-mounting portion (53a,53b,54a,54b) is bifurcated to define branches between which the film (F) is fitted.
13. The machine of claim 9, wherein the arm (35) is supported, movably in a radial direction of the cylindrical housing (21,31,41), on a support (34H) which is rotatable integrally with a rotary shaft (34) of the motor (32); and the arm (35) is equipped with a cam follower (352,353) movable in a biased state and in contact with a cam (33C) which controls movement of the arm (35).
14. The machine of claim 13, wherein the cam (33C) is formed such that the arm (35) is extended at a first position where the arm (35) engages the through-hole (52H) of the film holder (50) and is retreated at a second position where the arm (35) is disengaged from the through-hole (52H) of the film holder (50).
15. The machine of claim 14, wherein the first position is the position that - when the film holder (50) is resting on a bottom wall (244) of the film-holder-inserting portion (240), said bottom wall being an internal wall of the housing (21) - a free end of the arm (35) faces the through-hole (52H).
16. The machine of claim 1, wherein the film-holder-detaching means (45) comprises a detaching projection (46) fixed on an inner wall of the housing (21,31,41) in a region where the film holder (50) moves after completion of development processing, an end portion of the film holder (50) being brought into contact with the detaching projection (46), and a transfer path (42) for guiding to a film

holder take-out opening (43) the film holder (50) dropped from the arm (35) by a contact with the detaching projection (46).

17. The machine of claim 1, wherein the film-holder-detaching means (45) comprises a region (33C₃) of a cam (33C), said region being capable of retreating the arm (35), and a transfer path (42) for guiding to a film holder take-out opening (43) the film holder (50) dropped by a retreat of the arm (35).

Patentansprüche

1. Zahnröntgenfilmentwicklungsgerät mit einem Gehäuse (21, 31, 41) mit einer Symmetrieachse, einem Motor (32), der am Gehäuse befestigt ist, einem Arm (35), der durch den Motor um die Symmetrieachse herum drehbar ist, und einem Filmhalter (50), der in einem lösbaren Eingriff mit dem Arm (35) bringbar ist, wobei die Entwicklung eines an dem Filmhalter (50) angebrachten Film (F) durchgeführt wird, während der Filmhalter (50) eine volle Umdrehung innerhalb des Gehäuses (21, 31, 41) ausführt, umfassend: eine Vielzahl von Behältern (36), die entlang einer Umfangswand des Gehäuses (21, 31, 41) angeordnet sind, wobei einer der Behälter einen Entwickler und ein anderer der Behälter eine Lösung zur abschließenden Behandlung enthält, einen Filmhaltereinsatzbereich (240), der bezogen auf die Drehrichtung des Arms (35) vor dem den Entwickler enthaltenden Behälter (36) angeordnet ist, so daß der Filmhalter (50) mit dem daran angebrachten Film (F) an einer Stelle angeordnet werden kann, an der der Filmhalter (50) mit dem Arm (35), der angetrieben ist, in Eingriff gebracht werden kann, und ein Mittel (45, 33C₁) zum Lösen des Filmhalters (50) von dem Arm (35), wobei das Filmhalterlösemittel bezogen auf die Drehrichtung des Arms (35) hinter dem die Lösung zur abschließenden Behandlung enthaltenden Behälter (36) angeordnet ist, **dadurch gekennzeichnet**, daß das Gehäuse (21, 31, 41) zylindrisch ist, daß die Behälter (36) entferntbar angeordnet sind und daß der Filmhaltereinsatzbereich (240) so angeordnet ist, daß der Filmhalter (50) mit dem Arm (35) zum Eingriff gebracht wird, wobei sich nur der Arm um die Symmetrieachse dreht.
2. Gerät nach Anspruch 1, **dadurch gekennzeichnet**, daß eine Seitenwand jedes Behälters (36), wobei diese Seitenwand der Umfangswand des Gehäuses (21, 31, 41) gegenüberliegt, wenn sie in dem Entwicklungsgerät angeordnet ist, mit ei-

nem Krümmungsradius ausgebildet ist, der dem der Umfangswand des Gehäuses entspricht, und daß die Breite (W) des Behälters (36) viel kleiner als die Tiefe (d) des Behälters ist.

3. Gerät nach Anspruch 2, **dadurch gekennzeichnet**, daß jeder Behälter (36) eine Öffnung aufweist, die durch eine entfernbare Folie (361) abgedeckt ist.
4. Gerät nach Anspruch 2, **dadurch gekennzeichnet**, daß jeder Behälter (36) am Gehäuse (21, 31, 41) mittels einer Behälteranordnungsstruktur befestigt ist, die an einer Seite des Gehäuses (21, 31, 41) ausgebildet ist.
5. Gerät nach Anspruch 4, **dadurch gekennzeichnet**, daß die Behälteranordnungsstruktur mindestens einen an dem Behälter (36) ausgebildeten Ansatz und eine gleiche Anzahl von Nuten aufweist, die im Gehäuse (21, 31, 41) ausgebildet sind, wodurch der Ansatz in der Nut angesetzt werden kann.
6. Gerät nach Anspruch 1, **dadurch gekennzeichnet**, daß der Filmhaltereinsetzbereich (240) entlang der Längswand des Gehäuses (21, 31, 41) vorgesehen ist, eine Öffnung zum Einsetzen des Filmhalters (50) dort hindurch aufweist und eine Bodenwand (244) zum Abstützen des Filmhalters (50) und einen Abschneidebereich (246) aufweist und daß dann, wenn der Filmhalter (50) an der Bodenwand (244) abgestützt ist, der Abschneidebereich es gestattet, ein Ende des Filmhalters (50) an der Stelle anzuordnen, an der das eine Ende des Filmhalters mit dem Arm (35) zum Eingriff kommen kann, und auch die Freigabe des Filmhalters (50) von dem Filmhaltereinsetzbereich (240) gestattet.
7. Gerät nach Anspruch 6, **dadurch gekennzeichnet**, daß der Filmhaltereinsetzbereich (240) eine vertikale Tiefe aufweist, die ausreicht, das Einsetzen mindestens eines Filmhalters (50) zu gestatten.
8. Gerät nach Anspruch 1, **dadurch gekennzeichnet**, daß der Filmhalter (50) einen Schaftbereich (51) mit zwei Enden, einem Hakenbereich (52), der an einem Ende des Schaftbereichs (51) ausgebildet und mit dem Arm (35) zum Eingriff bringbar ist, und einen Filmanbringungs-
bereich (54a, 54b) umfaßt, der am anderen Ende des Schaftbereichs (51) ausgebildet ist und das dortige Einsetzen des Films (F) gestattet.
9. Gerät nach Anspruch 1, **dadurch gekennzeichnet**, daß der Filmhalter (50) einen Schaftbereich (51) mit zwei Enden, einem Durchgangsloch

(52H), das in einem Ende des Schaftbereichs (51) ausgebildet und mit dem Arm (35) zum Eingriff bringbar ist, und einen Filmanbringungs-
bereich (53a, 53b, 54a, 54b) umfaßt, der am anderen Ende des Schaftbereichs (51) ausgebildet und das dortige Einsetzen des Films (F) gestattet.

10. Gerät nach Anspruch 8 oder 9, **dadurch gekennzeichnet**, daß der Schaftbereich (51) im wesentlichen die gleiche Krümmung wie die Umfangswand des Gehäuses (21, 31, 41) aufweist.
11. Gerät nach Anspruch 8 oder 9, **dadurch gekennzeichnet**, daß mindestens ein dünnwandiger Bereich (51a) am Schaftbereich (51) an einer Seite des Filmanordnungsbereichs ausgebildet ist.
12. Gerät nach Anspruch 8 oder 9, **dadurch gekennzeichnet**, daß der Filmanbringungs-
bereich (53a, 53b, 54a, 54b) gegabelt ist, um Zweige zu bilden, zwischen denen der Film (F) eingesetzt wird.
13. Gerät nach Anspruch 9, **dadurch gekennzeichnet**, daß der Arm (35) in einer Radialrichtung des zylindrischen Gehäuses (21, 31, 41) bewegbar an einem Träger (34H) abgestützt ist, der einstückig mit einer Drehwelle (34) des Motors (32) drehbar ist, und daß der Arm (35) mit einem Nockenläufer (352, 353) ausgestattet ist, der in einem vorgespannten Zustand und in Berührung mit einem Nocken (33 C), der die Bewegung des Arms (35) steuert, bewegbar ist.
14. Gerät nach Anspruch 13, **dadurch gekennzeichnet**, daß der Nocken (33C) derart ausgebildet ist, daß sich der Arm (35) an einer Stellung ausgestreckt ist, an der der Arm (35) mit dem Durchgangsloch (52H) des Filmhalters (50) im Eingriff steht, und an einer zweiten Stellung zurückgezogen ist, an der der Arm (35) von dem Durchgangsloch (52H) des Filmhalters (50) außer Eingriff kommt.
15. Gerät nach Anspruch 14, **dadurch gekennzeichnet**, daß die erste Stellung die Stellung ist, daß - wenn der Filmhalter (50) an einer Bodenwand (244) des Filmhaltereinsetzbereichs (42) auf-
liegt, wobei die Bodenwand eine Innenwand des Gehäuses (21) ist - ein freies Ende des Arms (35) dem Durchgangsloch (52H) zugewandt ist.
16. Gerät nach Anspruch 1, **dadurch gekennzeichnet**, daß das Filmhalterlösemittel (45) einen Lösungsvorsprung (46) aufweist, der an einer Innenwand des Gehäuses (21, 31, 41) in einem Bereich befestigt ist, in dem sich der Filmhalter (50) nach Abschluß der Entwicklungsbehandlung be-

wegt, wobei ein Endbereich des Filmhalters (50) mit dem Lösungsvorsprung (46) in Berührung gebracht wird, und eine Übergabebahn (42) zur Führung einer Filmhalter-Entnahmeöffnung (43) aufweist, wobei der Filmhalter (50) von dem Arm (35) durch eine Berührung mit dem Lösungsvorsprung (46) abgegeben wird.

17. Gerät nach Anspruch 1, **dadurch gekennzeichnet**, daß das Filmhalterlösungsmittel (45) einen Bereich (33C₃) eines Nokkens (33C), wobei dieser Bereich den Arm (35) zurückziehen kann, und eine Übergabebahn (42) zur Führung zu einer Filmhalter-Entnahmeöffnung (43) umfaßt, wobei der Filmhalter (50) durch ein Zurückziehen des Arms (35) entfernt wird.

Revendications

1. Appareil de développement de films radiographiques dentaires comportant un logement (21, 31, 41) avec un axe symétrique, un moteur (32) fixé sur le logement, un bras (35) entraîné en rotation par le moteur autour de cet axe de symétrie et un porte-film (50) destiné à être mis en engagement amovible avec le bras (35), le traitement de développement d'un film (F) monté sur le porte-film (50) étant effectué pendant que le porte-film (50) effectue un tour complet à l'intérieur du logement (21, 31, 41), l'appareil comprenant :

une pluralité de réservoirs (36) disposés le long d'une paroi périphérique du logement (21, 31, 41), l'un de ces réservoirs contenant un révélateur, et un autre de ces réservoirs contenant une solution de traitement final ;

une portion d'insertion de porte-film (240) située en amont du réservoir contenant le révélateur (36) par rapport à la direction de rotation du bras (35) de sorte que le porte-film (50) avec le film (F) monté sur celui-ci peut être positionné en un point où le porte-film (50) peut être mis en engagement avec le bras (35) qui est entraîné ; et

des moyens (45, 33C₁) destinés à détacher le porte-film (50) du bras (35), ces moyens de détachement du porte-film étant situés en aval du réservoir contenant la solution de traitement final (36) par rapport à la direction de rotation du bras (35),

caractérisé en ce que le logement (21, 31, 41) est cylindrique, en ce que les réservoirs (36) sont disposés de façon amovible et en ce que la portion d'insertion de porte-film (240) est disposée de façon à amener le porte-film (50) en engagement avec le bras (35) faisant uniquement tourner le bras autour de l'axe de symétrie.

2. Appareil selon la revendication 1, dans lequel

une paroi latérale de chaque réservoir (36), cette paroi latérale faisant face à la paroi périphérique du logement (21, 31, 41) en agencement dans l'appareil de développement, est réalisée avec un rayon de courbe adapté à celui de la paroi périphérique du logement, et la largeur (W) du réservoir (36) est très inférieure à la profondeur (d) du réservoir.

3. Appareil selon la revendication 2, dans lequel chaque réservoir (36) possède une ouverture qui est recouverte d'une pellicule amovible (361).

4. Appareil selon la revendication 2, dans lequel chaque réservoir (36) est fixé sur le logement (21, 31, 41) au moyen d'une structure de positionnement de réservoir formée sur un côté de logement (21, 31, 41).

5. Appareil selon la revendication 4, dans lequel la structure de positionnement de réservoir comprend au moins une projection formée sur le réservoir (36) et un nombre identique de gorges formées dans le logement (21, 31, 41), la projection pouvant s'encaster dans la gorge.

6. Appareil selon la revendication 1, dans lequel la portion d'insertion de porte-film (240) est prévue le long de la paroi périphérique du logement (21, 31, 41), définit une ouverture pour l'insertion du porte-film (50), et possède une paroi de fond (244) servant à supporter le porte-film (50) et une portion de découpe (246) ; et, lorsque le porte-film (50) est supporté par la paroi de fond (244), la portion de découpe permet de positionner une extrémité du porte-film (50) au point où l'une des extrémités du porte-film peut coopérer avec le bras (35) et permet également la libération du porte-film (50) de la portion d'insertion de porte-film (240).

7. Appareil selon la revendication 6, dans lequel la portion d'insertion de porte-film (240) présente une profondeur verticale suffisante pour permettre l'introduction d'au moins l'un des porte-films (50).

8. Appareil selon la revendication 1, dans lequel le porte-film (50) comprend une portion de tige (51) présentant deux extrémités, une portion de crochet (52) formée sur une extrémité de la portion de tige (51) et pouvant coopérer avec le bras (35), et une portion de montage de film (54a, 54b) formée sur l'autre extrémité de la portion de tige (51) et permettant l'insertion encastrée du film (F) dans celle-ci.

9. Appareil selon la revendication 1, dans lequel le

- porte-film (50) comprend une portion de tige (51) avec deux extrémités, un trou traversant (52H) formé dans une extrémité de la portion de tige (51) et pouvant coopérer avec le bras (35), et une portion de montage de film (53a, 53b, 54a, 54b) formée sur l'autre extrémité de la portion de tige (51) et permettant l'introduction encastrée du film (F) dans celle-ci. 5
10. Appareil selon la revendication 8 ou 9, dans lequel la portion de tige (51) présente sensiblement la même courbure que la paroi périphérique du logement (21, 31, 41). 10
11. Appareil selon la revendication 8 ou 9, dans lequel au moins une portion à paroi mince (51a) est formée dans la portion de tige (51) sur un côté de la portion de montage de film. 15
12. Appareil selon la revendication 8 ou 9, dans lequel la portion de montage de film (53a, 53b, 54a, 54b) forme une bifurcation définissant des embranchements entre lesquels est encastré le film (F). 20
13. Appareil selon la revendication 9, dans lequel est supporté le bras (35), -de façon mobile dans une direction radiale du logement cylindrique (21, 31, 41) sur un support (34H) qui est rotatif solidairement avec un arbre rotatif (34) du moteur (32) ; et le bras (35) est muni d'une contre-came (352, 353) mobile dans un état précontraint et en contact avec une came (33C) qui commande le mouvement du bras (35). 25
14. Appareil selon la revendication 13, dans lequel la came (33C) est formée de telle sorte que le bras (35) s'étend sur une première position où le bras (35) s'engage dans le trou traversant (52H) du porte-film (50) et il est rabattu sur une seconde position où le bras (35) est libéré du trou traversant (52H) du porte-film (50). 30
15. Appareil selon la revendication 14, dans lequel la première position est la position où - lorsque le porte-film (50) repose sur la paroi de fond (244) de la portion d'insertion de porte-film (240), la paroi de fond étant une paroi interne du logement (21) - une extrémité libre du bras (35) est en regard du trou traversant (52H). 35
16. Appareil selon la revendication 1, dans lequel les moyens de détachement du porte-film (45) comprennent une saillie de détachement (46) fixé sur une paroi interne du logement (21, 31, 41) dans une zone où le porte-film (50) se déplace après réalisation du traitement de développement, une portion d'extrémité du porte-film (50) étant mise en contact avec la saillie de détachement (46), et une voie de transfert (42) permettant le guidage sur une ouverture de prélèvement de porte-film (43), le porte-film (50) libéré du bras (35) par un contact avec la saillie de détachement (46). 40
17. Appareil selon la revendication 1, dans lequel les moyens de détachement du porte-film (45) comprennent une zone (33C₃) d'une came (33C), cette zone pouvant rabattre le bras (35), et une voie de transfert (42) pour guider le porte-film (50) qui a été libéré par le rabattement du bras (35), sur une ouverture de prélèvement de porte-film (43). 45

FIG. 1

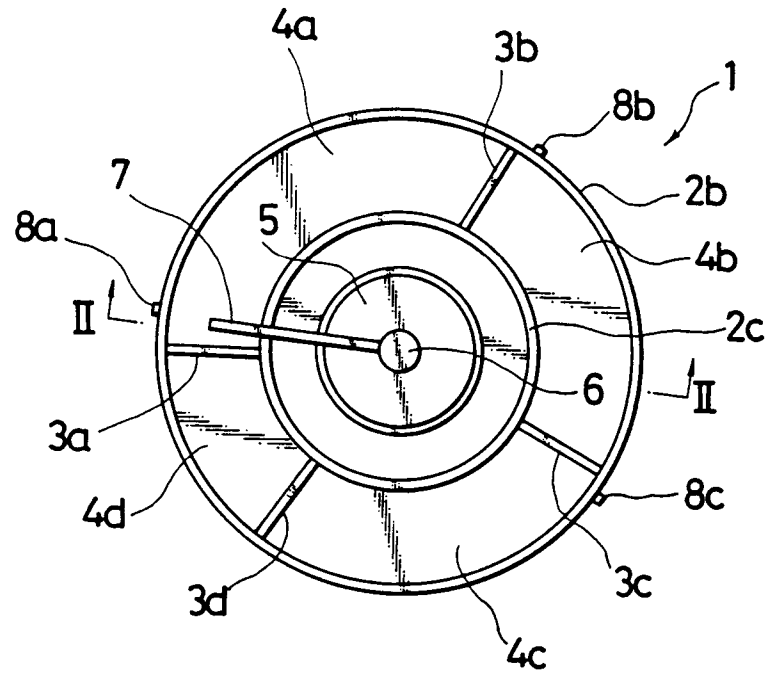


FIG. 2

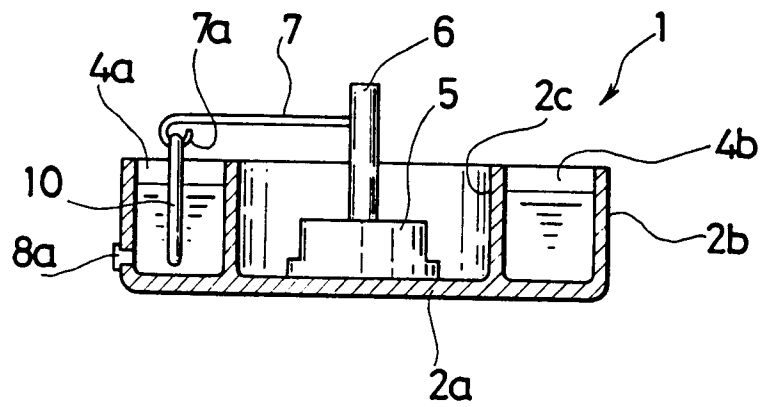


FIG. 3 (A)

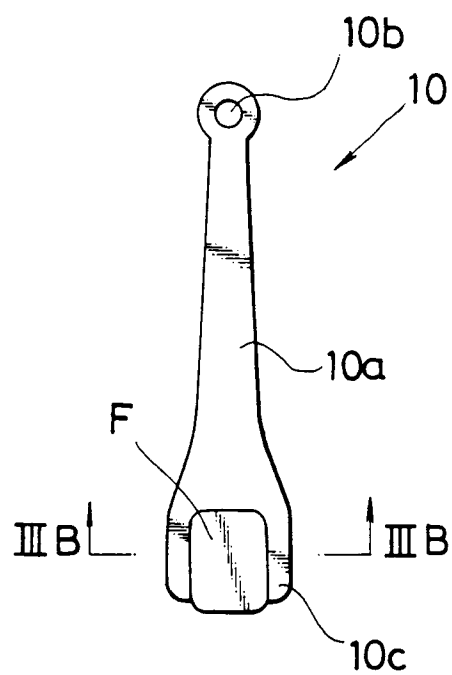


FIG. 3 (B)




FIG. 4

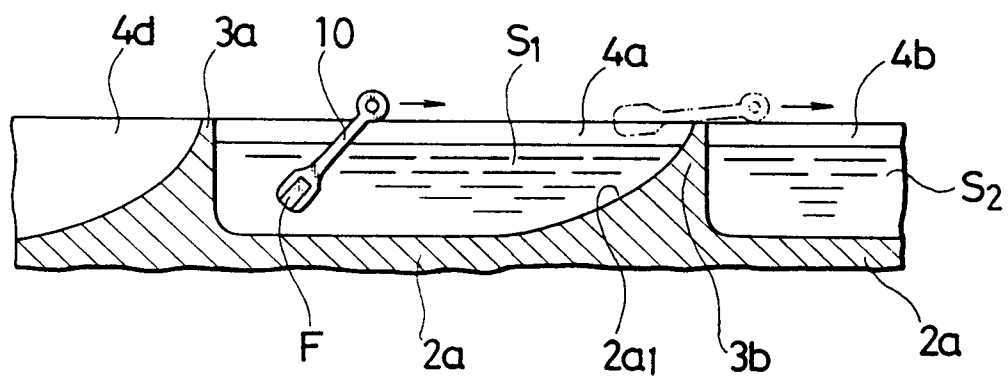


FIG. 5

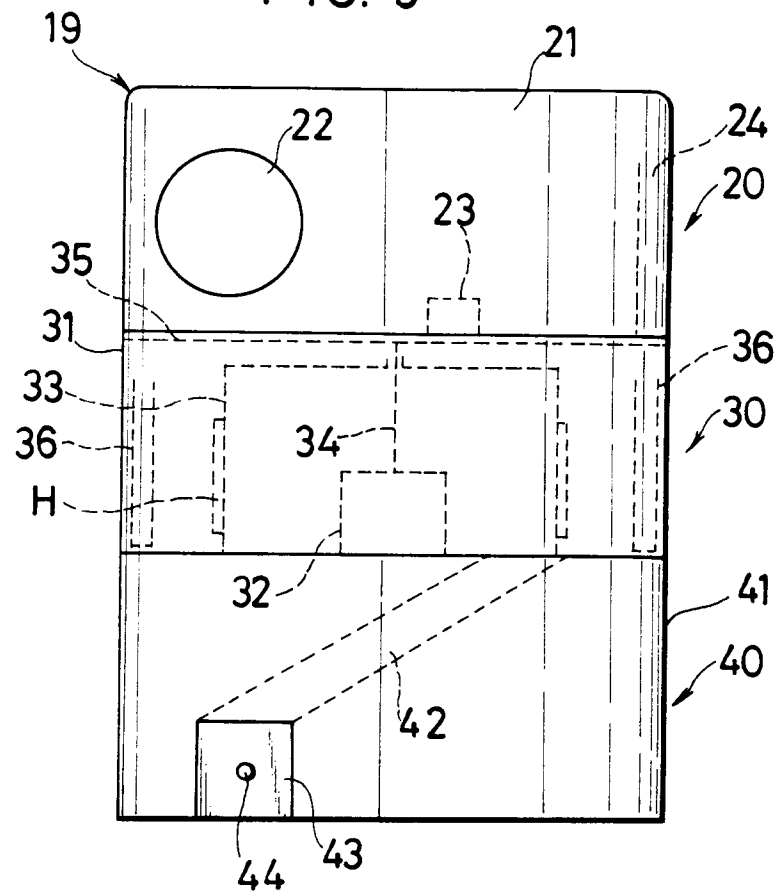


FIG. 6

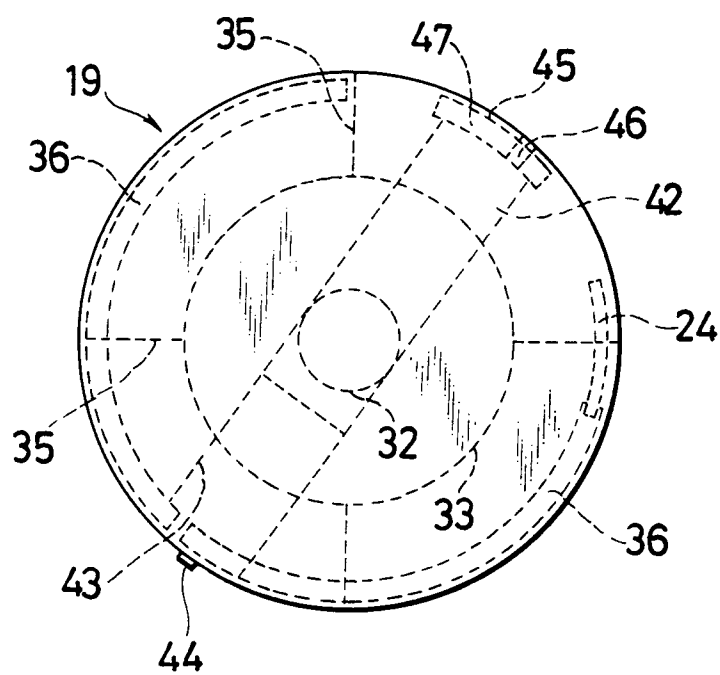


FIG. 7

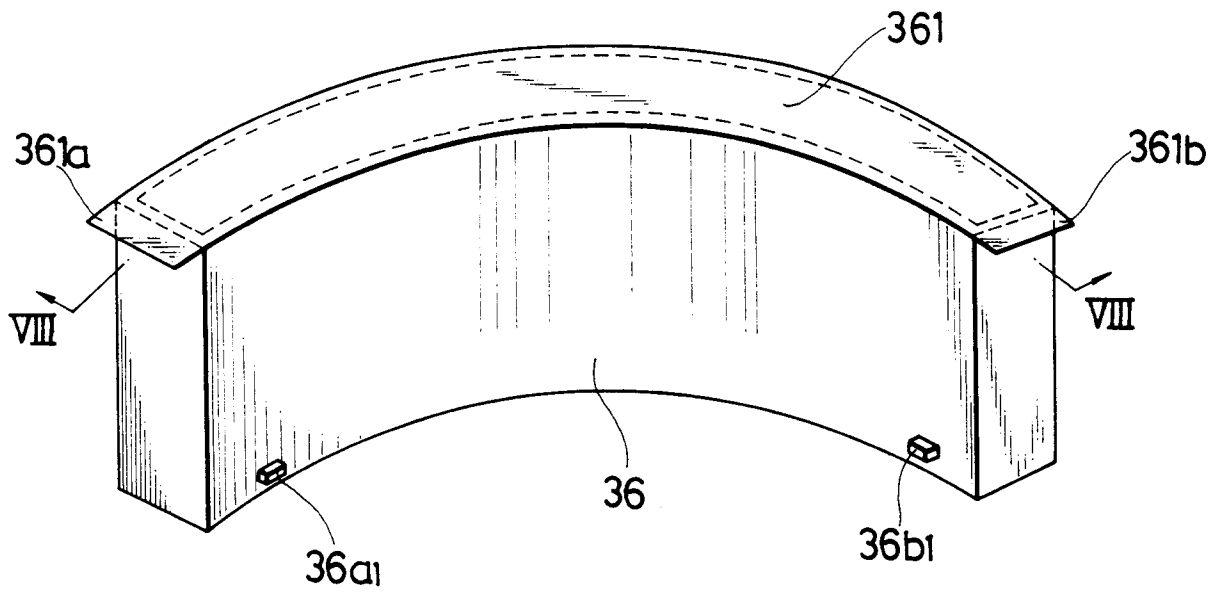


FIG. 8

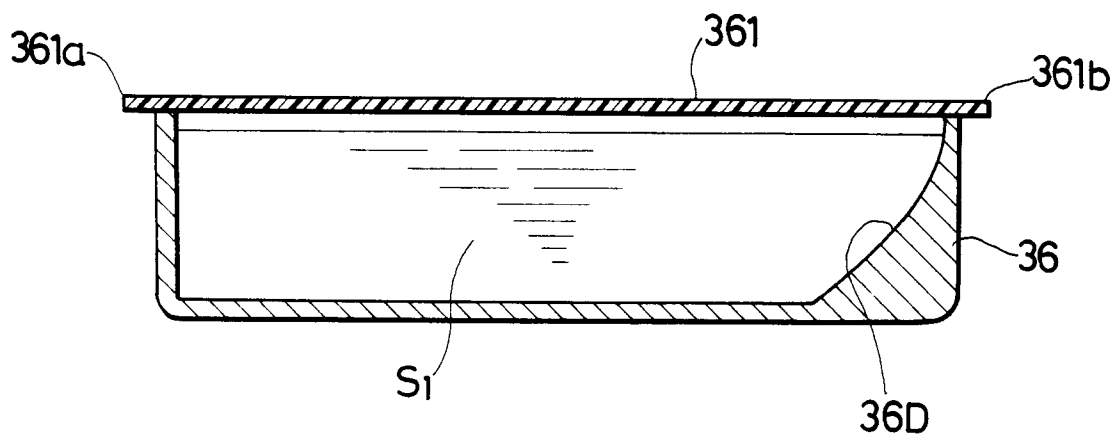


FIG. 9

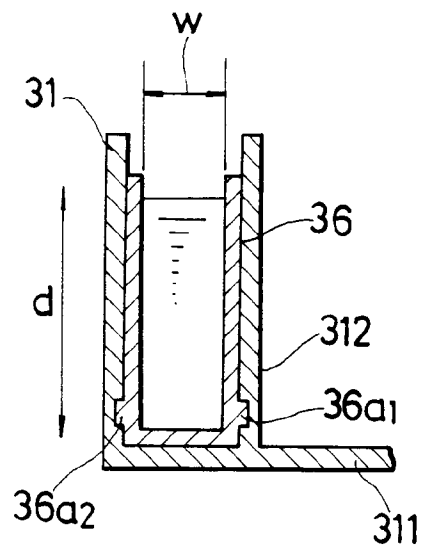


FIG. 10

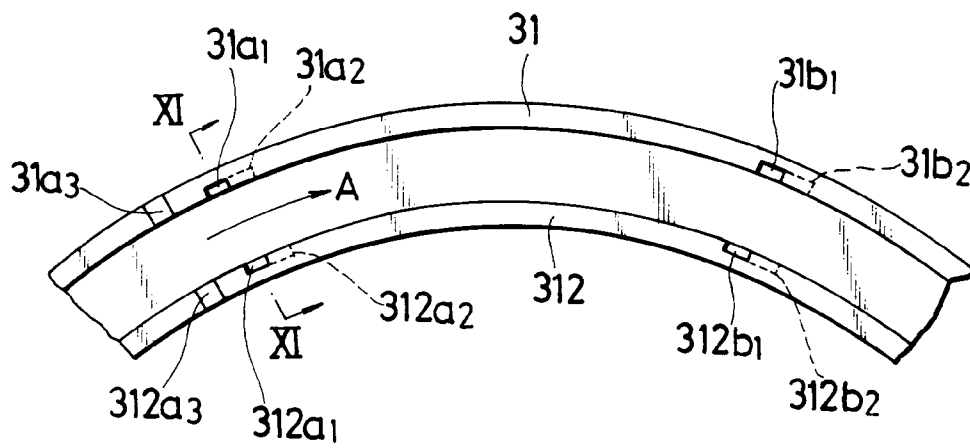


FIG. 11

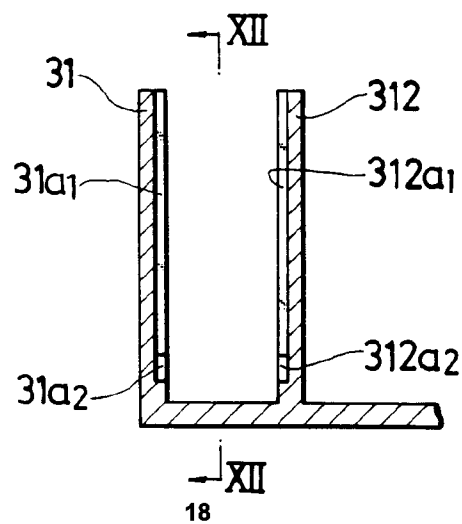


FIG. 12

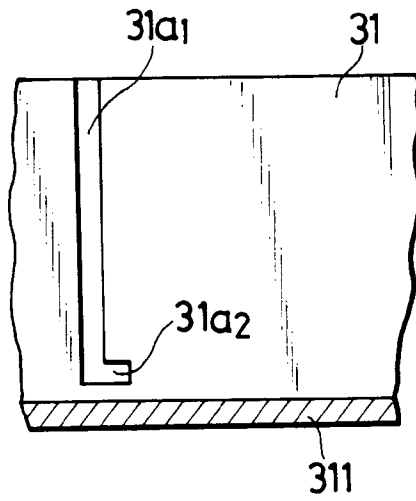


FIG. 13

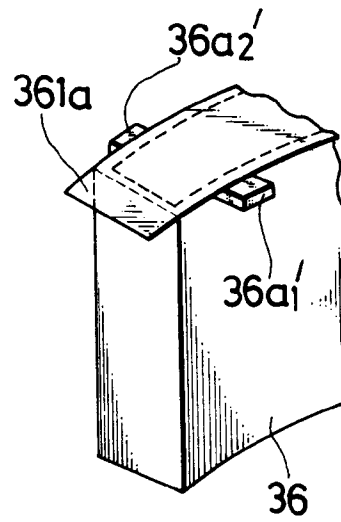


FIG. 14

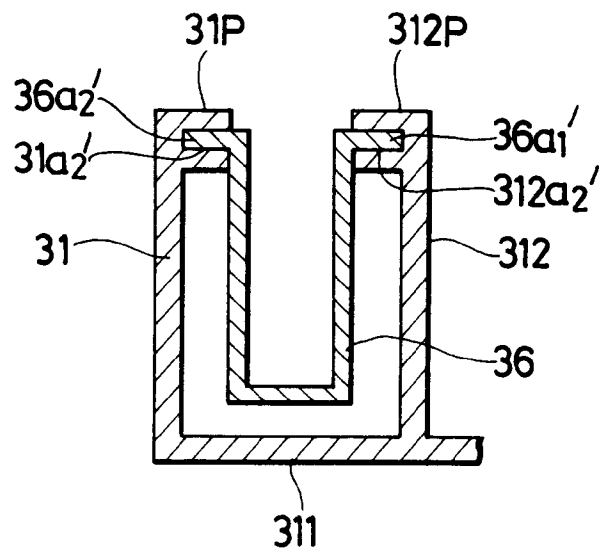


FIG. 15

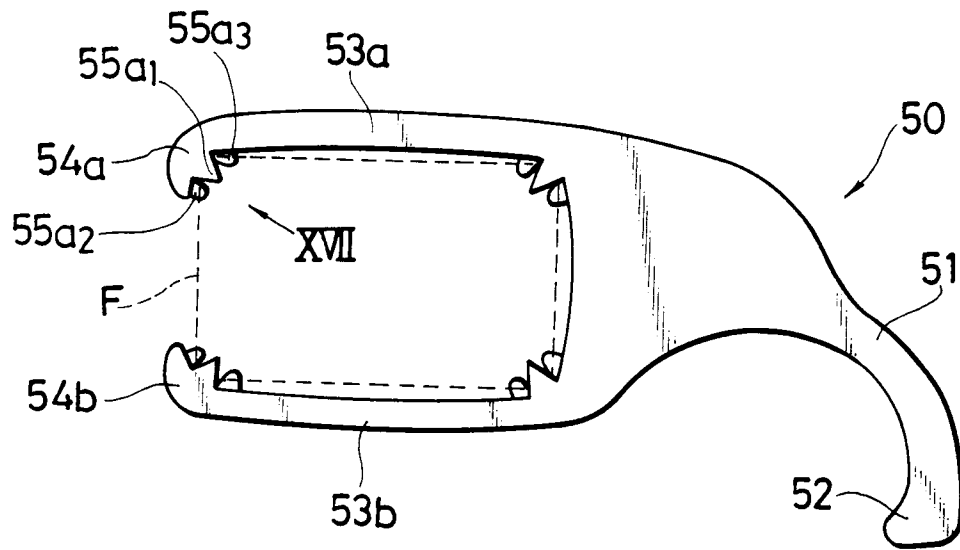


FIG. 16(A)

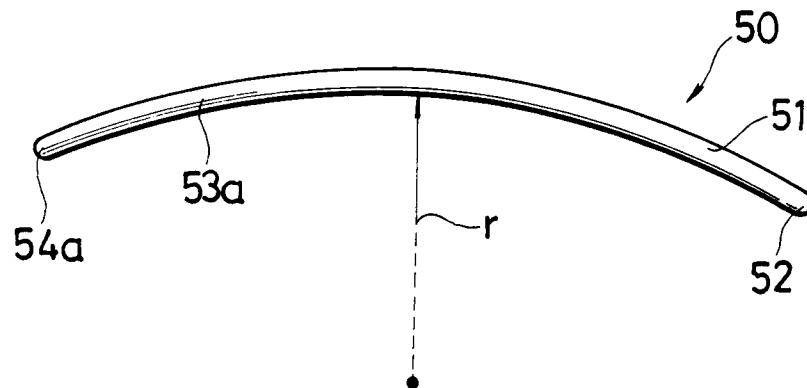


FIG. 16(B)

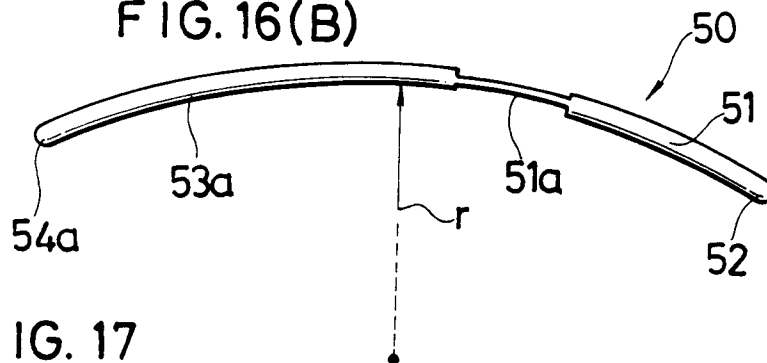


FIG. 17

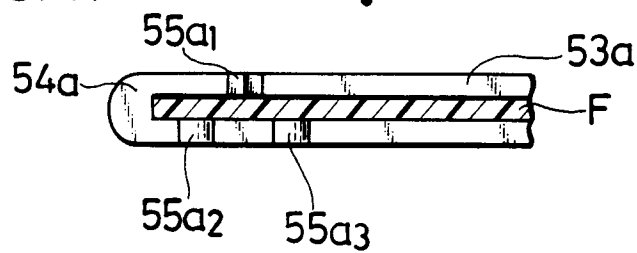


FIG. 18

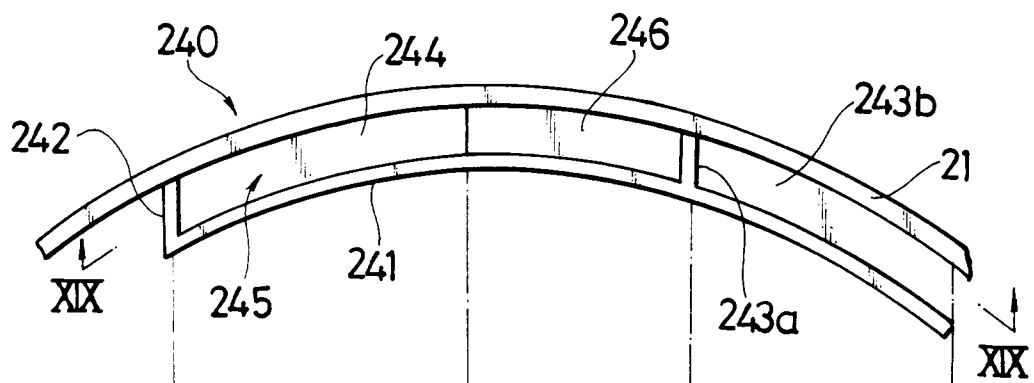


FIG. 19

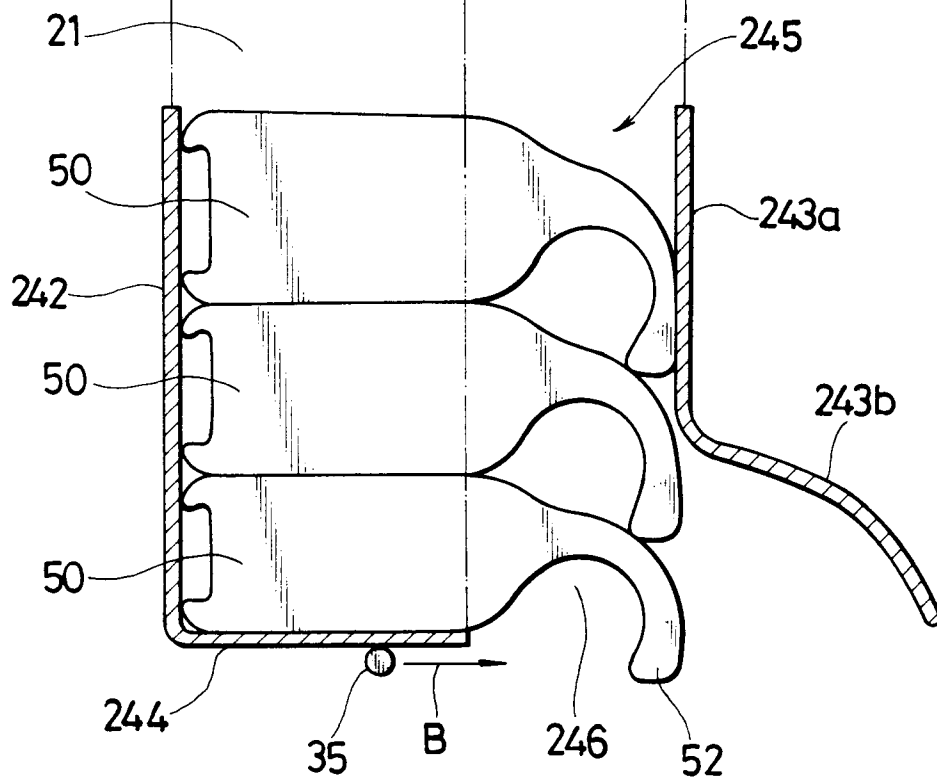


FIG. 20

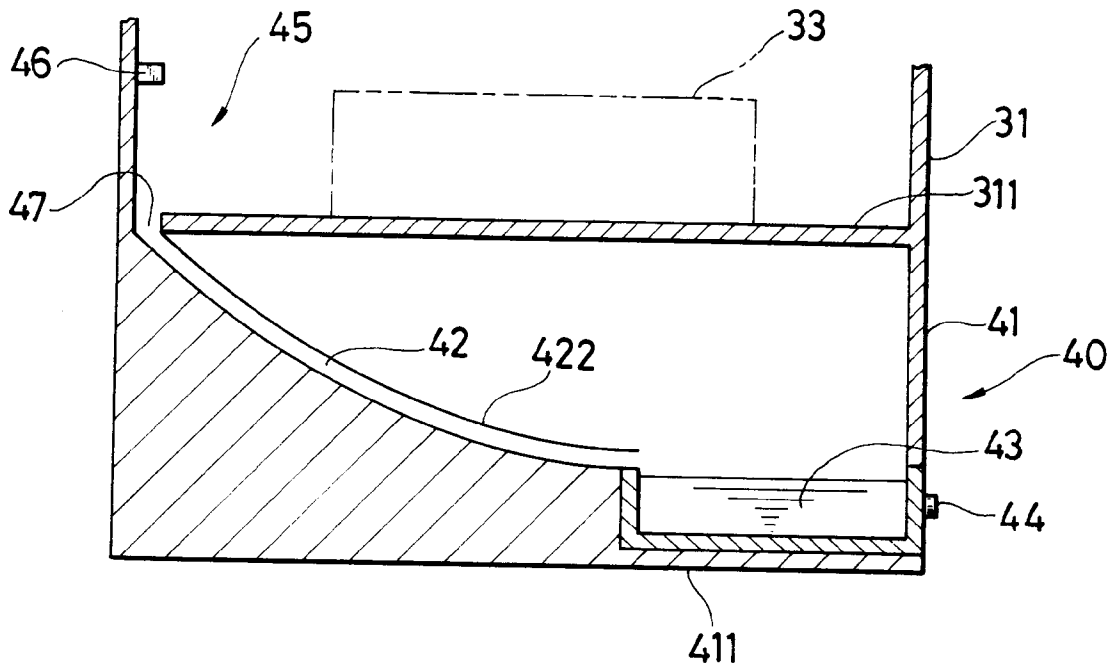


FIG. 21

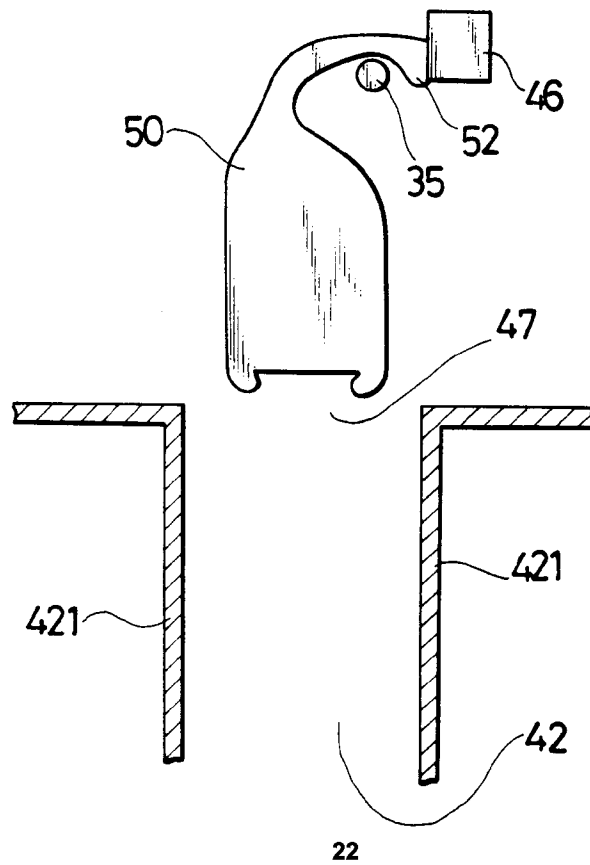


FIG. 22

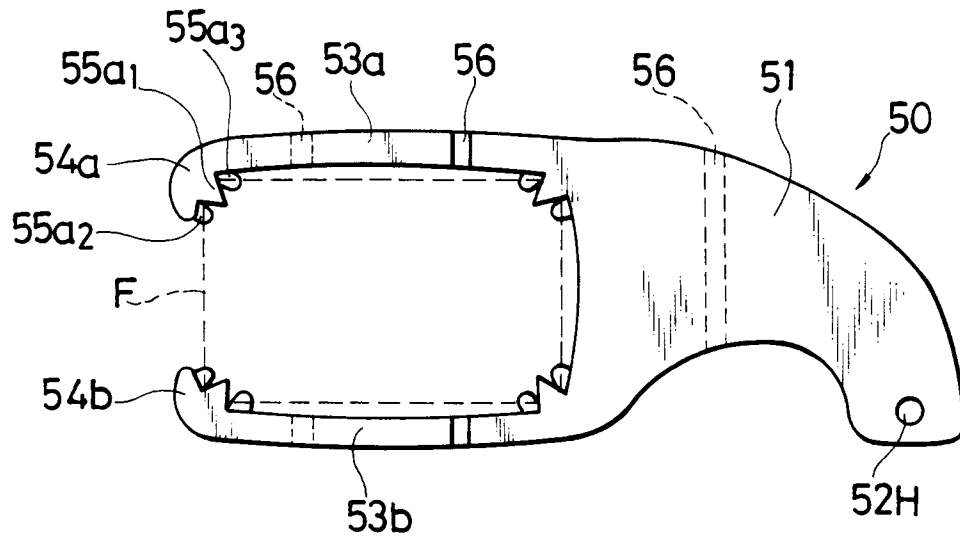


FIG. 23

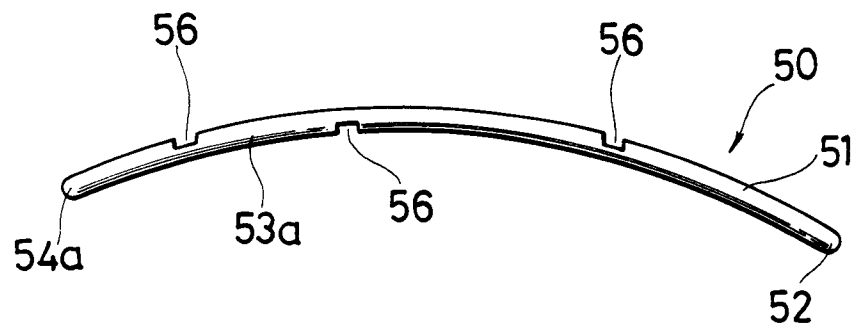


FIG. 24

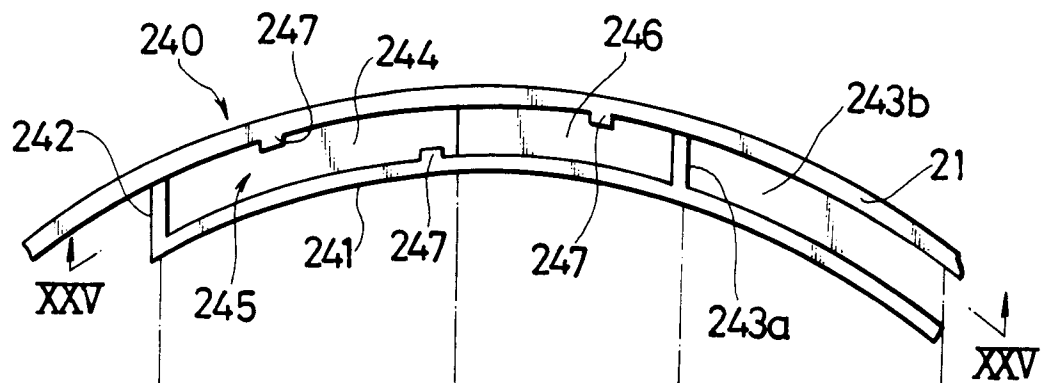


FIG. 25

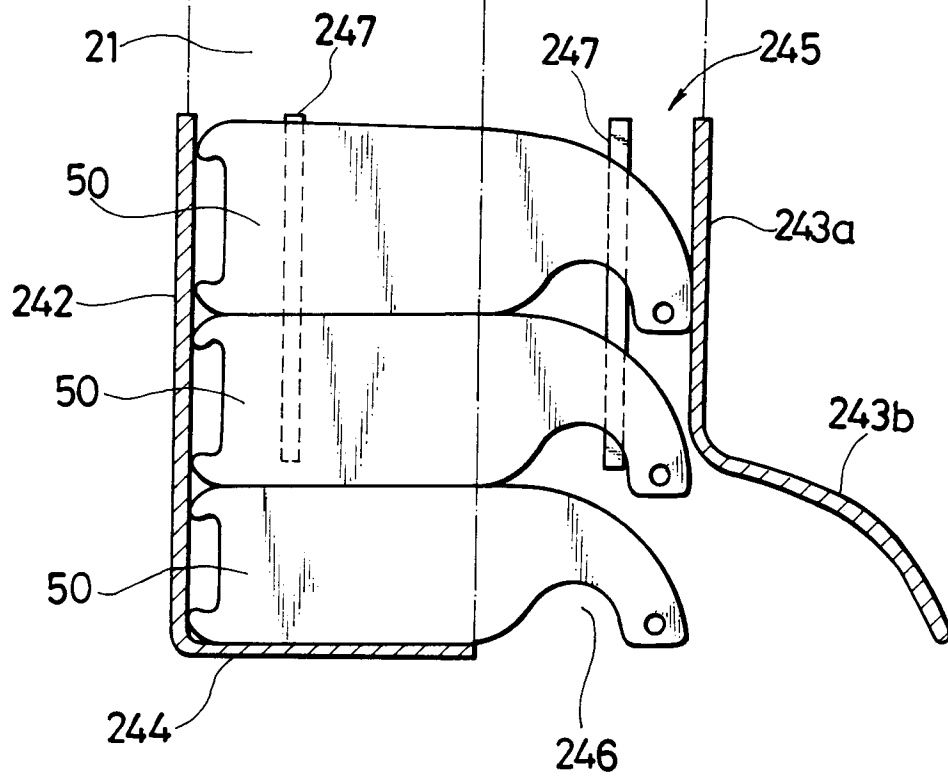


FIG. 26

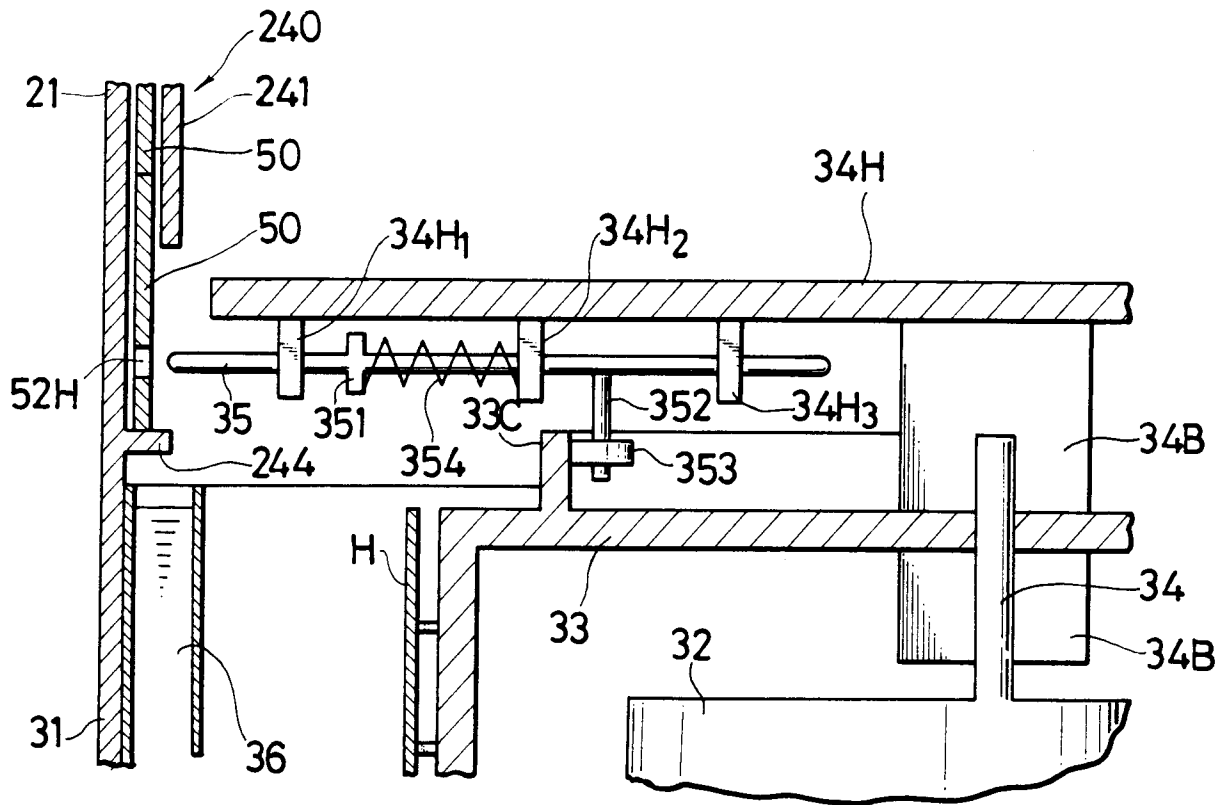


FIG. 27

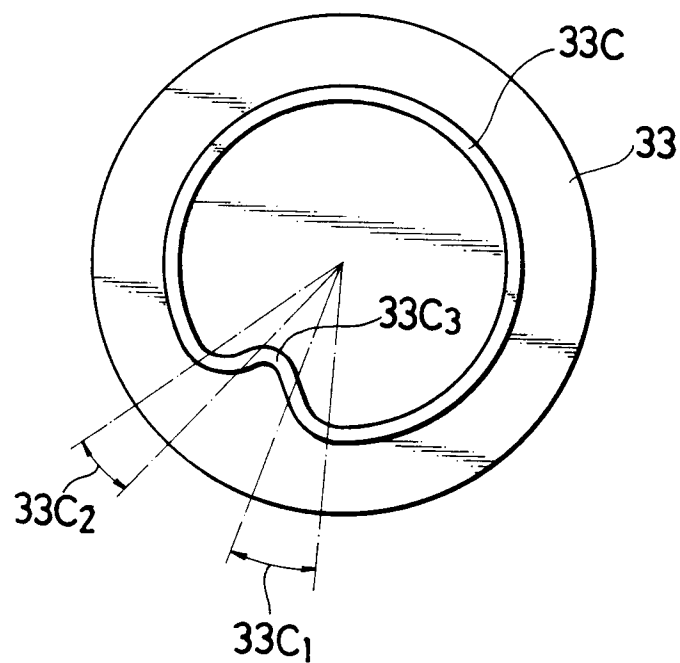


FIG. 28

