

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 470 131 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
13.01.1999 Bulletin 1999/02

(51) Int. Cl.⁶: **B42D 15/10**

(21) Application number: **90906739.9**

(86) International application number:
PCT/AU90/00167

(22) Date of filing: **27.04.1990**

(87) International publication number:
WO 90/12694 (01.11.1990 Gazette 1990/25)

(54) SECURE IMAGE PRODUCTION

BILDERZEUGUNG FÜR PERSONAL AUSWEISE

PRODUCTION D'IMAGES POUR PIÈCES D'IDENTITÉ

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB IT LI LU NL SE

(74) Representative:
Jackson, David Spence et al
REDDIE & GROSE
16, Theobalds Road
London, WC1X 8PL (GB)

(30) Priority: **27.04.1989 AU 3915/89**
31.08.1989 AU 6067/89

(43) Date of publication of application:
12.02.1992 Bulletin 1992/07

(56) References cited:
WO-A-82/04149 **WO-A-83/00766**
AU-A- 3 760 872 **US-A- 3 245 697**
US-A- 3 758 970 **US-A- 3 801 183**
US-A- 4 006 050 **US-A- 4 082 873**
US-A- 4 560 426

(60) Divisional application:
96108494.4 / 0 737 595

(73) Proprietor:
MINNESOTA MINING AND MANUFACTURING
COMPANY
St. Paul, Minnesota 55133-3427 (US)

- **PATENT ABSTRACTS OF JAPAN, vol. 14, no. 532 (M-1051), 22 November 1990; JP-A-02 223 494 (MITSUBISHI ELECTRIC CORPORATION)**
- **PATENTS ABSTRACTS OF JAPAN M-938, page 50, JP,A,01 301 293 (KONICA CORPORATION)12 May 1989 (12.05.89)**

(72) Inventor:
RADCLYFFE, Edward, Stanley
Ainslie, ACT 2602 (AU)

EP 0 470 131 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

This invention concerns the production of security documents, such as passports, identity cards, identification badges and labels, driving licences and the like. More particularly, it concerns a technique for providing, within a laminated structure, a printed image that is significantly more secure than images obtained by conventional procedures.

Background

The most common method of producing identity cards, identification badges and the like involves the steps of (i) mounting a photograph on a backing sheet of light card, (ii) sandwiching the card (with the photograph attached) between two sheets of a transparent plastics material, then (iii) bonding (using heat) the transparent sheets together at their edges. Such cards and badges, however, do not possess the degree of security that is required for passports and for passes to regions containing secret and classified information, for it is possible to cut the cards and badges near the edges of the transparent sheets, remove the card, substitute a new photograph, and then seal the modified card between two new sheets of transparent plastics material.

Passports are still produced by a technique which involves bonding a photograph to a page of the passport, using a conventional paper glue, then covering at least part of that page (with the photograph affixed) with either a transparent strip of a polyester material having adhesive on one side or a glass bead laminate. In this way the photograph is covered by the transparent strip or the glass beads and its security is improved. However, it is possible for a determined person to separate the components of the passport page, then substitute a fresh photograph for the photograph that has been mounted in the passport using this technique.

To improve the security of passports and identity cards, it has been proposed to print photographic information (including an image of the holder of the passport or identity card) on the end sheet of a passport or on a sheet of card, rather than simply mount photographs on the sheets, and to cover the printed image to prevent the deliberate (or inadvertent) removal of that information. However, no reasonably economic and technically viable technique for implementing this approach has been put forward.

In US-A-4 082 873 there is described a method of forming a laminated label by reverse printing information on one side of a flexible transparent film such as Mylar film, applying a layer of pressure sensitive adhesive to the printed side of the film, and applying the adhesive coated side of the film to a substrate in the form of an article to be labelled. The adhesive is chosen

to adhere more strongly to the printing and to the article than to the film.

US-A-3 801 183 describes a retro-reflective sheet material that is substantially transparent when viewed under diffuse light and has embedded information that is visible under retro-reflective conditions. The sheet material has on one face a layer of adhesive material. To form the sheet material, a monolayer of clear glass beads embedded to about 40% of their diameter in a polyethylene coating on paper sheet is coated with a quarter wave layer of cryolite, printed with information using a transparent colourless lithographic alkyd varnish, and coated then with a quarter wave layer of zinc sulphide. Where in contact, the cryolite and zinc sulphide layer provide a transparent mirror. The printed areas with the varnish between the cryolite and zinc sulphide provides a less efficient transparent mirror. An adhesive layer is coated over the zinc sulphide. The sheet thus formed is placed adhesive down against the face of a positive colour photograph print and heated under pressure in a platen press. After cooling, the polyethylene coated paper is stripped off to expose the glass beads.

US-A-4 006 050 describes a method of manufacturing a card by forming by xerography a developed, transferable image on a transfer sheet consisting of a carrier sheet, a release layer on the carrier sheet, and a laquer layer separated from the carrier sheet by the release layer, with the image being on the face of the laquer layer remote from the release layer, and causing the image and the laquer layer of the transfer sheet to transfer to a base formed of a plastics material. The transfer is effected by a combination of heat and pressure and the material of the image and base become firmly fixed together. In particular, glassine paper is used as the carrier sheet, and the release layer may be formed by allowing a coating of a mixture of toluene, methyl ethyl ketone, chlorinated paraffin wax, and a polythene wax to dry.

The present invention is defined by the claims hereinafter, to which reference should now be made.

A preferred embodiment of the present invention provides a technique for producing an image within a laminate formed by a layer of a transparent medium and a sheet of paper, card or the like, which satisfies the requirements for the production of more secure passports, identity cards, security badges, identification labels and the like.

This technique uses the surprising discovery that an image can be produced on (or in) a layer of a high temperature glue (that is, a glue having a melting point of about 95°C) at low temperature, and that image is not destroyed, if the toner or other carbon-containing material used to create the image has set, when the glue layer is heated to create a bond. Thus, if a sheet of a transparent medium (for example, a polyester material or a layer of glass beads) has one side coated with a high temperature glue, and an image is printed on the

glue layer using (for example) a laser xerography technique or printing ink, and that transparent material is subsequently bonded to a sheet of paper or other substrate by a thermal process, the image is presented without deterioration within the laminate thus produced, provided the toner or ink used for the printing of the image has set on the glue before the thermal bonding is effected. When the image includes printing, that printing is machine readable.

It has also been found that compounds other than carbon or carbon-containing compounds can be used to produce machine-readable characters, provided those other compounds are highly absorbent of radiation having a wavelength in the visible spectrum or the near infra-red region.

The preferred embodiment produces an image within a laminate by the steps of

- (a) coating one side of a sheet of transparent medium with a layer of a high temperature glue;
- (b) producing an image on the glue layer using carbon or a carbon-containing or other visible or near infrared radiation absorbent compound which does not flow when applied to the glue layer and, if necessary, allowing or causing the image-producing compound to set;
- (c) applying a substrate to the high temperature glue layer on which the image has been produced; and
- (d) bonding the transparent medium to the substrate using a known high temperature thermal bonding process, thus producing a laminate of the transparent material and the substrate.

Some manufacturers produce a laminate in the form of a sheet of a transparent medium to which a layer of a high temperature glue has been applied. Such a product can be used in the present invention.

The thermal bonding technique for high temperature glues - that is, the bonding technique of step(d) is well known, so that detailed discussion of that technique in this specification is not necessary.

Since, in almost all uses of the present invention, the image (which may consist of or include printing) will be viewed through the transparent medium, the image will normally be printed on the glue as a reverse image.

Without limiting the generality of the carbon-containing or radiation absorbing compounds that may be used in the present invention, the image may be created by laser xerography or other photo-copying technique, by an ink-jet printer (provided the ink used is chosen - or thickened - so that it does not flow on contact with the glue layer), by a dot matrix printer using a typewriter ribbon (preferably a carbon typewriter ribbon), or by a typewriter adapted to print mirror images of the normal characters of the typewriter. Ink jet printers and dot matrix printers can be used to create the equivalent of photographic images by an appropriate printing of dots.

The printing of the image is effected by programming the printer after scanning the image to determine the density of dots in the pixels which make up the image. Clearly, if a typewriter ribbon is the medium through which the carbon or carbon-containing compound is applied to the glue layer, there is no requirement to allow or cause the material of the image to set before proceeding to the thermal bonding step of the present invention.

If a programmable printer is used for the image-producing step of the present invention, an entire page of a passport, or an entire identification card or badge, comprising both a photographic image and lettering, may be printed by the printer.

If the printer used to produce the lettering cannot also produce a photographic image, then the passport page or identification card or badge may be produced with two printing steps. The first printing step will produce an image of the required lettering and the second printing step will provide the photographic image of the bearer of the passport or the holder of the identification card or badge. (Of course, the image may be printed before the lettering.) The glue layer containing the two printed images will then be brought into contact with the substrate, and the high temperature thermal process will be used to produce the completed passport page or identification card or badge.

The transparent sheet material is typically either a flexible, transparent polyester material, such as the material marketed under the trade mark "Mylar", or it may be a layer of glass beads in glue. Both such materials are available commercially with a layer of high temperature glue applied to one face of the transparent sheet.

If greater stiffness of the final product laminate is required, one or more additional layers of any suitable material may be bonded to the substrate of the product laminate of the present invention, preferably (but not necessarily) using the high temperature glue bonding technique.

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a sectional view (partly schematic) through a sheet of transparent polyester material that is to be bonded to a backing sheet, using glue on which an image has been printed.

Figure 2 is a similar sectional view (partly schematic) through a sheet of a glass bead laminate with a high temperature glue layer, that is being bonded to a substrate.

Detailed Description of the Illustrated Embodiment

Figure 1 shows a sheet 10 of a transparent polyester material, such as "Mylar" (trade mark), or another known flexible, transparent polyester material that is available in sheet form, to one side of which a thin layer 11 of a known high temperature glue has been applied by the manufacturer. Thin layers of the high temperature glue are also transparent.

Figure 2 depicts a glass bead laminate comprising a layer 20 of glass beads in glue, to one side of which a thin layer 11 of a high temperature glue has been applied. An optional (but usually present) sheet 26 of backing paper is included to improve the stiffness of the laminate and to protect the glass beads at the face of layer 20.

In each case, images - usually reverse images of a photographic impression and associated lettering to be viewed, subsequently, through the transparent sheet 10 or 20 in the direction of the arrow A - are printed on the region 12 of the glue 11, using carbon or a carbon-containing compound. As indicated above, laser xerography is a convenient way of producing the images. This way of producing the images is preferred, but it is acknowledged that increased use of scanners and programmed printers, and developments in that technology, may result in programmable printers becoming the preferred equipment for the image production.

If, as in the example shown in the drawings, the images are in part lettering, the image of the lettering may be applied to the glue layer before, or after, the application of an image of a photographic impression.

When the image is produced by a xerographic process or with printing ink, the toner must be allowed (or caused) to set, or the ink must be dry, before the next step in the fabrication of the product laminate is taken. The setting or drying usually takes a very short time. Indeed, when laser xerography is used produce the image, the heat required to set the toner is applied as part of the printing process. Surprisingly, although the heat applied to set the toner should be sufficient to melt the high temperature glue, the glue layer 11 is not softened during its passage through the printer.

When the toner of the image has set, or the ink used for printing the image has dried, the transparent sheet 10 or 20 is placed on a substrate 13 of paper or other suitable material with the glue layer 11 sandwiched between the transparent sheet 10 or 20 and the substrate 13. The substrate 13 may have information printed on it in regions 14 outside the area of the substrate which is covered by the image regions 12 of the glue layer 11.

The sandwich of sheet 10 or 20 with the substrate 13 is then heat treated in the conventional manner to bond the transparent sheet 10 or 20 to the substrate 13 and form a product laminate of the two sheets. Following this step it is very difficult to separate the sheet 10 (or 20) from the substrate 13. The surprising aspect of

such a thermal treatment (during which the temperature of the components of the sandwich reaches at least about 95°C to enable the high temperature glue layer 11 to bond the sheet 10 or 20 and the substrate 13 together) is that the imprinted image on or in the glue is not destroyed or distorted, but retains its identity and clarity, despite the melting of the glue during the high temperature bonding treatment.

After the heat treatment step, the substrate 13 of the product laminate may be bonded to additional sheets 27 of paper or card or other suitable material to form a thicker, and therefore stiffer, laminate. It has been found that such additional bonding does not destroy or distort the original image on the region 12 of the basic laminate. Indeed, tests using images produced by the present invention have shown that when the images include alpha-numeric characters, those characters remain machine readable to the extent required by the International Civil Aviation Organisation's specification No 9303. Thus the present invention incorporates a stable machine-readability feature into passports and other travel documents.

If the glass bead laminate of Figure 2 is used, the protective backing sheet 26 is peeled off the product laminate after its formation, to expose the outer surface of the transparent layer 20.

It will be appreciated that using the technique of the present invention, it is possible to produce identity cards, passport pages, security passes, identification labels and the like, which are both durable and significantly more secure than those products made using the methods currently in use.

Those skilled in this field will acknowledge that although two specific realisations of the present invention have been illustrated and described above, modifications to the described embodiments can be made without departing from the present inventive concept as defined by the claims.

Claims

1. A method of producing a security laminate having an image therein, comprising the steps of:
 - (a) providing a sheet (10,20) of transparent medium having on a face thereof a layer (11) of a high temperature glue;
 - (b) producing an image (12) on the glue layer (11) using carbon or a compound which does not flow when applied to the glue layer (11) and which is absorptive of visible or near infra-red radiation; and, if necessary, allowing or causing the compound to set;
 - (c) applying a substrate (13) to the glue layer (11) on which the image (12) has been produced; and
 - (d) bonding the glue layer (11) to the substrate (13) by using a high temperature thermal bond-

ing process, so as to form the security laminate with the image (12) disposed between the sheet (10,20) of transparent medium and the substrate (13).

2. A method according to claim 1, wherein step (a) comprises coating the said face of the sheet (10,20) of transparent medium with the layer (11) of high temperature glue.
3. A method according to claim 1 or 2, wherein the image (12) is applied to the glue layer (11) by a xerographic process, and the said compound is the toner used in the xerographic process.
4. A method according to claim 1 or 2, wherein the image (12) applied to the glue layer (11) is produced using a programmable printer which prints using a ribbon impregnated with, or carrying a layer of, carbon or a carbon-containing compound.
5. A method according to claim 1 or 2, wherein the image (12) is applied to the glue layer (11) by an ink jet printer.
6. A method according to any preceding claim, including the additional step of bonding at least one further layer (27) to the laminate to increase the stiffness thereof.

Patentansprüche

1. Verfahren zum Herstellen eines Sicherheitslaminats mit einem Bild, umfassend die Verfahrensschritte:
 - (a) Liefern einer Lage (10, 20) aus transparentem Medium, die auf einer Seite eine Schicht (11) aus Hochtemperaturklebstoff aufweist;
 - (b) Herstellen eines Bildes (12) auf der Klebstoff-Schicht (11) mittels Kohlenstoff oder einem Gemisch, das nicht fließt, wenn es auf der Klebstoff-Schicht (11) angewendet wird, und die Strahlung im sichtbaren oder in einem nahen infraroten Bereich absorbiert; und, wenn notwendig, Ermöglichen oder Bewirken, daß das Gemisch erstarrt;
 - (c) Anwenden eines Substrats (13) auf die Klebstoff-Schicht (11), auf der das Bild (12) erzeugt worden ist; und
 - (d) Verbinden der Klebstoff-Schicht (11) mit dem Substrat (13) durch Verwenden eines thermischen Hochtemperatur-Verbundprozesses, um ein Sicherheitslaminat mit dem Bild (12) zwischen der Lage (10, 20) aus transparentem Medium und dem Substrat (13) zu schaffen.

2. Verfahren gemäß Anspruch 1, wobei beim Verfahrensschritt (a) die Seite der Lage (10, 20) aus transparentem Medium mit der Schicht (11) aus Hochtemperatur-Klebstoff bedeckt wird.

5

3. Verfahren gemäß Anspruch 1 oder 2, wobei das Bild (12) auf die Klebstoff-Schicht (11) durch einen xerographischen Prozeß angewendet wird und das Gemisch ein beim xerographischen Prozeß eingesetzter Toner ist.

10

4. Verfahren gemäß Anspruch 1 oder 2, wobei das auf die Klebstoff-Schicht (11) angewendete Bild (12) mittels eines programmierbaren Druckers hergestellt wird, der mittels eines Bandes, das mit Kohlenstoff oder einen Kohlenstoff enthaltenden Gemisch imprägniert ist oder eine Schicht daraus trägt, druckt.

15

20

5. Verfahren gemäß Anspruch 1 oder 2, wobei das Bild (12) auf die Klebstoff-Schicht (11) durch einen Tintenstrahldrucker angewendet wird.

25

6. Verfahren gemäß einem der vorstehenden Ansprüche, wobei weiter wenigstens eine weitere Schicht (27) mit dem Laminat verbunden wird, um deren Steifigkeit zu erhöhen.

30

Revendications

1. Un procédé de production d'un stratifié de sécurité incluant une image, comprenant les étapes consistant à:

35

(a) agencer une feuille (10, 20) de support transparent sur une face de laquelle une couche (11) de colle à haute température est agencée;

40

(b) produire sur la couche de colle (11) une image (12) en utilisant du carbone ou un composé qui ne coule pas lorsqu'il est appliqué à la couche de colle (11) et qui est absorbant pour un rayonnement visible ou dans l'infrarouge proche; et permettre ou provoquer, si nécessaire, une prise du composé;

45

(c) appliquer un substrat (13) à la couche de colle (11) sur laquelle l'image (12) a été produite; et

50

(d) attacher la couche de colle (11) au substrat (13) en utilisant un processus d'attache thermique à haute température de façon à former le stratifié de sécurité où l'image (12) est disposée entre la feuille (10, 20) de support transparent et le substrat (13).

55

2. Un procédé selon la revendication 1, dans lequel l'étape (a) comprend une étape consistant à revêtir ladite face de la feuille (10, 20) de support transpa-

rent au moyen de la couche (11) de colle à haute température.

3. Un procédé selon la revendication 1 ou 2, dans lequel l'image (12) est appliquée à la couche de colle (11) par un procédé de xérographie, et ledit composé est le toner utilisé dans le processus de xérographie. 5
4. Un procédé selon la revendication 1 ou 2, dans lequel l'image (12) appliquée à la couche de colle (11) est produite en utilisant une imprimante programmable qui imprime en utilisant un ruban imprégné de carbone ou d'un composé contenant du carbone, ou un ruban portant une couche de carbone ou d'un tel composé. 10 15
5. Un procédé selon la revendication 1 ou 2, dans lequel l'image (12) est appliquée à la couche de colle (11) par une imprimante à jets d'encre. 20
6. Un procédé selon une revendication précédente quelconque, qui inclut l'étape additionnelle consistant à attacher au moins une autre couche (27) au stratifié pour augmenter sa rigidité. 25

30

35

40

45

50

55

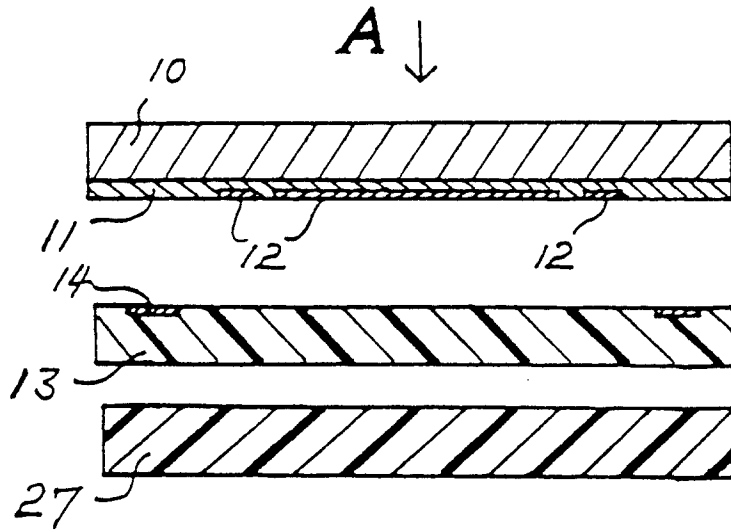


FIG. 1.

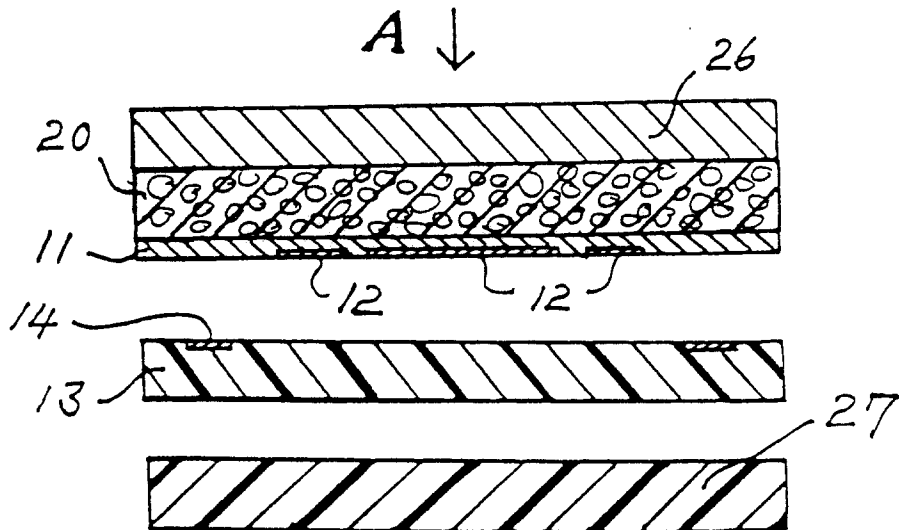


FIG. 2.