

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 478 099 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.07.2000 Bulletin 2000/28

(51) Int. Cl.⁷: **F04B 1/06**, F01L 9/02,
F02M 47/04

(21) Application number: **91250240.8**

(22) Date of filing: **29.08.1991**

(54) Fuel injection system for an internal combustion engine

Einspritzvorrichtung einer Brennkraftmaschine

Système d'injection d'un moteur à combustion interne

(84) Designated Contracting States:
CH DE DK LI

(30) Priority: **28.09.1990 JP 25733690**
09.10.1990 JP 26936990

(43) Date of publication of application:
01.04.1992 Bulletin 1992/14

(73) Proprietor:
MITSUBISHI JUKOGYO KABUSHIKI KAISHA
Tokyo (JP)

(72) Inventors:

- **Irie, Yasutaka,**
c/o Yokohama Dockyard,
Machin.Wrks
Naka-ku, Yokohama, Kanagawa Pref. (JP)
- **Ono, Shigemi,**
c/o Yokohama Dockyard,
Machin.Wrks
Naka-ku, Yokohama, Kanagawa Pref. (JP)
- **Kunimoto, Etsuo,**
c/o Nagasaki Techn. Inst.
Nagasaki, Nagasaki Pref. (JP)

- **Tosa, Youzou,**
c/o Nagasaki Techn. Inst.
Nagasaki, Nagasaki Pref. (JP)
- **Nagae, Yoshinori,**
c/o Nagasaki Techn. Inst.
Nagasaki, Nagasaki Pref. (JP)

(74) Representative:
Meissner, Peter E., Dipl.-Ing. et al
Meissner & Meissner,
Patentanwaltsbüro,
Postfach 33 01 30
14171 Berlin (DE)

(56) References cited:

DE-A- 3 700 003	DE-A- 3 800 003
GB-A- 2 067 681	US-A- 2 219 002

- **PATENT ABSTRACTS OF JAPAN vol. 9, no. 34**
(M-357) 14 February 1985 & JP-A-59 176 412
(SAITOU ATSUSHI) 5 October 1984
- **PATENT ABSTRACTS OF JAPAN vol. 9, no. 29**
(M-356) 7 February 1985 & JP-A-59 173 512
(SAITOU ATSUSHI)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 478 099 B1

Description

FIELD OF THE INVENTION AND RELATED ART STATEMENT

[0001] The present invention relates to a fuel injection system for an internal combustion engine.

[0002] A fuel injection system for an internal combustion engine is known from the GB-A-2067681. And in Japanese Patent Application Laid-Open No.59-173512 (No.173512/1984) a fuel injection system is also described. This fuel injection system is composed of a working oil feeding pump, a filter, a working oil tank pressure regulating valve and an accumulator. The working oil feeding pump is driven by an engine through a belt.

[0003] In above-mentioned conventional fuel injection system, however, there has been such a drawback that no consideration is given to a counter-measure when a trouble occurs and reduction in driving force in the working oil feeding pump. Namely, in the former case, since there is provided only one set of working oil feeding pump, feeding of the working oil is stopped when a piston and a cylinder of the pump stick together, and equipments driven by the working oil become inoperable, and in its turn an engine has to be suspended. Further, in the latter case, the working oil feeding pump always discharges the working oil at a consumption quantity and more of the fuel injection system and the working oil pressure is controlled by a pressure regulating valve. Therefore, the driving force of the working oil feeding pump is at a required quantity and more, thus producing a big power loss. Furthermore, only an accumulator is provided as a counter-measure against discharge pressure fluctuation of the working oil and no consideration is given to the feeding pump.

[0004] On the other hand, a conventional oil pressure control system for a fuel injector, an exhaust valve and the like which are driven by oil pressure is described in Japanese Patent Application Laid-Open No.59-176412(No.176412/1984) for instance. As shown in Fig. 11, this system is provided with a fuel feeding device S having a fuel feeding pump 69 which is driven by an internal combustion engine 68, a working oil feeding device P having a working oil pump 76 which is driven by the internal combustion engine, an injector device T having an injector 32 which pressurizes the fuel oil which is sent by pressure from the fuel feeding device S by means of an oil pressure servo mechanism 33 and injects the fuel oil from a nozzle valve 2 and a solenoid valve portion 31 which actuates the oil pressure servo mechanism 33 so as to control communication of the working oil, a valve device X consisting of a valve mechanism portion 62 which drives an exhaust valve 36 to open and close with oil pressure and a valve drive unit 61 having a solenoid valve portion 63 which actuates the valve mechanism portion 62 so as to control communication of the working oil, and a controller R

having a computer 65 which controls a solenoid coil 12 of the solenoid valve portion 31 of the injector device T and a solenoid coil 48 of a solenoid valve portion 63 of the valve device X appropriately in accordance with the operating state of the internal combustion engine 68, and it is constructed so that the working oil is fed to the injector device T and the valve device X from the working oil feeding device P and the valve device X.

[0005] In a conventional oil pressure control system, however, the working oil pump 76 always discharges a constant quantity of high pressure working oil, and the discharge pressure is regulated by releasing the discharge oil by means of a pressure regulating valve 75, thus producing big loss in the driving power. Further, the fuel injector device T is composed as one body of the injector portion 32, the oil pressure servo mechanism 33 and the solenoid valve 31, and the structure thereof is complicated. Furthermore, the injector device T has to be replaced entirely even in case a trouble happens even at any one location. Therefore, not only economical disadvantages are caused, but also deterioration of the working oil is not avoidable because the working oil and the fuel oil are existent in a mixed state in the injector device T.

[0006] Further, the valve device X is composed of the valve mechanism portion 62, the solenoid valve portion 63 and the valve drive unit 61 as one body. Thus, there have been such problems that the structure is complicated and the valve device X has to be replaced entirely even if a trouble occurs at any one place, which is uneconomical, and moreover, consumption of the working oil is large and the loss of the driving power of the working oil pump 76 is also big since the valve drive device 61 is composed of a single piston.

OBJECT AND SUMMARY OF THE INVENTION

[0007] It is an object of the present invention which has been made in view of such points to provide a fuel injection system for an internal combustion engine in which above-described problems of a conventional fuel injection system are solved, the oil feeding quantity of a working oil pump may be matched surely to the use quantity, power loss is small, and oil pressure fluctuation is small.

[0008] It is another object of the present invention to provide a highly economical fuel injection system for an internal combustion engine in which above-described problems of a conventional fuel injection system are solved, the structure is simple and troubles occur less, only the minimal parts exchange is required in case a trouble occurs, working oil consumption is small, driving power loss of a working oil pump is reduced, and fuel oil is prevented from mixing into the working oil so as to eliminate deterioration.

[0009] The epitome of the present invention for achieving above-mentioned objects is as stated in the following.

[0010] A fuel injection system for an internal combustion engine according to the present invention comprises a plurality of high pressure pumps, working oil sources for feeding working oil to said high pressure pumps; an accumulator or gathering pipe for accumulating high pressure working oil discharged from the respective high pressure pumps; a pressure detector for detecting the pressure of working oil in said accumulator or gathering pipe; an actuator for adjusting the discharge quantity of said high pressure pumps; and a controller for controlling said pressure of working oil to a predetermined pressure by adjusting the discharge quantity of said high pressure pumps by said actuator on the basis of deviations of said pressure detected by said pressure detector from said predetermined pressure, said high pressure pumps are disposed around a crank shaft of the engine, said high pressure pumps are driven by a cam having a plurality of lobes integrally fixed to the outer circumference of said crank shaft, so that the number of discharge times from said high pressure pumps per one revolution of the engine is expressed by the product of the number of said high pressure pumps and the number of said lobes of the cam, there are further provided: a crank angle detector for detecting the crank angle of said crank shaft; a fuel injection pump of the oil pressure drive type; and a switching valve between a pressure chamber of said fuel injection pump and said accumulator or gathering pipe so that said switching valve can be opened and closed by said controller on the basis of signals from said crank angle detector, thereby injecting the required quantity of fuel oil into cylinders via said fuel injector. Here, it is preferred, that the high pressure pumps are arranged in equal intervals around the said cam.

[0011] As to the operation of a fuel injection system of the present invention, since a jerk type fuel injection pump having sufficient application results as a high pressure pump is utilized and a plurality of these pumps are used, the working oil will never be stopped to be fed by means of other pumps in case one set of plunger and barrel stick together and restoration to the original state can be made by replacing a stuck high pressure pump. Thus, it is not required to suspend the engine completely even when a trouble occurs in the pump in a part. According to the invention it is possible to decrease the number of high pressure pumps thereby to thin out related pumps so that discharge oil pressure fluctuation becomes less, and the volume of the gathering pipe can be reduced. Furthermore, since the oil pressure in the gathering pipe is detected and the discharge quantity of the high pressure pump is controlled through the pump rack based on the deviation from a predetermined pressure so that the working oil is discharged by the quantity corresponding to the consumption quantity, there is an advantage that the loss of driving power of the high pressure pump may be made small.

[0012] The present invention being constructed as

described above, such effects are obtainable that driving loss of high pressure pumps is eliminated, discharge pressure fluctuation of the high pressure pumps may be made small, the volume of an accumulator or a gathering pipe may also be reduced, high safety may be achieved because a plurality of high pressure pumps are installed, and suspension of feeding working oil may be prevented.

[0013] Further, a fuel injection system for an internal combustion engine comprises a valve device of the oil pressure drive type; and a switching valve for connection between a pressure chamber of said valve device and said accumulator or gathering pipe so that said switching valve can be opened and closed by the predetermined timing by said controller on the basis of signals from said crank angle detector, thereby opening and closing an exhaust valve via said valve device.

[0014] Furthermore, a fuel injection system for an internal combustion engine comprises a starting booster which feeds high pressure working oil to above-mentioned accumulator or gathering pipe at the time of starting said engine based on an instruction of said controller.

[0015] As to the operation of the present invention, a valve device M being composed of two stages, a large diameter piston for opening an exhaust valve and a small diameter piston for maintaining lift, consumption of the working oil is small. Further, the discharge quantity of the high pressure working oil pump is controlled by the controller through the valve actuator so as to discharge only a required quantity corresponding to a set pressure of the accumulator. Therefore, the driving power of the high pressure working oil pump can be reduced by a large margin, which is advantageous economically. Furthermore, since a plurality of high pressure working oil pumps are provided, the pump may be replaced individually even during operation and it is not required to suspend the engine.

[0016] Further, the fuel injector is separated independently into a fuel regulating valve, a fuel pressurizer and a fuel valve. Therefore, parts to be repaired or to be replaced against individual trouble are small in number. Thus, the fuel injection system is economical, and is able to prevent the fuel oil from mixing into the working oil before it happens.

[0017] Furthermore, the exhaust valve device is also separated independently into a valve regulating valve and a valve actuator, and parts to be repaired or to be replaced against individual trouble are small in number, which is economical.

[0018] Moreover, starting can be performed surely and easily because the high pressure working oil flows into an accumulator C from a starting booster at the time of starting.

[0019] The present invention being composed as described above, such effects are obtained that consumption of accumulated working oil may be reduced to the irreducible minimum of the demand, thus eliminating

driving power of a high pressure working oil pump. Furthermore, repair and parts replacement to the irreducible minimum of the demand may be performed without suspension of an engine by separating composition of equipments independently, and it is also possible to avoid deterioration of working oil by preventing fuel oil from mixing into the working oil, and to prevent accidents from occurring by suspending fuel injection in a cylinder after defective operation of the discharge valve occurs.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020]

Fig. 1 thru Fig. 5 show a first embodiment of the present invention, wherein:

Fig. 1 is a structural view of a rear end portion of an engine (taken along a line I-I in Fig. 2);

Fig. 2 (a) is a perspective view seen in a direction shown at II_a in Fig. 1;

Fig. 2 (b) is a sectional view taken along a line II_b-II_b in Fig. 1;

Fig. 3 is a sectional view of a high pressure pump;

Fig. 4 is an explanatory view of pressure fluctuation; and

Fig. 5 shows explanatory diagrams for explaining pump arrangement and discharge interval.

Fig. 6 thru Fig. 10 show a second embodiment of the present invention, wherein:

Fig. 6 shows general structural views of an oil pressure control system;

Fig. 7 is a detailed view of a valve regulating valve F shown in Fig. 6;

Fig. 8 is a detailed view of a fuel regulating valve shown in Fig. 6;

Fig. 9 is a perspective view seen in a direction shown at IX in Fig. 6, which shows an arrangement example of high pressure working oil pumps;

Fig. 10 is a sectional view of a high pressure working oil pump; and

Fig. 11 is a general structural view of a conventional oil pressure control system.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0021] Embodiments of the present invention will be described in detail hereafter with reference to the accompanying drawings.

The first embodiment:

[0022] An embodiment of the present invention will be described hereafter with reference to Figs. 1 to 5.

[0023] Fig. 1 is a structural view of a rear end portion of an engine, which is a sectional view taken along a line I-I in Fig. 2, Fig. 2 (a) is a perspective view seen in

a direction shown at II_a in Fig. 1, and Fig. 2 (b) is a sectional view taken along a line II_b-II_b in Fig. 1 showing a general structural view of a fuel injection system.

[0024] In these Figures, a numeral 1 denotes a crank shaft, 2 denotes a thrust collar formed with the crank shaft 1 as one body, 3 denotes a plurality of thrust pads which form a thrust bearing which receives the thrust collar 2 and moves forward and rearward, 4 denotes a cam which has a plurality of lobes 4a fastened to the outer periphery of the thrust collar 2 through a key 5 as one body with bolts and is divided into halves, and 6 denotes a journal bearing which receives the crank shaft 1. 7 denotes a fitting base fastened with bolts to an engine body 8, 9 denotes a high pressure pump fastened with bolts to the fitting base 7 through a pump cradle 10, 11 denotes a roller fitted rotatably to a slide cylinder 13 through a pin 12, and the slide cylinder 13 is guided slidably up and down on the fitting base 7 and the pump cradle 10 and the upper end thereof abuts against a plunger of the high pressure pump 9.

[0025] A spring 14 presses the roller 11 against the cam 4 through the pin 12. A plurality of high pressure pumps 9 are arranged radially at a pitch θ , and pump racks 9a of respective high pressure pumps 9 are joined with each other and one end thereof is coupled with an actuator 15, and the discharge quantity of these high pressure pumps is controlled through feedback by means of a controller 16 so that the pressure of a gathering pipe 17 becomes a set value. In Fig. 2, the high pressure pump 9 shown with a broken line shows a case in which the number of pumps is reduced in an engine having a small number of cylinders, and is shielded with a cover 18. The high pressure pump 9 has a low pressure oil gateway 19, and the low pressure oil is fed from a tank 20 by a motor-driven oil pump 22 through a filter 21, and circulates in the high pressure pump, and the oil pressure is regulated by a pressure regulating valve 23. The filter 21 and the oil pump 22 are provided against emergency.

[0026] Fig. 3 is a sectional view showing a jerk type high pressure pump. A plunger 30 is guided slidably along a plunger barrel 32 having an oil filler port 32a fixed to the body 31. The plunger 30 is pressed against the slide cylinder 13 at the lower portion thereof by means of a spring 33, moves vertically by the cam 4, rotates the plunger 30 through a sleeve 34 by the pump rack 9a and changes the position of a lead 35 so as to control the discharge quantity of the high pressure pump 9. A discharge valve 38 which is fastened with a bolt 39 through a cap metal fittings 36 and pressed downward by a spring 37 is provided in an upper part of a barrel 32, and 40 indicates a high pressure oil outlet.

[0027] In the next place, the operation of the present embodiment will be described.

[0028] Since a plurality of high pressure pumps 9 are installed, the high pressure oil is continued to be feed even when one set of pump sticks if other pumps

are in a normal state, thus making it possible to repair and restore the high pressure pump without suspending the engine. The number of discharge times Y of the high pressure pump 9 per one revolution of the engine is expressed by the product of the number N of the high pressure pumps 9 and the number Z of the lobes of the cam 4 as shown in the following expression.

$$Y = N \times Z \quad (1)$$

[0029] Here, the coefficient of pressure fluctuation Δ_p of the high pressure oil produced by the discharge of the working oil is determined by the coefficient of flow rate fluctuation Δ_q of the discharge, and Δ_q is expressed by the number of discharge times Y as shown in Fig. 4. Fig. 4 shows discharge at equal intervals, and the pressure fluctuation becomes the minimal in the case of equal intervals.

[0030] Next, an example at equal intervals in the present invention will be explained with reference to Fig. 5. When it is assumed that the number of lobes of the cam is Z and the number of high pressure pumps is N, the interval θ (degrees) of high pressure pump arrangement is expressed as:

$$\theta = \frac{360}{Z \cdot N} \quad (2)$$

[0031] Namely, Fig. 5 shows a high pressure pump arrangement drawing (upper drawing) and a high pressure pump discharge interval drawing (lower drawing) when the number of lobes of the cam is 4, and the number of high pressure pumps is 4 in Fig. 5 (a), 3 in Fig. 5 (b) and 2 in Fig. 5 (c) (the number of high pressure pumps is increased and decreased in accordance with the number of cylinders). When description is made in detail with

[0032] Fig. 5 (a) as an example, $360^\circ/4 = 90^\circ$ is considered as one unit in case the number of lobes of the cam is 4, and high pressure pump are arranged (shown at positions shown with \bigcirc in the upper drawing) at every interval θ_1 (degrees) obtained by dividing 90° by the number of high pressure pumps.

[0033] In the case of Fig. 5 (c), the configuration shows that high pressure pumps shown in Fig. 5 (a) are thinned out, and thus common elements such as a fitting base shown in Fig. 5 (a) may be used. Accordingly, commonness may be planned, thus curtailing the cost.

[0034] Further, in the case of Fig. 5, it is possible to thin out one set of high pressure pump shown in Fig. 5 (a) for a 5-6 cylinder engine (though no longer at equal intervals). Therefore, further cost reduction may be expected by common use of parts.

[0035] Besides, it is needless to say that $360^\circ/3 = 120^\circ$ or $360^\circ/5 = 72^\circ$ is adopted as one unit when the number of lobes of the cam is 3 or 5.

[0036] Furthermore, since the controller 16 controls

one end of the rack 9a through the actuator 15 so that the deviation becomes zero by comparing a set pressure and a detected pressure in the gathering pipe 17, the high pressure pump 9 feeds the working oil in the quantity corresponding to the consumption quantity, and the driving loss of the high pressure pumps is small. The second embodiment:

[0037] Another embodiment of the present invention will be described hereafter with reference to Figs. 6 to 10.

[0038] Fig. 6 is a general structural view of an electronic oil pressure control system of a fuel injection system, Fig. 7 is a structural view of a valve regulating valve in Fig. 6, Fig. 8 is a structural view of a fuel regulating valve in Fig. 6, Fig. 9 is a perspective view seen in a direction shown at IX in Fig. 6 showing an arrangement diagram of high pressure working oil pumps, and Fig. 10 is a sectional view of a jerk type high pressure hydraulic oil pump.

[0039] In Fig. 6, A indicates an oil pressure source consisting of a plurality of high pressure working oil pumps A4 which are driven by a multi-lobe cam A2 fixed as one body on an outer periphery of a thrust collar A1 at a rear portion of a crank shaft through a roller A3. Incidentally, low pressure working oil is fed with circulation to the oil pressure source A from a working oil feeding source B consisting of a filter B1, an electric pump B2, a pressure regulating valve B3 and a tank B4. C indicates an accumulator which accumulates high pressure working oil which has been fed with pressure from the oil pressure source A, and D indicates a fuel regulating valve which consists of an injection starting logic valve D2 and an injection terminating logic valve D3 which are opened and closed through working oil by means of a 5-way electromagnetic valve D1 controlled by a controller E. F indicates a valve regulating valve, which includes a valve opening logic valves F3 and a valve opening logic valve F4 which are opened and closed through working oil by means of 3-way electromagnetic valves F1 and F2. G indicates a fuel pressurizer, which is fixed to a body G1 and includes a barrel G3 for guiding a plunger G2, a pump rack G4 which rotates the plunger G2 and regulates discharge quantity of high pressure fuel oil, a spring G5 which energizes the plunger G2 downward, an injection pump G10 having a discharge valve G6, and a piston G8 guided by a cylinder G7 which receives working oil controlled by the fuel regulating valve D and drives the injection pump G10. Low pressure fuel oil is fed with circulation to the injection pump G10 from a fuel feeding source H consisting of a filter H1, an electric pump H2, a pressure regulating valve H3 and a tank H4. The fuel oil pressurized to a high pressure is injected into a cylinder not shown by means of the injection pump G10 from a plurality of fuel valves L through a high pressure pipe J and a branching metal mountings K.

[0040] M indicates a valve actuator and is composed of a two-stage piston M3 guided by a cylinder M2

fixed to a body M1 and a check valve M4. The two-stage piston M3 has a small diameter piston M3a and a large diameter piston M3b, and the cylinder M2 has a small diameter piston feeding hole M2a and a large diameter piston feeding hole M2b. Further, the valve actuator M has the two-stage piston M3 and oil cushions M6 and M5 at upper and lower moving ends. N indicates an exhaust valve, which is fixed to a cylinder cover N1 and consists of a valve rod guide N3 which guides a valve rod N2 and an air spring N4, and the air spring N4 is fed with air from a guide tank N5. P indicates a starting booster, which receives low pressure working oil from the working oil feeding source B and sends with pressure high pressure working oil to the accumulator C temporarily at the time of starting an engine based on an instruction of the controller E. A5 indicates an actuator, in which discharge quantity of the high pressure working oil pump A4 is controlled by means of the controller E with a signal of a pressure detector C1 so that the pressure in the accumulator becomes a set pressure. A6 indicates a crank angle detector, which outputs a signal for the controller E to control the 5-way electromagnetic valve D1 and 3-way electromagnetic valves F1 and F2. Z indicates an operation detector of the exhaust valve N and outputs a signal notifying of defective operation of the exhaust valve to the controller E.

[0041] Fig. 7 shows a concrete construction of a valve opening logic valve F3, a valve closing logic valve F4 and 3-way electromagnetic valves F1 and F2, and Fig. 8 shows a concrete construction of an injection starting logic valve D2, an injection terminating logic valve D3, a 5-way electromagnetic valve D1 and an accumulator C. Fig. 9 is an arrangement drawing of high pressure working oil pumps A4. Fig. 10 shows a jerk type high pressure fuel pump, in which A4a denotes a body, A4b denotes a barrel, A4c denotes a plunger guided by the barrel A4b, A4d denotes a pump rack which regulates discharge quantity by rotating the plunger A4c, A4e denotes a spring which energizes the plunger A4c downward, and A4f denotes a discharge valve.

[0042] Next, the operation of above-mentioned embodiment will be described.

[0043] In Fig. 9, the working oil is fed to high pressure working oil pumps A4 under low pressure from the working oil feeding source B and pressurized by the high pressure working oil pumps A4 during engine operation, and the working oil is pressurized temporarily by means of a starting booster P and accumulated in the accumulator C. The controller E controls pump racks A4d of high pressure working oil pumps A4 through an actuator A5 based on a signal of a pressure detector C1 so that the accumulator pressure becomes a set value, and regulates the discharge quantity of high pressure working oil pumps A4 to a required quantity. The accumulated oil is controlled by the switching valve D in accordance with an instruction of the controller E based on a signal of a crank angle detector A6 and is fed to a

fuel pressurizer G by the injection starting logic valve D2 at the time of fuel injection, and has the piston G8 stroke. Feeding is suspended at the completion of stroke of the piston G8 corresponding to the fuel injection quantity. The working oil fed to the fuel pressurizer G is discharged by the injection terminating logic valve D3, and the piston G8 returns to the initial position by the urging force of a spring G5. The injection pump G10 pressurizes the fuel oil fed from a fuel feeding source H under a low pressure by upward movement of the piston G8 and injects it into a cylinder not shown from fuel valves L through a high pressure pipe J and a branching metal mounting K. Further, the injection pump G10 makes the injection quantity zero through an actuator G9 so as to sustain the engine by means of the controller E of the pump racks G4 and an independent device not shown upon an abnormal state of the controller E. Incidentally, the following methods of checking abnormal state may be considered.

- ① When there is no input/output because of disconnection of the controller, checking is possible by monitoring input/output signals.
- ② When an input/output signal of the controller shows an abnormal value, checking may be made in such a manner that an appropriate range is predetermined and an input/output signals are monitored so as to find whether these signals are off the appropriate range.
- ③ When a driver of a switching valve becomes inoperative, checking may be made by monitoring the operation of the switching valve with a sensor.

[0044] The valve regulating valve F controls the accumulated oil in accordance with an instruction of the controller E based on a signal of the crank angle detector A6. The accumulated oil is fed to the valve actuator M by the valve opening logic valve F3 at the time of opening the exhaust valve so as to have an exhaust valve N stroke, and the stroke is suspended after completion of required strokes. The working oil in the valve actuator M is discharged by the valve closing logic valve F4 at the time of closing the exhaust valve, and the two-stage piston M3 is returned to the initial position by the energizing force of the air spring N4, thus completing the operation of the exhaust valve N. When an exhaust valve having a large resistance of the exhaust valve N is opened, the accumulated oil is fed to a small diameter piston M3a from a check valve M4 and fed to a large diameter piston M3b through a large diameter piston feeding hole M2b, thereby to consume a large flow quantity. However, when the two-stage piston M3 strokes until the time when the resistance of the exhaust valve N becomes small, the accumulated oil is fed to a small diameter piston also through a large diameter piston feeding hole M2b, thus reducing consumption of the accumulated oil. Further, the movement of the two-stage piston M3 is relieved by means of oil cushions M5

and M6 at upper and lower ends of the stroke, thereby to prevent mechanical collision. When defective operation of the exhaust valve N is detected by the operation detector Z which checks light quantity of a gap sensor and the like, the injection quantity of fuel injection thereafter in the cylinder is made zero by means of a device not shown which makes the pump rack G4 independent of the controller E so as to suspend the engine, thereby to prevent accident from occurring.

Claims

1. Fuel injection system for an internal combustion engine (8), comprising:

a plurality of high pressure pumps (9,A4);
 a working oil source (20) for feeding working oil to said high pressure pumps;
 an accumulator (C) or gathering pipe (17) for accumulating high pressure working oil discharged from the respective high pressure pumps;
 a pressure detector (C1) for detecting the pressure of working oil in said accumulator or gathering pipe;
 an actuator (15,9a,A5,A4d) for adjusting the discharge quantity of said high pressure pumps; and a controller (16,E) for controlling said pressure of working oil to a predetermined pressure by adjusting the discharge quantity of said high pressure pumps by said actuator on the basis of deviations of said pressure detected by said pressure detector from said predetermined pressure,
 characterized in that said high pressure pumps are disposed around a crank shaft (1, A1) of the engine, said high pressure pumps are driven by a cam (4, A2) having a plurality of lobes (4a) integrally fixed to the outer circumference of said crank shaft, so that the number of discharge times from said high pressure pumps per one revolution of the engine is expressed by the product of the number of said high pressure pumps and the number of said lobes of the cam, there are further provided:
 a crank angle detector (A6) for detecting the crank angle of said crank shaft; a fuel injection pump (G10) of the oil pressure driven type; and a switching valve (D) between a pressure chamber of said fuel injection pump and said accumulator or gathering pipe so that said switching valve can be opened and closed by said controller on the basis of signals from said crank angle detector, thereby injecting the required quantity of fuel oil into cylinders of said internal combustion engine via said fuel injector.

2. Fuel injection system for an internal combustion engine, as claimed in claim 1, wherein said high pressure pumps (9,4A) are arranged in equal intervals around said cam (4,12).

3. Fuel injection system for an internal combustion engine, as claimed in claim 1, wherein there is further provided a starting booster (P) which feeds high pressure working oil to said accumulator or gathering pipe at the time of starting said engine based on an instruction of said controller (16,E).

4. Fuel injection system for an internal combustion engine according to claim 1, wherein there are further provided:

a valve device (M) of the oil pressure drive type; and a switching valve (F) for connection between a pressure chamber (M2) of said valve device and said accumulator or gathering pipe so that said switching valve can be opened and closed by the predetermined timing by said controller on the basis of signals from said crank angle detector, thereby opening and closing an exhaust valve (N) via said valve device.

Patentansprüche

1. Kraftstoffeinspritzsystem für einen Verbrennungsmotor (8), bestehend aus:

einer Anzahl von Hochdruckpumpen (9, A4),
 einer Druckölquelle (20) zur Versorgung der Hochdruckpumpen mit Drucköl,
 einem Druckspeicher (C) oder einem Druckspeicherrohr (17) zur Aufnahme von mit hohem Druck beaufschlagtem Drucköl, das von den entsprechenden Hochdruckpumpen gefördert wurde,
 einem Druckmeßfühler (C1) zum Messen des Drucks des Drucköls in dem Druckspeicher bzw. Druckspeicherrohr,
 einem Stellantrieb (15, 9a, A5, A4d) zum Anpassen der Fördermenge der Hochdruckpumpen und einem Regler (16, E) zum Regeln des Drucköldrucks auf einen bestimmten Druck, was mit Hilfe des Stellantriebs durch Anpassen der Fördermenge der Hochdruckpumpen anhand der Abweichung des mit Hilfe des Druckmeßfühlers gemessenen Drucks vom vorgegebenen Druck geschieht, dadurch gekennzeichnet, daß die Hochdruckpumpen um eine Kurbelwelle (1, A1) herum angeordnet sind, wobei die Hochdruckpumpen durch einen Nockenkörper (4, A2) angetrieben werden, der eine Anzahl von Nockenerhebungen (4a) hat, die am äußeren Umfang integriert

auf der Kurbelwelle angeordnet sind, so daß die Förderstoßanzahl der Hochdruckpumpen je Motorumdrehung durch das Produkt aus der Anzahl der Hochdruckpumpen und der Anzahl der Nockenhebungen ausgedrückt werden kann, wobei des weiteren als Bestandteile vorgesehen sind:

ein Kurbelwinkelmeßfühler (A6) zum Messen des Kurbelwinkels, eine druckölbetriebene Kraftstoffeinspritzpumpe (G10) und ein Schaltventil (D) zwischen einem Druckraum der Kraftstoffeinspritzpumpe und dem Druckspeicher bzw. dem Druckspeicherrohr, so daß das Schaltventil durch Signale von dem Kurbelwinkelmeßfühler durch den Regler geöffnet und geschlossen werden kann, wodurch mit Hilfe der Einspritzdüse die erforderliche Menge Kraftstoff in die Zylinder des Verbrennungsmotors eingespritzt wird.

2. Kraftstoffeinspritzsystem für einen Verbrennungsmotor nach Anspruch 1, bei dem die Hochdruckpumpen (9, A4) in gleichmäßigen Abständen um den Nockenkörper (4, 12) herum angeordnet sind.

3. Kraftstoffeinspritzsystem für einen Verbrennungsmotor nach Anspruch 1, bei dem des weiteren ein Startverstärker (P) vorgesehen ist, der zum Zeitpunkt des Anlassens des Motors auf einen Befehl vom Regler (16, E) dem Druckspeicher bzw. dem Druckspeicherrohr unter hohem Druck Drucköl zuführt.

4. Kraftstoffeinspritzsystem für einen Verbrennungsmotor nach Anspruch 1, bei dem des weiteren als Bestandteile vorgesehen sind:

eine druckölbetriebene Ventileinrichtung (M) und ein Schaltventil (F) zur Herstellung der Verbindung zwischen einem Druckraum (M2) der Ventileinrichtung und dem Druckspeicher bzw. Druckspeicherrohr, so daß das Schaltventil entsprechend der Taktung, die durch den Regler durch die Signale vom Kurbelwinkelmeßfühler vorgegeben wird, geöffnet oder geschlossen wird, wodurch über die Ventileinrichtung ein Auslaßventil (N) geöffnet und geschlossen wird.

Revendications

1. Système d'injection de carburant pour un moteur à combustion interne (8), comprenant :

- une pluralité de pompes à haute pression (9, A4) ;
- une source d'huile de fonctionnement (20) pour fournir de l'huile de fonctionnement auxdites

pompes à haute pression ;

- un accumulateur (C) ou un conduit de collecte (17) pour accumuler de l'huile de fonctionnement à haute pression évacuée des pompes à haute pression respectives ;
- un détecteur de pression (C1) pour détecter la pression de l'huile de fonctionnement dans ledit accumulateur ou ledit conduit de collecte ;
- un actionneur (15, 9a, A5, A4d) pour ajuster le débit desdites pompes à haute pression ; et
- un dispositif de commande (16, E) pour commander ladite pression de l'huile de fonctionnement à une pression prédéterminée en ajustant le débit desdites pompes à haute pression par ledit actionneur sur la base d'écart de ladite pression détectés par ledit détecteur de pression à partir de ladite pression prédéterminée, caractérisé en ce que lesdites pompes à haute pression sont disposées autour d'un vilebrequin (1, A1) du moteur, lesdites pompes à haute pression sont entraînées par une came (4, A2) ayant une pluralité de lobes (4a) fixés intégralement à la périphérie externe dudit vilebrequin, de sorte que le nombre de fois d'évacuation desdites pompes à haute pression par tour du moteur est exprimé par le produit du nombre desdites pompes à haute pression et du nombre desdits lobes de la came, il est de plus prévu : un détecteur d'angle (A6) pour détecter l'angle dudit vilebrequin ; une pompe d'injection de carburant (G10) du type entraîné par la pression d'huile ; et une valve de commutation (D) entre une chambre de pression de ladite pompe d'injection de carburant et ledit accumulateur ou ledit conduit de collecte, de sorte que ladite valve de commutation peut être ouverte et fermée par ledit dispositif de commande sur la base de signaux à partir du détecteur d'angle, en injectant ainsi la quantité requise de carburant dans les cylindres dudit moteur à combustion interne via ledit injecteur de carburant.

2. Système d'injection de carburant pour un moteur à combustion interne comme revendiqué dans la revendication 1, dans lequel lesdites pompes à haute pression (9, 4A) sont agencées à des intervalles égaux autour de ladite came (4, 12).

3. Système d'injection de carburant pour un moteur à combustion interne comme revendiqué dans la revendication 1, dans lequel il est de plus prévu un amplificateur de mise en marche (P) qui fournit de l'huile de fonctionnement à haute pression vers ledit accumulateur ou ledit conduit de collecte au moment du démarrage dudit moteur, en se basant sur une ins-

truction dudit dispositif de commande (16, E).

4. Système d'injection de carburant pour un moteur à combustion interne selon la revendication 1, dans lequel il est de plus prévu : un dispositif à valves (M) du type entraîné par la pression d'huile ; et une valve de commutation (F) pour la connexion entre une chambre de pression (M2) dudit dispositif à valves et ledit accumulateur ou ledit conduit de collecte, de sorte que ladite valve de commutation peut être ouverte et fermée par minutage prédéterminé par ledit dispositif de commande sur la base de signaux dudit détecteur d'angle, en ouvrant et en fermant ainsi une valve d'échappement (N) via ledit dispositif à valves.

20

25

30

35

40

45

50

55

FIG. 1

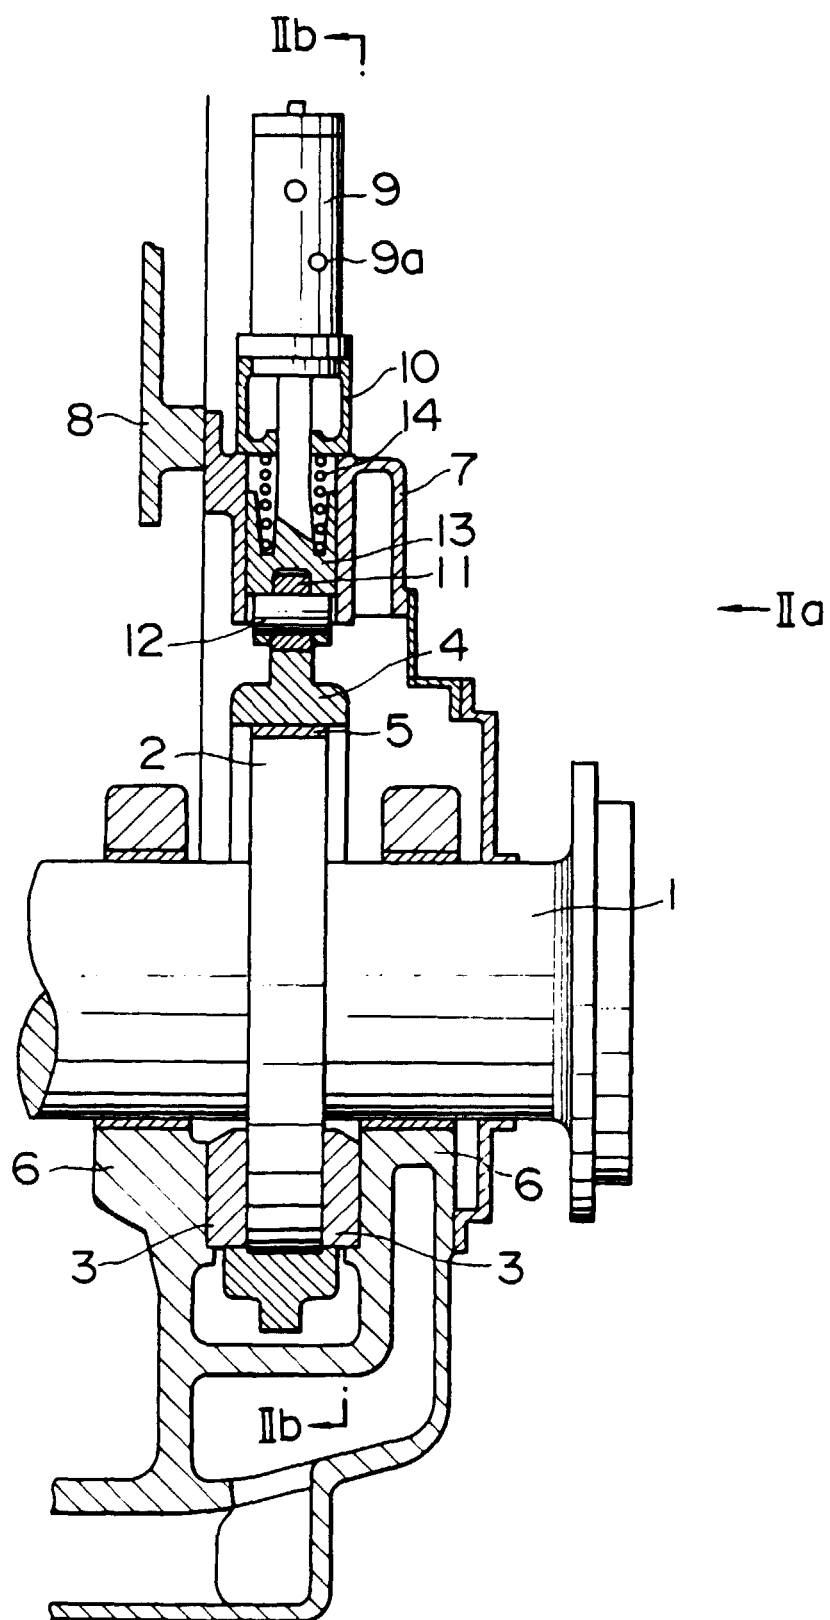


FIG. 2

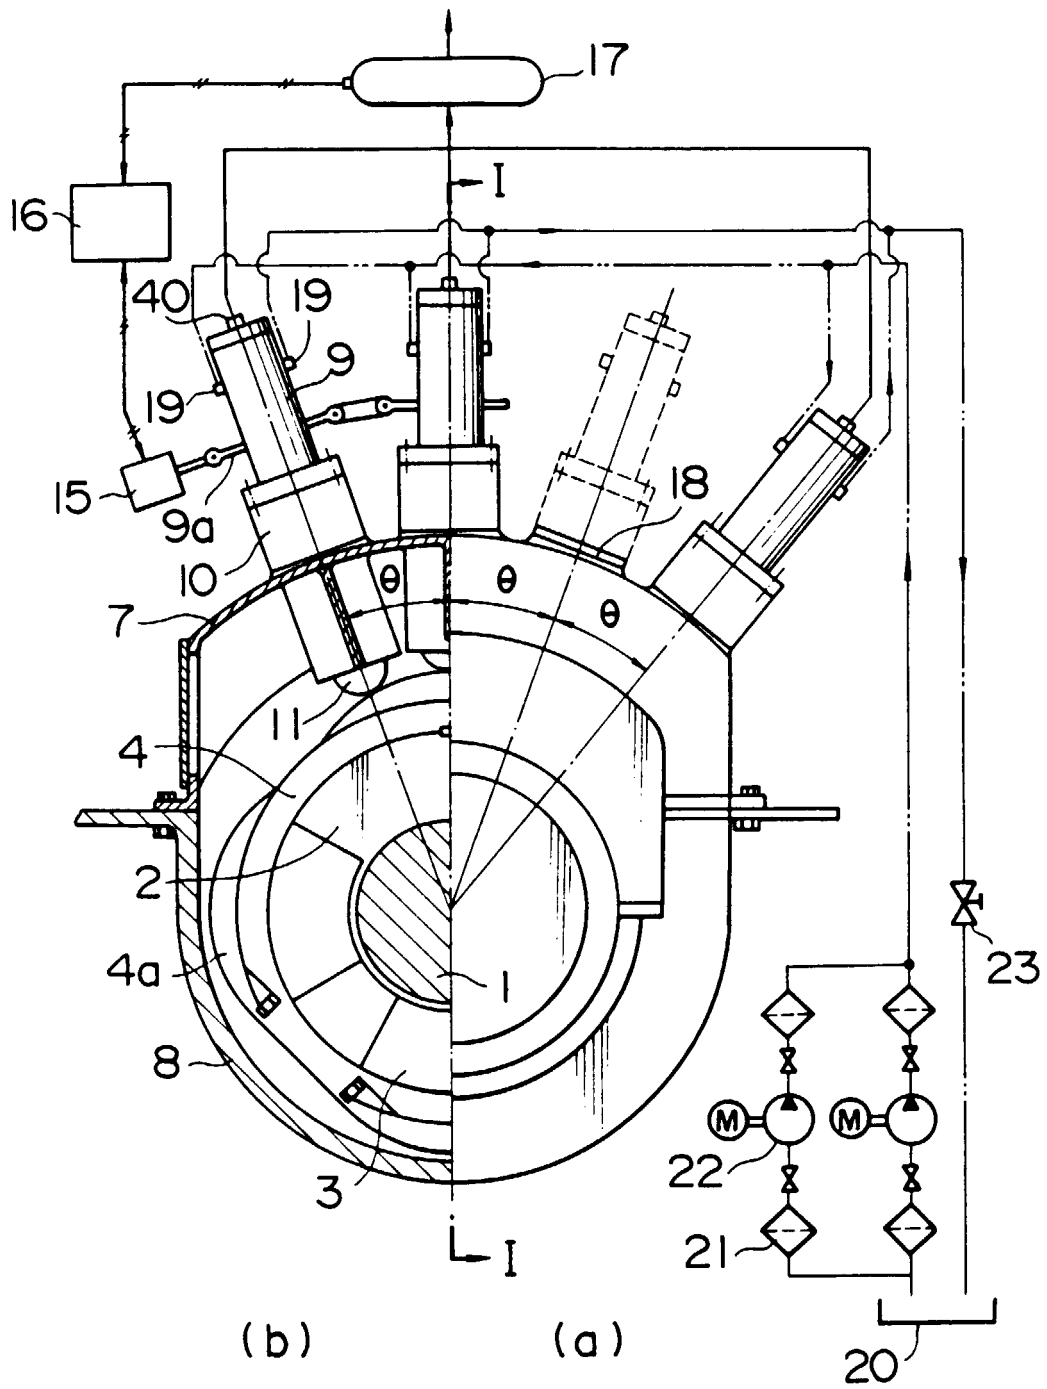


FIG. 3

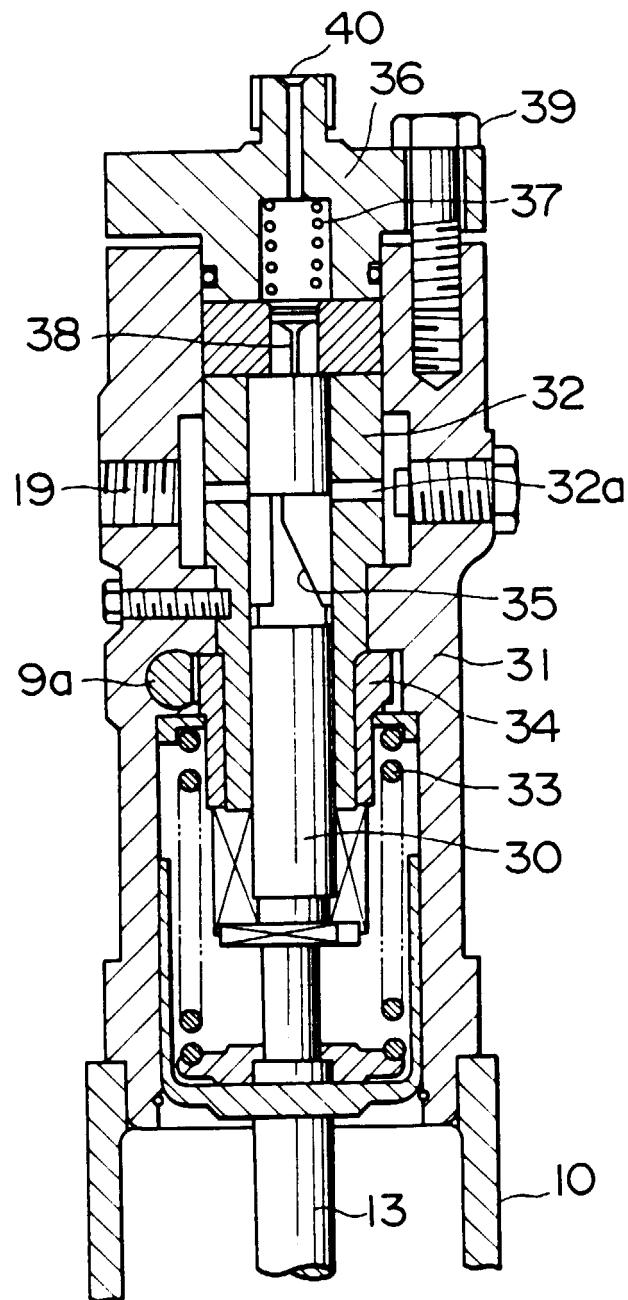


FIG. 4

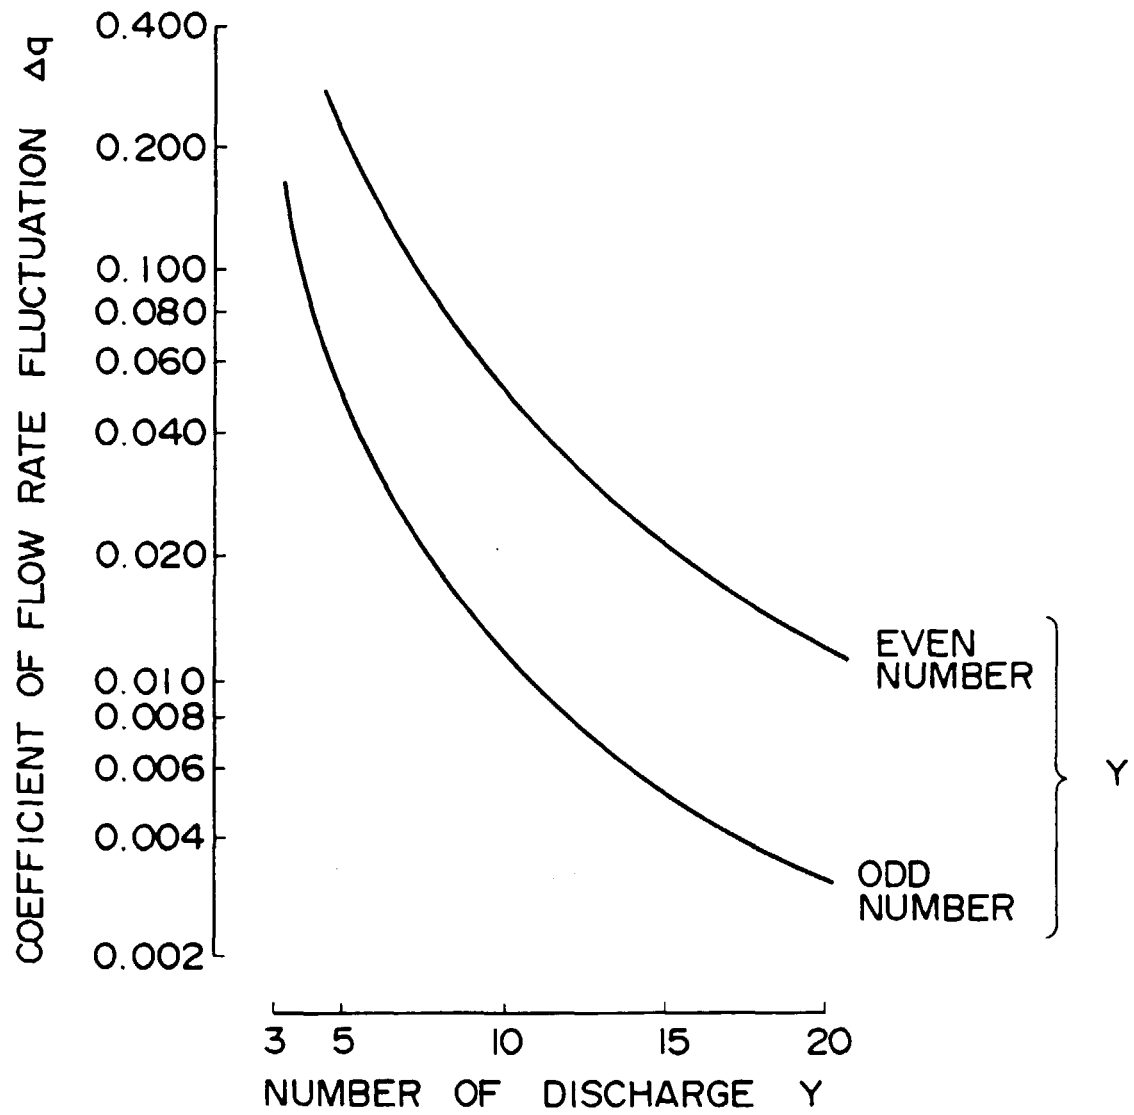


FIG. 5(a) FIG. 5(b) FIG. 5(c)

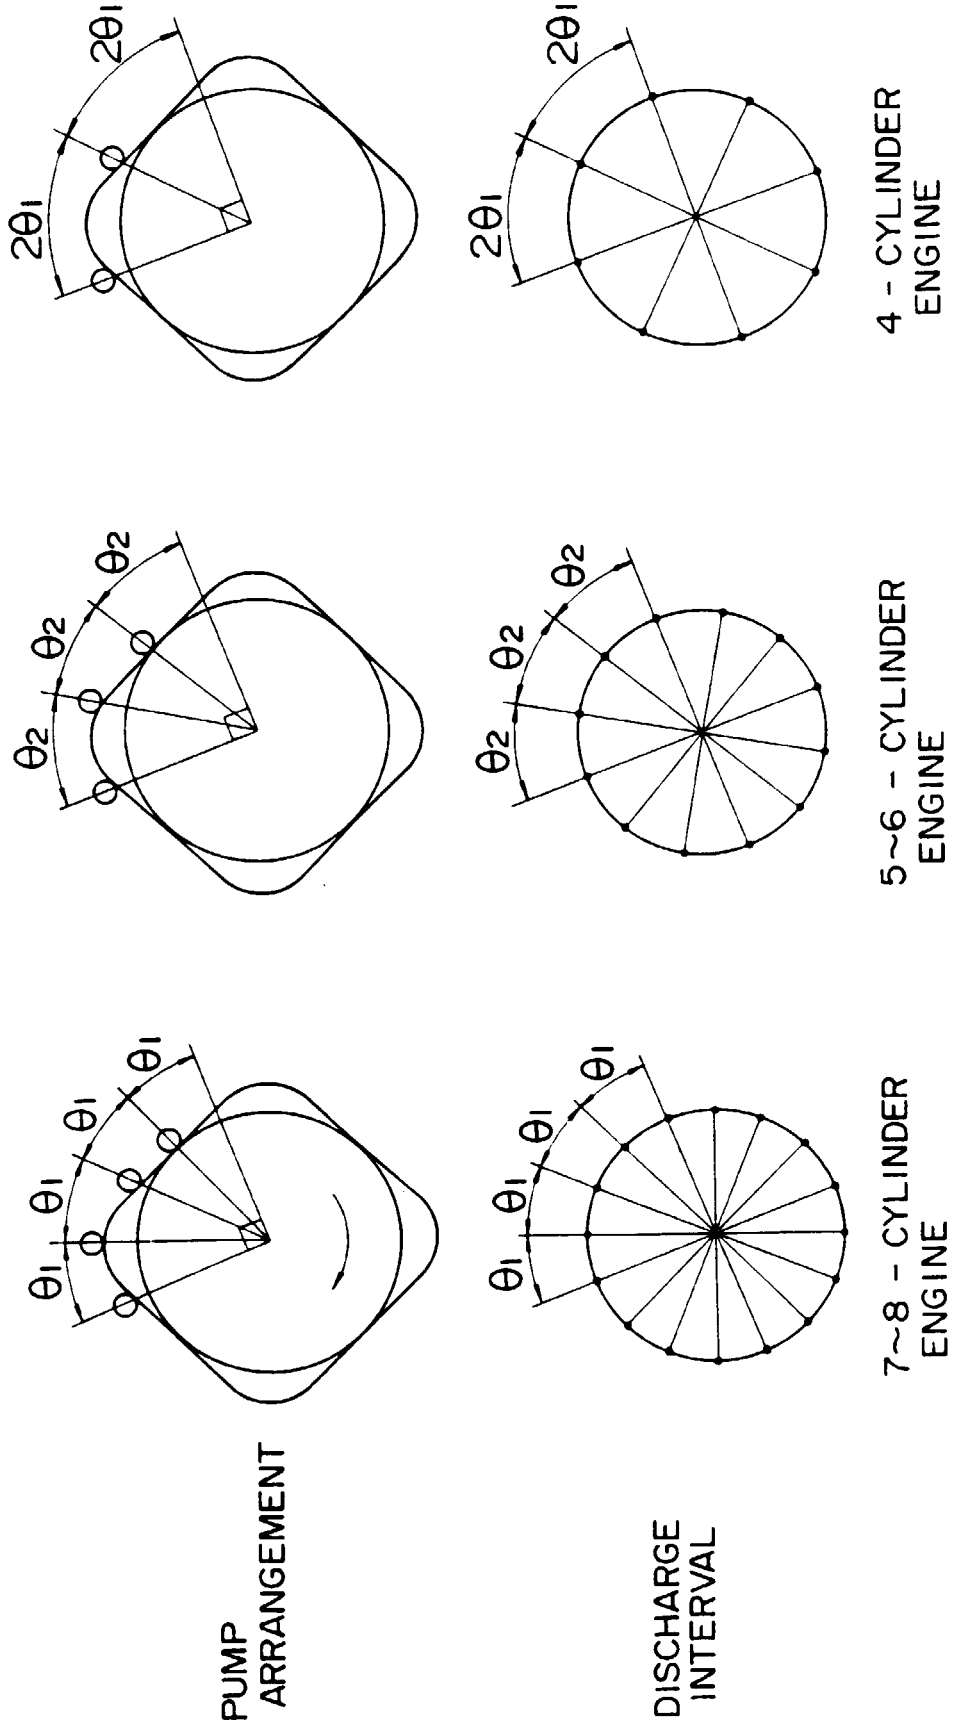


FIG. 6(A)

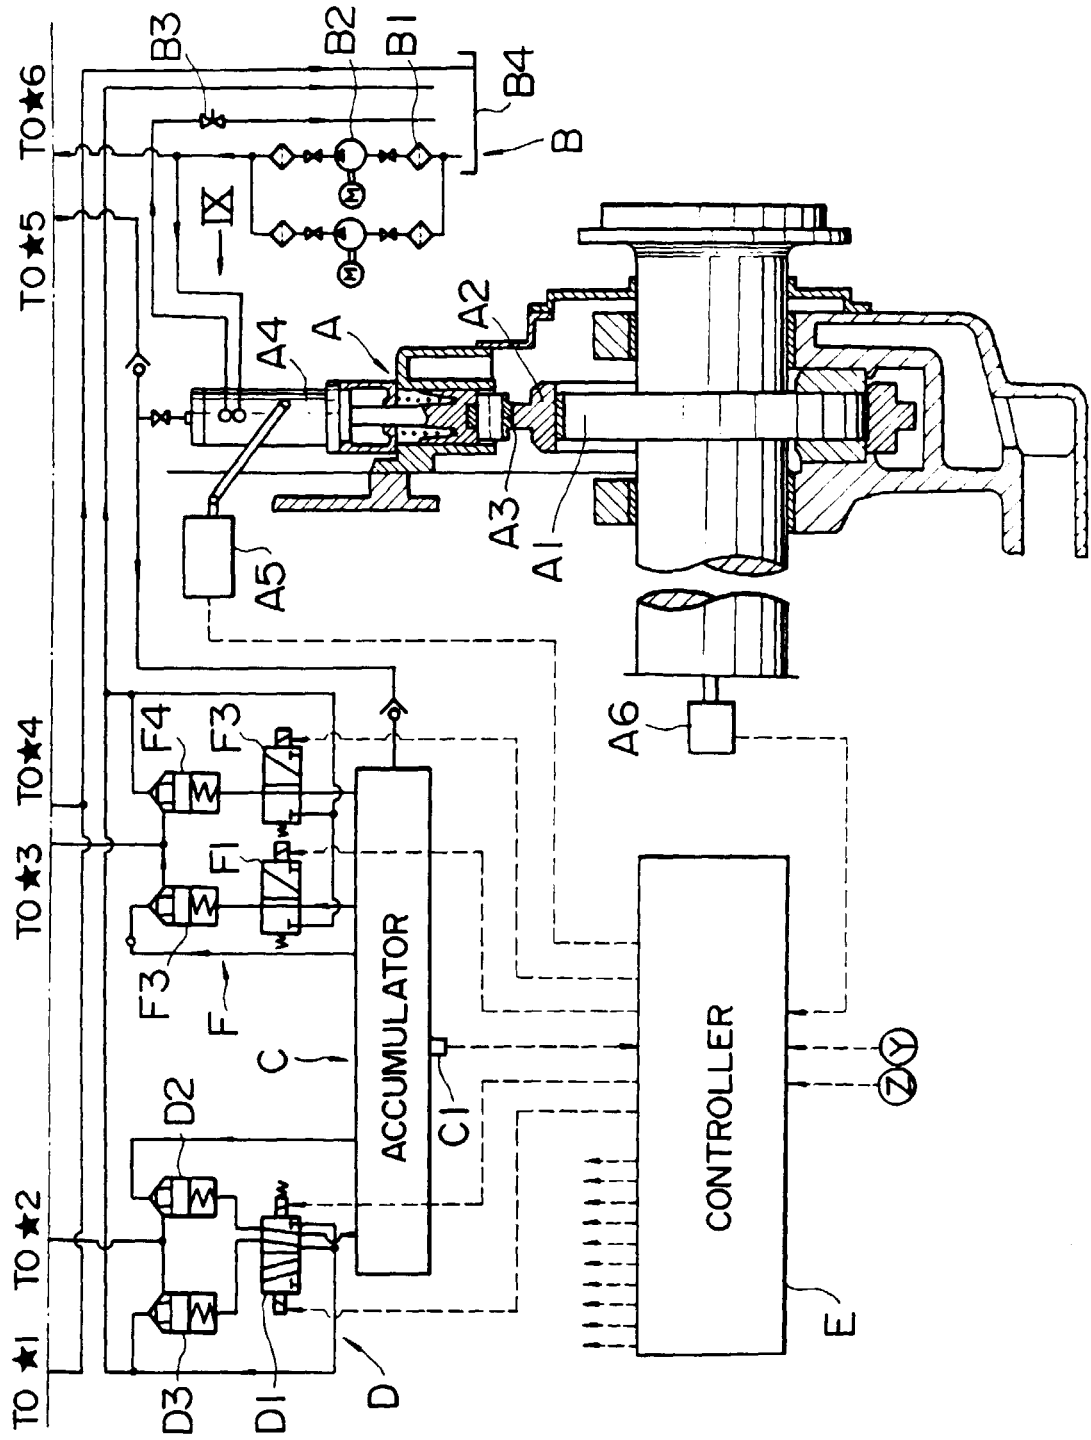


FIG. 6

FIG. 6(B)

FIG. 6(A)

FIG. 6(B)

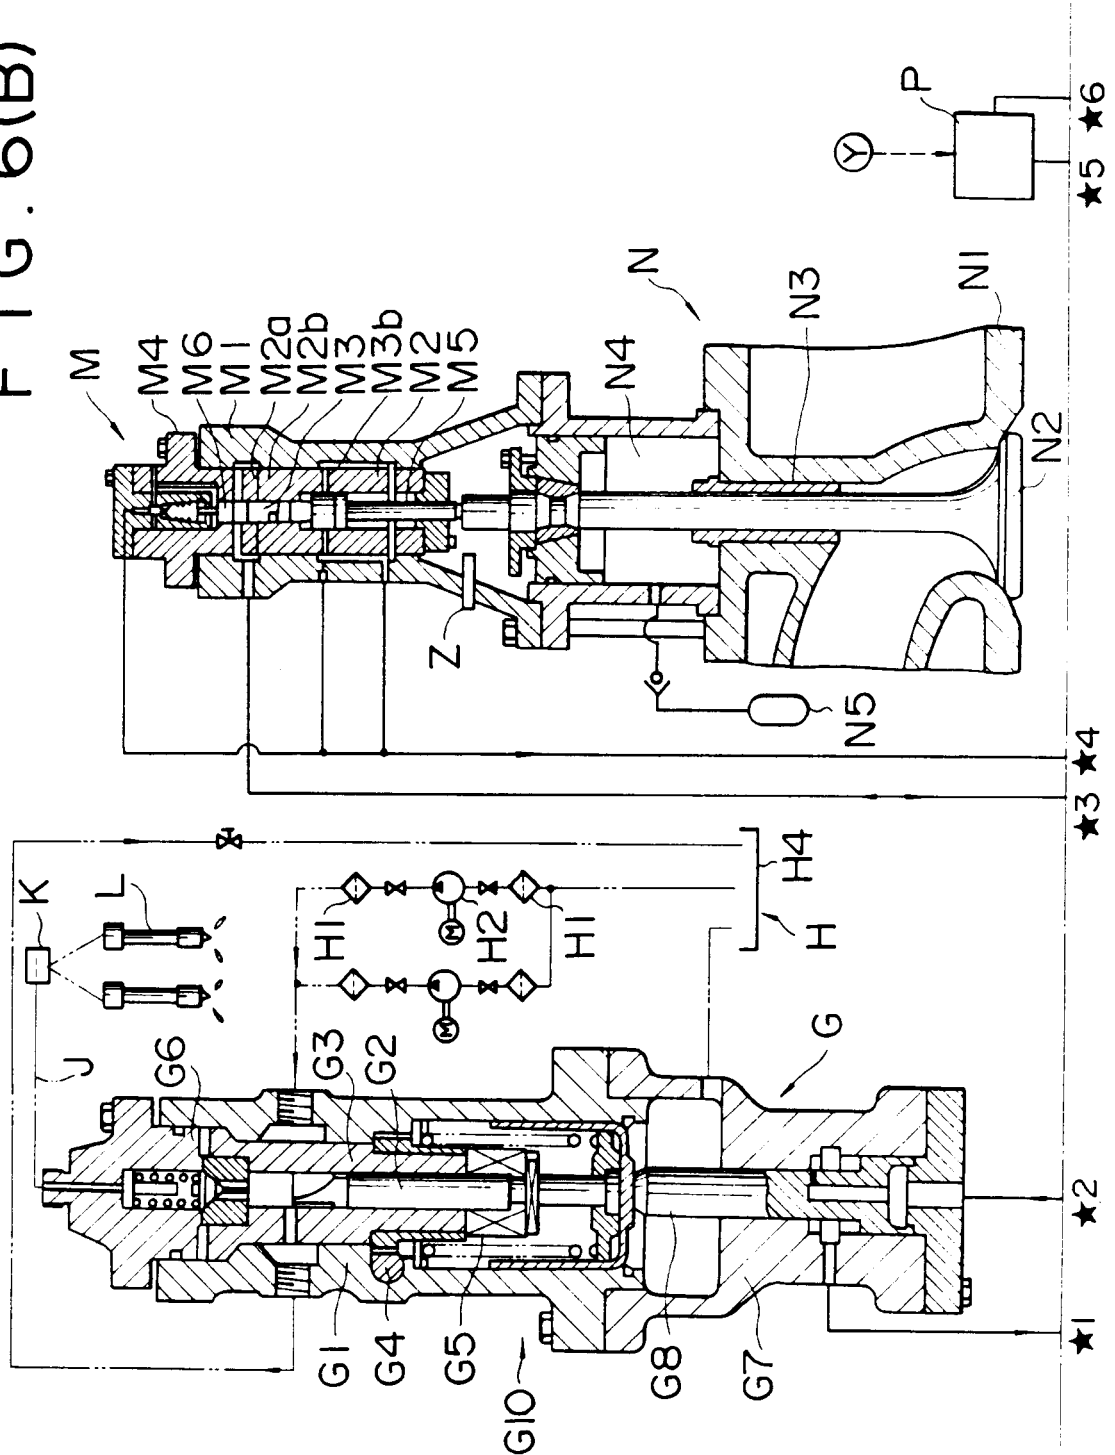


FIG. 7

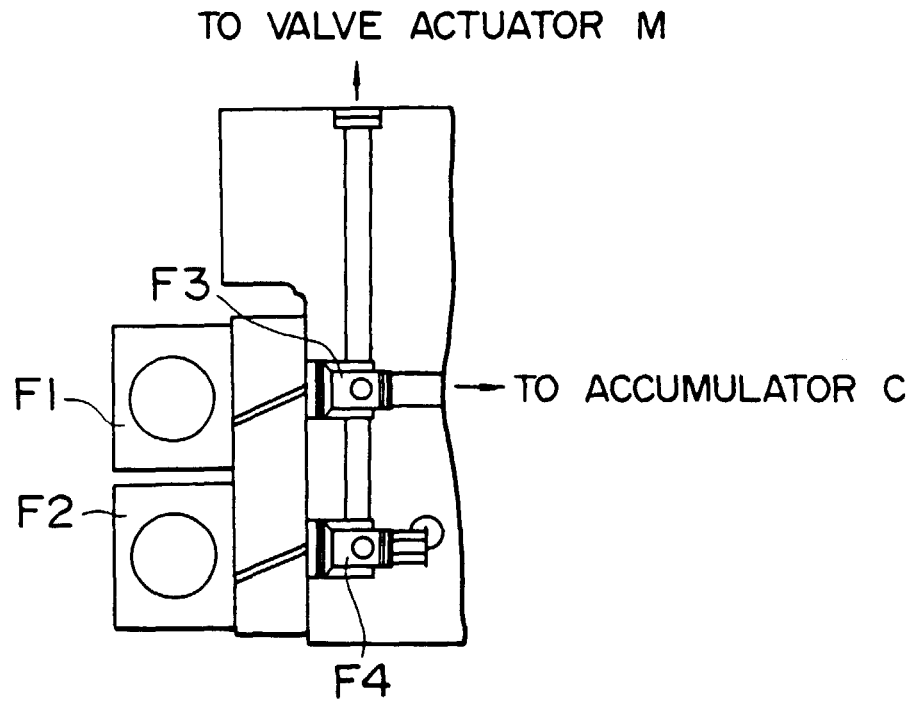


FIG. 8


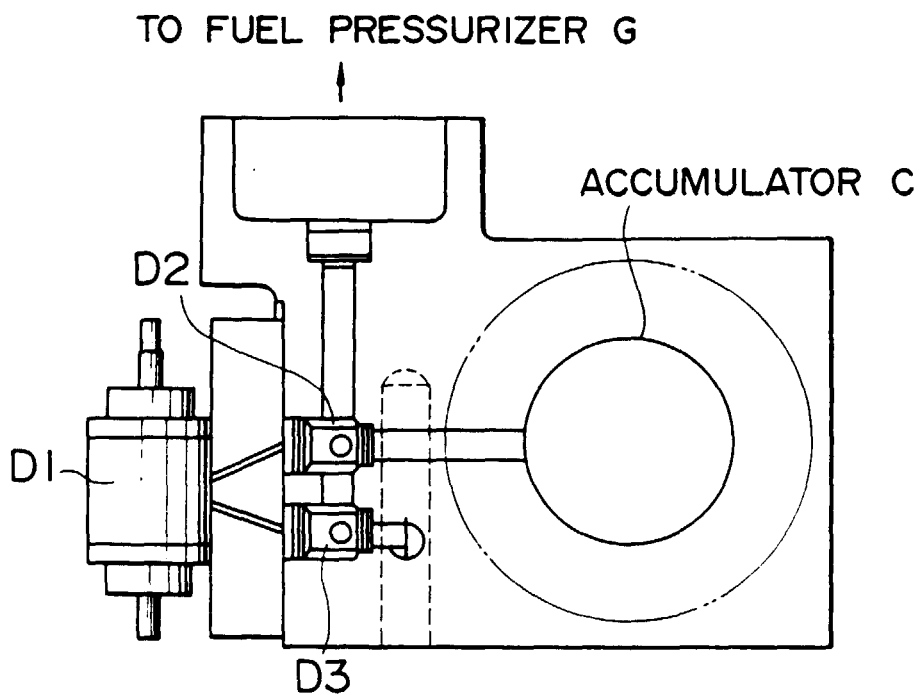


FIG. 9

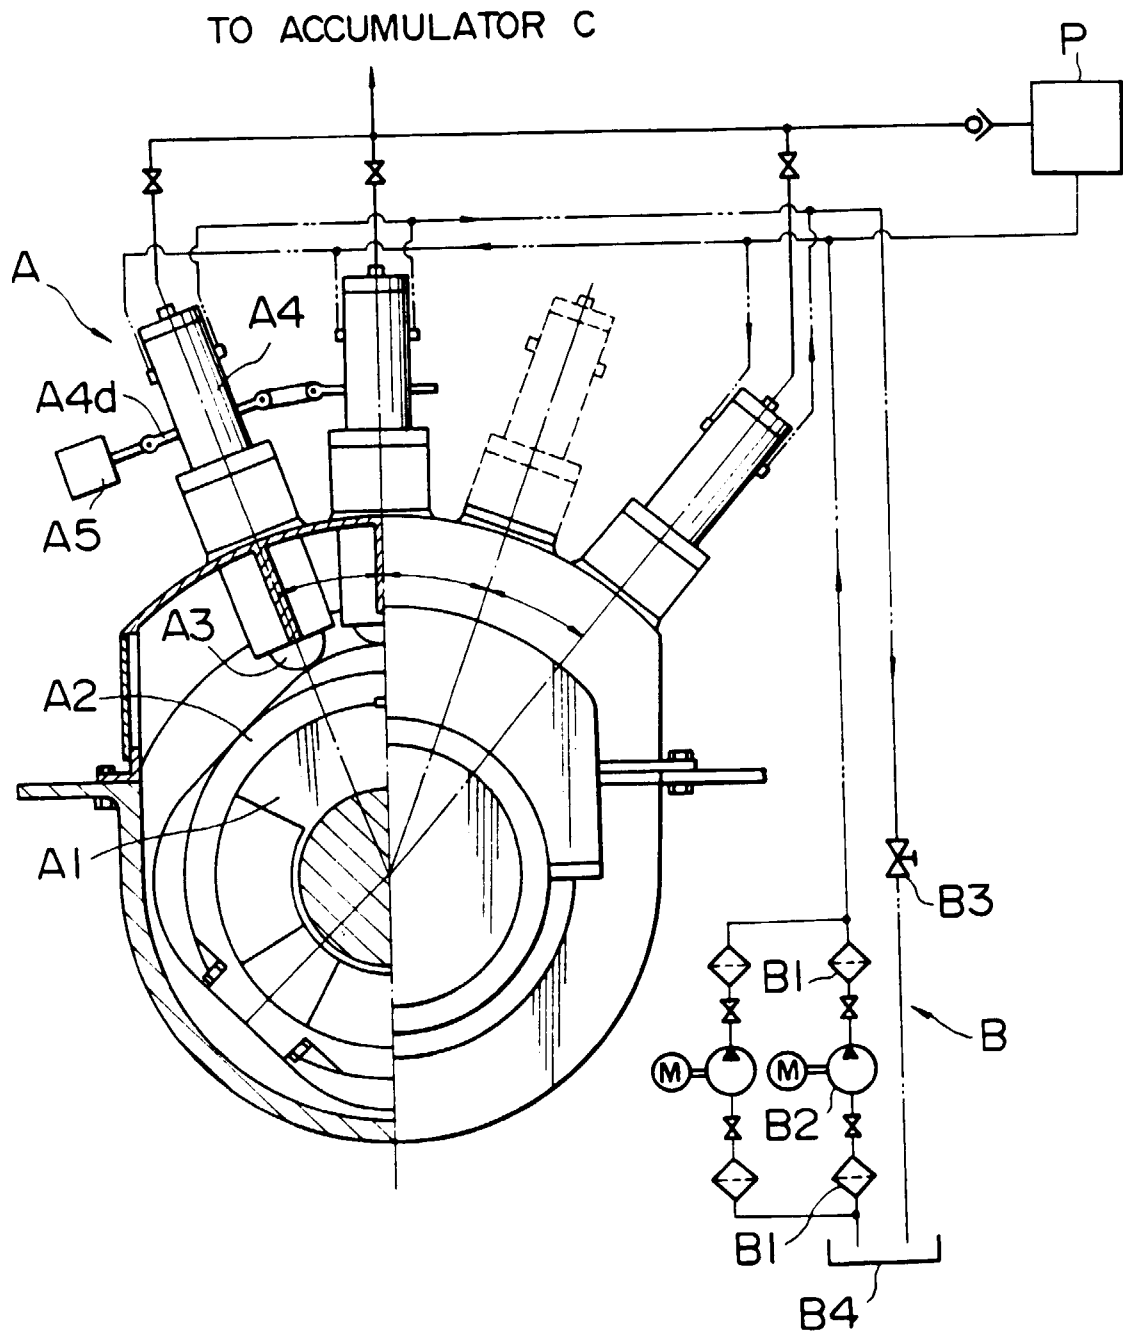

F I G. 10

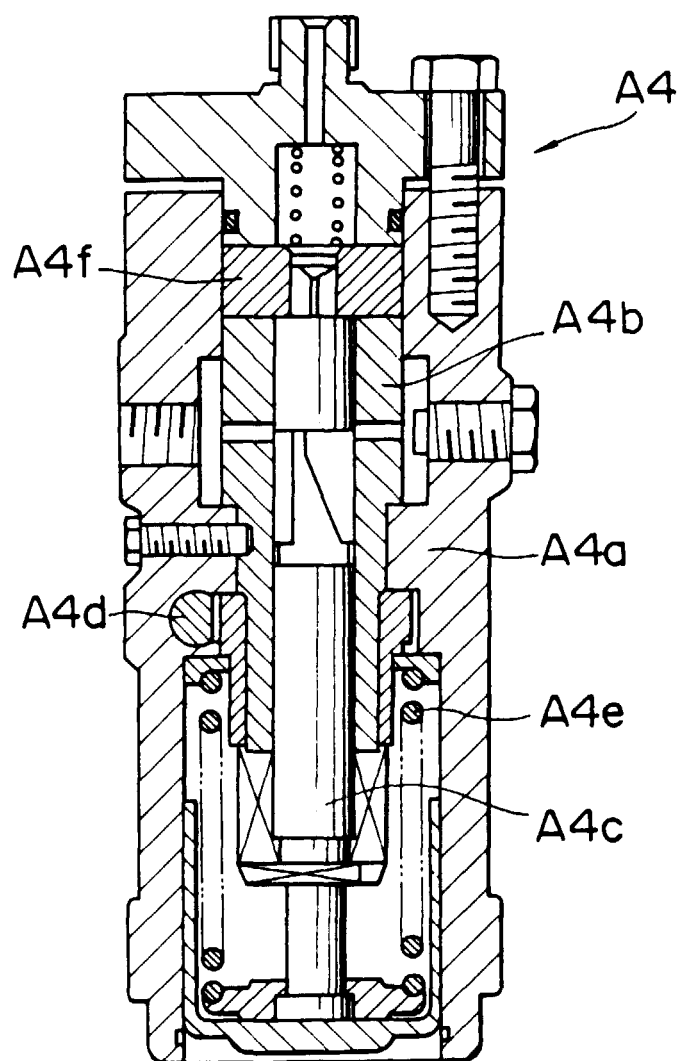


FIG. 11

